

SPORT ENVIRONMENTAL SERVICES, PLLC Midland Texas 79701 Midland Texas 79701

Business: 432.683.1100 Fax: 888.500.0622

2009 JUN 18 PM 1 06

June 15, 2009

Mr. Brad Jones State of New Mexico Oil Conservation Division 1220 South St. Francis Drive Santa Fe, NM 87505

Re: Notice of Closure BOPCO, L.P. Josephine Rodke Federal #1 API No. 30-015-05833 Unit Letter G

> Section 27, T-20-S, R-31-E **Eddy County, New Mexico**

Notice of Closure BOPCO, L.P. G.H. Cobb Federal #1 API No. 30-015-05829 Unit Letter M Section 23, T-20-S, R-31-E **Eddy County, New Mexico**

Dear Mr. Jones,

Sport Environmental on behalf of BOPCO, L.P. is providing notice to the NMOCD according to NMAC 19.15.17.13(j) of the above mentioned location that we will be filing for closure of said two permanent pits.

If you have any questions or comments with regard to this matter, please contact me at either my office (432.683.1100) or on my cell (432.553.8555).

Sincerely,

I PURA S. MOORE

Debi S. Moore, M.E., R.E.P.A. President

Enclosure: Form C-144

BOPCO, L.P. cc:

Attn: Steve Johnson P. O. Box 2760 Midland, TX 79702



SPORT ENVIRONMENTAL SERVICES, PLLC

502 N. Big Spring Street, Midland, Texas 79701 ULIVE Business: 432.683.1100 Fax: 888.500.0622

2009 JUL 2 AM 9 48

June 30, 2009

Mr. Brad Jones State of New Mexico Oil Conservation Division 1220 South St. Francis Drive Santa Fe, NM 87505

Re: NMOCD Form C-144
BOPCO, L.P.
Josephine Rodke Federal #1
API No. 30-015-05833
Unit Letter G
Section 27, T-20-S, R-31-E
Eddy County, New Mexico

Dear Mr. Jones,

Enclosed is the Form C-144 and associated documents for the aforementioned site. Per our conversation, we have made the requested changes to the closure plan and associated documents.

If you have any questions or comments with regard to this matter, please contact me at either my office (432.683.1100) or on my cell (432.553.8555).

Sincerely,

IRAS. MOORE

Debi S. Moore, M.E., R.E.P.A. President

Enclosure: Form C-144

cc: BOPCO, L.P.
Attn: Steve Johnson
P. O. Box 2760
Midland, TX 79702

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office. For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Closed-Loop System, Below-Grade Tank, or			
Proposed Alternative Method Permit or Closure Plan Application Type of action: Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Modification to an existing permit Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method			
Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request			
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the			
environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.			
Operator: BOPCO, L.P. OGRID #:001801			
Address: P.O. Box 2760, Midland, Texas 79702			
Facility or well name: Josephine Rodke Federal Battery #1			
API Number: 30-015-05833 OCD Permit Number:			
U/L or Qtr/Qtr C Section 27 Township 20S Range 31E County: Eddy			
Center of Proposed Design: Latitude N32°32'45.132 Longitude W103°51'15.048 NAD: 1927 1983			
Surface Owner: ⊠ Federal ☐ State ☐ Private ☐ Tribal Trust or Indian Allotment			
Pit: Subsection F or G of 19.15.17.11 NMAC Temporary: Drilling Workover Workover Emergency Cavitation P&A Lined Unlined Liner type: Thickness mil LLDPE HDPE PVC Other String-Reinforced Volume: bbl Dimensions: L x W x D 3.			
Closed-loop System: Subsection H of 19.15.17.11 NMAC			
Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent)			
☐ Drying Pad ☐ Above Ground Steel Tanks ☐ Haul-off Bins ☐ Other			
☐ Lined ☐ Unlined Liner type: Thicknessmil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other			
Liner Seams: Welded Factory Other			
4. Below-grade tank: Subsection I of 19.15.17.11 NMAC Volume:bbl Type of fluid: Tank Construction material:			
Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off			
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☐ Other			
Liner type: Thicknessmil			
5.			
Alternative Method: Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.			

·			
Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)			
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church)	nospital,		
Four foot height, four strands of barbed wire evenly spaced between one and four feet			
Alternate. Please specify			
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)			
Screen Netting Other			
Monthly inspections (If netting or screening is not physically feasible)			
8. Signs: Subsection C of 19.15.17.11 NMAC			
☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers			
⊠ Signed in compliance with 19.15.3.103 NMAC			
9.			
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.			
Please check a box if one or more of the following is requested, if not leave blank:			
Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau consideration of approval.	office for		
Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.			
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or			
above-grade tanks associated with a closed-loop system.			
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No		
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes No		
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No ☐ NA		
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits)	☐ Yes ☐ No ☐ NA		
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image			
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No		
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No		
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No		
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No		
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ☐ No		
Within a 100-year floodplain FEMA map	☐ Yes ☐ No		

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:
12.
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number:
Previously Approved Operating and Maintenance Plan API Number:(Applies only to closed-loop system that use above ground steel tanks or haul-off bins and propose to implement waste removal for closure)
13.
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Climer Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Cilimatory Control Plan Cilimat
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. ☐ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC ☐ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC ☐ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) ☐ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC ☐ Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC ☐ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

16. Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17.13.D NMAC) Instructions: Please indentify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if more than two facilities are required.				
Disposal Facility Name: Disposal Facility Permit Number:				
Disposal Facility Name: Disposal Facility Permit Number:				
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future service and operations? Yes (If yes, please provide the information below) No				
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC				
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.				
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA			
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA			
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA			
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No			
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No			
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	☐ Yes ☐ No			
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	Yes No			
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No			
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No			
 Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	☐ Yes ☐ No			
Within a 100-year floodplain FEMA map	☐ Yes ☐ No			
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Sicil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC				

10			
19. Operator Application Certification:			
I hereby certify that the information submitted with this application is true, accurate and	complete to the best of my knowledge and belief.		
Name (Print): Steve Johnson	Title: SR. Production FOREMAN		
Signature:	Date: 7///09		
e-mail address:	Telephone: (432) 683-2277		
20. OCD Approval: ☐ Permit Application (including closure plan) ☐ Closure Plan (on	ly)		
OCD Representative Signature:	Approval Date:		
Title: Frynce OCD	Permit Number:		
Closure Report (required within 60 days of closure completion): Subsection K of 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.			
	Closure Completion Date:		
22. Closure Method: Waste Excavation and Removal □ On-Site Closure Method □ Alternative Closure If different from approved plan, please explain.	osure Method Waste Removal (Closed-loop systems only)		
Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Instructions: Please indentify the facility or facilities for where the liquids, drilling flu			
two facilities were utilized.	sus una una cumings were assposed ose andenment if more man		
Disposal Facility Name: Disp	osal Facility Permit Number:		
	osal Facility Permit Number:		
Were the closed-loop system operations and associated activities performed on or in area			
Yes (If yes, please demonstrate compliance to the items below) \(\square\$ No	is that was not do do do as a second of the control		
Required for impacted areas which will not be used for future service and operations: Site Reclamation (Photo Documentation)			
Soil Backfilling and Cover Installation			
Re-vegetation Application Rates and Seeding Technique			
24.			
Closure Report Attachment Checklist: Instructions: Each of the following items mu	ist be attached to the closure report. Please indicate, by a check		
mark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division)			
Proof of Deed Notice (required for on-site closure)			
☐ Plot Plan (for on-site closures and temporary pits)			
Confirmation Sampling Analytical Results (if applicable)			
Waste Material Sampling Analytical Results (required for on-site closure)			
☐ Disposal Facility Name and Permit Number			
☐ Soil Backfilling and Cover Installation ☐ Re-vegetation Application Rates and Seeding Technique			
Site Reclamation (Photo Documentation)			
On-site Closure Location: Latitude Longitude	NAD: □1927 □ 1983		
25.			
Operator Closure Certification:			
I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.			
Name (Print): Annette Childers	Title: Regulatory Clerk		
Signature:	Date:		
e-mail address: machilders@basspet.com	Telephone: (432) 683-2277		

BOPCO, L.P. GH Cobb Federal #1 Section 23, T-20-S, R-31-E Eddy County, NM

API# 30-015-05829

CLOSURE PLAN

The New Mexico OCD and Bureau of Land Management were both sent notification of closure on June 15, 2009. BOPCO, L.P. will excavate to ten feet below ground surface to the bottom of the pit removing any dried sludge. The pit was unlined so no liner will need to be removed. No free liquids are presently in the pit and there is not any associated equipment in or around the pit that will need to be removed. All excavated dried sludge will be hauled and disposed of at CRI (Controlled Recovery Incorporated - Permit R-9166). BOPCO, L.P. will test the soils beneath the permanent pit to determine whether a release has occurred. BOPCO, L.P. will collect, at a minimum, a five point, composite sample; collect individual grab samples from any area that is wet, discolored or showing other evidence of a release; and analyze for BTEX, TPH and chlorides to demonstrate that the benzene concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 0.2 mg/kg; total BTEX concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 50 mg/kg; the TPH concentration, as determined by EPA method 418.1 or other EPA method that the division approves, does not exceed 100 mg/kg; and the chloride concentration, as determined by EPA method 300.1 or other EPA method that the division approves, does not exceed 250 mg/kg, or the background concentration, whichever is greater. BOPCO, L.P. will notify the division of its results on form C-141 in accordance with NMAC 19.15.17.13(c) Closure method for permanent pits. If the BOPCO or the division determines that a release has occurred, then the BOPCO shall comply with 19.15.29 NMAC and 19.15.30 NMAC, as appropriate. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Paragraph (3) of Subsection C of 19.15.17.13 NMAC, then the BOPCO, L.P. will backfill the excavation with compacted, non-waste containing, earthen material; construct a divisionprescribed soil cover; recontour and re-vegetate the site. The division-prescribed soil cover, recontouring and re-vegetation requirements will comply with Subsections G, H and I of 19.15.17.13 NMAC per our Site Reclamation Plan. BOPCO, L.P. will commence closure of the site within one week of approval from the NMOCD. It will take BOPCO, L.P. approximately 2 days to excavate to ten feet and one day to sample the excavation. It will take five days to receive the results from the lab. Approximately three days to backfill the excavation and recontour the site with the existing topography. It will take one day to reseed the area. Within 60 days of closure completion, BOPCO, L.P. will submit a closure report on form C-144, with necessary attachments to document all closure activities including sampling results; information required by 19.15.17 NMAC; a plot plan; and details on back-filling, capping and covering, where applicable. In the closure report, BOPCO, L.P. will certify that all information in the report and attachments is correct and that BOPCO, L.P. has complied with all applicable closure requirements and conditions specified in the approved closure plan.






BEPCO, L.P. Josephine Rodke Federal Section 27, Township 20S, Range 31E Eddy County, New Mexico

GIS MAP

Drawing Not To Scale



The Oilfield Waste Disposal Experts.[™]

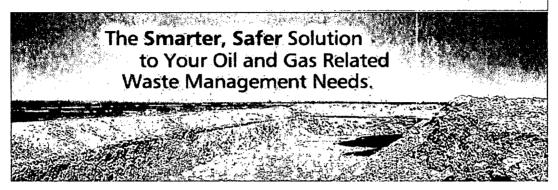


Disposal Facility Name

Controlled Recovery, Inc

Permit Number

R-9166

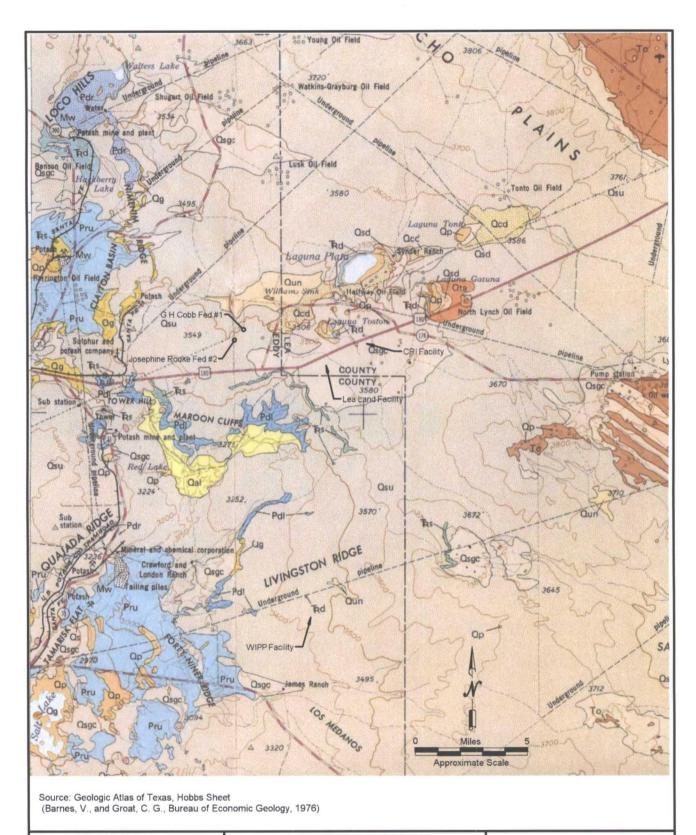




BEPCO, L. P.

G. H. Cobb Federal #1 & Josephine Rodke Federal #2Township 20 South, Range 31 East (Sections 23 & 27)Eddy County, New Mexico

FIGURE 1
GEOLOGIC MAP

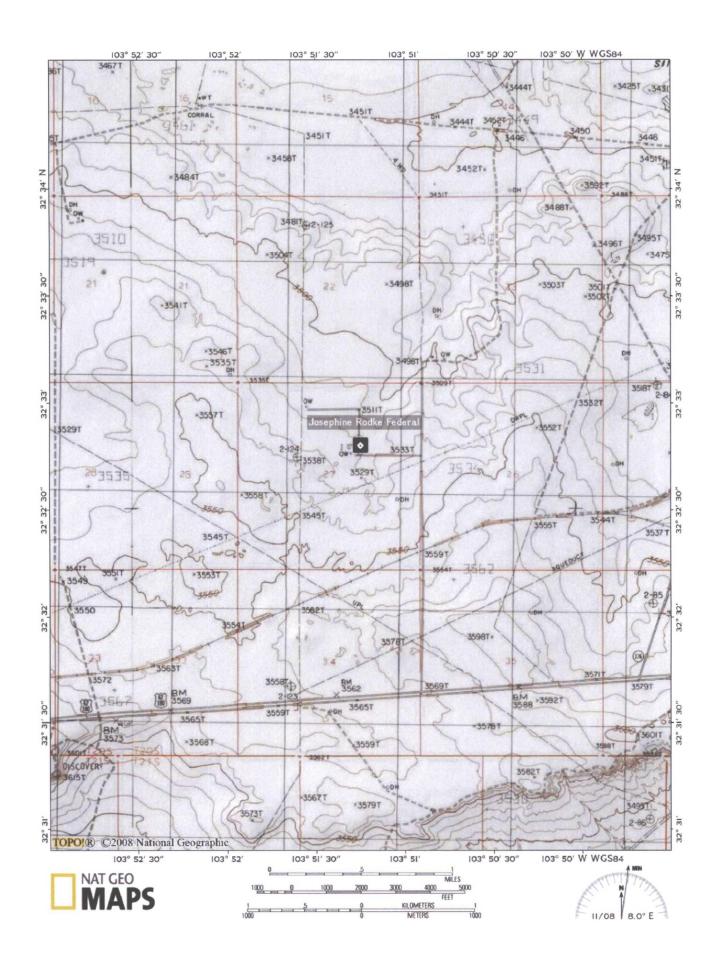





BOPCO, L.P.
Josephine Rodke Federal #1
Section 20, Township 20S, Range 31E
Eddy County, New Mexico


Permanent Pit Location

32.546110° , -103.853911





MINING AND MINERALS DIVISION

Coal Mine Locations

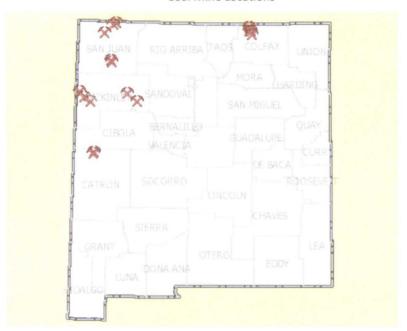

Mines, Mills and Quarries Locations

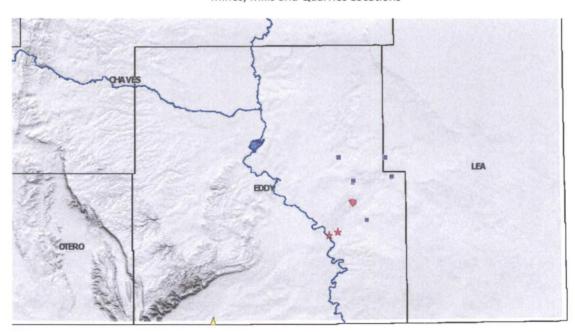

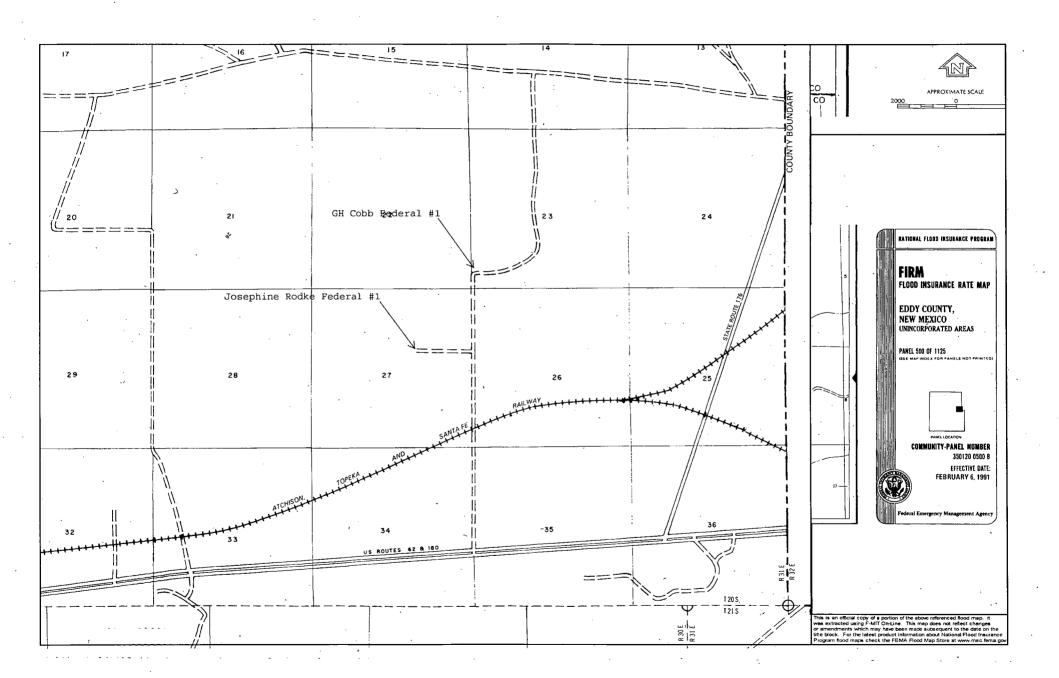



SITE RECLAMATION PLAN

RECLAMATION OBJECTIVE

(This reclamation objective is in accordance with Surface Operating Standards and Guidelines for Oil and Gas Exploration and Development: Chapter 6 – Reclamation and Abandonment)

Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can insure the effect is not permanent. At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases, this means returning the land to a condition approximating or equal to that which existed prior to the disturbance.

The reclamation process involves restoring the original landform or creating a landform that approximates and blends in with the surrounding landform. It also involves revegetating disturbed areas to native species, controlling erosion, controlling invasive non-native plants and noxious weeds, and monitoring results.

Reclamation generally can be judged successful when a self-sustaining, vigorous, diverse, native (or otherwise approved) plant community is established on the site, with a plant density sufficient to control erosion and non-native plant invasion and to re-establish wildlife habitat or forage production. Erosion control is generally sufficient when adequate groundcover is reestablished, water naturally infiltrates into the soil, and gullying, headcutting, slumping, and deep or excessive rilling is not observed. The site must be free of State-or county-listed noxious weeds, oilfield debris, contaminated soil, and equipment.

RECLAMATION PLAN

A reclamation plan is included in the Surface Use Plan of Operations and should discuss plans for final reclamation. Reclamation is required of any surface previously disturbed. The operator should submit a new plan with the Notice of Intent to Abandon (NIA) or Subsequent Report Plug and Abandon (SRA) using the Sundry Notices and Reports on Wells Form 3160-5 when abandoning wells and other facilities that do not have an approved reclamation plan. Additional reclamation measures may be required based on the conditions existing at the time of abandonment and made a part of the conditions of approval of the NIA or SRA. Earthwork for final reclamation generally must be completed within 6 months of plugging.

<u>Pit Reclamation</u> The site will be reclaimed to a natural condition that blends with the rest of the reclaimed pad area. In addition, the reclaimed pit will be restored to a safe and stable condition.

Site Reclamation Plan 2

<u>Site Preparation and Revegetation</u> Disturbed areas will be revegetated after the site has been satisfactorily prepared. Site preparation will include respreading topsoil to an adequate depth, described by the sections below, and may also include ripping, tilling, disking on contour, and dozer track-imprinting. Seeding will be accomplished by drilling on the contour whenever practical or by other approved methods such a dozer track-walking followed by broadcast seeding. Seeding will be performed according to the application specifications outlined by the BLM. BLM Seed Mixture 2 for sandy sites is to be applied as addressed below.

Soil Cover Designs

The soil cover for site reclamation shall consist of one or more of the following parameters:

- (A) The soil cover for closures where the operator has removed the pit contents or remediated the contaminated soil to the divisions' satisfaction shall consist of the background thickness of topsoil or one foot of suitable material to establish vegetation at the site, whichever is greater.
- (B) The soil cover for burial-in-place or trench burial shall consist of a minimum of four feet of compacted, non-waste containing, earthen material. The soil cover shall include either the background thickness of topsoil or one foot of suitable material to establish vegetation at the site, whichever is greater.
- (C) The holder shall construct the soil cover to the site's existing grade and prevent ponding of water and erosion of the cover material.

Re-vegetation Procedure, using BLM Seed Mixture 2, for Sandy Sites

The holder will begin seeding the first growing season after the holder closes a pit or trench or is no longer using a drying pad, below-grade tank or an area associated with a closed-loop system, pit or below-grade tank, including access roads. Seeding shall be accomplished by drilling on the contour whenever practical or by other division-approved methods. The holder will seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be <u>no</u> primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed will be done in accordance with State Law(s) and within nine (9) months prior to purchase. Commercial seed will be either certified or registered seed. The seed container will be tagged in accordance with State law(s) and available for inspection by the authorized officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop to the bottom of the drill and are planted first). The holder will take appropriate measures to ensure that this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. The holder shall obtain coverage that equals 70% of the native perennial vegetative cover (un-impacted by overgrazing, fire or other intrusion damaging to native vegetation) consisting of at least three native plants native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. During the two growing seasons, that prove viability, there will be no artificial irrigation of the vegetation. The holder will repeat seeding or planting as necessary, until it successfully achieves the required vegetation cover. Evaluation of growth will not be made before completion of at least one full growing season after seeding.

When conditions are not favorable for the establishment of vegetation, such as periods of drought, the holder may delay seeding or planting, with the division's approval, until soil moisture conditions

Site Reclamation Plan

become favorable. However, the division may require the holder to use additional cultural techniques such as mulching, fertilizing, irrigating, fencing, or other practices to establish re-vegetation. The holder may propose an alternative to the re-vegetation plan if the holder demonstrates that the proposed alternative effectively prevents erosion, and protects fresh water, human health, and the environment. The proposed alternative shall be agreed upon by the surface owner. The holder will then submit the proposed alternative, with written documentation, that the surface owner agrees to the alternative, to the division for approval.

The holder will notify the division when it has seeded or planted and when it successfully achieves revegetation.

BLM Seed Mixture 2, for Sandy Sites

Species to be planted in pounds of pure live seed* per acre:

<u>Species</u>	<u>lb/acre</u>
Sand dropseed (Sporobolus cryptandrus)	1.0
Sand love grass (Eragrostis trichodes)	1.0
Plains bristlegrass (Setaria macrostachya)	2.0

^{*}Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure life seed

WELL RECLAMATION

Pit Locations, On-Site Burial Locations, and Drying Pads

Once the holder has closed a pit or trench, or is no longer using a drying pad, below-grade tank or an area associated with a closed-loop system, pit, trench or below-grade tank, the holder will reclaim the pit location, drying pad location, below-grade tank location, or trench location and all areas associated with the closed-loop system, pit, trench or below-grade tank, including associated access roads, to a safe and stable condition that blends with the surrounding, undisturbed area. The holder shall substantially restore the impacted surface area to the condition that existed prior to oil and gas operations by recontouring the location and associated areas to a contour that approximates the original contour blends with the surrounding topography and re-vegetate the site as stated previously.

Final Reclamation Restoration of the original landform is a key element in ensuring that the effects of oil and gas development are not permanent. To achieve final reclamation, the well site will be recontoured to original contour or a contour that blends with the surrounding landform, stockpiled topsoil redistributed, and the site revegetated.

In recontouring areas that have been surfaced with gravel or similar materials (caliche), the material must be removed from the well location or buried deep in the recontoured cut to prevent possible surface exposure. All excavations and pits will be closed in accordance with New Mexico Oil Conservation Division standards and graded to conform to the surrounding terrain.

Site Reclamation Plan

4

Salvaged topsoil must be respread evenly over the surfaces to be revegetated. The topsoiled site will be prepared to provide a seedbed for reestablishment of desirable vegetation. Water breaks and terracing will only be installed when absolutely necessary to prevent erosion of fill material.