

State of New Mexico  
Energy, Minerals & Natural Resources

Form C-101  
May 27, 2004

District I  
1625 N. French Dr., Hobbs, NM 88240  
District II  
1301 W. Grand Avenue, Artesia, NM 88210  
District III  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

Oil Conservation Division  
1220 S. St. Francis Dr.  
Santa Fe, NM 87505

Submit to appropriate District Office

☐ AMENDED REPORT

**APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE**

<sup>1</sup> Operator Name and Address OXY USA Inc. P.O. Box 50250 Midland, TX 79710-0250		<sup>2</sup> OGRID Number 16696
<sup>4</sup> Property Code 27111	<sup>5</sup> Property Name Bravo Dome Carbon Dioxide Gas Unit 2034	<sup>3</sup> API Number 30-059-20475
<sup>9</sup> Proposed Pool 1 Bravo Dome Carbon Dioxide Gas 640 96010		<sup>6</sup> Well No. 072
<sup>10</sup> Proposed Pool 2		

<sup>7</sup> Surface Location									
UL or lot no.	Section	Township	Range	Lot. Idn	Feet from the	North/South Line	Feet from the	East/West line	County
K	7	20 N	34 E		1650	South	1650	West	Union

<sup>8</sup> Proposed Bottom Hole Location If Different From Surface									
UL or lot no.	Section	Township	Range	Lot. Idn	Feet from the	North/South Line	Feet from the	East/West line	County

Additional Well Location					
<sup>11</sup> Work Type Code N	<sup>12</sup> Well Type Code C	<sup>13</sup> Cable/Rotary R	<sup>14</sup> Lease Type Code P	<sup>15</sup> Ground Level Elevation 4840.6'	
<sup>16</sup> Multiple No	<sup>17</sup> Proposed Depth 2600'	<sup>18</sup> Formation Tubb	<sup>19</sup> Contractor N/A	<sup>20</sup> Spud Date 5/1/06	
Depth to ground water >100'		Distance from nearest fresh water well >1000'		Distance from nearest surface water >1000'	
Pit: Liner: Synthetic <input checked="" type="checkbox"/> 12 mils thick Clay <input type="checkbox"/> Pit Volume 4000 bbls Drilling Method: Closed-Loop System <input type="checkbox"/> Fresh Water <input checked="" type="checkbox"/> Brine <input type="checkbox"/> Diesel/Oil-based <input type="checkbox"/> Gas/Air <input type="checkbox"/>					

<sup>21</sup> Proposed Casing and Cement Program					
Hole Size	Casing Size	Casing weight/foot	Setting Depth	Sacks of Cement	Estimated TOC
12-1/4"	8-5/8"	24#	700'	300sx	Surface
7-7/8"	5-1/2"	5.9#FG/15.5#	2600'	300sx	Surface

<sup>22</sup> Describe the proposed program. If this application is to DEEPEN or PLUG BACK, give the data on the present productive zone and proposed new productive zone. Describe the blowout prevention program, if any. Use additional sheets if necessary.

See Attachment

<sup>23</sup> I hereby certify that the information given above is true and complete to the best of my knowledge and belief. I further certify that the drilling pit will be constructed according to NMOCD guidelines <input checked="" type="checkbox"/> a general permit <input type="checkbox"/> , or an (attached) alternative OCD-approved plan <input type="checkbox"/> .		OIL CONSERVATION DIVISION	
Signature: <i>David Stewart</i>		Approved by: <i>[Signature]</i>	
Printed name: David Stewart		Title: DISTRICT SUPERVISOR	
Title: Sr. Regulatory Analyst		Approval Date: 3/13/07	
E-mail Address: david.stewart@oxy.com		Expiration Date: 3/13/07	
Date: 3/3/06	Phone: 432-685-5717	Conditions of Approval: Attached <input type="checkbox"/>	

**ATTACHMENT C-101**  
**BDCDGU**

**PROPOSED TD:** 2600' TVD

**BOP PROGRAM:** 0-700' None  
700-2600' 8" 2M annular hydril preventer.

**CASING:** Surface: 8-5/8" OD 24# J55 8rd ST&C new casing set at 700'  
12-1/4" hole  
Centralizers from TD-Surf, every fourth joint  
Production: 5-1/2" OD new casing from 0-2600'  
300'-15.5# J55 8rd LTC 2300'-5.9# 10rd FG  
7-7/8" hole - 5 centralizers

\*This well will have fiberglass casing from surface to the productive interval (Tubb). Steel casing will be used across the Tubb. The fiberglass casing must penetrate the Cimarron at a minimum. The optimum point for setting the fiberglass casing is at the midpoint of the Cimarron formation.

**CEMENT:** Surface - Circulate cement with 300sx Premium Plus with 2%  $\text{CaCl}_2$  + .25#/sx Poly E Flake, (WT-14.8ppg, Yld-1.34cf/sx, FW-6.3g/sx)  
Production - Cement with 150sx Premium Plus with 3%  $\text{CaCl}_2$  + .25#/sx Poly E Flake, (WT-11.1ppg, Yld-3.27cf/sx, FW-20.47g/sx) followed by 150sx Premium Plus with 3%  $\text{CaCl}_2$  + .25#/sx Poly E Flake, (WT-13.2ppg, Yld-1.86cf/sx, FW-9.93g/sx)

**MUD:** 0-700' Fresh water/native mud.  
Wt 8.6-9.2ppg, Vis 32-36sec  
700-2600' Fresh water/Starch/Gel  
pH control as needed.  
Wt 9.0-9.2ppg, Vis 28-29sec

District I  
1625 N. French Dr., Hobbs, NM 88240

District II  
811 South First, Artesia, NM 88210

District III  
1000 Rio Brazos Rd., Aztec, NM 87410

District IV  
2040 South Pacheco, Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION  
2040 South Pacheco  
Santa Fe, NM 87505

Form C-102  
Revised October 18, 1994  
Instructions on back  
Submit to Appropriate District Office  
State Lease - 4 Copies  
Fee Lease - 3 Copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number <b>30-059-</b>	Pool Code <b>96010</b>	Pool Name <b>BRAVO DOME CARBON DIOXIDE GAS</b>
Property Code <b>27111</b>	Property Name <b>BRAVO DOME CARBON DIOXIDE GAS UNIT 2034</b>	Well Number <b>072</b>
OGRID No. <b>16696</b>	Operator Name <b>OXY USA INC.</b>	Elevation <b>4840.6</b>

Surface Location


UL or lot no. <b>K</b>	Section <b>7</b>	Township <b>20 N</b>	Range <b>34 E</b>	Lot Idn.	Feet from the <b>1650'</b>	North/South line <b>SOUTH</b>	Feet from the <b>1650'</b>	East/West line <b>WEST</b>	County <b>UNION</b>
---------------------------	---------------------	-------------------------	----------------------	----------	-------------------------------	----------------------------------	-------------------------------	-------------------------------	------------------------

Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn.	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres <b>640</b>	Joint or Infill <b>Y</b>	Consolidation Code	Order No.						

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED  
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

<p>7</p> <p>NM-E NAD27 Lot - 35° 58' 36.95" Lon - 103° 22' 07.93"</p>	<p><b>OPERATOR CERTIFICATION</b></p> <p>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.</p> <p> Signature <b>David Stewart</b> Printed Name <b>Sr. Regulatory Analyst</b> Title <b>3/3/06</b> Date</p> <p><b>SURVEYOR CERTIFICATION</b></p> <p>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</p> <p><b>February 24, 2006</b> Date of Survey  Signature and Seal of Professional Surveyor <b>Terry Asel</b> Certificate Number <b>15079</b></p>
-------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

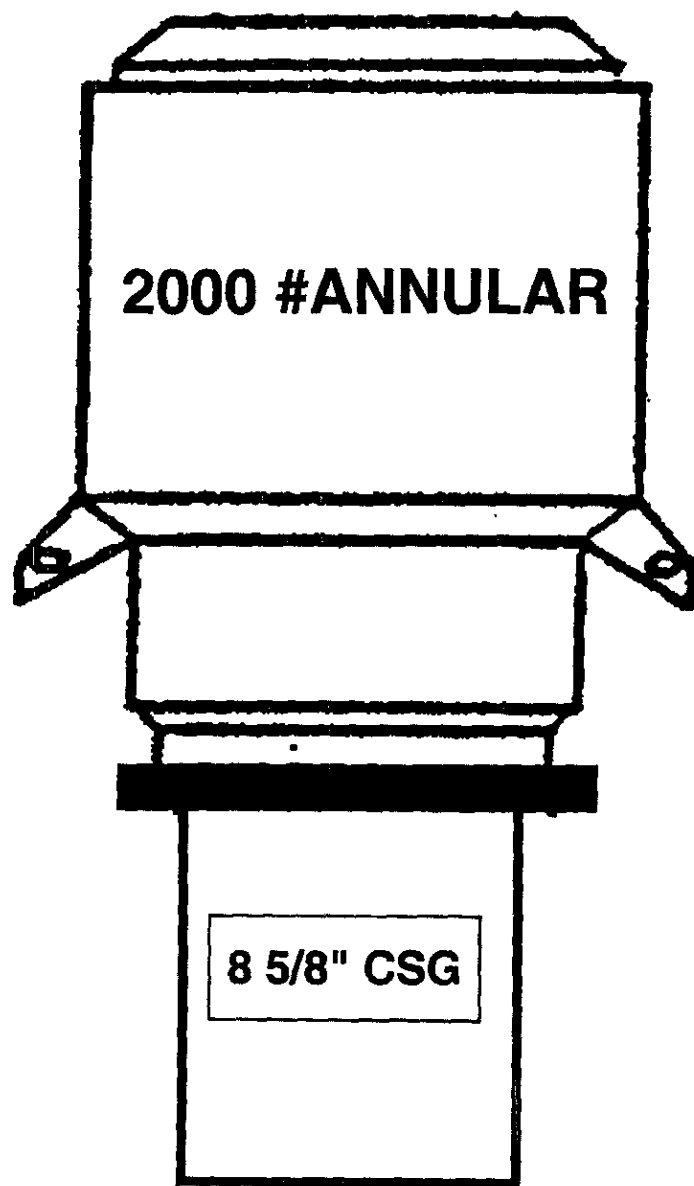

**BRAVO DOME 2003 DRILLING PROJECT BOP DIAGRAM**

Bravo Dome Unit  
Location and Pit Design  
Cheyenne Rig 8

