

District I  
1625 N. French Dr., Hobbs, NM 88240  
District II  
811 S. 1st Street, Artesia, NM 88210  
District III  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV  
2040 South Pacheco, Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals & Natural Resources

NSL 4873

Form C-101  
Revised March 17, 1999

Oil Conservation Division  
2040 South Pacheco  
Santa Fe, NM 87505

Submit to appropriate District Office  
State Lease - 6 Copies  
Fee Lease - 5 Copies

☐ AMENDED REPORT

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

<sup>1</sup> Operator Name and Address OXY USA Inc. P.O. Box 50250 Midland, TX 79710-0250		<sup>2</sup> OGRID Number 16696
<sup>4</sup> Property Code 27111	<sup>5</sup> Property Name Bravo Dome Carbon Dioxide Gas Unit 1933	<sup>3</sup> API Number 30- 021- 20323 <sup>6</sup> Well No. 112 A

<sup>7</sup> Surface Location

UL or lot no.	Section	Township	Range	Lot. Idn	Feet from the	North/South Line	Feet from the	East/West line	County
I	11	19N	33E		1414	south	532	east	Harding

<sup>8</sup> Proposed Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot. Idn	Feet from the	North/South Line	Feet from the	East/West line	County

<sup>9</sup> Proposed Pool 1

Bravo Dome Carbon Dioxide Gas 640 , 96010

<sup>10</sup> Proposed Pool 2

<sup>11</sup> Work Type Code N	<sup>12</sup> Well Type Code C	<sup>13</sup> Cable/Rotary R	<sup>14</sup> Lease Type Code P	<sup>15</sup> Ground Level Elevation 4991.1'
<sup>16</sup> Multiple No	<sup>17</sup> Proposed Depth 2600'	<sup>18</sup> Formation Tubb	<sup>19</sup> Contractor N/A	<sup>20</sup> Spud Date 5/15/03

<sup>21</sup> Proposed Casing and Cement Program

Hole Size	Casing Size	Casing weight/foot	Setting Depth	Sacks of Cement	Estimated TOC
12-1/4"	8-5/8"	24#	700'	300sx	Surface
7-7/8"	5-1/2"	5.9#FG/15.5#	2600'	300sx	Surface

<sup>22</sup> Describe the proposed program. If this application is to DEEPEN or PLUG BACK, give the data on the present productive zone and proposed new productive zone.  
Describe the blowout prevention program, if any. Use additional sheets if necessary.

SEE ATTACHED

<sup>23</sup> I hereby certify that the information given above is true and complete to the best of my knowledge and belief. Signature: <i>David Stewart</i>		OIL CONSERVATION DIVISION	
Printed name: David Stewart		Approved by: <i>[Signature]</i>	
Title: Sr. Regulatory Analyst		Title: DISTRICT SUPERVISOR	
Date: 4/2/03		Approval Date: 5/7/03	Expiration Date: 5/7/04
Phone: 915-685-5717		Conditions of Approval: Attached <input type="checkbox"/>	

ATTACHMENT C-101  
BDCDGU 1933-112

PROPOSED TD: 2600' TVD

BOP PROGRAM: 0-700' None  
700-2600' 8" 2M annular hydril preventer.

CASING: Surface: 8-5/8" OD 24# J55 8rd ST&C new casing set at 700'  
12-1/4" hole  
Centralizers from TD-Surf, every fourth joint  
Production: 5-1/2" OD new casing from 0-2600'  
300'-15.5# J55 8rd LTC 2300'-5.9# 10rd FG  
7-7/8" hole - 5 centralizers

\*This well will have fiberglass casing from surface to the productive interval (Tubb). Steel casing will be used across the Tubb. The fiberglass casing must penetrate the Cimarron at a minimum. The optimum point for setting the fiberglass casing is at the midpoint of the Cimarron formation.

CEMENT: Surface - Circulate cement with 300sx Premium Plus with 2% CaCl<sub>2</sub> + .25#/sx Poly E Flake, (WT-14.8ppg, Yld-1.34cf/sx, FW-6.3g/sx)  
Production - Cement with 150sx Premium Plus with 3% CaCl<sub>2</sub> + .25#/sx Poly E Flake, (WT-11.1ppg, Yld-3.27cf/sx, FW-20.47g/sx) followed by 150sx Premium Plus with 3% CaCl<sub>2</sub> + .25#/sx Poly E Flake, (WT-13.2ppg, Yld-1.86cf/sx, FW-9.93g/sx)

MUD: 0-700' Fresh water/native mud.  
Wt 8.6-9.2ppg, Vis 32-36sec  
700-2600' Fresh water/Starch/Gel  
pH control as needed.  
Wt 9.0-9.2ppg, Vis 28-29sec

District I  
1625 N. French Dr., Hobbs, NM 88240  
District II  
811 South First, Artesia, NM 88210  
District III  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV  
2040 South Pacheco, Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION  
2040 South Pacheco  
Santa Fe, NM 87505

Form C-102  
Revised October 18, 1994  
Instructions on back  
Submit to Appropriate District Office  
State Lease - 4 Copies  
Fee Lease - 3 Copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number	Pool Code 96010	Pool Name BRAVO DOME CARBON DIOXIDE GAS
Property Code 27111	Property Name BRAVO DOME CARBON DIOXIDE GAS UNIT 1933	Well Number 112
OGRID No. 16696	Operator Name OXY USA INC.	Elevation 4991.1



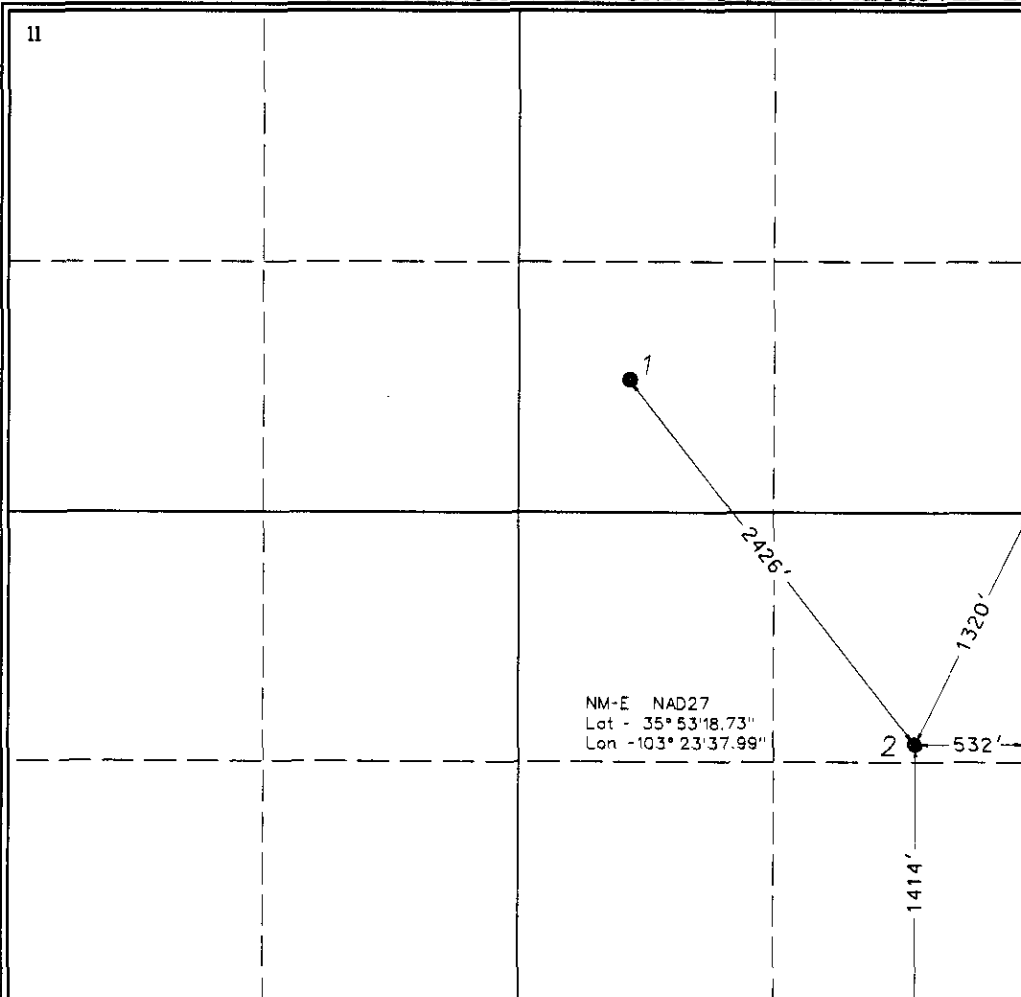
Surface Location

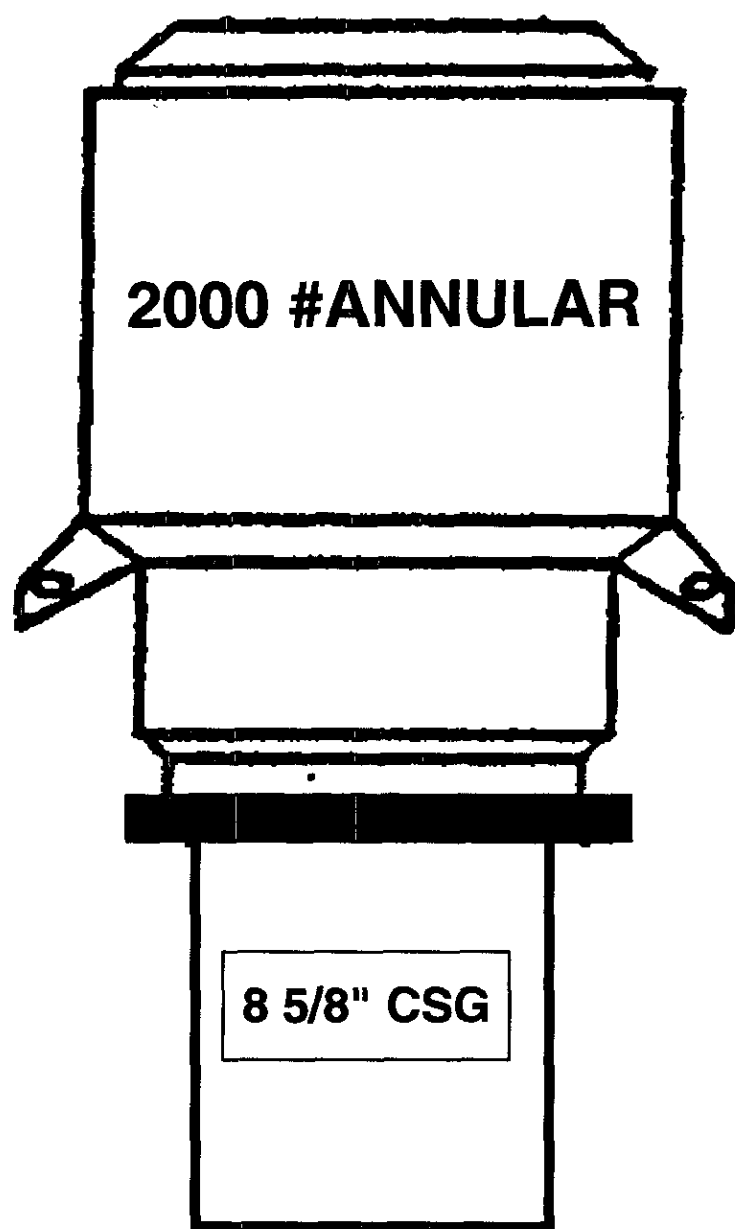
UL or lot no.	Section	Township	Range	Lot Idn.	Feet from the	North/South line	Feet from the	East/West line	County
1	11	19 N	33 E		1414'	SOUTH	532'	EAST	HARDING

Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn.	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres 640	Joint or Infill 1	Consolidation Code	Order No.						

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED  
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

11					<b>OPERATOR CERTIFICATION</b> <i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.</i>   Signature David Stewart Printed Name Sr. Regulatory Analyst Title 4/2/03 Date	
					<b>SURVEYOR CERTIFICATION</b> <i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</i> March 20, 2003 Date of Survey Signature and Seal of Professional Surveyor  Jesse M. Martin Certificate Number 7911	
						



**BRAVO DOME 2003 DRILLING PROJECT BOP DIAGRAM**