

# **Class II AGI Permit Application for Kings Landing AGI No. 1 and No. 2**

Eddy County, New Mexico

Prepared for *Frontier Field Services, LLC*  
*OGRID No. 221115*  
*Houston, Texas*

By  
*Lonquist Engineering, LLC*  
Austin, TX

June 2025  
Revised January 2026



## TABLE OF CONTENTS

1	Project Overview .....	5
2	Well Data .....	6
2.1	Location .....	6
2.2	Well Design .....	8
2.2.1	Casing Design .....	12
2.2.2	Cement Program .....	14
2.2.3	Monitoring and Safety Equipment .....	16
2.2.4	Wellhead Specifications .....	16
2.2.5	Proposed Geophysical Logging Plan .....	17
2.2.6	Completion Plan .....	17
2.3	Injection Operations .....	18
2.3.1	Injection Stream Composition and Characteristics .....	18
2.3.2	Modeled Injection Rates .....	18
2.3.3	Maximum Allowable Operating Pressure .....	19
3	Area of Review .....	19
3.1	Oil and Gas Wells in the Area of Review .....	19
3.2	Groundwater Wells and Sampling .....	25
4	Geology/Reservoir Overview .....	28
4.1	Executive Summary .....	28
4.2	Site Characterization .....	30
4.2.1	Regional Overview and Basin Evolution .....	31
4.2.2	Methodology for Obtaining Porosity and Permeability Estimates .....	32
4.2.3	Injection Zone .....	36
4.2.4	Confining Zones .....	37
4.2.5	Anticipated Formation Tops .....	39
4.2.6	Structure .....	41
4.3	Injection Zone Chemistry .....	43
4.4	Hydrology .....	48
4.5	Induced Seismicity .....	51
4.6	Fault Slip Potential Modeling .....	58
5	Reservoir Modeling .....	58
5.1	Model Development .....	58
5.1.1	Gridding Parameters and Boundary Conditions .....	58
5.1.2	Offset Well Review .....	59
5.1.3	Key Inputs .....	59
5.2	Wellbore Model Construction .....	63
5.3	Model Results .....	64
6	Affirmative Statement of No Evidence of Connection to Underground Sources of Drinking Water .....	69
7	Determination and Notice of Affected Parties .....	69
7.1	Notice Parties Within the Area of Review .....	69
7.2	Draft Notice for Hearing .....	<b>Error! Bookmark not defined.</b>
8	Appendices .....	72
9	References .....	73

**Figures**

Figure 1 – Project Overview Map ..... 7

Figure 2 – Kings Landing AGI No. 1 Wellbore Schematic..... 10

Figure 3 – Kings Landing AGI No. 2 Wellbore Schematic..... 11

Figure 4 – Two-Mile Area of Review Map..... 21

Figure 5 – Water Wells, 1-Mile Area of Review..... 26

Figure 6 – Permian Basin overview map showing major structural features in relation to the Kings Landing AGI site (modified from Caf and Pigott, 2021)..... 29

Figure 7 – Lower Paleozoic stratigraphic column as encountered in the Delaware Basin, with the proposed injection interval shaded in yellow (modified from Ruppel et al., 2005)..... 30

Figure 8 – Present-day Delaware Basin in relation to the mid-Paleozoic Tobosa Basin (modified from Adams, 1965). ..... 31

Figure 9 – Kings Landing Type Log (API No. 30-015-31615) annotated with key formation tops and shaded yellow over the gross injection zone and brown over the upper and lower confining zones. .... 34

Figure 10 - Porosity-permeability crossplot from Siluro-Devonian core data samples in the Dollarhide Field. The location of the data samples is shown in a regional map in Figure 11. .... 35

Figure 11 – Location of Dollarhide Field near the Kings Landing AGI site (modified from Ruppel and Holtz, 1994)..... 36

Figure 12 – Regional isopach map of the Woodford Shale in southeastern New Mexico, with the location of the Kings Landing AGI wells represented by the red star (modified from Broadhead, 2011). ..... 38

Figure 13 – Structure map (TVD subsea) of the top of the Siluro-Devonian (injection zone)..... 42

Figure 14 – Generalized stratigraphic column of geologic units in the Delaware Basin of southeastern New Mexico, with the three aquifer systems of the greater area indicated on the right panel (Fichera et al., 2024)..... 49

Figure 15 – Map of southeastern New Mexico showing the location of potash mines and surface water bodies in relation to the Kings Landing AGI site (modified from Brokaw et al., 1972)..... 50

Figure 16 – TexNet Earthquake Catalog search parameters used to query seismic records within a 25-km radius around the Kings Landing AGI site. .... 51

Figure 17 – Zero records returned from the query of the TexNet Earthquake Catalog within a 25-km radius around the Kings Landing AGI site. .... 52

Figure 18 – USGS Geological Survey search parameters applied in the seismic record review, with zero records returned within the 25-km radius around the Kings Landing AGI site..... 52

Figure 19 – USGS database search: (a) modified search parameters to reflect a 50-km radius to find the nearest seismic events recorded in the USGS Geological Survey; (b) map of seismic events with labeled distances from the Kings Landing AGI site and details of the closest event (35 km southeast). ..... 53

Figure 20 – Salinity vs. Depth..... 62

Figure 21 – Temperature Profile..... 64

Figure 22 – Well Operations Summary for Kings Landing AGI No. 1..... 65

Figure 23 – Wellhead Pressure Time Series for Kings Landing AGI No. 1..... 65

Figure 24 – Maximum Plume Extents (50 Years Post-Injection)..... 67

Figure 25 – Maximum Plume Extents with Offset Faults ..... 68  
 Figure 26 – Offset Operators ..... 70  
 Figure 27 – Offset Lessees ..... 71

**Tables**

Table 1 – AGI Well Surface Location Details ..... 6  
 Table 2 – Kings Landing AGI No. 1 Casing Design ..... 12  
 Table 3 – Kings Landing AGI No. 2 Casing Design ..... 13  
 Table 4 – Proposed Cement Program ..... 14  
 Table 5 – TAG Composition..... 18  
 Table 6 – Model Inputs ..... 18  
 Table 7 – MAOP at Each Proposed Class II AGI..... 19  
 Table 8 – One-Mile Area of Review Well List..... 22  
 Table 9 – Water Wells Within the 2-Mile Area of Review ..... 27  
 Table 10 – Pore structure properties of Woodford Shale core samples (Kibria, Hu, and Zhang, 2017). ... 39  
 Table 11 – Anticipated Formation Tops at Kings Landing AGI No. 1 and No. 2 Locations..... 40  
 Table 12 – Produced Siluro-Devonian formation water characteristics for wells within 25 miles of the Kings Landing AGI site. .... 47  
 Table 13 – Water Wells Registered Within 2 miles of the Kings Landing AGI Site ..... 48  
 Table 14 – USGS Geological Survey list of seismic events within a 50-km radius of the Kings Landing AGI site..... 54  
 Table 15 – Offset Wells Included in Simulation Model..... 59  
 Table 16 – Reservoir Model Inputs ..... 59  
 Table 17 – Rock Properties by Model Layer..... 60  
 Table 18 – Inputs for Eaton’s Equation..... 63  
 Table 19 – Fracture Gradient Calculations..... 63  
 Table 20 – Affected Parties ..... 72

## 1 Project Overview

Frontier Field Services, LLC (Frontier) is submitting this C-108 application to support their proposed gas treating plant, Kings Landing Gas Plant in Eddy County, New Mexico. Frontier intends to drill and complete two acid gas injection (AGI) wells, Kings Landing AGI No. 1 and Kings Landing AGI No. 2. These wells are designed to each inject up to 20 million cubic feet per day (MMcf/D) of treated acid gas to support their planned gas processing plant. Frontier is requesting a combined allowable injection volume of 20 MMcf/D to be shared between the two wells. Frontier anticipates injecting into these wells for 30 years. The original application for the Kings Landing AGI wells planned for two vertical wells. However, upon acquiring and evaluating 3D seismic, Frontier is proposing to deviate the bottomhole locations of both wells approximately 2,500 ft to the southeast. This change moves the injection away from an identified fault and targets a favorable porosity area, as indicated by the seismic interpretation.

The treated acid gas (TAG) that will be injected into these two wells is expected to be composed of 80% carbon dioxide (CO<sub>2</sub>), 20% hydrogen sulfide (H<sub>2</sub>S), and trace amounts (less than 1%) of hydrocarbons. The TAG stream will be injected into the Siluro-Devonian formations, including the Thirtyone, Wristen, and Fusselman groups, plus the Montoya Formation, at depths of approximately 13,675 feet (ft) to 14,860 ft, true vertical depth, in the No. 1 well and 13,700–14,885 ft, true vertical depth, in the No. 2 well.

The injection zone is confined by approximately 225 ft of Woodford Shale. Additionally, there is 500 ft of Mississippian limestone. The deepest productive interval in the area of the Kings Landing AGI wells is the Morrow. At the Kings Landing location, approximately 710 ft separate the top of the injection interval from the base of the lowest productive zones. Below the injection interval, the low porosity Simpson Group is the lower confining interval. Both the upper and lower confining zones are sufficient to prevent migration of injected fluids from the injection zone.

The Kings Landing AGI wells will be limited to a maximum allowable operating pressure (MAOP) of **4,132** pounds per square inch (psi), as determined using the New Mexico Oil Conservation Division (NMOCD)-approved method, calculated using the density of the TAG.

The Kings Landing AGI No. 1 and No. 2 wells are planned as vertical wells and are designed to prevent the TAG stream from escaping the injection zone and reaching either productive zones or potential underground sources of drinking water (USDWs), including the Capitan Reef. The surface casing will be set to protect the Rustler Formation (Limestone). An intermediate casing string will be set just above the top of the Capitan reef and a second intermediate string set at the top of the Bone Springs. A 7-inch (in.) production casing string will be set above the Siluro-Devonian injection zone. The bottom 300 ft of the production string will be constructed of corrosion-resistant materials and cemented with acid-resistant cement or resin to protect the well from corrosion caused by the TAG. Cement bond logs will be run on each casing string to ensure a sufficient bond—to prevent fluid migration.

The geological review of the area, incorporated with analysis from the 3D seismic survey, identified a fault that is approximately 0.7 miles west-northwest of the proposed site. However, the dynamic reservoir model verified that the CO<sub>2</sub> injected at Kings Landing will not reach the fault. A fault-slip potential (FSP) model shows that the injection will not significantly increase the risk of an induced seismicity event.

Dynamic reservoir modeling considered the geological evaluation and reservoir properties in the area to estimate the extent of the TAG plume after 30 years of injection at the combined maximum rate of 20 MMCF/D. The stabilized plume, after 50 years of density drift, would reach a maximum extent of 1.06 miles and encompass approximately 508 acres of pore space around the Kings Landing AGI wells. No wells penetrate the injection zone in this plume area so there is little risk to offset wells that would result in an impact to production or create leakage pathways.

The Kings Landing AGI wells will safely and effectively inject the proposed TAG stream and enable the production of nearby oil and gas resources—while limiting waste and flaring in the event of well downtime and allowing for the sequestration of CO<sub>2</sub> and H<sub>2</sub>S.

## 2 Well Data

### 2.1 Location

The proposed Kings Landing AGI No. 1 and No. 2 wells are 12.5 miles southeast of Loco Hills, New Mexico. The C-102 plat packages are provided in Appendix A.

Table 1 – AGI Well Location Details

Well	Location	API No.	County	Unit	Section	Township	Range	Footage Calls (ft)	Ground Elevation (ft)
Kings Landing AGI No. 1	Surface	TBD	Eddy	E	15	19S	31E	2,176 FNL, 384 FWL	3,525
	Bottomhole		Eddy	K	15	19S	31E	2,342' FSL, 2,071' FWL	
Kings Landing AGI No. 2	Surface	TBD	Eddy	E	15	19S	31E	1,876 FNL, 735 FWL	3,535
	Bottomhole		Eddy	F	15	19S	31E	2,590' FNL, 2,305' FWL	

\*FNL – from the north line; FWL – from the west line; FSL - from the south line

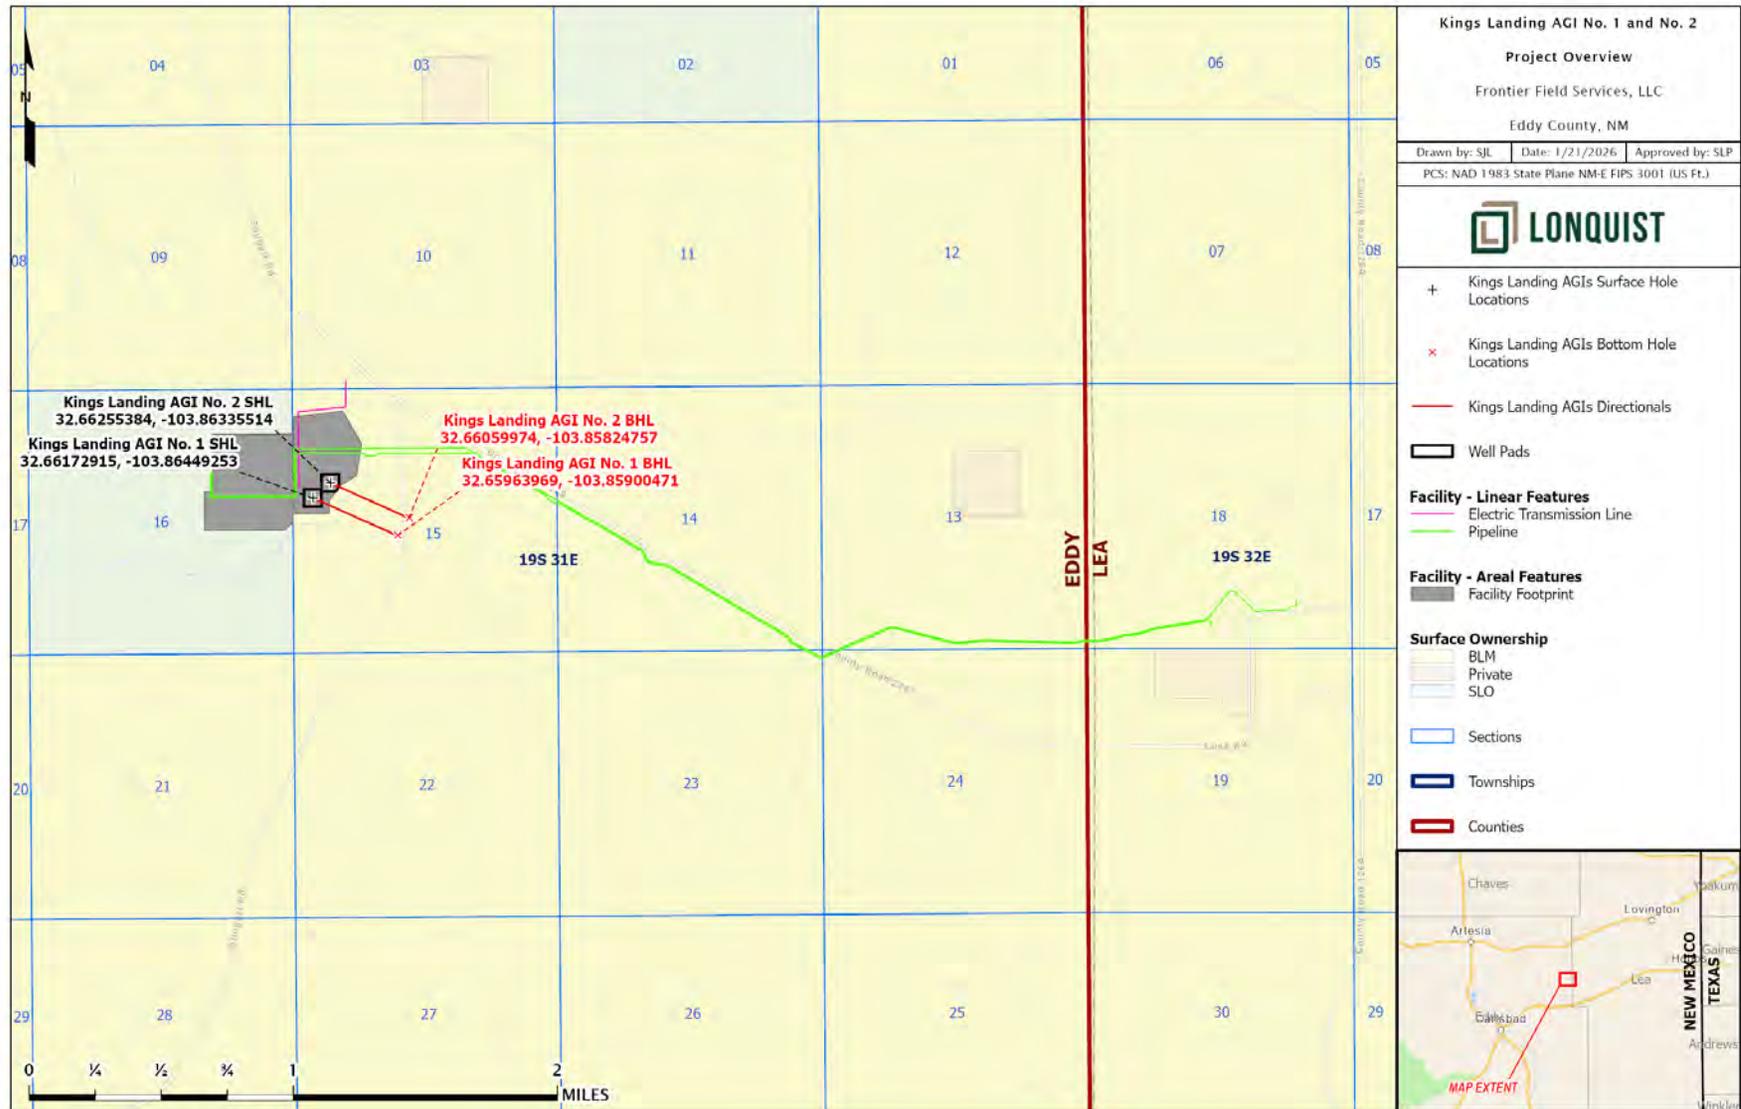


Figure 1 – Project Overview Map

## 2.2 Well Design

Kings Landing No. 1 and No. 2 will be drilled and completed as Siluro-Devonian injection wells and are designed to service the Kings Landing Gas Plant through disposal of the plant's TAG effluent. The injection wells are designed to accommodate a cumulative disposal volume of 20 MMcf/D of the acid gas, which will be composed of 80% CO<sub>2</sub>, 20% H<sub>2</sub>S, and trace amounts of impurities. The two wells will be developed to inject the acid gas simultaneously, with an expected volume of up to 20 MMcf/D in each of the wells (No. 1 and No. 2), once the No. 2 well is online, with a combined daily injection not to exceed 20 MMcf/D. The redundancy of the two-well package will provide operational flexibility for the plant to continue injection up to the combined maximum daily rate, in the event that one of the wells requires workover or servicing.

The general well design for Kings Landing No. 1 and No. 2, shown in Figures 2 and 3, respectively, will be a five-string design that includes a 30-in. surface casing, 20 in. intermediate string, 13 3/8-in. intermediate string, 9 5/8-in. intermediate string, and 7-in. production casing. The casing setting points are selected to isolate and protect all shallow groundwater units, intervals productive of oil and gas, any formations exhibiting overpressured conditions, and all high-permeability formations that could result in lost-circulation intervals. The wells will include an openhole completion across all proposed injection intervals, including the Siluro-Devonian and Montoya formations.

To ensure wellbore integrity for the life of the project and confinement of the acid gas within the permitted injection zone, corrosion-resistant alloy (CRA) materials will be installed across the upper confining zone (UCZ), the Woodford Shale. The CRA materials installed will include a 300-ft section of G3-110ksi, 7-in. production casing set from the shoe at the top of the permitted injection zone to above the UCZ. A 4 1/2-in. injection tubing string will be installed and include a 300-ft section of G3-110ksi material set at the base of the injection string and stung into the 4 1/2-in. x 7-in. permanent CRA packer, signature F 587-400, or equivalent.

The well cement programs will ensure that cement is circulated to the surface for each cemented casing string. Stage tools will be installed to isolate cement across lost circulation intervals and overpressured formations. Additionally, a dedicated casing string, Intermediate 2, will be installed through the top of the Bell Canyon to ensure adequate isolation of the Capitan Reef complex. A single-stage tool will be installed in the third intermediate string to ensure isolation across the Delaware Mountain Group. Two stage tools will be installed in the 7-in. production casing, one above the UCZ—to ensure that resin is adequately placed across the zone—and one in the first bone springs lime, to ensure that cement is circulated to the surface.

During the drilling phase, a closed-loop solids control system will be utilized. The blowout prevention (BOP) equipment installed to drill both wells will include a 26 3/4-in. 3M BOP stack to drill the surface and first intermediate hole, and a 13 5/8-in. 10M BOP stack to drill the second intermediate hole, production hole, and openhole sections.

Upon completion of the wells, the openhole injection interval will be stimulated, and a step-rate test and pressure falloff test will be performed. The completion assembly will include injection tubing, stung into the injection packer set at the top of the injection interval. The tubing will be installed with a subsurface safety valve (SSSV) set at 500 ft and monitoring equipment mounted on the backside, including a tubing-encapsulated conductor (TEC) line connecting the ported pressure/temperature gauge at the base of the tubing, above the packer.

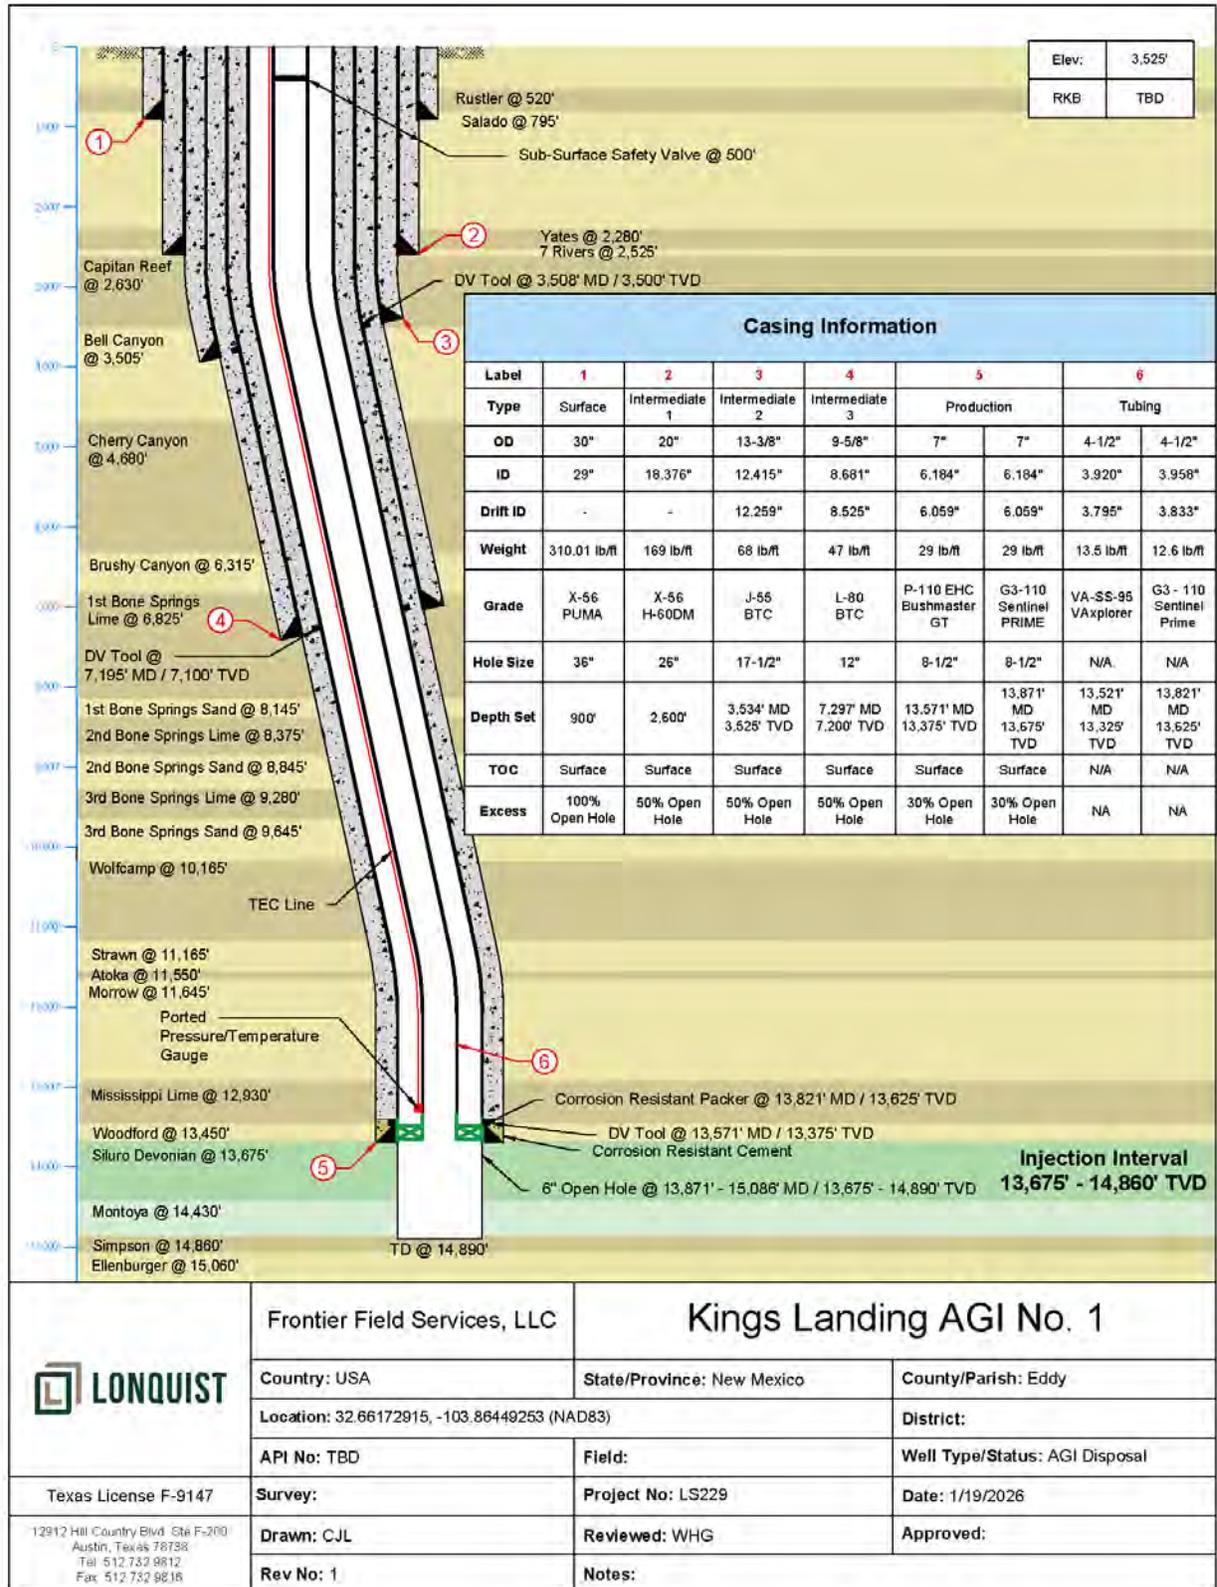


Figure 2 – Kings Landing AGI No. 1 Wellbore Schematic

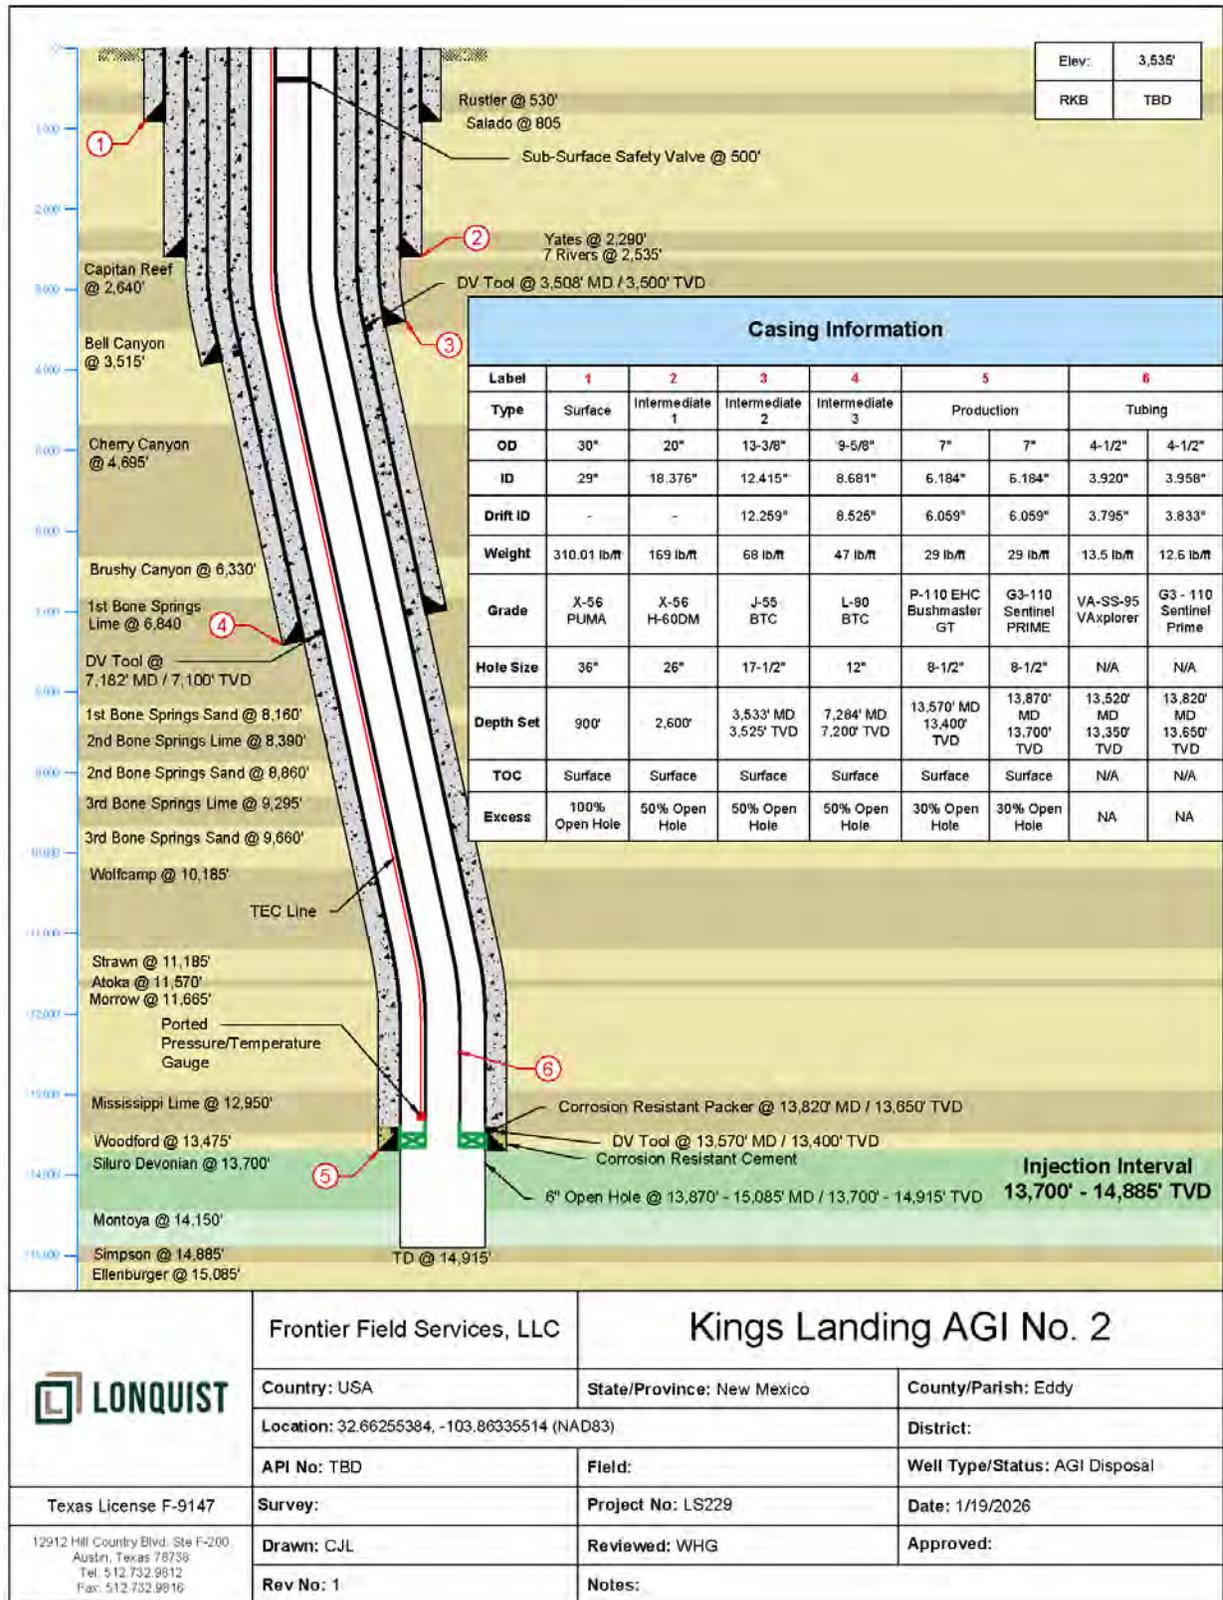


Figure 3 – Kings Landing AGI No. 2 Wellbore Schematic

## 2.2.1 Casing Design

Table 2 – Kings Landing AGI No. 1 Casing Design

Proposed Casing Design							
Casing	Casing Size (in.)	Inner Diameter (in.)	Hole Size (in.)	Pounds per Foot	Grade	Connection	Depth (ft.)
Surface	30	29	36	310.01	X-56	Puma	900
Intermediate 1	20	18.376	26	169	X-56	H-60DM	2600
Intermediate 2	13 3/8	12.415	17 1/2	68	J-55	BTC	3,525 TVD 3,534 MD
Intermediate 3	9 5/8	8.681	12	47	L-80	BTC	7,200 TVD 7,297 MD
Production	7	6.184	8 1/2	29	P-110 EHC	Bushmaster GT	13,375 TVD 13,571 MD
Production (CRA)	7	6.184	8 1/2	29	G3-110	Sentinel PRIME	13,675 TVD 13,871 MD
Proposed Tubing Design							
Tubing	4 1/2	3.920	N/A	13.5	VA-SS- 95	VExplorer	13,325 TVD 13,521 MD
Tubing (CRA)	4 1/2	3.958	N/A	12.6	G3-110	Sentinel PRIME	13,625 TVD 13,821 MD

\*BTC – buttress-thread and coupled

Table 3 – Kings Landing AGI No. 2 Casing Design

Proposed Casing Design							
Casing	Casing Size (in.)	Inner Diameter (in.)	Hole Size (in.)	Pounds per Foot	Grade	Connection	Depth (ft.)
Surface	30	29	36	310.01	X-56	Puma	900
Intermediate 1	20	18.376	26	169	X-56	H-60DM	2600
Intermediate 2	13 3/8	12.415	17 1/2	68	J-55	BTC	3,525 TVD 3,533 MD
Intermediate 3	9 5/8	8.681	12	47	L-80	BTC	7,200 TVD 7,284 MD
Production	7	6.184	8 1/2	29	P-110 EHC	Bushmaster GT	13,400 TVD 13,570 MD
Production (CRA)	7	6.184	8 1/2	29	G3- 110	Sentinel PRIME	13,700 TVD 13,870 MD
Proposed Tubing Design							
Tubing	4 1/2	3.920	N/A	13.5	VA-SS- 95	VExplorer	13,350 TVD 13,520 MD
Tubing (CRA)	4 1/2	3.958	N/A	12.6	G3- 110	Sentinel PRIME	13,650 TVD 13,820 MD

### 2.2.2 Cement Program

Table 4 – Proposed Cement Program

Kings Landing No. 1									
Casing	Stage	Lead (ft)	Tail (ft)	Openhole Excess (%)	Volume (LD/TL, cu.ft)	Yield (LD/TL)	Weight (lbm/gal)	Sacks	Type
30-in. Surface Casing		0–600	600–900	100	4,090	2.20 / 1.33	12.4 / 14.8	1,178 / 1,126	Class C
20-in. Intermediate 1		0–2,080	2,080–2,600	50	4,690 / 1,331	2.77 / 1.7	12.8 / 14.8	1,695 / 783	Class C
13 3/8-in. Intermediate 2		0–2,409	2,409–3,534	50	2,087 / 1,177	1.7 / 1.13	12.8 / 14.5	1,231 / 1,041	Class C/Class H
9 5/8-in. Intermediate 3	1	3,534–6,797	6,797–7,297	50	1,379 / 243	2.628 / 1.423	11 / 14.8	530 / 175	NeoCem/HalCem
	2	0-3,008	3,008-3,508	50	1,009 / 168	2.162 / 1.425	12.7 / 14.8	470 / 120	EconoCem/HalCem
7-in. Production	1	13,571–13,871		30	66.3	N/A	12.5	11.8 bbl	Resin
	2	7,195-12,571	12,571–13,571	30	884 / 165	1.496 / 1.557	12.5 / 13.5	595 / 106	NeoCem/CorrosaCem
	3	0-6,195	6,195-7,195	N/A	891 / 144	1.496 / 1.557	12.5 / 13.5	600 / 95	NeoCem/CorrosaCem
Kings Landing No. 2									
Casing	Stage	Lead (ft)	Tail (ft)	Openhole Excess (%)	Volume (LD/TL, cu.ft)	Yield (LD/TL)	Weight (lbm/gal)	Sacks	Type
30-in. Surface Casing		0–600	600–900	100	4,090	2.20 / 1.33	12.4 / 14.8	1,178 / 1,126	Class C
20-in. Intermediate 1		0–2,080	2,080–2,600	50	4,690 / 1,331	2.77 / 1.7	12.8 / 14.8	1,695 / 783	Class C

13 3/8-in. Intermediate 2		0–2,408	2,408–3,533	50	2,086 / 1,177	1.7 / 1.13	12.8 / 14.5	1,230 / 1,041	Class C/Class H
9 5/8-in. Intermediate 3	1	3,508–6,784	6,784–7,284	50	1,374 / 243	2.628 / 1.423	11 / 14.8	525 / 175	NeoCem/HalC em
	2	0-3,008	3,008-3,508	50	1,009 / 168	2.162 / 1.425	12.7 / 14.8	470 / 120	EconoCem/ HalCem
7-in. Production	1	13,570– 13,870		30	66.3	N/A	12.5	11.8 bbl	Resin
	2	7,182–12,570	12,570–13,570	30	886 / 165	1.496 / 1.557	12.5 / 13.5	595 / 106	NeoCem/ CorrosaCem
	3	0-6,182	6,182-7,182	N/A	889 / 165	1.496 / 1.557	12.5 / 13.5	595 / 95	NeoCem/ CorrosaCem

\*LD – lead; TL – tail; lbm – pound mass; bbl – barrels

### 2.2.3 Monitoring and Safety Equipment

Kings Landing AGI No. 1 and No. 2 will each have monitoring equipment installed. A TEC line will be installed on the tubing annulus and connect to temperature and pressure gauges set above the packer, in the tubing string. The gauges will be set in an internally and externally ported mandrel made up in the tubing string, which will allow the gauges to record the injection pressure and temperature at the top of the injection zone and the pressure of the tubing-casing annulus at the base of the tubing. The data collected by the gauges will be transmitted to the surface through the TEC line and allow for data to be continuously recorded and monitored at the surface—to immediately determine any variations in bottomhole conditions.

An SSSV will be installed at 500 ft in the injection tubing. The SSSV will be set in a profile nipple that is made up in the tubing during installation and will connect to the surface via a control line. The SSSV will be installed as a fail-safe device that will shut in the well(s) in the event of a well control issue at surface. Additionally, the SSSV will be wireline retrievable such that the device can be removed prior to a workover event to allow full access to the wellbore through the tubing.

### 2.2.4 Wellhead Specifications

The wellheads for Kings Landing AGI No. 1 and No. 2 will include the appropriate materials for all flow-wetted components and ports to access the pressure and temperature monitoring equipment results at the surface. The wellhead specifications include the following:

- A Section Wellhead
  - 30-in. SOW x 26 ¾-in. 3M Solid Body Mandrel
    - 3-in. line pipe 5M manual ball side-outlet valve
  - 20 ¾-in. nominal x 20-in. hanger
- B Section Wellhead
  - 26 ¾-in. 3M x 20 3/4-in. 3M Spool
    - 3 1/8-in. 5M manual gate side-outlet valves
  - 20 3/4-in. nominal x 13-3/8-in. hanger
- C Section Wellhead
  - 20 3/4-in. 3M x 13-5/8-in. 5M spool
    - 2 1/16-in. 5M manual gate side-outlet valves
  - 13-5/8-in. nominal x 9-5/8-in. hanger
- D Section Wellhead
  - 13-5/8-in. 5M x 13-5/8-in. 10M spool
    - 1 3/16-in. 10M manual gate side-outlet valves
  - 13-5/8-in. nominal x 7-in. mandrel hanger
- E Section Wellhead
  - 13-5/8-in 10M x 7-1/16-in 10M spool
    - 1-13/16-in 10M manual gate side-outlet valves
  - 7-1/16-in. nominal x 4-1/2-in. 15M tubing hanger (HH trim)

- Production Tree Assembly
  - 7 1/16-in. 10 M x 4 1/16-in. 10M adapter flange (HH trim)
  - 4 1/16-in. 10M manual gate lower master valve (HH trim)
  - 4 1/16-in. 10M manual gate upper master valve (FF trim)
  - 4 1/16-in. 10M flow cross (FF trim)
  - 4 1/16-in. 10M manual gate wing valves (FF trim)
  - 4 1/16-in. 10M hydraulic actuated wing valves (FF trim)
  - 4 1/16-in. 10M manual gate crown valve and cap (FF trim)

### 2.2.5 Proposed Geophysical Logging Plan

Openhole logs will be run in the production hole and open-hole sections. The production hole and open hole will be logged with a mud log from the section TD to surface and production casing shoe, respectively. The Woodford Shale (UCZ) section of the production hole and the Siluro-Devonian section of the open-hole will be logged with an open-hole logging suite which will include gamma-ray, resistivity, density-neutron, dipole sonic, and fracture identification (Formation Microimager).

### 2.2.6 Completion Plan

The Kings Landing AGI No. 1 and 2 wells will have 6-in. openhole completions in the Siluro-Devonian and Montoya formations.

#### 2.2.6.1 Proposed Testing Plan

A step-rate test will be performed on one of the wells to evaluate the injectivity potential of both wells, to attempt to identify the fracture pressure gradient of the injection formation, and to ensure that operating bottomhole pressures stay below the pressure needed to fracture the reservoir.

Additionally, a pressure falloff test will be performed to further evaluate the injectivity potential and establish baseline reservoir conditions.

#### 2.2.6.2 Proposed Stimulation Plan

Frontier plans to stimulate the Kings Landing AGI No. 1 and No. 2. The stimulation activities may include an initial wellbore flush of 5,000 gallons of 15% hydrochloric acid (HCl) acid to reduce any skin damage incurred during the drilling phase, prior to the step-rate and falloff pressure testing, followed by a matrix stimulation of approximately 60,000 gallons of 15% HCl.

Frontier reserves the right to update the proposed stimulation plans based on the logging and any results encountered when drilling the openhole section. Specific details of the stimulation volume and composition will be provided to the NMOCD for approval prior to execution.

Frontier may also conduct stimulation activities to improve well performance through well workover events, which may include future acid matrix stimulation, non-acid stimulation, coiled-

tubing nitrogen washout, and/or flowing or swabbing the wells. Notice of activities will be submitted to the NMOCD and all details approved prior to performing any additional well work.

## 2.3 Injection Operations

### 2.3.1 Injection Stream Composition and Characteristics

The TAG that will be injected into the two AGI wells is expected to be composed primarily of CO<sub>2</sub>, H<sub>2</sub>S, and trace amounts (less than 1%) of hydrocarbons. Kings Landing AGI No. 1 and No. 2 have been designed to safely handle and dispose of this modeled TAG stream, the composition of which is provided in Table 5. Actual variations from the modeled TAG stream composition will be used in subsequent model updates but are not expected to cause the modeled plume extent to expand significantly.

Table 5 – TAG Composition

Component	Mol %
CO <sub>2</sub>	80
H <sub>2</sub> S	20

tNavigator utilizes equation-of-state (EOS) to predict the behavior of the TAG at various pressures and temperatures. Modified Peng Robinson was chosen as the EOS to model the density and other properties of the acid gas. As discussed in Section 5.2, a wellbore model was created to determine acid gas properties inside the wellbore. Table 6 provides gas density at wellhead, bottomhole (inside tubing), and reservoir conditions.

Table 6 – Model Inputs

	Temperature (°F)	Pressure (psi)	Density (lb/ft <sup>3</sup> )	Specific Gravity
Wellhead Conditions	120	2,560	45.652	0.732
Tubing Bottomhole Conditions	152	7,915	54.748	0.877
Reservoir Conditions	215	7,915	49.481	0.793

\*lb/ft<sup>3</sup> – pounds per cubic foot

### 2.3.2 Modeled Injection Rates

Frontier plans to inject up to 20 MMcf/D in either well at any given point in time. The maximum combined rate for both wells will be limited to 20 MMcf/D. Injection rates were modeled at the maximum permitted volumes. Each injector is separately modeled at a rate of 20 MMscf/D for 20 years of active injection. Secondary bottomhole pressure (BHP) and MAOP constraints were

imposed on the well to limit acid gas volumes in case pressure exceeded these constraints. No rate limitations occurred during the model runs.

### 2.3.3 Maximum Allowable Operating Pressure

The MAOP is determined using NMOCD-approved methodology (Equation 1) and the specific gravity of the acid gas stream. Temperature and pressure outputs from tNavigator were utilized to determine the specific gravity of the TAG—for which only the temperature and pressure modeled inside the tubing was considered. Table 7 shows the MAOP for Kings Landing AGI No. 1 and No. 2.

$$(Eq. 1) \quad MAOP = D_{Top} \times (0.2 + 0.433(1.04 - SG_{tbg,avg}))$$

$$MAOP = 13,700 \times (0.2 + 0.433(1.04 - 0.804))$$

$$MAOP = 4,140 \text{ psi}$$

Where:

$D_{Top}$  – top of injection interval

$SG_{tbg,avg}$  – average TAG specific gravity inside tubing

Table 7 – MAOP at Each Proposed Class II AGI

Well	MAOP (psi)
Kings Landing AGI No. 1	4,140
Kings Landing AGI No. 2	4,132

## 3 Area of Review

Frontier has reviewed the oil and gas wells within a 1-mile and 2-mile radius of the proposed Kings Landing AGI No. 1 and No. 2 wells.

### 3.1 Oil and Gas Wells in the Area of Review

Within a 1-mile radius around both Kings Landing AGI No. 1 and No. 2, there are 25 active oil and gas wells, 21 plugged and abandoned wells, and 4 wells that are permitted but not yet drilled. Additionally, 16 wells were permitted but subsequently cancelled. The wells in the area of review (AOR) are shown in Figure 4 and the full details provided in Table 8. **None of these wells penetrate the UCZ of the AGI wells.**

Within 2 miles, there are 102 active oil and gas wells, 3 active saltwater disposal wells, 11 wells permitted but not yet drilled, and 78 plugged and abandoned wells. Additionally, 38 wells were

permitted but subsequently cancelled or expired. Higher resolution versions of the maps and lists of these wells are provided in Appendix B.

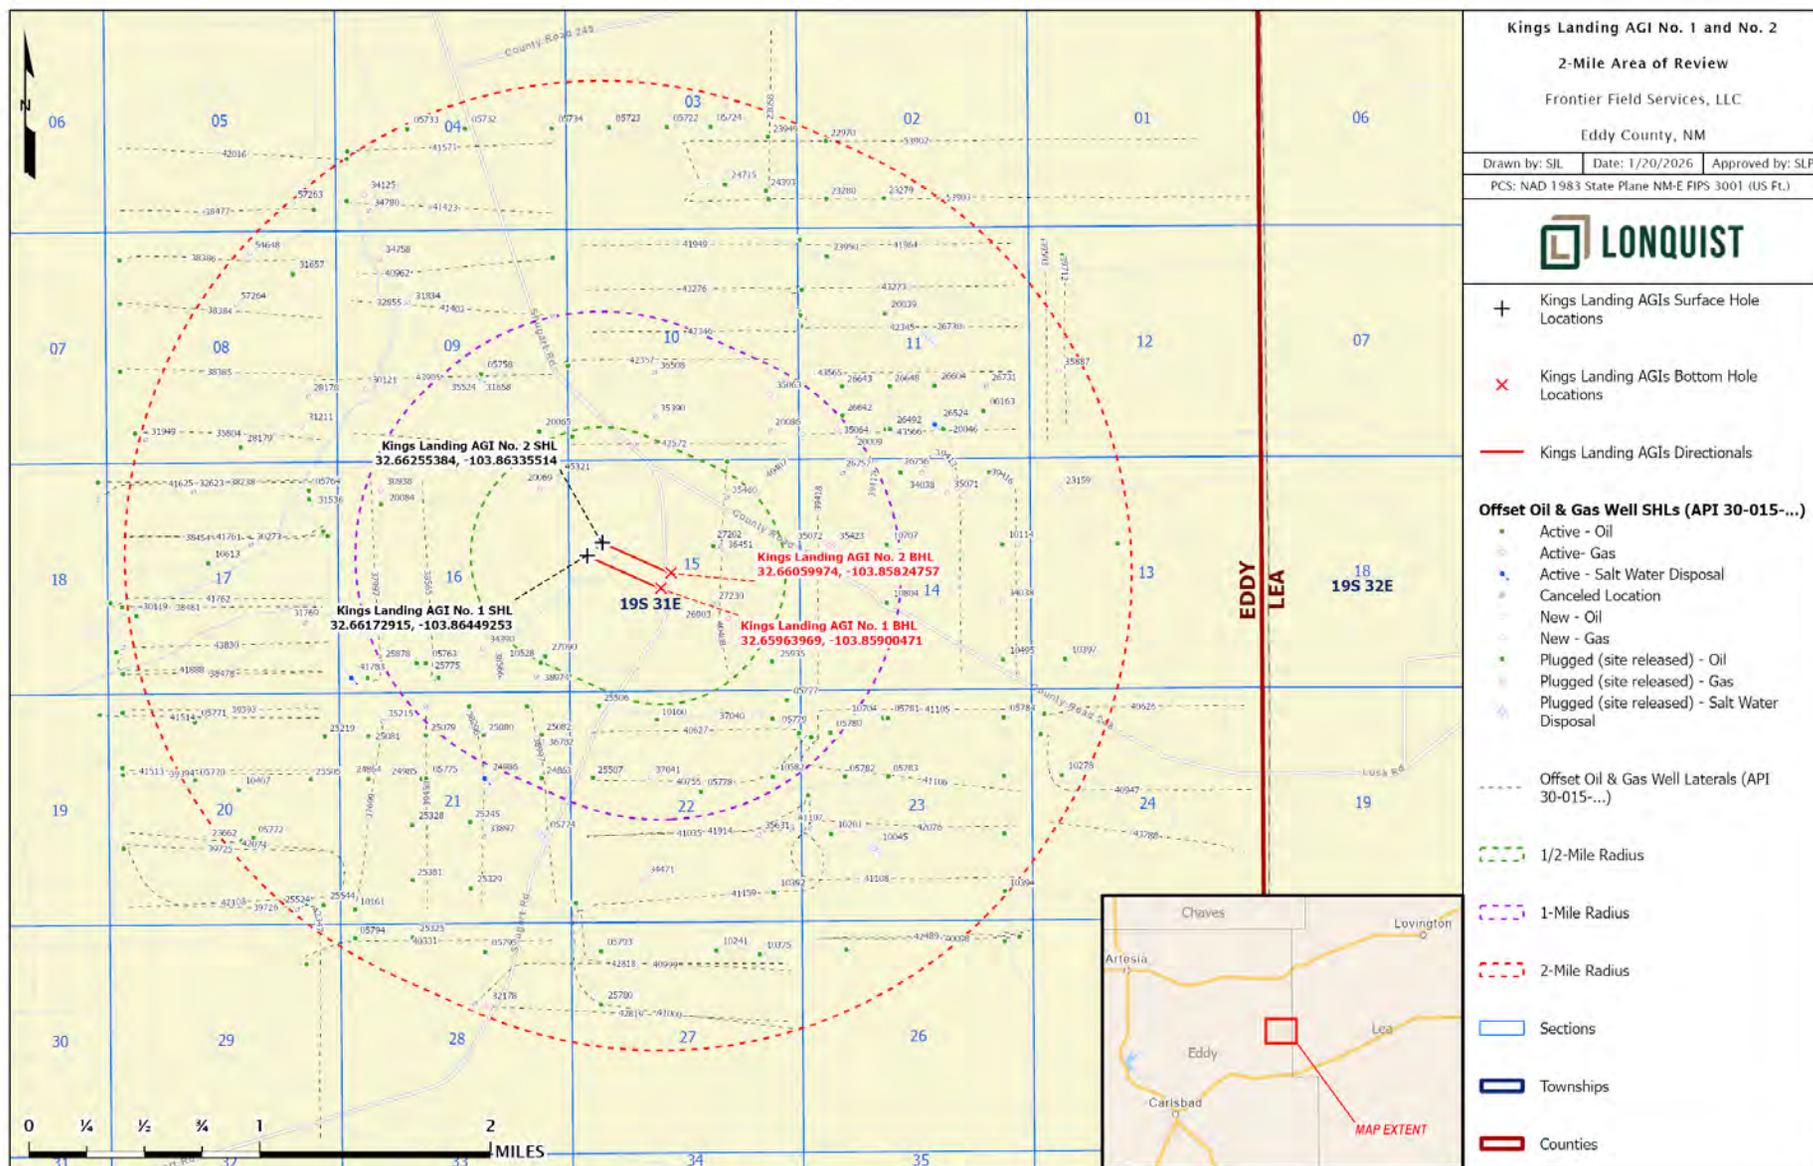


Figure 4 – Two-Mile Area of Review Map

Table 8 – One-Mile Area of Review Well List

API (30-015-...)	WELL NAME	WELL TYPE	STATUS	OPERATOR	TVD (FT.)	LATITUDE	LONGITUDE	DATE DRILLED	FIELD
05758	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	2,761	32.673172	-103.872253		
05763	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	2,479	32.655014	-103.876488		
05777	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	2,450	32.652603	-103.849640		
05778	PRE-ONGARD WELL #002	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	2,584	32.646877	-103.856056		
05779	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	2,599	32.651421	-103.850708		
05780	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	2,468	32.650520	-103.846420		
10160	BARTON A FEDERAL #001	Oil	Active	Acacia Operating Company, LLC	2,412	32.651409	-103.859306	3/28/1963	[42180] LUSK, YATES, WEST
10276	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	2,625	32.662296	-103.863632		
10528	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	2,575	32.655026	-103.867897		
10582	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	1,385	32.647793	-103.850700		
10707	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	1,410	32.662327	-103.842171		
10804	DOZIER FEDERAL COM #001	Oil	Plugged (site released)	CIMAREX ENERGY CO. OF COLORADO	1,390	32.658691	-103.842156	4/28/1966	[41480] LUSK, BONE SPRING, WEST
20065	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	11,300	32.669548	-103.867950		
20069	RUDOLPH ATX STATE #001	Gas	Active	EOG RESOURCES INC	135	32.665920	-103.867935		[80840] LUSK, MORROW, WEST (GAS)
20084	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	2,491	32.664997	-103.879738	1/24/2000	
20086	PRE-ONGARD WELL #001	Oil	Cancelled	PRE-ONGARD WELL OPERATOR	2,484	32.669571	-103.850786		
24863	HILL FEDERAL #001	Oil	Active	Acacia Operating Company, LLC	3,903	32.6477661	-103.8678741		[29490] HACKBERRY, YATES-7 RVRS, NORTH
25080	AMOCO FEDERAL #004	Oil	Active	Acacia Operating Company, LLC	2,400	32.6504822	-103.8721695	9/13/1984	[29490] HACKBERRY, YATES-7 RVRS, NORTH
25082	HILL FEDERAL #002	Oil	Active	Acacia Operating Company, LLC	2,425	32.6504898	-103.8678818	12/27/1984	[29490] HACKBERRY, YATES-7 RVRS, NORTH
25506	LUSK 22 FEDERAL #001	Oil	Active	Acacia Operating Company, LLC	2,425	32.6523094	-103.8636017	9/29/1985	[29490] HACKBERRY, YATES-7 RVRS, NORTH
25507	LUSK 22 FEDERAL #002	Oil	Active	Acacia Operating Company, LLC	2,300	32.6477737	-103.8640671	12/27/1985	[29490] HACKBERRY, YATES-7 RVRS, NORTH
25775	B B STATE #001	Oil	Plugged (site released)	EL RAN INC		32.6550140	-103.8764877		[29348] HACKBERRY, DELAWARE
25878	B B STATE #002	Oil	Plugged (site released)	EL RAN INC	6,000	32.6550102	-103.8771362	7/31/1987	[29348] HACKBERRY, DELAWARE
25935	LUSK 15 FEDERAL #001	Oil	Plugged (site released)	DEVON SFS OPERATING INC	9,200	32.6550484	-103.8507233	9/16/1987	[29348] HACKBERRY, DELAWARE; [41480] LUSK, BONE SPRING, WEST
26757	PRE-ONGARD WELL #002	Oil	Cancelled	PRE-ONGARD WELL OPERATOR	2,725	32.6668565	-103.8453893	12/6/1990	
26903	PRE-ONGARD WELL #002	Oil	Cancelled	PRE-ONGARD WELL OPERATOR	2,744	32.6586688	-103.8550570	5/3/1991	
27090	LUSK B #001	Oil	Plugged (site released)	RAY WESTALL		32.6554108	-103.8675766		[29348] HACKBERRY, DELAWARE
27202	RUNNING WOLF #001	Oil	Plugged (site released)	SANTA FE ENERGY OPERATING PARTNERS L P	2,850	32.6623116	-103.8550415	5/30/1991	[29348] HACKBERRY, DELAWARE
27230	PRE-ONGARD WELL #001	Oil	Cancelled	PRE-ONGARD WELL OPERATOR		32.6586688	-103.8550570		
30938	RUDOLPH ATX STATE #002	Gas	Active	EOG RESOURCES INC	2,555	32.6659050	-103.8797455	10/31/1994	[80840] LUSK, MORROW, WEST (GAS)
31658	DOMINO AOJ FEDERAL COM #006C	Oil	Cancelled	EOG Y RESOURCES, INC.	12,340	32.6728924	-103.8722790	8/25/1998	
32677	DOMINO AOJ FEDERAL COM #006E	Gas	Cancelled	EOG Y RESOURCES, INC.	12,350	32.6728924	-103.8722790		[96068] DO NOT USE
34390	TOP DOLLAR STATE COM #001	Gas	Plugged (site released)	MARBOB ENERGY CORP	12,700	32.6559258	-103.8721924		[29348] HACKBERRY, DELAWARE; [41480] LUSK, BONE SPRING, WEST; [80809] LUSK

API (30-015-...)	WELL NAME	WELL TYPE	STATUS	OPERATOR	TVD (FT.)	LATITUDE	LONGITUDE	DATE DRILLED	FIELD
									MORROW,NO.(GAS)(CONSOLIDATED)*; [80840] LUSK, MORROW, WEST (GAS)
35063	ACME 10 FEDERAL #001	Gas	Plugged (site released)	DEVON ENERGY PRODUCTION COMPANY, LP	12,500	32.6718292	-103.8507843		[41480] LUSK, BONE SPRING, WEST; [80840] LUSK, MORROW, WEST (GAS)
35064	ROADRUNNER 11 FEDERAL COM #001	Gas	New	DEVON ENERGY PRODUCTION COMPANY, LP	12,709	32.6695786	-103.8458328	6/30/2005	[80840] LUSK, MORROW, WEST (GAS)
35072	COYOTE 14 FEDERAL #002	Gas	Plugged (site released)	DEVON ENERGY PRODUCTION COMPANY, LP	12,300	32.6623230	-103.8464584	10/2/2005	[80840] LUSK, MORROW, WEST (GAS)
35390	ACME 10 FEDERAL COM #002C	Gas	Cancelled	DEVON ENERGY PRODUCTION COMPANY, LP	12,500	32.6704649	-103.8593396	6/24/2006	[80840] LUSK, MORROW, WEST (GAS)
35423	COYOTE 14 FEDERAL #002Y	Gas	Active	DEVON ENERGY PRODUCTION COMPANY, LP	12,500	32.6623230	-103.8461380	6/24/2006	[80759] LUSK, MORROW (GAS); [80840] LUSK, MORROW, WEST (GAS)
35460	ACME 15 FEDERAL COM #003C	Gas	Cancelled	DEVON ENERGY PRODUCTION COMPANY, LP	12,500	32.6653055	-103.8540031	6/24/2006	[80840] LUSK, MORROW, WEST (GAS)
35524	DOMINO AOJ FEDERAL COM #006	Gas	Cancelled	EOG Y RESOURCES, INC.	12,747	32.6728924	-103.8722790	10/22/2006	[96542] WILDCAT, GRANITE
36451	ACME 15 FEDERAL COM #002G	Gas	Cancelled	DEVON ENERGY PRODUCTION COMPANY, LP	12,600	32.6623087	-103.8544986	4/27/2007	[80759] LUSK, MORROW (GAS)
36508	ACME 10 FEDERAL COM #002K	Gas	Cancelled	DEVON ENERGY PRODUCTION COMPANY, LP	12,600	32.6731861	-103.8593489	4/27/2007	[80840] LUSK, MORROW, WEST (GAS)
36748	ACME 15 FEDERAL COM #001	Gas	Active	DEVON ENERGY PRODUCTION COMPANY, LP	13,000	32.6577682	-103.8539505		[80840] LUSK, MORROW, WEST (GAS)
36782	CADILLAC FEDERAL #001A	Gas	Cancelled	CIMAREX ENERGY CO. OF COLORADO	12,725	32.6500740	-103.8678893	9/2/2008	[78060] HAPPY VALLEY, MORROW (GAS)
37040	IRON HORSE 22 FEDERAL #001	Gas	New	DEVON ENERGY PRODUCTION COMPANY, LP	1,322	32.6511383	-103.8550034	12/27/2006	[97080] GREENWOOD, MORROW (G)
37041	BAMBINO 22 FEDERAL COM #001	Gas	New	DEVON ENERGY PRODUCTION COMPANY, LP	12,700	32.6477776	-103.8597794		[97080] GREENWOOD, MORROW (G)
37997	RUDOLPH ATX STATE COM #003H	Oil	Active	EOG RESOURCES INC	12,700	32.6540985	-103.8807755	2/1/2007	[41480] LUSK, BONE SPRING, WEST
38296	PENNY PINCHER FEDERAL COM #003H	Oil	Active	CIMAREX ENERGY CO. OF COLORADO	12,150	32.6522942	-103.8732529		[29345] HACKBERRY, BONE SPRING
38565	RUDOLPH ATX STATE COM #004H	Oil	Active	EOG RESOURCES INC	12,650	32.6541061	-103.8755112		[41480] LUSK, BONE SPRING, WEST
38566	RUDOLPH ATX STATE COM #005H	Oil	Cancelled	EOG Y RESOURCES, INC.	8,970	32.6541138	-103.8708801	3/20/2010	[41480] LUSK, BONE SPRING, WEST
38974	RUDOLPH ATX STATE COM #006H	Oil	Cancelled	EOG Y RESOURCES, INC.	8,945	32.6541176	-103.8682175	7/30/2010	[41480] LUSK, BONE SPRING, WEST
38997	PENNY PINCHER FEDERAL COM #004H	Oil	Active	CIMAREX ENERGY CO. OF COLORADO	8,871	32.6523018	-103.8689575	11/6/2010	[29345] HACKBERRY, BONE SPRING
39417	CAPELLA 14 FEDERAL COM #003H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	8,945	32.6668625	-103.8430939	3/12/2011	[41480] LUSK, BONE SPRING, WEST
39418	CAPELLA 14 FEDERAL COM #004H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,091	32.6668587	-103.8473206	3/12/2011	[41480] LUSK, BONE SPRING, WEST
39450	PENNY PINCHER FEDERAL COM #002H	Oil	Cancelled	CIMAREX ENERGY CO. OF COLORADO	8,839	32.6522903	-103.8764801	2/19/2011	[29345] HACKBERRY, BONE SPRING
39544	DOMINO AOJ FEDERAL COM #013H	Oil	Active	EOG RESOURCES INC	8,884	32.6686440	-103.8668747	9/4/2011	[29345] HACKBERRY, BONE SPRING; [97056] HACKBERRY, BONE SPRING, NORTH
40407	BOOTES 15 FEDERAL COM #001H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,017	32.6676254	-103.8497314	7/7/2011	[41480] LUSK, BONE SPRING, WEST

API (30-015-...)	WELL NAME	WELL TYPE	STATUS	OPERATOR	TVD (FT.)	LATITUDE	LONGITUDE	DATE DRILLED	FIELD
40408	BOOTES 15 FEDERAL COM #002H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	8,902	32.6676178	-103.8539886	11/24/2011	[41480] LUSK, BONE SPRING, WEST
40627	AQUILA 22 FEDERAL COM #001H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,179	32.6505165	-103.8487244	11/24/2011	[41480] LUSK, BONE SPRING, WEST
40755	AQUILA 22 FEDERAL #002H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,179	32.6503792	-103.8487244	11/24/2011	[41480] LUSK, BONE SPRING, WEST
41105	ANTARES 23 FEDERAL COM #001H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,120	32.6504059	-103.8478317	9/28/2013	[41480] LUSK, BONE SPRING, WEST
41106	ANTARES 23 FEDERAL #002H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,116	32.6502686	-103.8478317	7/9/2012	[41480] LUSK, BONE SPRING, WEST
42357	HADAR 10 FEDERAL COM #003H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,019	32.6736603	-103.8657990		[41480] LUSK, BONE SPRING, WEST
42572	HADAR 10 FEDERAL COM #004H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	8,017	32.6692314	-103.8654938	5/5/2014	[41480] LUSK, BONE SPRING, WEST
43566	LA BONITA 11 FEDERAL #002H	Oil	Expired	APACHE CORPORATION	14,756	32.6693149	-103.8483803	6/16/2014	[29290] GREENWOOD, BONE SPRING
45321	I'M YOUR HACKBERRY STATE SWD #001	Salt Water Disposal	Cancelled	Summit Midstream Permian, LLC	9,040	32.6668270	-103.8664380	8/27/2014	[97869] SWD, DEVONIAN-SILURIAN

\*TVD – true vertical depth

### **3.2 Groundwater Wells and Sampling**

A search of the New Mexico Office of the State Engineer's website identified five water wells that were drilled within 1 mile of Kings Landing AGI No. 1 and No. 2. A map of these wells is provided in Figure 5, with the respective well details shown in Table 9. The associated Water Rights Summaries are included in Appendix B.

Three of these wells were shown to be plugged. The search was expanded to 2 miles, but the additional wells were also plugged. The well drilled by Frontier was dry and filled in. The other four locations in the 1-mile radius were visited to confirm that samples could not be obtained from any of these wells.

Frontier confirmed with the Snyder Ranch that no functional water wells exist in the surrounding area.

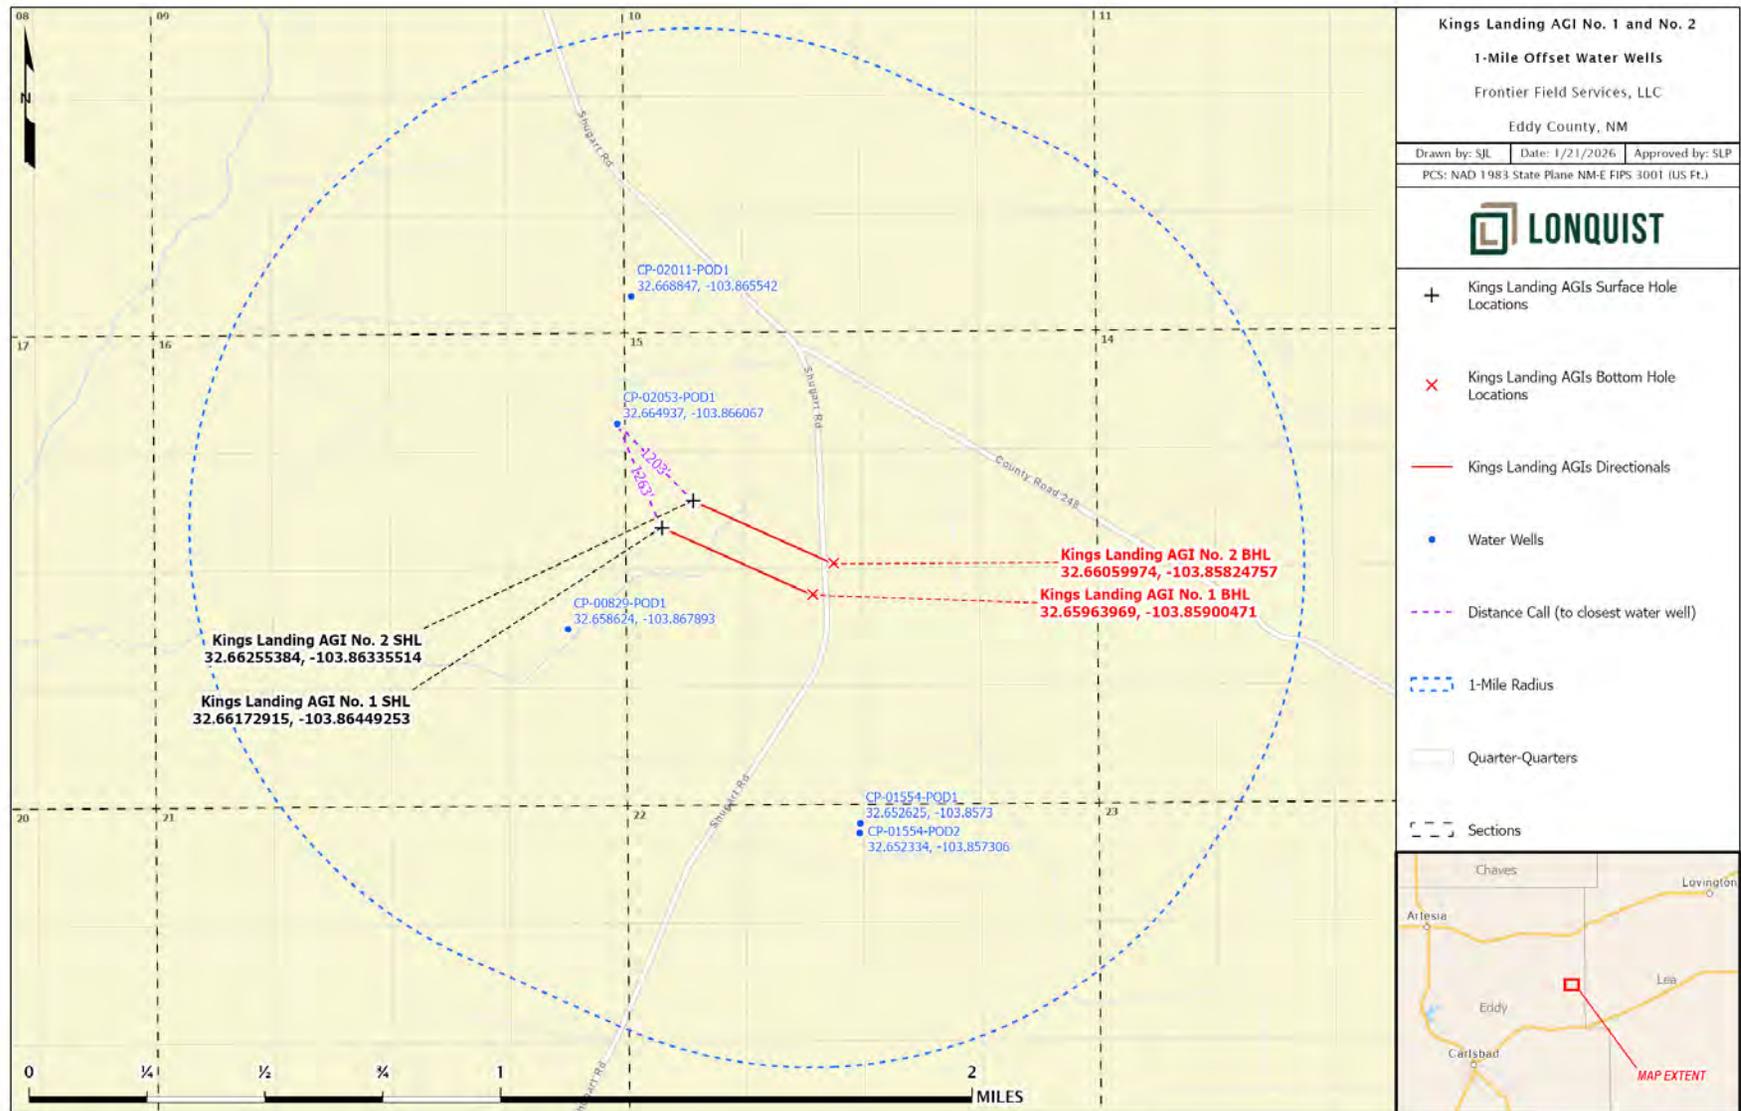


Figure 5 – Water Wells, 1-Mile Area of Review

Table 9 – Water Wells Within the 2-Mile Area of Review

AOR	OBJECTID_1	pod_basin	pod_nbr	pod_suffix	pod_name	tws	rng	sec	county	start_date	plug_date	depth_well	pod_status	pod_rec_nb	pod_file	status	use_	own_lname
1 Mile	75216	CP	00829	POD1	CP-829	19S	31E	16	LE			120	ACT	108094	CP-00829-POD1	DCL	PLS	Snyder Ranches
1 Mile	218275	CP	01554	POD1	CP-1554	19S	31E	22	LE	9/22/2015	9/23/2015	400	PLG	298264	CP-01554-POD1	PMT	CPS	Hopper
1 Mile	218276	CP	01554	POD2	CP-1554	19S	31E	22	LE	9/24/2015	9/25/2015	400	PLG	298265	CP-01554-POD2	PMT	CPS	Hopper
1 Mile	265491	CP	02011	POD1		19S	31E	10	ED	8/27/2024	9/3/2024	105	PLG	348519	CP-02011-POD1	PMT	EXP	Devon Energy Co.
1 Mile	271232	CP	02053	POD1		19S	31E	16	ED	7/14/2025		360	ACT	351129	CP-02053-POD1	PMT	San/Com	Frontier Field Services
2 Mile	220597	CP	00076	POD1	CP-76	19S	31E	27	LE			0		300859	CP-00076-POD1	DCL	OIL	Hegwer
2 Mile	220651	CP	00079	POD1	CP-79	19S	31E	27	LE			0		300915	CP-00079-POD1	DCL	OIL	First Interstate Bank Of Lea
2 Mile	220655	CP	00080	POD1	CP-80	19S	31E	27	LE			0		300919	CP-00080-POD1	DCL	OIL	First Interstate Bank
2 Mile	261421	CP	01985	POD1		19S	31E	17	ED	1/18/2024	1/22/2024	55	PLG	344054	CP-01985-POD1	PMT	MON	Devon Energy Resources
2 Mile	262062	CP	01989	POD1		19S	31E	10	ED			0	PEN	344765	CP-01989-POD1	PMT	MON	Devon Energy Production Company

## 4 Geology/Reservoir Overview

### 4.1 Executive Summary

The proposed Kings Landing AGI No. 1 and No. 2 wells are planned as directional wells with their surface hole locations (SHL) located near the western boundary of Section 15 in Township 19 South, Range 31 East, in Eddy County, New Mexico. The planned directional surveys for the two wells are identical with their bottomhole location (BHL) approximately 1,852 ft east-southeast of their surface hole locations. The two AGI wells are located 460 ft apart and are collectively referred to as the Kings Landing AGI site. The proposed site is located approximately 27 miles northeast of Carlsbad and 42 miles west of Hobbs, New Mexico. Geologically, the AOR falls within the northern Delaware Basin, west of the Central Basin Platform, as shown in Figure 6. The Devonian-age sediments of the Thirtyone, Wristen, and Fusselman formations will serve as the proposed gross injection interval, as depicted in Figure 7. The injection interval will be penetrated at or near the BHLs of the two directional AGI wells. A high-level discussion of the depositional environment, rock properties, and geologic characterization of the proposed site as it relates to AGI operations is provided in the subsequent sections.

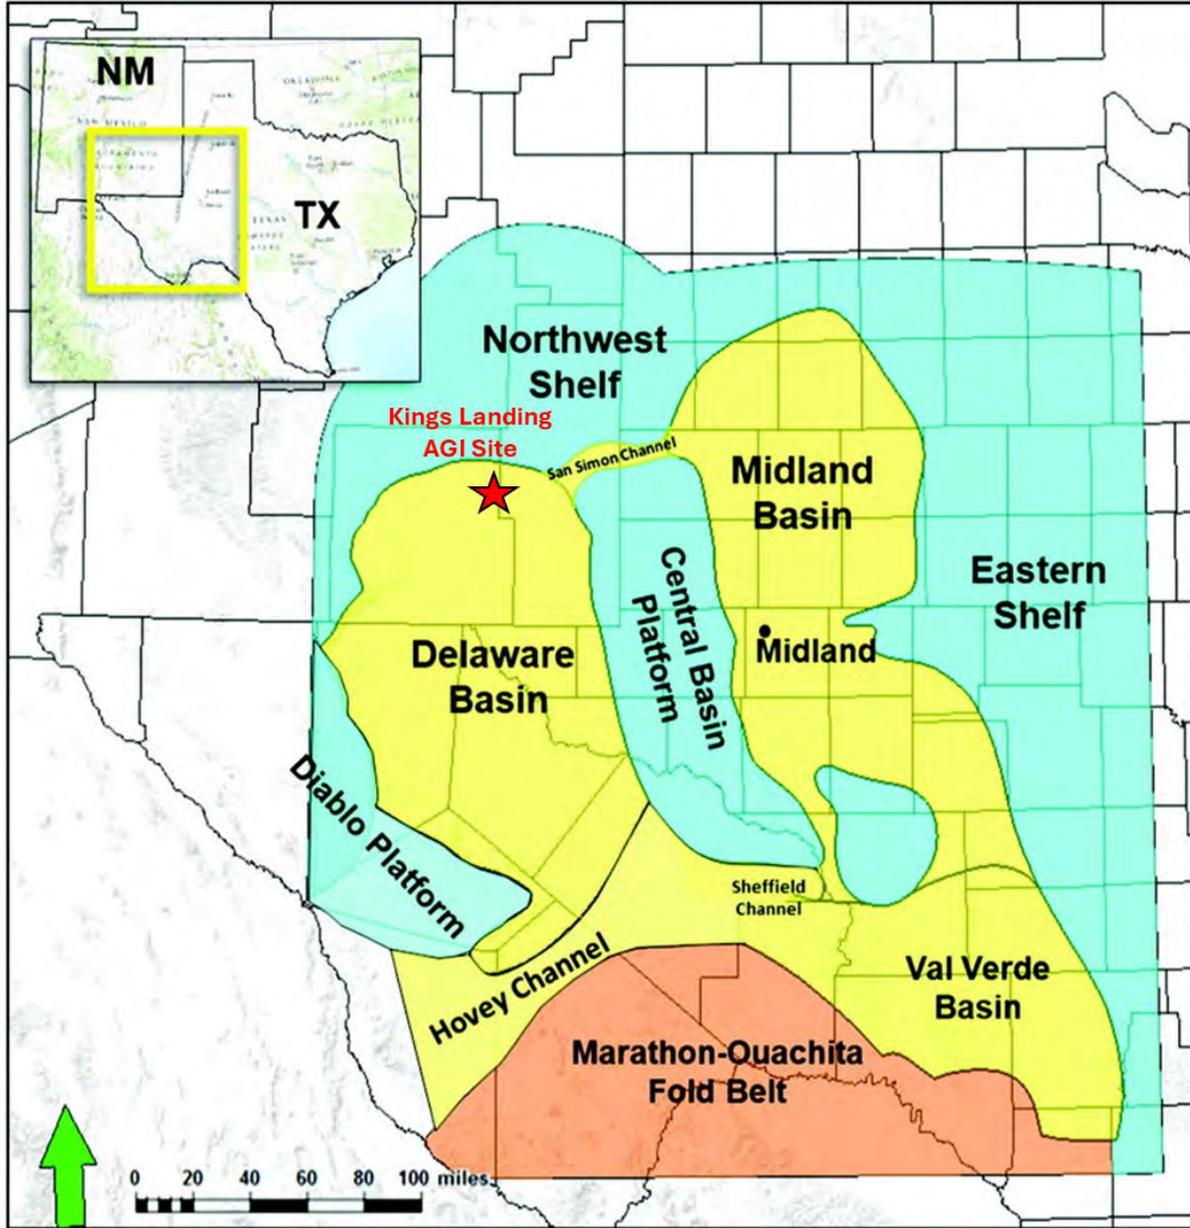


Figure 6 – Permian Basin overview map showing major structural features in relation to the Kings Landing AGI site (modified from Caf and Pigott, 2021).

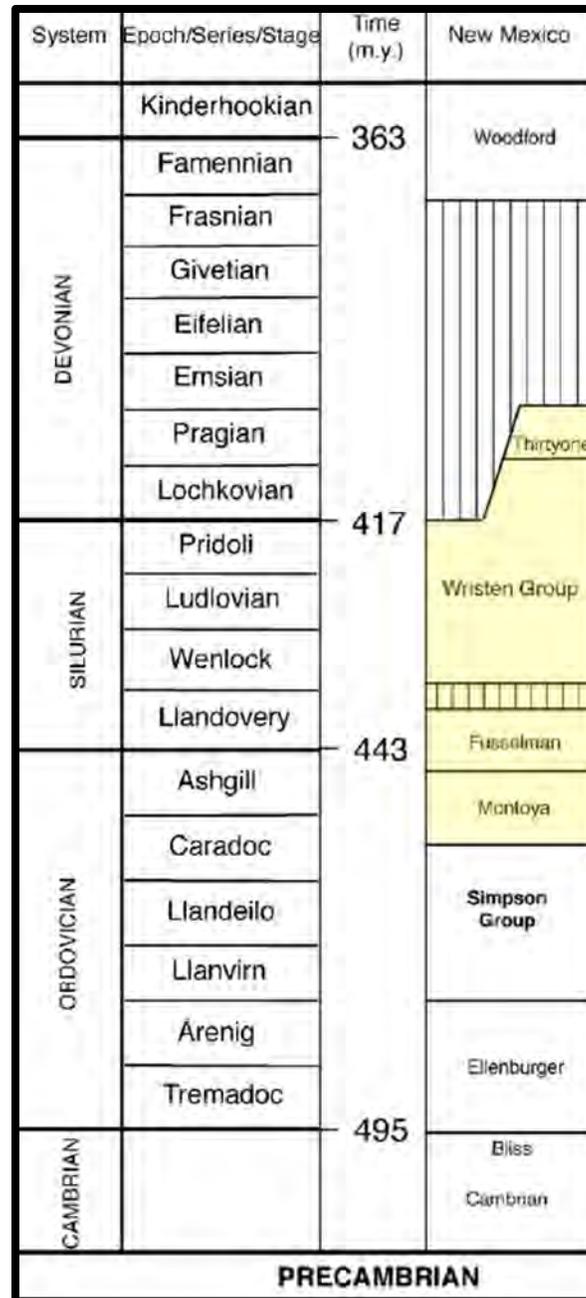


Figure 7 – Lower Paleozoic stratigraphic column as encountered in the Delaware Basin, with the proposed injection interval shaded in yellow (modified from Ruppel et al., 2005).

#### 4.2 Site Characterization

The following sections describe the geologic characterization of the Kings Landing AGI site, utilizing all available subsurface data, interpretations, licensed 3D seismic data and published literature research.

#### 4.2.1 Regional Overview and Basin Evolution

The Delaware Basin is a structural depression in western Texas and southeastern New Mexico, which, in its early history, was part of the western mid-Paleozoic Tobosa Basin, as shown in Figure 8. In the early Pennsylvanian, a median ridge formed separating the Delaware from the ancestral Tobosa Basin; during the Pennsylvanian and Permian, 20,000 ft of sediments accumulated in the deep Delaware Basin trough (Adams, 1965). These basinal sediments consisted largely of clastics in contrast to the thinner equivalent carbonate sections deposited on the surrounding shallow shelves. Water depth is a major controlling factor in the facies distribution pattern, with limited clastic supplies to the basin and the consistently deep waters of the basin having a large influence on sediment accumulation. Only near the end of the Permian, when the basin filled with evaporites, did the surface of sedimentation reach sea level (Adams, 1965).

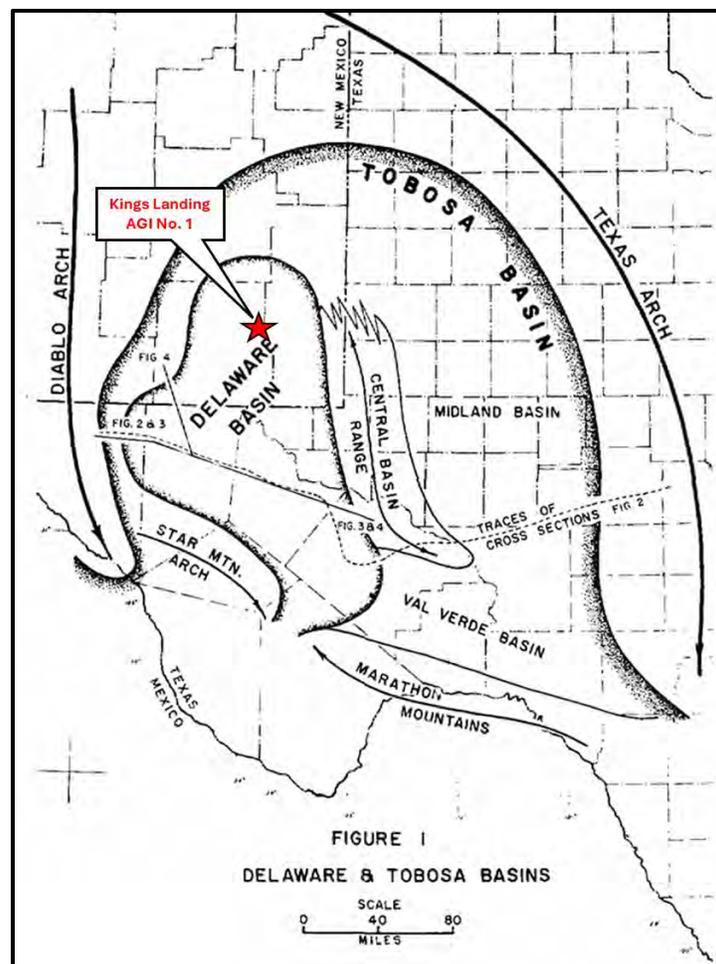


Figure 8 – Present-day Delaware Basin in relation to the mid-Paleozoic Tobosa Basin (modified from Adams, 1965).

The northwestward-transgressing Early Ordovician, Ellenberger Sea spread a wedge of sediments across the Texas–New Mexico area. Sediments deposited in the offshore areas consist of evenly bedded shelf carbonates resting on thin near-shore clastics. Cross-shelf circulation was limited and minor amounts of evaporites were deposited in the more restricted areas, which resulted in the dolomitization of most of the limestone units soon after deposition (Adams, 1965). Dolomitization refers to the process whereby a mineralogical change from calcium carbonate (calcite) to calcium magnesium carbonate (dolomite) occurs.

Crustal warping divided the Lower Ordovician shelf into a series of sags and arches, one being the 350-mile-wide sag known as the Tobosa Basin. During that time, a lens of mid-Ordovician, Simpson sandstone, shale, and limestone accumulated in the lower parts of the sag (Adams, 1965).

During Late Ordovician, Silurian, and Devonian, the basin was generally a site of relatively deep water, which was too deep and acidic for extensive limestone deposition after Montoya Formation time. Meanwhile, clastic supplies were insufficient for sedimentation to keep pace with subsidence, which resulted in considerable parts of the basin being sediment-starved during this time (Adams, 1965). In the intervening epochs of rapid subsidence, the starved central parts of the basin expanded shoreward, and when structural stability was temporarily reestablished, forestepping of the carbonate shelves advanced seaward. Dolomite and white chert characterize the shelf carbonates whereas dense limestone and dark chert predominate in the starved depressions. Multiepisodic subaerial exposure diagenetically altered the highly compartmentalized Montoya to Thirtyone Formation carbonate and chert succession (Calle et al., 2024).

Slight uplifts in Late Devonian time exposed the marginal Siluro-Devonian shelf deposits to truncation. The early Mississippian seas transgressing these leveled-marginal shelf areas received limited supplies of terrestrial clastics. These clastics formed the highly radioactive, richly sapropelic Woodford shales that blanketed most of the submerged areas (Adams, 1965). The widespread, unoxidized, organic-rich Woodford Shale is generally regarded as the source for much of the oil in the pre-Mississippian rocks in the basin.

#### **4.2.2 Methodology for Obtaining Porosity and Permeability Estimates**

Well control that penetrates deep enough to log the Devonian and Ordovician sections is very limited in and surrounding the Kings Landing site. Porosity data was obtained from a nearby type well, the Chevron-operated Greenwood Pre-Grayburg Unit No. 14 (API No. 30-015-31615). This well was selected due to its proximity (located just 3.7 miles north of the Kings Landing AGI site) and as a characteristic representation of typical thicknesses and log responses compared to offset wells in the greater area. Additionally, bulk density was measured across the entirety of the injection and confining zones, allowing for the conversion to density porosity using a dolomite matrix density of 2.87 grams per cubic centimeter ( $\text{g}/\text{cm}^3$ ) and assuming a salt gel (drilling fluid) density of  $1.1 \text{ g}/\text{cm}^3$ .

The type log is shown in Figure 9 with key formation tops annotated and the injection and confining zones depicted via color fill shading. The left track shows gamma ray on a scale from 0 to 150 gAPI from left to right. The middle track has deep resistivity displayed on a logarithmic scale from 0.2 to 20,000 ohms; the right track has density porosity shown on a fractional scale from 0.3 to -0.1 (i.e. 30% to -10%).

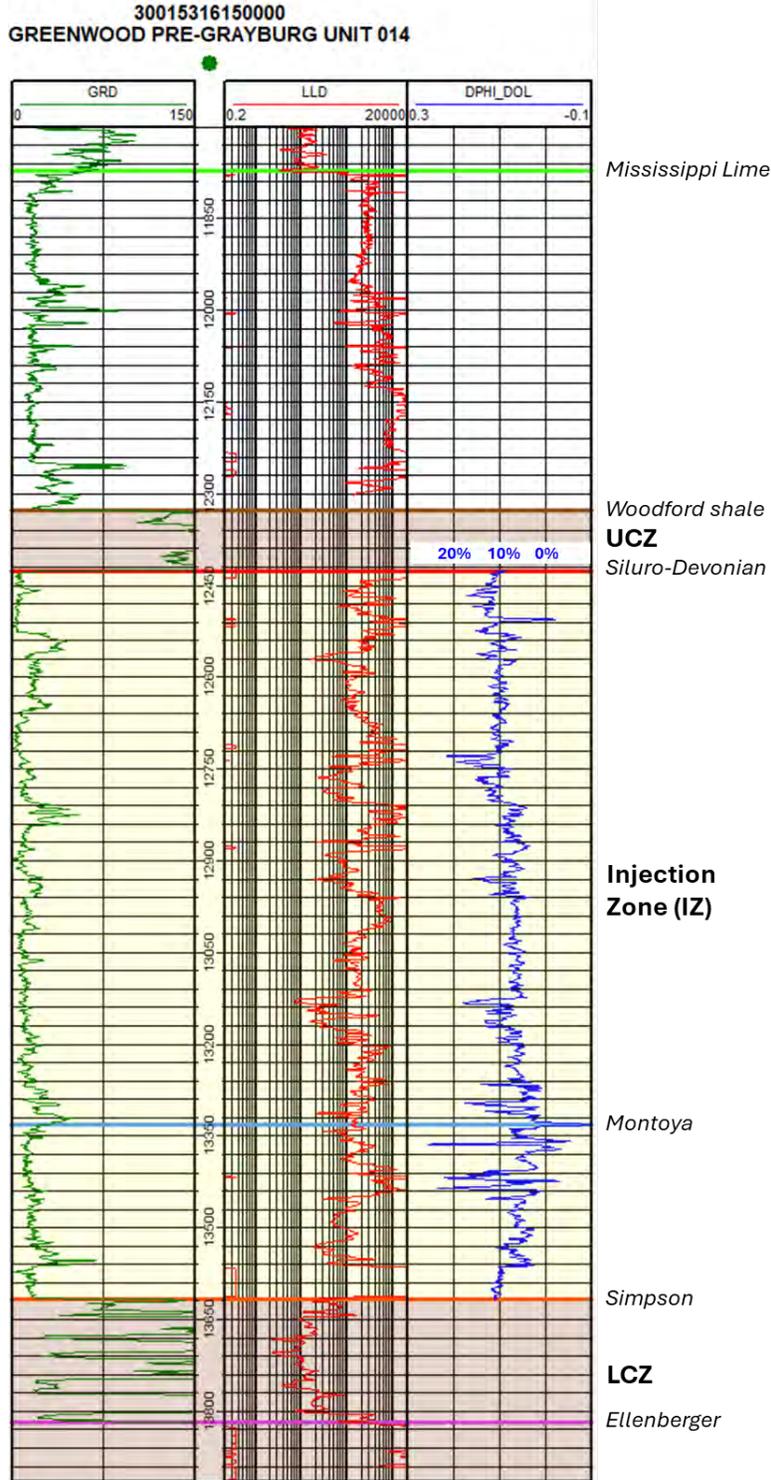


Figure 9 – Kings Landing Type Log (API No. 30-015-31615) annotated with key formation tops and shaded yellow over the gross injection zone and brown over the upper and lower confining zones.

Due to the lack of publicly available core data in the Siluro-Devonian strata, porosity-permeability relationships from published literature were reviewed for potential application to the Kings Landing AOR. A permeability transform by Lucia (1993) was selected to estimate permeability

from the porosity measurements in the porosity type log. The grain-dominated packstone/dolo-packstone/dolostone was most representative of anticipated rock fabric at the project site given the location relative to the basin and its depositional history. Therefore, the recommended Class 2 transform from Lucia (1993) shown in Equation 2 was used as a starting point for estimating permeability.

(Eq. 2)

$$k = (2.040 \times 10^6) \times \phi^{6.38}$$

Furthermore, a study conducted by Smye et al. (2024) reviewed SWD injection history throughout the Delaware basin to create an injectivity-derived permeability. These injectivity-derived values were used to further refine the permeability estimated for this permit application.

Lastly, a crossplot by Ruppel and Holtz (1994) in the Dollarhide field, located on the border of Lea County, New Mexico and Andrews County, TX, was used to quality-check and adjust the Lucia (1993) transform and Smye et al. (2024) injectivity-derived permeabilities. The crossplot which provides the important distinction between dolomitic vs. chert lithologies, as well as a locator map of Dollarhide field are shown in Figures 10 and 11, respectively.

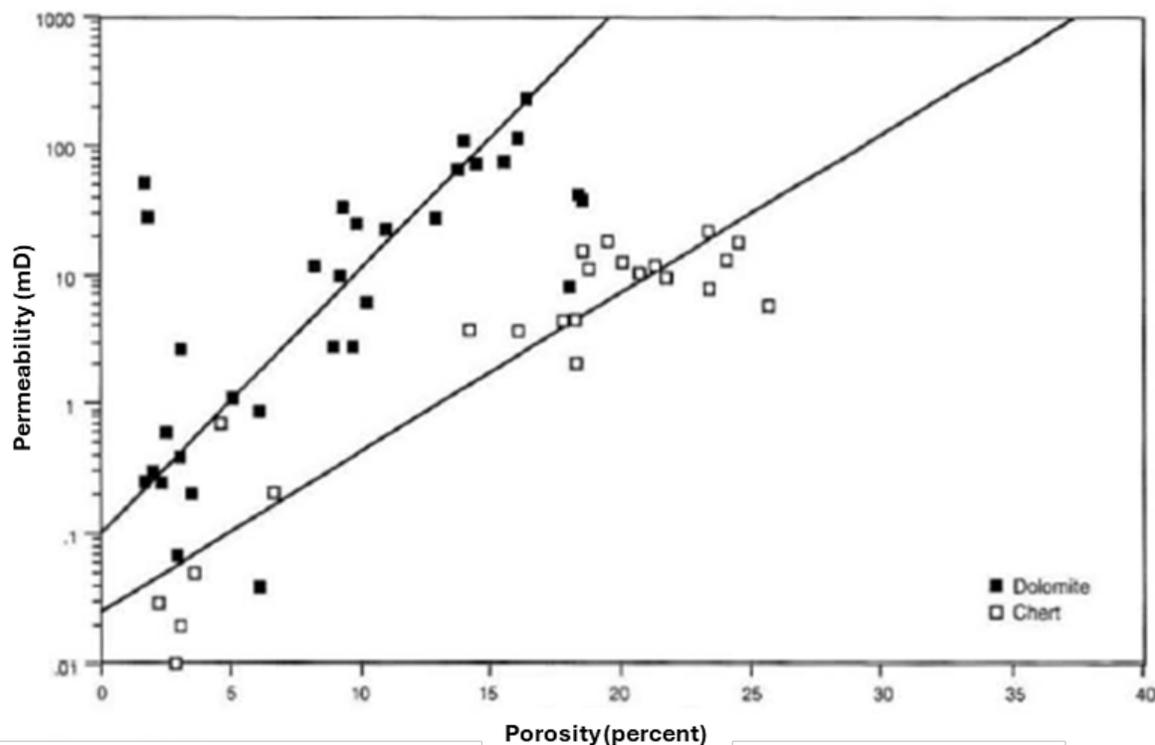


Figure 10 - Porosity-permeability crossplot from Siluro-Devonian core data samples in the Dollarhide Field. The location of the data samples is shown in a regional map in Figure 11.

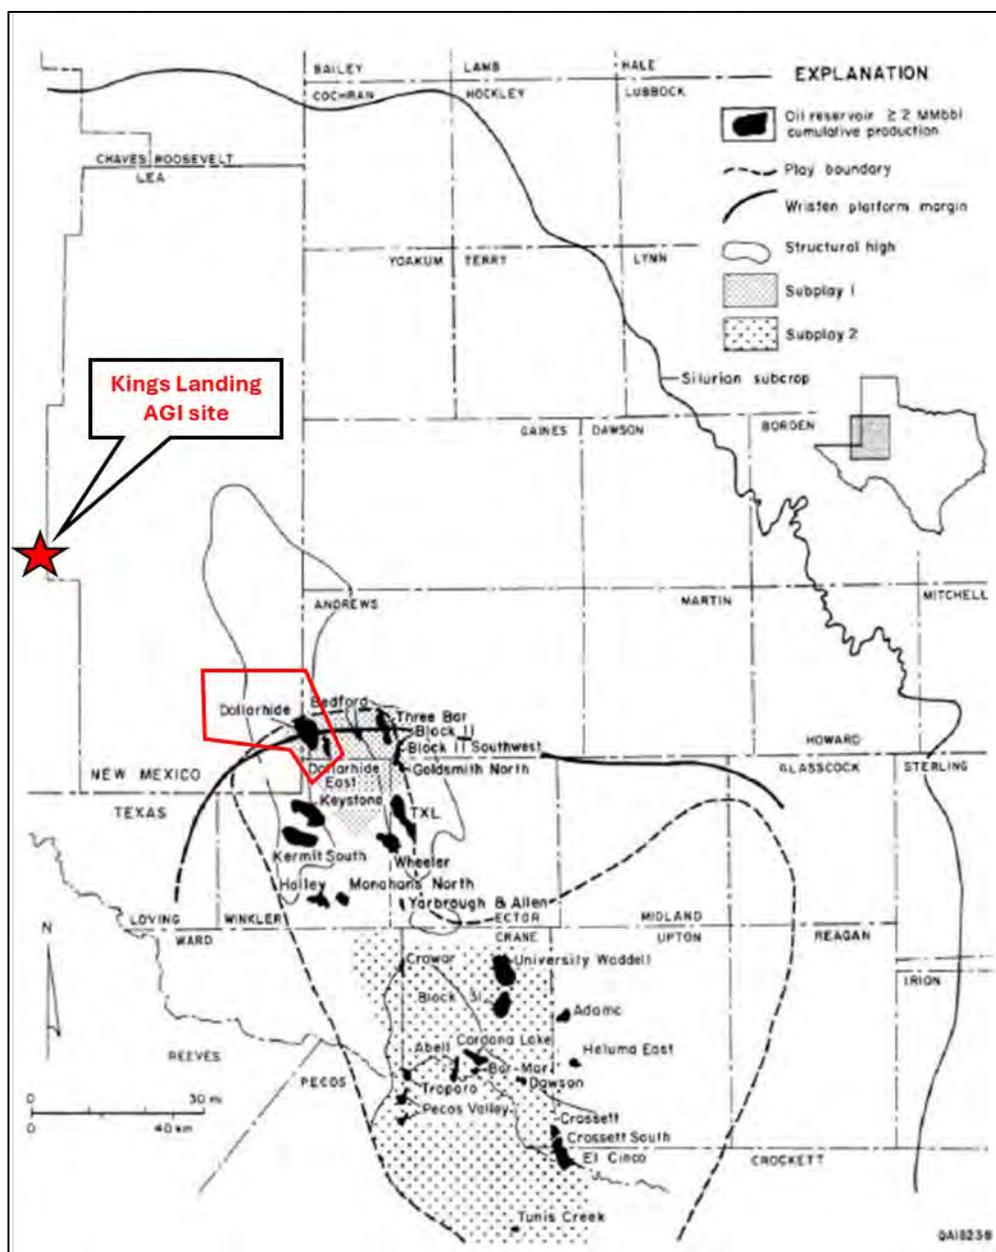


Figure 11 – Location of Dollarhide Field near the Kings Landing AGI site (modified from Ruppel and Holtz, 1994).

The following sections present more specific site characteristics, including brief lithologic characteristics; ranges and averages of thickness, porosity, and permeability of the injection and confining zones; as well as anticipated formation top depths at the AGI well locations.

### 4.2.3 Injection Zone

The injection zone consists of the Devonian Thirtyone and the Silurian Wristen and Fusselman formations, collectively referred to as the Siluro-Devonian. The Montoya group found

immediately below the Siluro-Devonian interval will serve as the basal member of the injection zone. The Siluro-Devonian and Montoya groups were deposited between 390 million years (m.y.) and 450 m.y. as shown in the stratigraphic column that was presented in Figure 7. The Montoya and Fusselman share many reservoir characteristics due to similar depositional environments, so have historically been grouped together in many publications. Subtle variability in porosity and permeability exists within the injection zone, with a general trend of decreasing porosity with depth, whereby the upper portion of the Siluro-Devonian (i.e. Thirtyone and Wristen groups) exhibit slightly higher porosities compared to the lower portion of the injection zone (i.e. Fusselman and Montoya groups). This trend can be observed in the type log provided in Figure 9.

The Siluro-Devonian and Montoya injection zone is comprised of approximately 1,200 ft of dolomitized lime with an anticipated depth interval of 13,215–14,425 ft true vertical depth (TVD) at the Kings Landing AGI No. 1 location and 13,240–14,440 ft TVD at the Kings Landing AGI No. 2 location. Density-porosity measurements from the nearby type log (API No. 30-015-31615) range from 0.9% to 15.1%, with an average porosity of 8.67%, using a dolomite matrix density of 2.87 g/cm<sup>3</sup>. An estimated permeability of 5.8 mD was used as input for the reservoir modeling. This value was derived from multiple data sources in overlapping alignment with one another, as described in greater detail in *Section 5.1.3.1*.

#### **4.2.4 Confining Zones**

##### **4.2.4.1 Upper Confining Zone**

The Woodford Shale (Upper Devonian) will serve as the UCZ for Kings Landing AGI No. 1 and No. 2. The shale is comprised predominantly of black, organic-rich shales and minor black cherts, siltstones, sandstones, and greenish-colored shales. The Woodford unconformably overlies the Siluro-Devonian carbonates and is unconformably overlain by the lower Mississippian limestone (Broadhead, 2011).

The Woodford Shale is regionally continuous across the Delaware Basin and has an average thickness of 125 ft, according to regional mapping by Broadhead (2011), displayed in Figure 12. This thickness is also supported by offset well logs in the Kings Landing AGI No. 1 area.

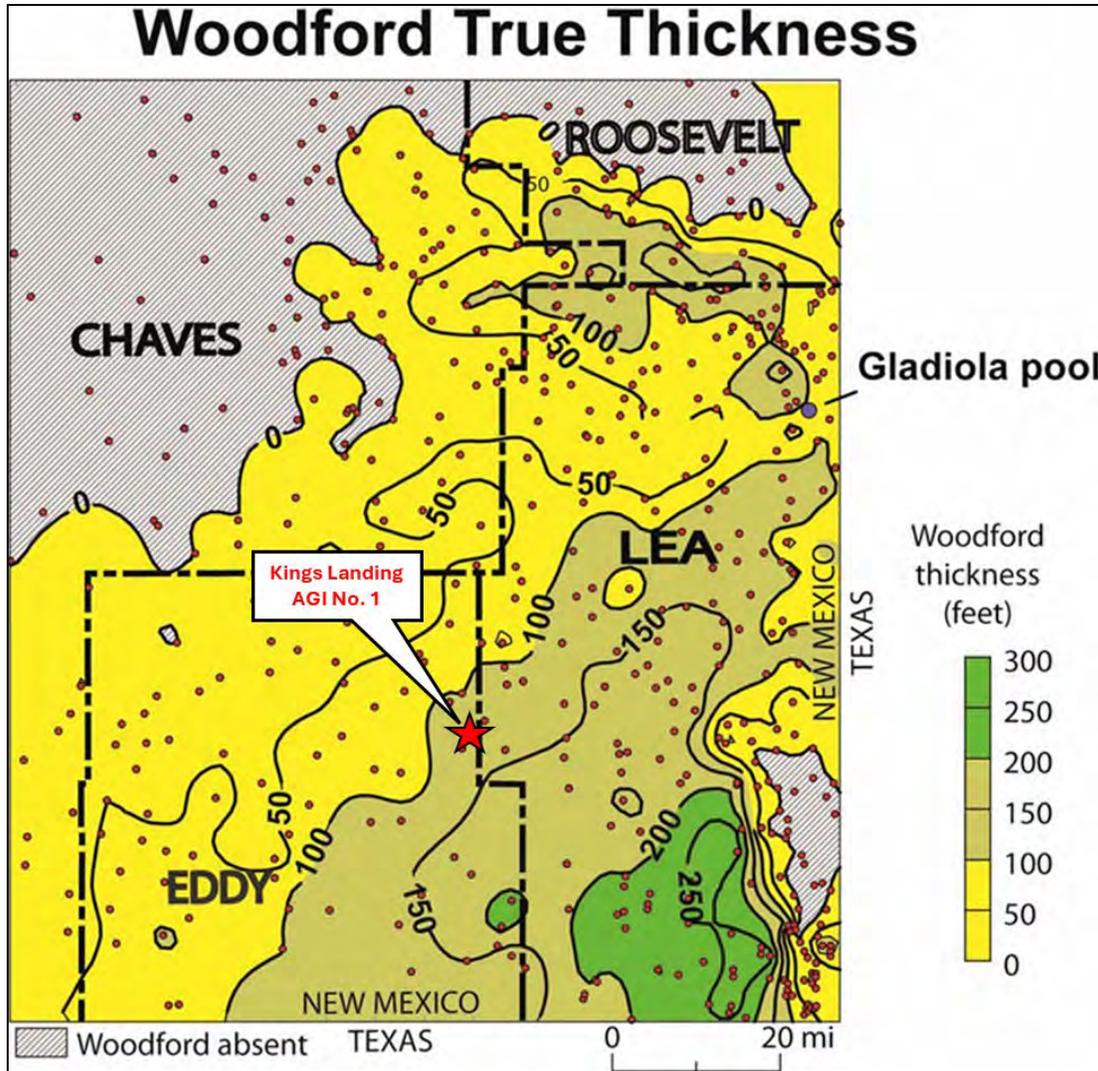


Figure 12 – Regional isopach map of the Woodford Shale in southeastern New Mexico, with the location of the Kings Landing AGI wells represented by the red star (modified from Broadhead, 2011).

The Woodford Shale has an average porosity of 2.3% and an average permeability of just 1.9 nanodarcies (nD) per core sample analysis published by Kibria, Hu, and Zhang (2017). The core data from five Woodford samples used to compute the aforementioned averages are presented in Table 10. The Woodford Shale is recognized “as an effective seal in the [Permian] basin for both the Ellenberger Group and the Montoya Group to Thirtyone Formation injection intervals” (Calle et al., 2024).

Table 10 – Pore structure properties of Woodford Shale core samples (Kibria, Hu, and Zhang, 2017).

Sample ID (GRI+)	Bulk density (g/cm <sup>3</sup> )	Apparent (skeletal) density (g/cm <sup>3</sup> )	Total pore area (m <sup>2</sup> /g)	Porosity (%)	Median pore-throat diameter (nm)	Permeability (nD)	'Tortuosity' (D <sub>0</sub> /D <sub>e</sub> )	L <sub>0</sub> /L [square root of (tortuosity * total porosity)]
RTC 12835 U	2.30	2.41	6.70	4.35	3.80	2.60	6339	16.60
RTC 12896 U	2.41	2.47	5.86	2.33	3.70	2.14	4872	10.65
RTC 12932 M	2.40	2.44	2.99	1.80	3.70	1.28	6970	11.21
RTC 12977 M	2.38	2.43	2.52	2.14	4.10	1.68	7019	12.27
RTC 13016 L	2.66	2.69	1.02	1.20	4.50	1.81	5862	8.38

#### 4.2.4.2 Lower Confining Zone

The lower confining zone (LCZ) is comprised of the Simpson group, a tight carbonate unit with abundant interbedded shales. Below the Simpson, additional confinement is provided by the Ellenberger group. The Ellenberger is a very shale-rich dolomitic limestone section that was deposited in a deep-water environment during early stages of basin infilling.

The Simpson and Ellenberger groups are laterally continuous across Eddy and Lea Counties. In the Kings Landing AGI area, the Simpson is approximately 200 ft thick, as observed in the type log (API No. 30-015-31615). The base of the Ellenberger is not reached in the type log but is at least several hundred feet thick, according to literature and other logs from the surrounding area.

The Simpson Group has an average matrix porosity of 2–3% from a study of 92 wells across the Midland basin by Calle et al. (2024). The Simpson group's "stacking pattern of multiple lithofacies with different pore networks and fabrics has a highly heterogeneous permeability system that adequately arrested vertical and lateral migration of intra-Simpson and underlying Ellenberger hydrocarbons" over the last 450 m.y.; these two units are widely recognized as "effective seals for injected fluid" (Calle et al., 2024).

#### 4.2.5 Anticipated Formation Tops

Key regional formation tops were picked and correlated across well logs within 25 miles of the Kings Landing AGI site. Structure maps were produced on these horizons and projected to the Kings Landing AGI No. 1 and No. 2 locations to give anticipated depths of the formations at the injection site. Where well control was lacking, seismic mapping was used as a guide to generate the structural contour map. Table 11 lists the anticipated depths and information of relevance related to the AGI operations.

Table 11 – Anticipated Formation Tops at Kings Landing AGI No. 1 and No. 2 Locations

Formation Top	AGI No. 1 (ft, MD)	AGI No. 1 (ft, TVD)	AGI No. 2 (ft, MD)	AGI No. 2 (ft, TVD)	Notable Information
Rustler	(ft, MD)	(ft, TVD)	(ft, MD)	(ft, TVD)	Potential USDW to be protected
Salado	KB = 3,525 ft	KB = 3,525 ft	KB = 3,535 ft	KB = 3,535 ft	
Rustler	520	520	530	530	Potential USDW to be protected
Salado	795	795	805	805	
Yates	2,280	2,280	2,290	2,290	
Seven Rivers	2,525	2,525	2,535	2,535	
Capitan Reef	2,630	2,630	2,640	2,640	Additional string of surface casing planned to protect reef
Bell Canyon	3,513	3,505	3,523	3,515	
Cherry Canyon	4,717	4,680	4,727	4,695	
Brushy Canyon	6,391	6,315	6,396	6,330	
1 <sup>st</sup> Bone Springs (lime)	6,913	6,825	6,917	6,840	
1 <sup>st</sup> Bone Springs (sand)	8,265	8,145	8,264	8,160	
2 <sup>nd</sup> Bone Springs (lime)	8,501	8,375	8,499	8,390	
2 <sup>nd</sup> Bone Springs (sand)	8,982	8,845	8,978	8,860	
3 <sup>rd</sup> Bone Springs (lime)	9,427	9,280	9,422	9,295	
3 <sup>rd</sup> Bone Springs (sand)	9,801	9,645	9,795	9,660	
Wolfcamp	10,334	10,165	10,331	10,185	
Strawn	11,357	11,165	11,351	11,185	
Atoka	11,746	11,550	11,740	11,570	
Morrow	11,841	11,645	11,835	11,665	
Mississippi limestone	13,126	12,930	13,120	12,950	
Woodford Shale	13,646	13,450	13,645	13,475	Top of UCZ
Siluro-Devonian	13,871	13,675	13,870	13,700	-Base of UCZ/Top of Injection Zone -Consists of Thirtyone, Wristen, and Fusselman groups
Montoya	14,626	14,430	14,625	14,455	Injection zone (continued)
Simpson	15,056	14,860	15,055	14,885	Top of LCZ
Ellenberger	15,256	15,060	15,255	15,085	Secondary LCZ

\*KB=Kelly Bushing

#### 4.2.6 Structure

Well data within 25 miles of the proposed Kings Landing AGI No. 1 was reviewed and logs that penetrated the top of the Siluro-Devonian were identified. Sixteen wells were found that reached deeply enough, and formation tops were correlated across these wells. Due to the limited control, however, structure mapping was quality-checked and validated by published regional structure maps in the area on the top of the Siluro-Devonian. Complete alignment in interpretation and formation-top depths was observed among the different data sources—providing additional confidence in the generated structure map shown in Figure 13.

Some faulting is believed to exist in the Siluro-Devonian section, as indicated by the aforementioned published regional structure maps.

Following the submittal of the original application (Case No. 25480, July 1, 2025), Frontier licensed approximately 20 square miles of 3D seismic data across the Kings Landing area. The goal of acquiring this data was to increase confidence in the structural interpretation, namely, identifying and mapping the faults and local variations in bed dip not accounted for in published regional subsurface maps. Most of the faults found in the published map sources were confirmed, except for a small fault 1.9 miles south-southeast of the proposed AGI well locations, which was not observed in the 3D seismic data. Additionally, a new fault was identified in the 3D seismic that was not shown on the regional published maps. This fault is approximately 0.7 miles west-northwest of the proposed AGI wells, making it the closest fault to the Kings Landing site. This fault trends northeast-southwest and dips to the southeast, putting the two AGI wells in its downthrown block; the seismic data suggests a fault throw of approximately 200 ft toward the center of the fault, with the throw decreasing towards the tip ends of the fault. A fault-slip potential model was performed on this fault and the rest of the faults in the Kings Landing area for potential seismicity events and can be found in Appendix D.

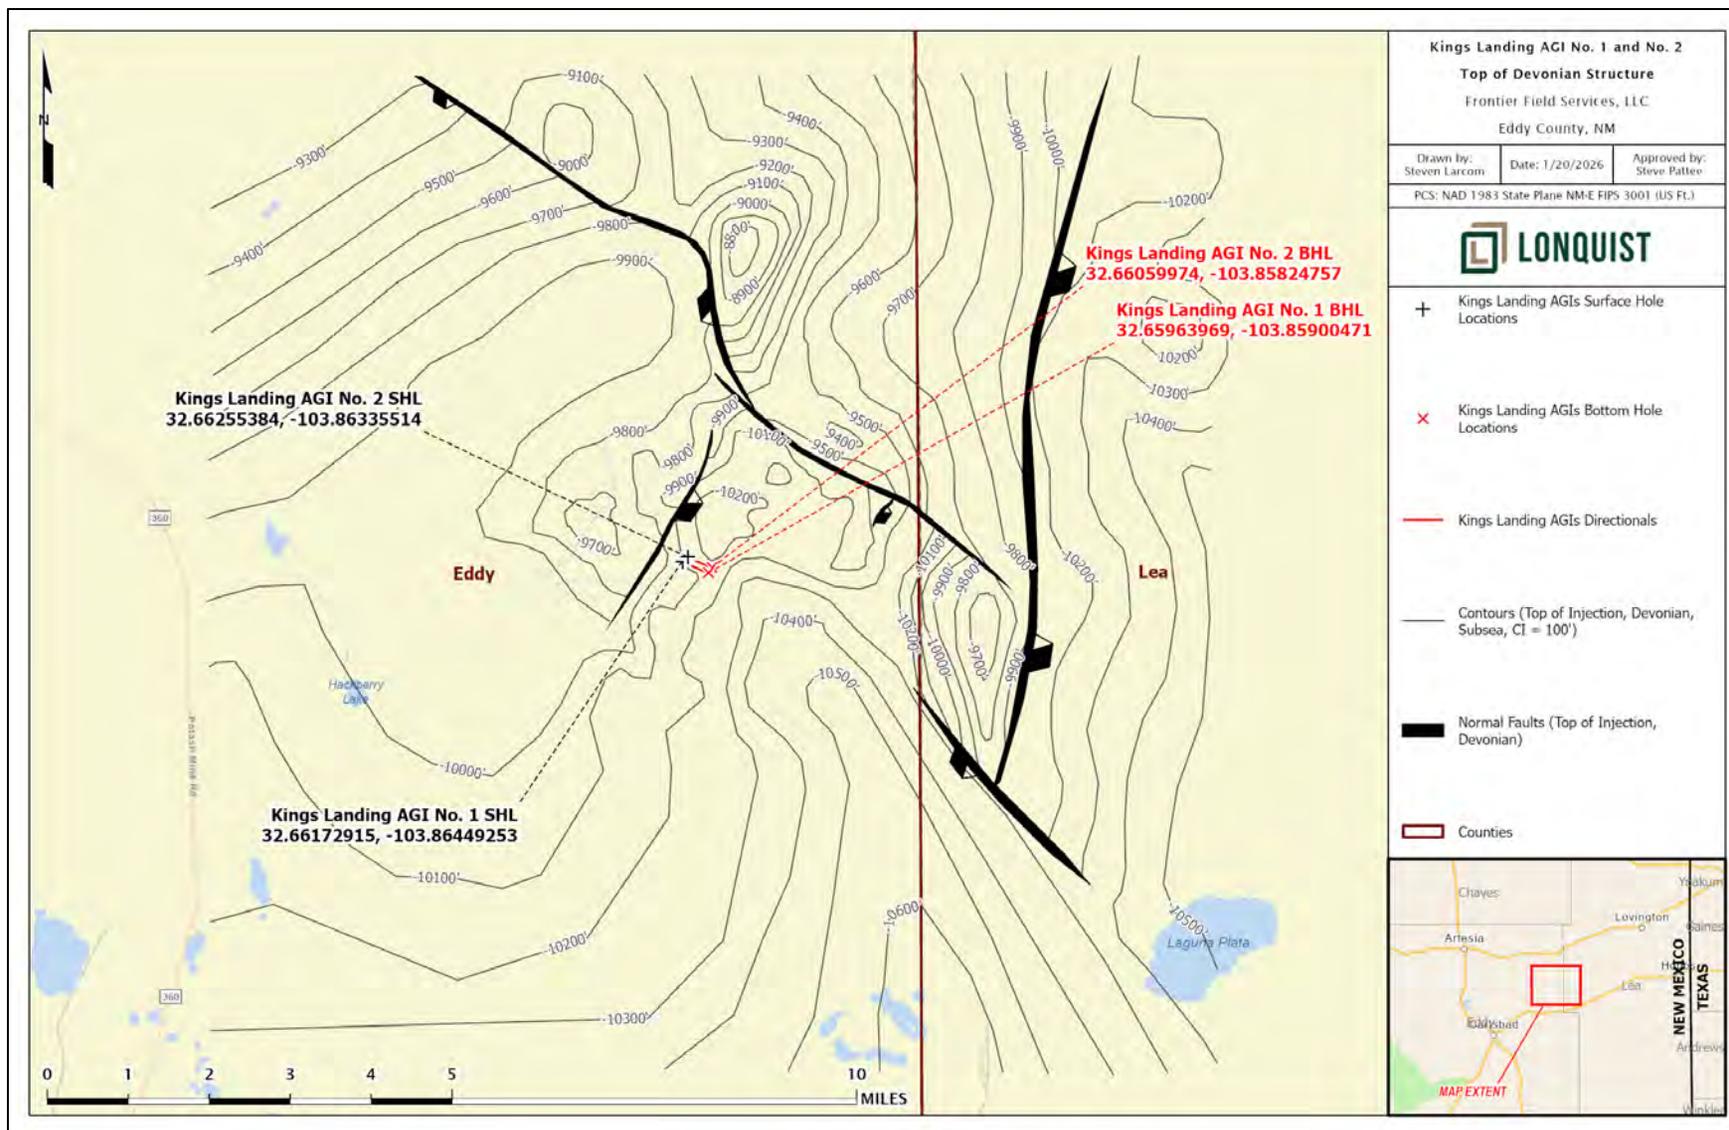


Figure 13 – Structure map (TVD subsea) of the top of the Siluro-Devonian (injection zone).

#### 4.2.7 Seismic Attribute Analysis

Several surface- and interval-based seismic attributes were generated for both the Kirchhoff Post-stack Time Migrated (KPSTM) and Kirchhoff Post-stack Depth Migrated (KPSDM) volumes. These parameters included amplitude, frequency, and edge detection-based attributes. Color-blending methods for visualizing frequency-based attributes were also applied. Additionally, inversion was carried out using the KPSTM volume. From these, the most useful were the acoustic impedance volume from inversion and the edge-detection, ant-tracking volume.

The post-stack inversion workflow included the synthetic generation for the Greenwood Pre-Grayburg Unit No. 14 well and the wavelet extraction from seismic at its location. A low frequency impedance model was also used as input into the simultaneous inversion process. The resulting acoustic impedance volume was used as a qualitative indicator of matrix porosity. The resulting volume was then integrated with the porosity logs from the wells and indicates probable similar porosities at the drill locations. Figure 14 shows a northwest-southeast section through the Greenwood Pre-Grayburg Unit No. 14 and Zia AGI No. 2 wells, in addition to the location map. The map is filtered to display only high impedance values, indicative of lower matrix porosity. Therefore, the drillsite locations are likely in areas with relatively higher porosities.

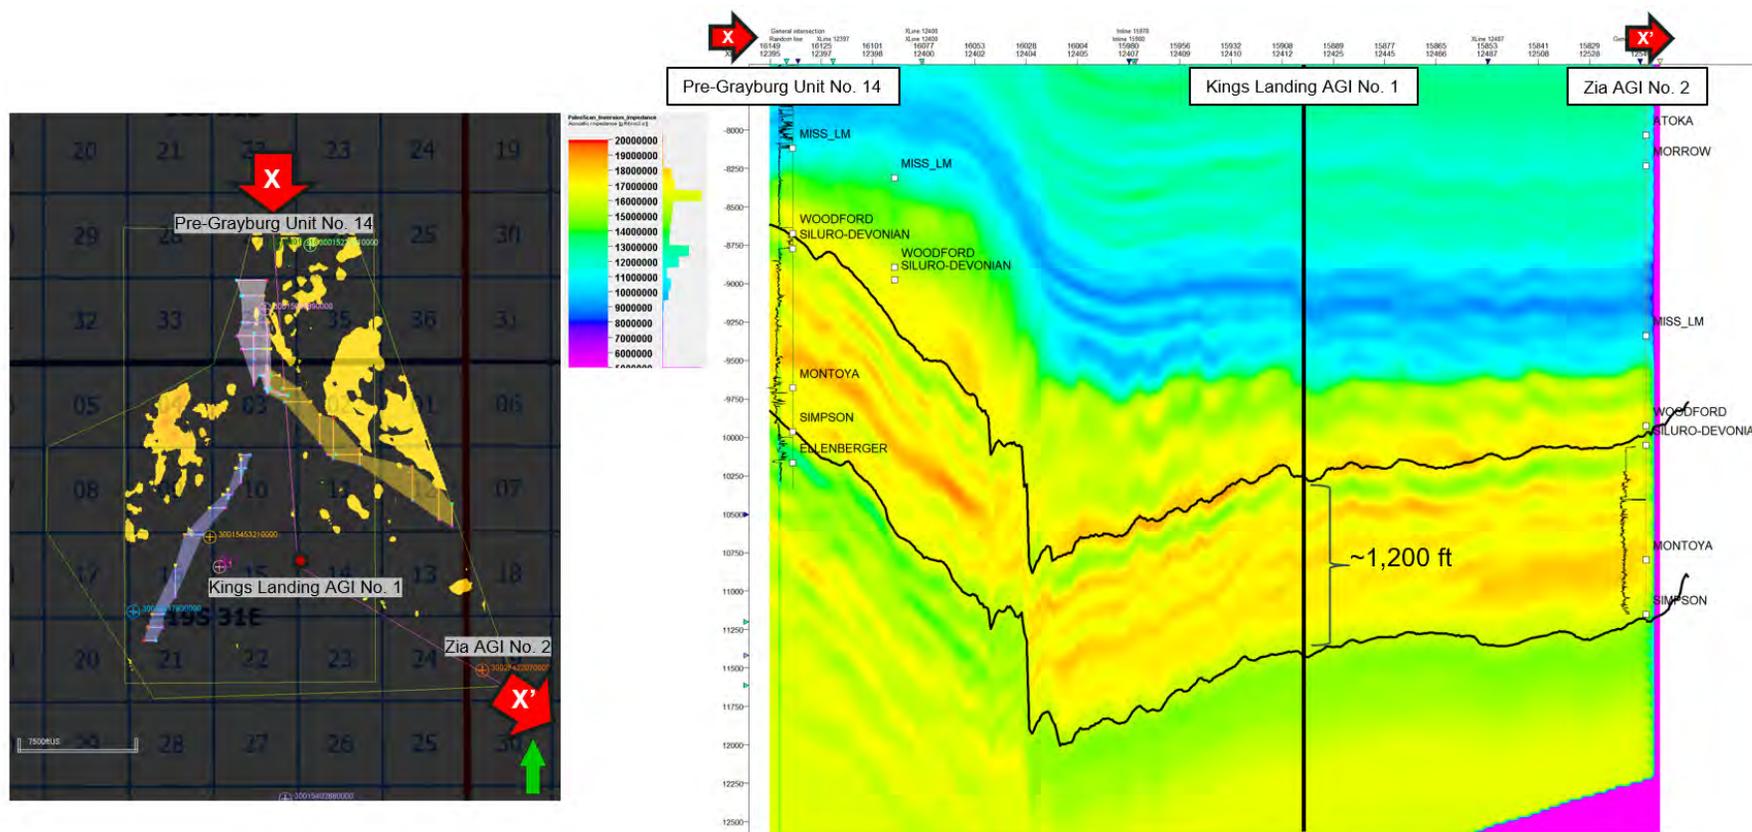


Figure 14 – Location reference map (left) with a relative impedance grid, whereby the higher impedances (yellow) correspond to lower matrix porosities and the lower impedances (black) represent areas with higher matrix porosities. A northeast-southwest-oriented line of section through the impedance volume is shown on the right.

The ant-tracking volume is an edge detection attribute that is useful for the detection of discontinuities such as faults and fractures. The workflow includes conditioning of the seismic volume before running the ant-tracking volume, whereby structural smoothing and variance volumes are generated. Figure 15 displays the ant-tracking discontinuity volume through the Woodford-to-Simpson (upper-to-lower confinement) seismic interval. The figure on the right has been filtered to display only the seismic discontinuities in basemap view. The surface and bottomhole locations of the two proposed AGI drill sites are annotated on the map. The proposed locations are in areas of high seismic discontinuity concentrations, which likely indicate relatively dense natural fracture networks that contribute to greater secondary porosity.

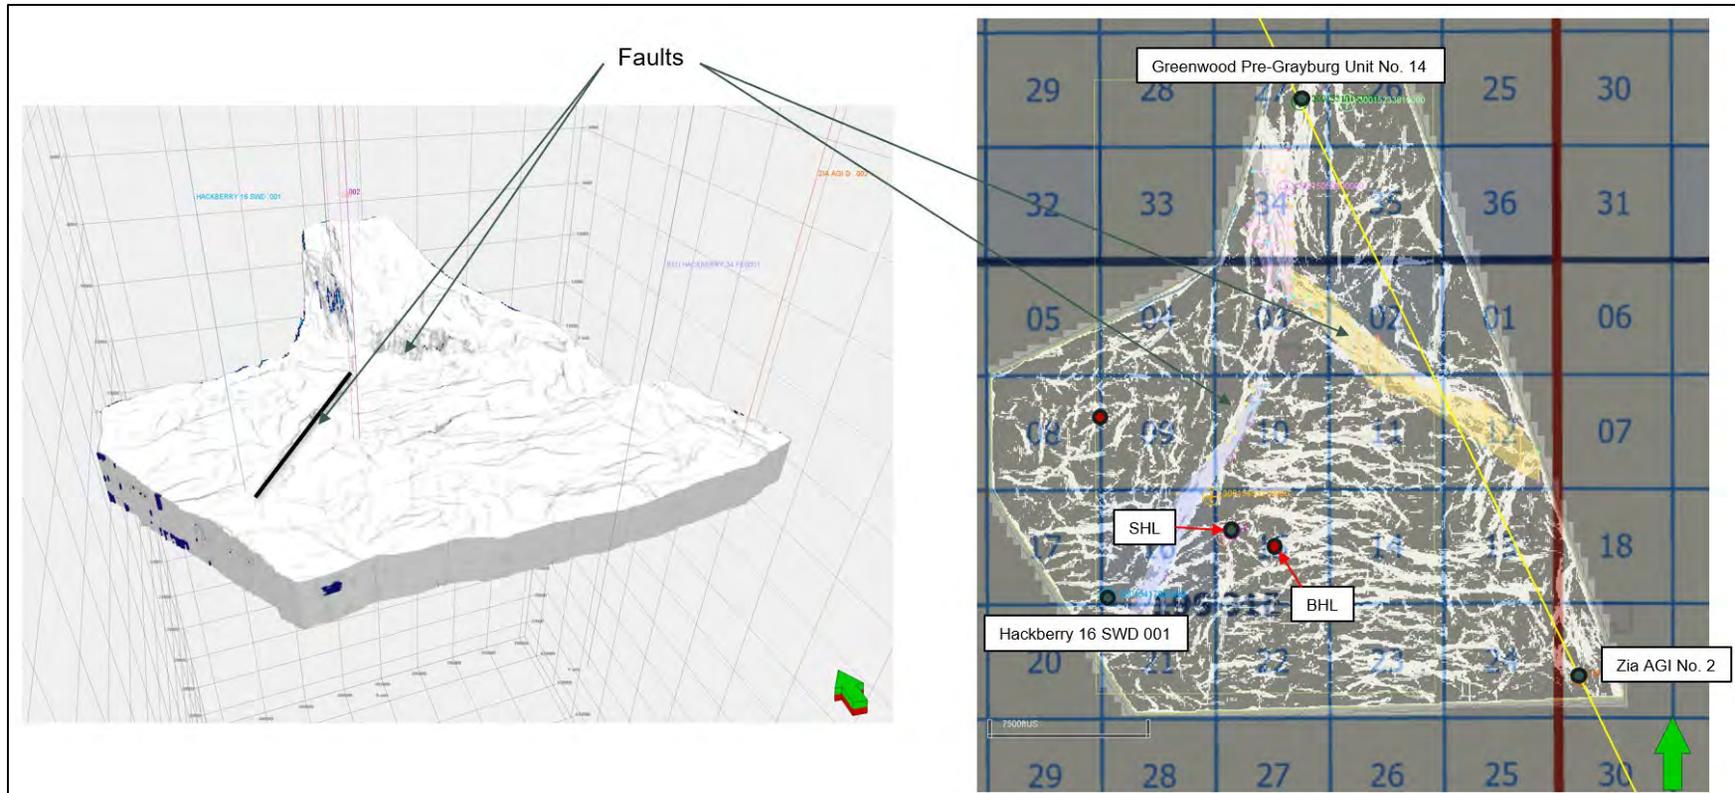


Figure 15 – Ant-tracking discontinuity volume in 3D view (left) and basemap view (right) showing the likelihood of natural fracturing and secondary porosity in the injection interval.

### 4.3 Injection Zone Chemistry

A formation-water review of the USGS National Produced Waters Geochemical Database (ver. 2.3; accessed January 30, 2025)—a public database of fluid samples—identified 17 wells, with analyses collected from the Siluro-Devonian interval in wells within approximately 25 miles of the proposed Kings Landing AGI site. A summary of their formation fluid characteristics is presented in Table 12.

Table 12 – Produced Siluro-Devonian formation water characteristics for wells within 25 miles of the Kings Landing AGI site.

USGS ID No.	API No.	Well Depth (ft)	pH	Concentration (ppm)						
				TDS	HCO <sub>3</sub>	Ca	Cl	Mg	Na	SO <sub>4</sub>
68319	30-025-03156	14,647	7.70	25,800	830	1,170	14,100	134	8,410	1,120
68382	30-015-20159	10,610	7.30	20,259	403	952	10,800	196	6,250	1,500
68446	30-025-08483	16,506	7.00	71,078	500	2,400	42,200	329	24,039	1,000
68449	30-025-21082	14,940	6.90	80,187	476	2,820	47,900	378	27,076	900
68452	30-025-21647	14,895	7.00	25,199	415	1,210	14,200	171	7,903	1,050
68541	30-025-20378	11,896	7.37	39,874	545	1,529	22,440	258	13,093	1,529
68542	30-025-20378	11,896	6.78	26,848	671	1,200	14,520	223	8,475	1,540
68552	30-015-05074	12,860	7.04	48,954	603	880	27,276	500	16,417	1,513
68626	30-025-01735	14,948	7.03	28,079	791	1,022	14,810	185	9,127	1,885
68646	30-025-01735	14948	7.03	28,696	808	1,044	15136	189	9328	1,926
68648	30-025-02791	12,978	7.20	36,862	178	2,060	21,109	310	11,534	1,319
70290	30-015-05614	13,446		17,219	231	3,979	10,750	1,117		518
70292	30-015-05615	12,858		28,898	942	1,352	16,380	435		1,382
70293	30-015-05615	12,858		27,603	291	1,712	16,400	544		610
70302	30-015-05689	12,925		40,731	1,073	1,610	23,530	279		619
70303	30-015-05689	12,925		39,813	1,051	1,504	22,960	185		623
70499	30-025-00935	14,367		25,847	641	1,287	14,100	56		1,324
<b>AVERAGE:</b>		<b>13,559</b>	<b>7.1</b>	<b>35,997</b>	<b>615</b>	<b>1,631</b>	<b>20,507</b>	<b>323</b>	<b>12,877</b>	<b>1,198</b>

The total dissolved solids (TDS) in the Kings Landing AGI site area ranges from 17,219 parts per million (ppm) to 80,187 ppm, with an average TDS of 35,997 ppm. The primary constituent of the Siluro-Devonian formation water is chloride, with an average concentration of 20,507 ppm.

Based on the data collected from offset wells, the Siluro-Devonian fluids are expected to be fully compatible with the acid gas injectate. However, formation fluids will be sampled in Kings Landing AGI No. 1 to provide more site-specific properties and to verify the assessment of fluid compatibility.

#### 4.4 Hydrology

The New Mexico Water Rights Database from the New Mexico Office of the State Engineer was queried (January 30, 2025) for water wells in the vicinity of the proposed Kings Landing AGI site. A search radius of 2 miles returned five water wells, as shown in Table 13. The depths of the wells range from 55–231 ft. The Rustler Formation may also be another USDW and will be protected through the top of the Salado Formation at 805 ft by setting surface casing at 900 ft.

Table 13 – Water Wells Registered Within 2 miles of the Kings Landing AGI Site

POD Number	County	Section	Township	Range	Well Depth (ft)
CP 00725 POD1	EDDY	28	19S	31E	231
CP 01942 POD1	EDDY	06	19S	31E	105
CP 01943 POD1	EDDY	20	19S	31E	55
CP 01985 POD1	EDDY	17	19S	31E	55
CP 02011 POD1	EDDY	10	19S	31E	105

The main population centers in the area include Carlsbad, Hobbs, Lovington, and Jal, along with the smaller communities of Loving and Malaga, located along the Pecos River. The Guadalupe Mountains west of the Kings Landing AGI site are a significant recharge area for groundwater resources in the Carlsbad area and the southernmost reach of the Pecos River in New Mexico. Multiple lithologic units are recognized as aquifer units in the Delaware Basin of southeast New Mexico, including the Pecos Valley alluvium deposits (Cenezoic), the Santa Rosa sandstone (Triassic), and the Rustler Limestone (Permian). These units are presented in Figure 16 with respect to the stratigraphic column of the Delaware Basin, in a hydrology study conducted by Fichera et al. (2024) on behalf of the New Mexico Bureau of Geology and Mineral Resources.

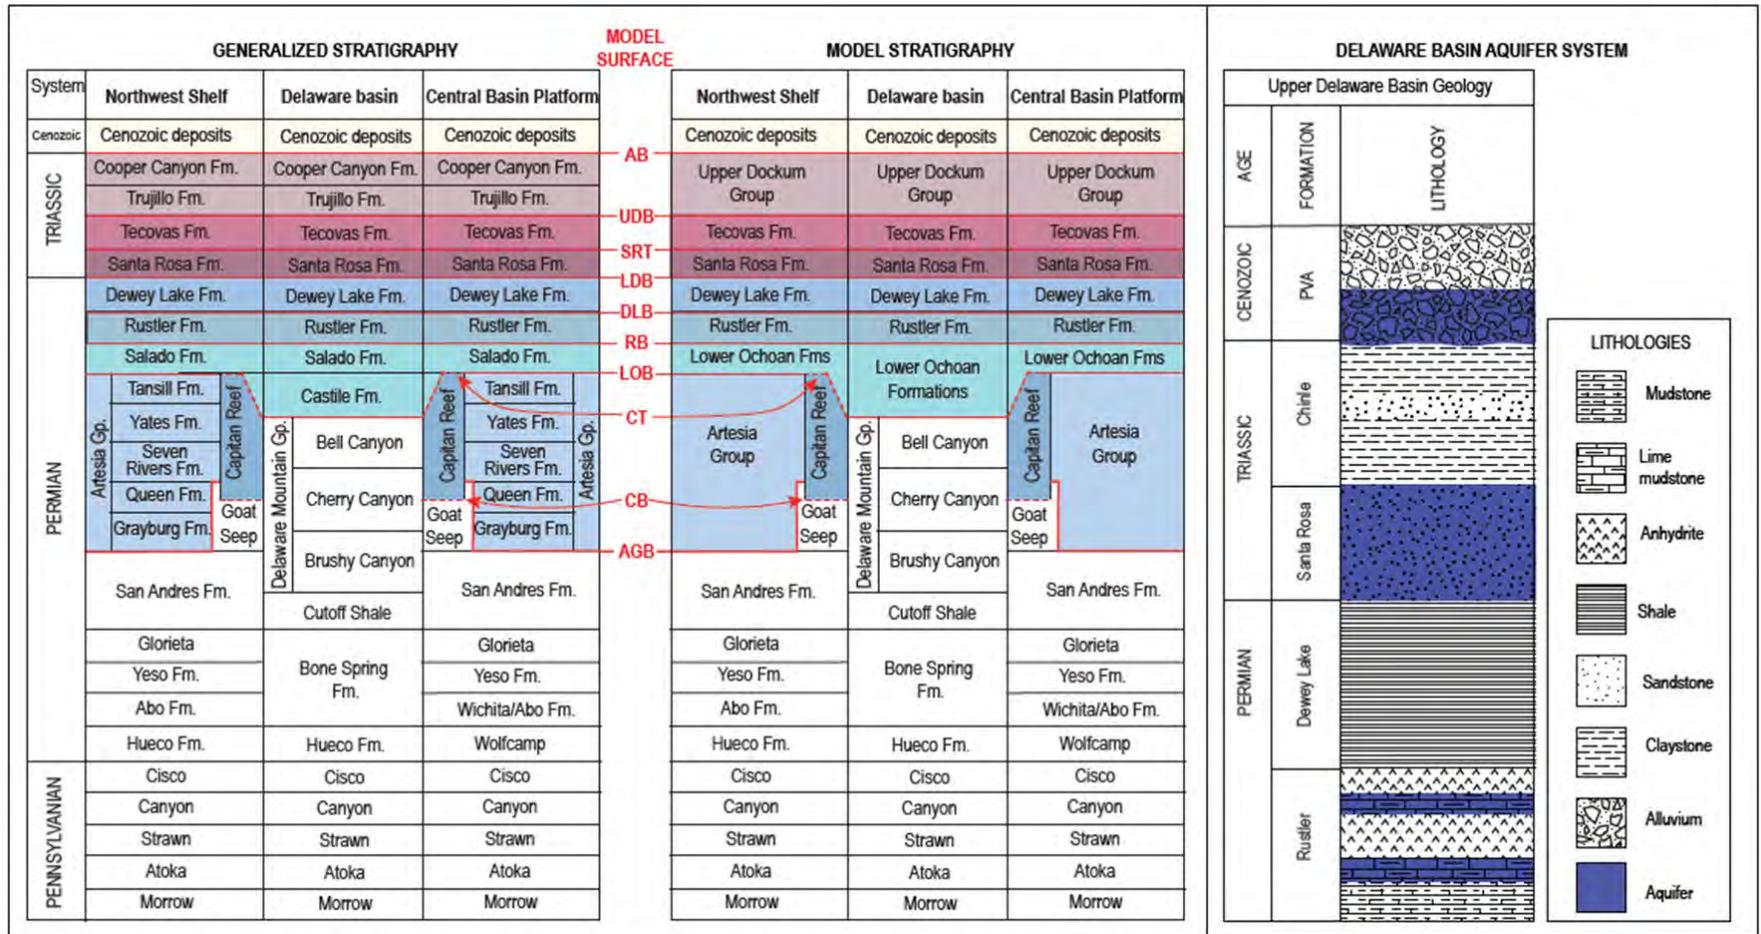


Figure 16 – Generalized stratigraphic column of geologic units in the Delaware Basin of southeastern New Mexico, with the three aquifer systems of the greater area indicated on the right panel (Fichera et al., 2024).

In general, groundwater with TDS concentrations less than 10,000 milligrams per liter (mg/L) occurs within 1,000 ft of the surface (Fichera et al, 2024), which holds true with the Kings Landing AGI site, with the base of the Rustler at approximately 805 ft.

Five potash mines were identified within approximately 7 miles of Kings Landing AGI No. 1.

The Pecos River, which rises in northeastern New Mexico and ultimately joins the Rio Grande at the Mexican border, is the only through-going perennial stream in this area. Here and further south, the Pecos receives almost all of the surface discharge and at least the greater part of the subsurface discharge from the area, although surface drainage from most of the area is poor (Brokaw et al., 1972). The nearest part of the Pecos River is approximately 26 miles southwest of the Kings Landing AGI No. 1 site, a few miles north of Carlsbad. The only other body of surface water present year-round is part of Salt Lake, located roughly 25 miles south-southwest of the Kings Landing AGI No. 1 site. All other lakes or “lagunas” east of the Pecos contain water and only after heavy rains. A map showing potash mines and surface water bodies or reservoirs in southeasternmost New Mexico is presented in Figure 17.

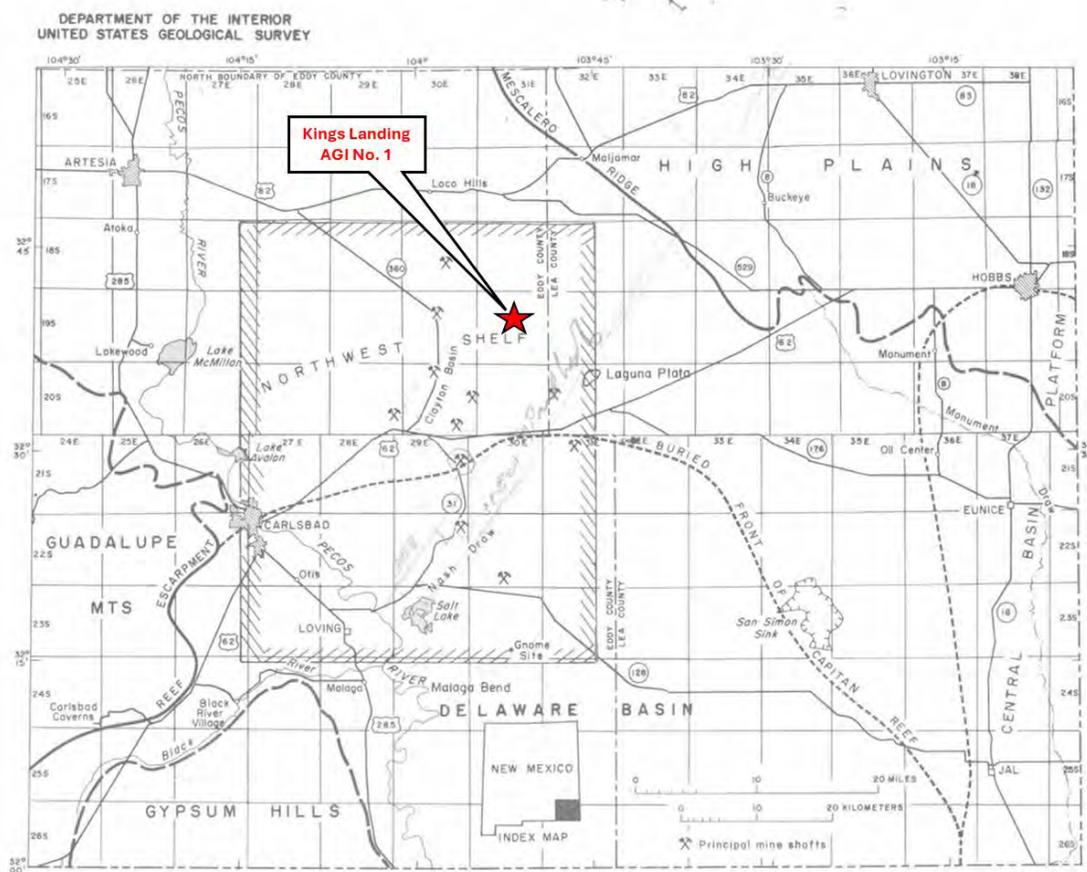


Figure 17 – Map of southeastern New Mexico showing the location of potash mines and surface water bodies in relation to the Kings Landing AGI site (modified from Brokaw et al., 1972).

### 4.5 Induced Seismicity

Seismic events of 2.0 or greater magnitude, recorded by the TexNet and USGS databases, within a 25 kilometer (km) radius of the AGI site—from 1970 to present—were collected to determine if active seismicity exists near the proposed Kings Landing AGI site. The separate database queries, shown in Figures 18 through 20, demonstrate that no recorded seismic event of 2.0 or greater magnitude has occurred within 25 km of the proposed site.

As shown in Figure 21, an expanded search in the USGS database was conducted using a radius of 50 km to capture the recorded seismic activity nearest to the Kings Landing AGI site. The nearest recorded seismicity was a 3.2 magnitude event approximately 35 km southeast of the proposed site. Similar to the other nearby events that were within 50 km of the site, the seismicity was recorded at a depth of 5 km. Table 14 lists all of the magnitude 2.0+ events within 50 km of the proposed site, with their location, depth of occurrence, and magnitude.

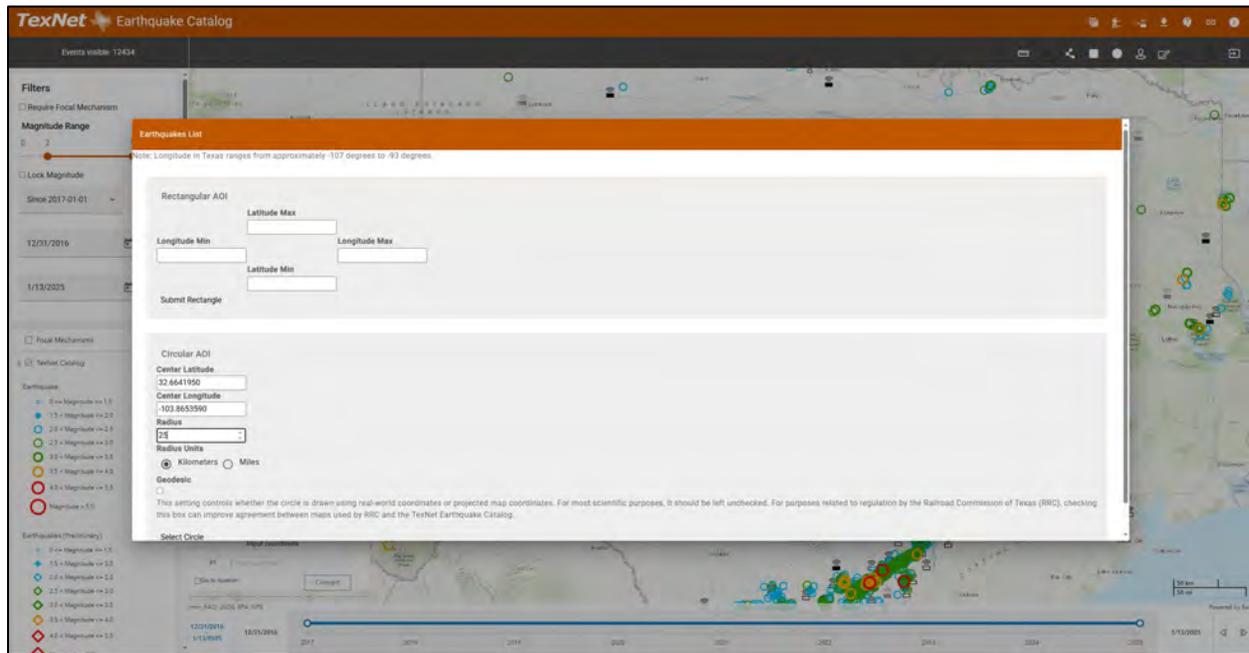


Figure 18 – TexNet Earthquake Catalog search parameters used to query seismic records within a 25-km radius around the Kings Landing AGI site.

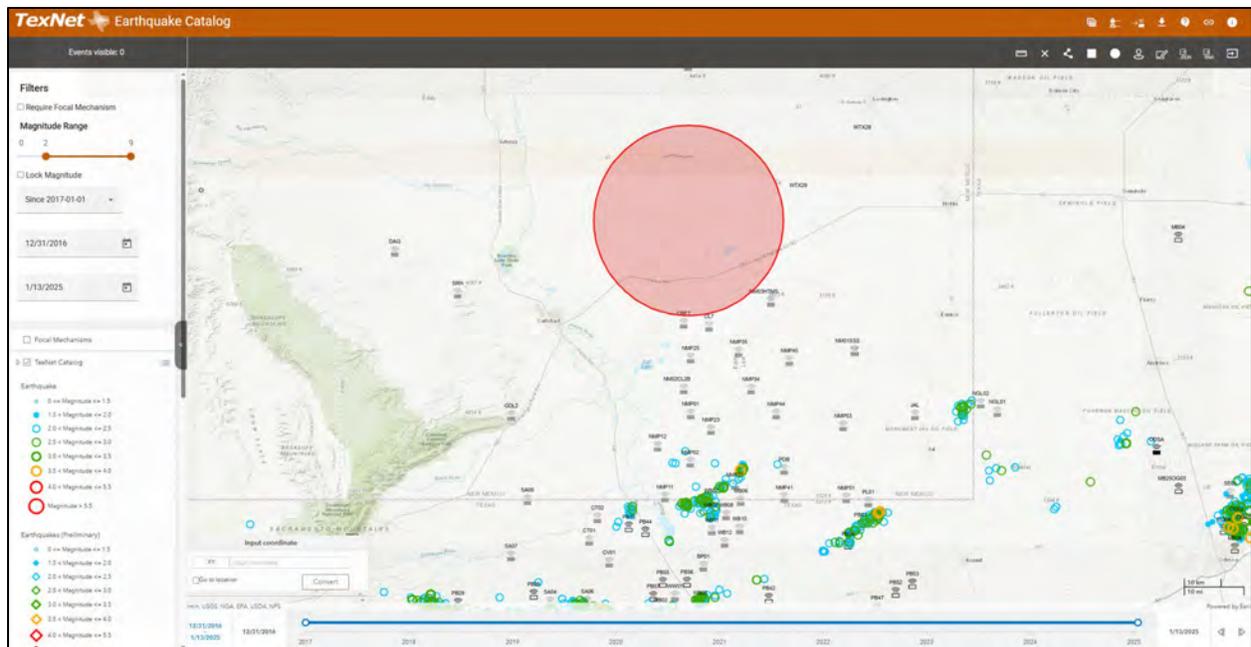


Figure 19 – Zero records returned from the query of the TexNet Earthquake Catalog within a 25-km radius around the Kings Landing AGI site.

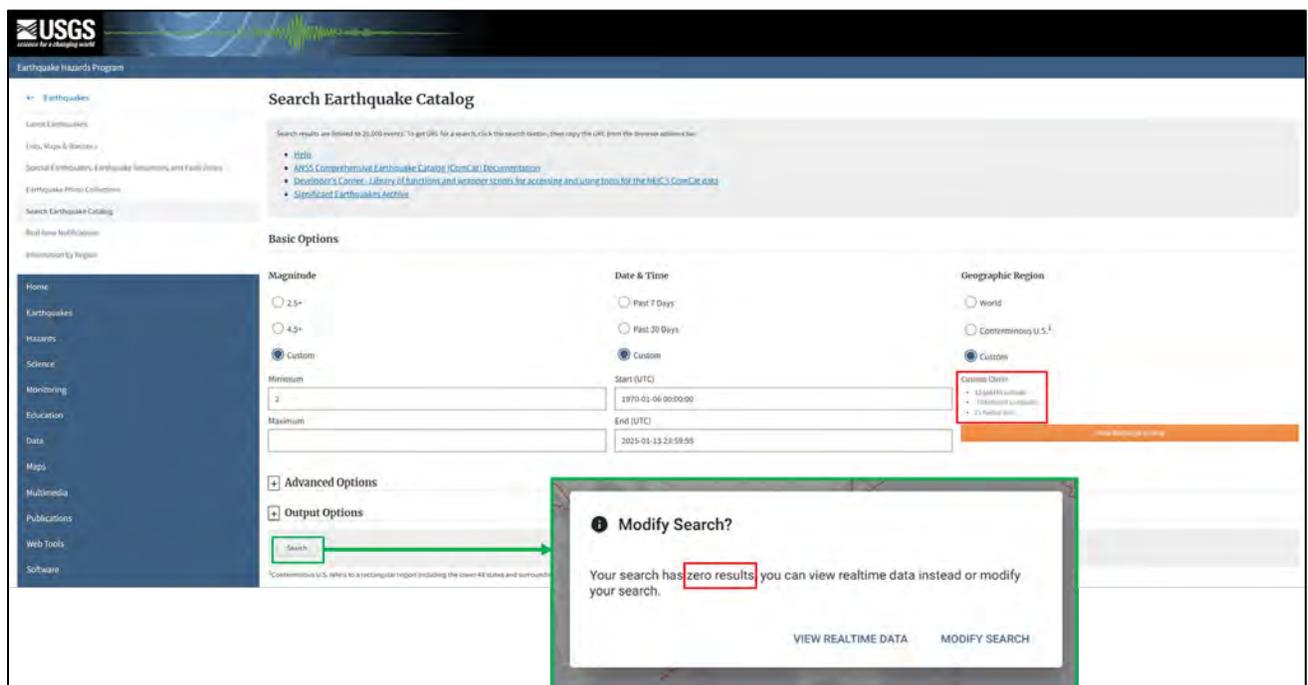


Figure 20 – USGS Geological Survey search parameters applied in the seismic record review, with zero records returned within the 25-km radius around the Kings Landing AGI site.

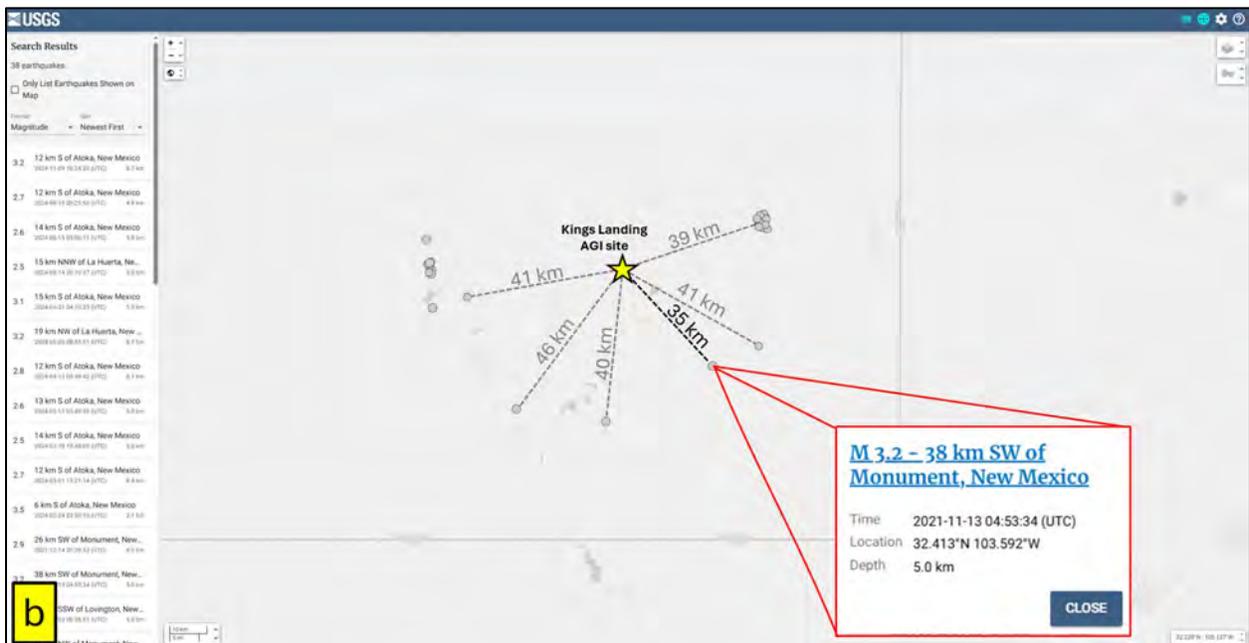
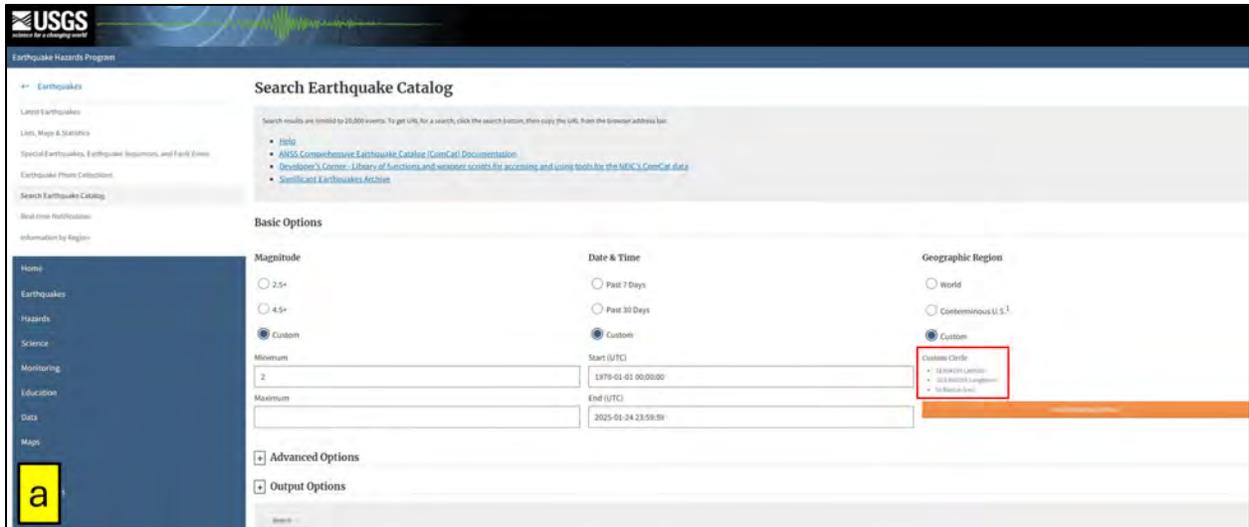


Figure 21 – USGS database search: (a) modified search parameters to reflect a 50-km radius to find the nearest seismic events recorded in the USGS Geological Survey; (b) map of seismic events with labeled distances from the Kings Landing AGI site and details of the closest event (35 km southeast).

Table 14 – USGS Geological Survey list of seismic events within a 50-km radius of the Kings Landing AGI site.

time	latitude	longitude	depth	mag	magType	nst	gap	dmin	rms	net	id	updated	place	type
2024-11-09T10:24:20.827Z	32.6576	-104.3874	8.715	3.2	ml	37	100	0.49	0.3	us	us7000nqv6	2025-01-09T04:00:57.605Z	12 km S of Atoka, New Mexico	earthquake
2024-08-15T05:25:50.575Z	32.6546	-104.3926	4.856	2.7	ml	33	81	0.493	0.35	us	us7000n73u	2024-10-26T15:48:38.040Z	12 km S of Atoka, New Mexico	earthquake
2024-08-15T05:06:11.879Z	32.6346	-104.3888	5	2.6	ml	32	81	0.481	0.47	us	us7000n73p	2024-10-26T15:48:37.040Z	14 km S of Atoka, New Mexico	earthquake
2024-08-14T20:18:37.269Z	32.5765	-104.2815	5	2.5	ml	25	105	0.374	0.45	us	us6000nk72	2024-10-26T15:48:00.040Z	15 km NNW of La Huerta, New Mexico	earthquake
2024-06-21T04:10:33.593Z	32.6315	-104.3825	5	3.1	ml	30	81	0.475	0.44	us	us7000mtqr	2024-08-30T18:17:11.040Z	15 km S of Atoka, New Mexico	earthquake
2024-06-20T08:45:51.054Z	32.5509	-104.3787	8.702	3.2	ml	31	78	0.442	0.3	us	us7000mtk0	2024-08-30T18:17:11.040Z	19 km NW of La Huerta, New Mexico	earthquake
2024-04-13T05:48:42.619Z	32.6595	-104.3831	8.122	2.8	ml	27	101	0.488	0.38	us	us7000mbut	2024-06-17T02:15:21.040Z	12 km S of Atoka, New Mexico	earthquake
2024-03-11T05:49:32.985Z	32.6476	-104.3878	5	2.6	ml	46	55	0.486	0.3	us	us7000m4mi	2024-05-18T21:24:27.040Z	13 km S of Atoka, New Mexico	earthquake
2024-03-10T15:48:09.202Z	32.6414	-104.3802	5	2.5	mb_lg	25	81	0.477	0.28	us	us7000m4jy	2024-05-15T17:35:00.040Z	14 km S of Atoka, New Mexico	earthquake
2024-03-01T15:21:14.224Z	32.656	-104.3903	8.394	2.7	ml	19	101	0.492	0.4	us	us6000mg2y	2024-05-10T21:25:57.040Z	12 km S of Atoka, New Mexico	earthquake
2024-02-24T23:50:10.585Z	32.7133	-104.3958	2.146	3.5	mwr	80	33	0.587	0.6	us	us7000m1ew	2024-05-02T15:50:14.040Z	6 km S of Atoka, New Mexico	earthquake
2021-12-14T20:39:53.513Z	32.4604	-103.4628	4.04	2.9	ml		52	0.118	0.61	us	us6000gc94	2022-02-24T21:00:52.040Z	26 km SW of Monument, New Mexico	earthquake
2021-11-13T04:53:34.340Z	32.4132	-103.5923	5	3.2	ml		58	0.082	0.34	us	us7000ftrh	2022-01-22T20:51:47.040Z	38 km SW of Monument, New Mexico	earthquake

time	latitude	longitude	depth	mag	magType	nst	gap	dmin	rms	net	id	updated	place	type
2020-07-03T08:36:51.209Z	32.7618	-103.4673	5	2.4	mb_lg		77	0.409	0.23	us	us7000ah6j	2020-09-11T22:13:59.040Z	23 km SSW of Lovington, New Mexico	earthquake
2020-06-30T23:06:21.348Z	32.7425	-103.4615	5	2.7	mb_lg		75	0.389	0.34	us	us7000afi1	2020-09-05T17:35:38.040Z	22 km NW of Monument, New Mexico	earthquake
2020-06-30T02:14:38.486Z	32.7701	-103.4584	5	2.4	mb_lg		78	0.416	0.49	us	us7000aetw	2020-09-05T17:35:35.040Z	21 km SSW of Lovington, New Mexico	earthquake
2020-06-29T19:57:11.102Z	32.7475	-103.4439	5	2.7	mb_lg		76	0.393	0.36	us	us7000aeli	2020-09-05T17:35:34.040Z	21 km NW of Monument, New Mexico	earthquake
2020-06-29T18:01:34.420Z	32.7614	-103.4413	5	2.6	mb_lg		78	0.406	0.71	us	us7000aeij	2020-09-05T17:35:33.040Z	22 km SSW of Lovington, New Mexico	earthquake
2020-06-29T15:19:38.191Z	32.7535	-103.4493	5	2.9	mb_lg		77	0.399	0.25	us	us7000aed2	2020-09-05T17:35:33.040Z	22 km NW of Monument, New Mexico	earthquake
2020-06-29T10:04:52.463Z	32.7731	-103.4484	5	2.7	mb_lg		79	0.418	0.72	us	us7000ae8f	2020-09-05T17:35:32.040Z	21 km SSW of Lovington, New Mexico	earthquake
2020-06-29T09:07:57.659Z	32.7606	-103.4484	3.78	2.4	mb_lg		61	0.406	0.46	us	us7000ae73	2020-09-05T17:35:32.040Z	22 km SSW of Lovington, New Mexico	earthquake
2020-06-29T08:37:18.914Z	32.7578	-103.4623	5	2.8	mb_lg		76	0.405	0.62	us	us7000ae6h	2020-09-05T17:35:32.040Z	23 km SSW of Lovington, New Mexico	earthquake
2020-06-28T17:09:25.561Z	32.7531	-103.4612	5	2.8	mb_lg		76	0.4	0.42	us	us7000adt2	2020-09-05T17:35:30.040Z	23 km NW of Monument, New Mexico	earthquake
2020-06-28T14:05:40.882Z	32.7577	-103.4486	5	2.3	mb_lg		77	0.403	0.24	us	us7000adr9	2020-09-05T17:35:30.040Z	22 km SSW of Lovington, New Mexico	earthquake

time	latitude	longitude	depth	mag	magType	nst	gap	dmin	rms	net	id	updated	place	type
2020-06-28T12:51:49.385Z	32.756	-103.4626	6.37	2.6	mb_lg		76	0.403	0.51	us	us7000adq9	2020-09-05T17:35:30.040Z	23 km SSW of Lovington, New Mexico	earthquake
2020-06-28T11:13:14.286Z	32.7375	-103.4374	5	2.7	mb_lg		35	0.382	0.63	us	us7000adnj	2020-09-05T17:35:29.040Z	20 km NW of Monument, New Mexico	earthquake
2020-06-28T10:20:21.917Z	32.7653	-103.4448	3.46	2.6	mb_lg		62	0.41	0.7	us	us7000admj	2020-09-05T17:35:29.040Z	21 km SSW of Lovington, New Mexico	earthquake
2020-06-28T10:10:41.007Z	32.7673	-103.4453	5	2.5	mb_lg		78	0.412	0.45	us	us7000adm7	2020-09-05T17:35:29.040Z	21 km SSW of Lovington, New Mexico	earthquake
2020-06-28T09:30:33.109Z	32.7518	-103.4471	5	2.3	mb_lg		76	0.397	0.6	us	us7000adle	2020-09-05T17:35:29.040Z	22 km NW of Monument, New Mexico	earthquake
2020-06-28T08:19:06.232Z	32.7488	-103.4515	5	2.7	mb_lg		76	0.395	0.27	us	us7000adjq	2020-09-05T17:35:29.040Z	22 km NW of Monument, New Mexico	earthquake
2020-06-28T08:14:44.753Z	32.7669	-103.4575	6.77	2.6	mb_lg		78	0.413	0.6	us	us7000adjl	2020-09-05T17:35:29.040Z	22 km SSW of Lovington, New Mexico	earthquake
2020-06-28T07:26:43.452Z	32.7407	-103.4512	4.47	2.8	mb_lg		75	0.387	0.43	us	us7000adi2	2020-09-05T17:35:28.040Z	21 km NW of Monument, New Mexico	earthquake
2020-06-28T07:17:03.930Z	32.7443	-103.454	5	2.5	mb_lg		75	0.391	0.43	us	us7000adhs	2020-09-05T17:35:28.040Z	22 km NW of Monument, New Mexico	earthquake
2020-06-28T06:09:35.533Z	32.7623	-103.4601	4.84	2.7	mb_lg		77	0.409	0.66	us	us7000adg0	2020-09-05T17:35:28.040Z	22 km SSW of Lovington, New Mexico	earthquake
2020-06-28T04:33:52.758Z	32.7488	-103.4568	5	2.7	mb_lg		76	0.395	0.52	us	us7000addx	2020-09-05T17:35:27.040Z	22 km NW of Monument, New Mexico	earthquake

time	latitude	longitude	depth	mag	magType	nst	gap	dmin	rms	net	id	updated	place	type
2020-06-28T02:23:23.971Z	32.748	-103.4622	5	2.8	mb_lg		75	0.395	0.52	us	us7000adc1	2020-09-05T17:35:27.040Z	23 km NW of Monument, New Mexico	earthquake
2012-03-18T10:57:22.430Z	32.281	-103.892	5	3.1	mblg	15	99.4		1.07	us	usp000jgeg	2014-11-07T01:47:16.446Z	18 km ENE of Malaga, New Mexico	earthquake
1974-11-28T03:35:20.500Z	32.311	-104.143	5	3.9	mb					us	usp00008xh	2014-11-06T23:21:27.578Z	5 km WNW of Loving, New Mexico	earthquake

## 4.6 Fault Slip Potential Modeling

Five FSP models were performed using the FSP tool developed by the Stanford Center for Induced and Triggered Seismicity. The models indicate that the reservoir and stress conditions associated with the proposed injection intervals do not increase the likelihood of fault slippage due to the AGI injection. All five models developed for the various fault traces demonstrate overall fault stability. Fault No. 13 in Model 2, which includes the AGI wells and offset saltwater disposal wells (SWD), has the highest FSP at 5%; however, only 0.3% of this potential is attributed to the proposed wells, based on Model 1 results for the AGI wells alone. Additionally, the absence of seismic events within the AOR (25 km), as reported by both TexNet and the USGS catalog, suggests a low seismic risk in the area. The complete FSP model report is included as Appendix D.

## 5 Reservoir Modeling

### 5.1 Model Development

A compositional model of the Siluro-Devonian formation was created using Rock Flow Dynamic's tNavigator software package. The Petra software package utilized offset well logs to identify the formation tops of the injection zone and create structure contours. Fault interpretation was also conducted in Petra and imported into tNavigator. The geologic model of the Siluro-Devonian was determined from public literature in addition to analysis of offset well logs—seven of which were used to delineate the geologic structure of the target formation.

The type log well Greenwood Pre-Grayburg Unit No. 14 (API No. 30-015-31615) was utilized to determine the total thickness and porosity of the reservoir model. Public literature was then utilized to estimate the permeability of the injection interval.

A well review was also conducted within a 5-mile radius of the Kings Landing AGI No. 1 and No. 2 wells to identify any offset SWDs or other injectors.

#### 5.1.1 Gridding Parameters and Boundary Conditions

The static model encompassed approximately 90 square miles (57,400 acres). The grid extended 200 grid cells in the x-direction (east-west), 200 cells in the y-direction (north-south), and 61 cells in the z-direction. In total, the model consisted of approximately 2.4 million grid blocks, each of which laterally extended 250 ft x 250 ft. The vertical layering of the grid was split into 15-ft intervals throughout each layer, except for the top layer being 5 ft thick. A total of 61 layers were included in the model where porosity, permeability, and thickness were held constant throughout each layer.

### 5.1.2 Offset Well Review

The review conducted within a 5-mile radius of the proposed injection wells to search for any offset SWDs or other injectors identified no nearby wells—including permitted wells—as injecting into the Siluro-Devonian formations in the project vicinity. In total three SWDs and one AGI were found within 5 miles of the proposed location. Historical injection was implemented into the model. After the historical period ends, each offset well is forecasted at their average injection rates over the last year. The SWDs are forecasted for the remaining life of the model, ending in 2095. The AGI injects until the end of its 20-year lifespan (Year 2037), representing the permitted lifespan of such wells. Table 15 provides a list of all offset wells.

Table 15 – Offset Wells Included in Simulation Model

API #	Well Name	Type
30-015-41783	Hackberry 16 SWD No. 001	Disposal
30-015-40288	Beu Hackberry 34 Federal No. 001	Disposal
30-015-05819	Big Eddy SWD No. 001	Disposal
30-015-42207	Zia AGI D No. 002	Acid Gas

### 5.1.3 Key Inputs

Offset well log analysis and review of public literature and databases were utilized to determine the model inputs, such as permeability, rock compressibility, salinity, reservoir pressure, and fracture pressure. (The literature review was conducted to supplement well data when no site-specific data was available.) Table 16 provides a summary of the key inputs used in the model. These values represent the averages across the model and may differ from well-specific values.

Table 16 – Reservoir Model Inputs

Input	Values
Average Porosity (%)	8.67
Average Permeability (mD)	5.80
Temperature Gradient (°F/100 ft)	1.05
Pore Pressure Gradient (psi/ft)	0.465
Fracture Pressure Gradient (psi/ft)	0.764
Salinity (ppm)	35,000
Residual Gas Saturation (%)	20
Rock Compressibility (1/psi)	$5 \times 10^{-6}$
TAG Composition	80% CO <sub>2</sub> / 20% H <sub>2</sub> S

### 5.1.3.1 Derivation of Rock Properties

Rock property values were assumed to be laterally homogeneous in each modeled layer. Thickness and porosity estimates were determined using the type log well (API No. 30-015-31615). As described in Section 4.2.2, a permeability-porosity relationship was determined from literature and applied to the porosity log to calculate permeability values. The recommended Class 2 transform (Lucia, 1993) was selected as most closely representing the rock fabric of the Siluro-Devonian formation. This approach resulted in an average permeability of approximately 1.5 mD.

To best represent dynamic fluid flow in carbonate reservoirs, which primarily comes from fractures or karsted features, the permeability was adjusted to better represent the target formation in this region (Calle et al., 2024). The Calle et al. study (2024) reviewed the injection history of SWDs throughout the Delaware Basin to create an injectivity-derived permeability—a value that showed higher field values, ranging from 10–20 mD, than log-derived permeability. A multiplier was then applied to the transform to maintain the heterogeneity in the model. This approach resulted in a conservative, average permeability of 5.80 mD. In comparison, the crossplot developed by Ruppel and Holtz (1994) resulted in an average permeability value of roughly 6 mD, closely aligning with the updated model permeability. Table 17 provides the rock properties for each layer.

Table 17 – Rock Properties by Model Layer

Layer No.	Thickness (ft)	Porosity (%)	Permeability (mD)
1	5	10.37	1.20
2	15	11.27	1.91
3	15	12.10	3.56
4	15	13.17	7.04
5	15	12.32	3.86
6	15	9.76	2.70
7	15	10.77	2.28
8	15	10.14	2.84
9	15	9.81	0.99
10	15	11.04	2.87
11	15	9.26	1.13
12	15	10.22	1.01
13	15	10.05	0.98
14	15	10.26	1.27
15	15	9.98	0.95
16	15	9.00	0.47
17	15	9.96	0.92
18	15	10.46	1.31
19	15	10.77	1.46

Layer No.	Thickness (ft)	Porosity (%)	Permeability (mD)
20	15	9.24	0.65
21	15	12.66	15.44
22	15	14.59	15.00
23	15	9.53	0.76
24	15	12.90	5.44
25	15	11.34	2.11
26	15	10.32	1.46
27	15	5.98	0.05
28	15	7.74	0.21
29	15	8.46	0.36
30	15	7.09	0.14
31	15	5.45	0.09
32	15	8.06	0.46
33	15	7.19	0.15
34	15	7.38	0.22
35	15	10.72	3.12
36	15	8.19	0.43
37	15	6.13	0.06
38	15	6.33	0.05
39	15	6.12	0.04
40	15	6.66	0.07
41	15	6.96	0.10
42	15	7.02	0.13
43	15	6.07	0.05
44	15	6.08	0.05
45	15	6.22	0.05
46	15	6.51	0.07
47	15	6.06	0.05
48	15	11.45	8.41
49	15	9.66	1.17
50	15	10.12	1.80
51	15	8.66	1.00
52	15	7.58	0.29
53	15	6.16	0.08
54	15	5.91	0.04
55	15	6.90	0.11
56	15	5.89	0.05
57	15	6.17	0.70
58	15	3.98	0.00
59	15	8.56	4.82

Layer No.	Thickness (ft)	Porosity (%)	Permeability (mD)
60	15	5.47	0.54
61	15	3.61	0.06

Publicly available papers were also reviewed to determine rock compressibility. Well logs in the Delaware Basin show that rock compressibility values can have a range of 4 to 27.6 x 10<sup>-6</sup> 1/psi (Calle et al., 2024). For the purposes of this model, a conservative value of 5 x 10<sup>-6</sup> 1/psi was selected.

5.1.3.2 Derivation of Fluid Properties

Salinity was determined by reviewing the USGS Produced Waters database, a public database of fluid samples. A regional review of was first conducted across Eddy County, where 56 samples were reviewed to help determine water salinity. As detailed in Figure 22, most fluid samples taken in the Siluro-Devonian formation have salinity values ranging between 20,000–50,000 mg/L. The median value of this data set is approximately 24,000 mg/L. As discussed in Section 4.3, the data was further refined to samples taken within 25 mi of the proposed injection site. The model assumes a salinity of 35,000 mg/L which remains consistent with the possible range of values.

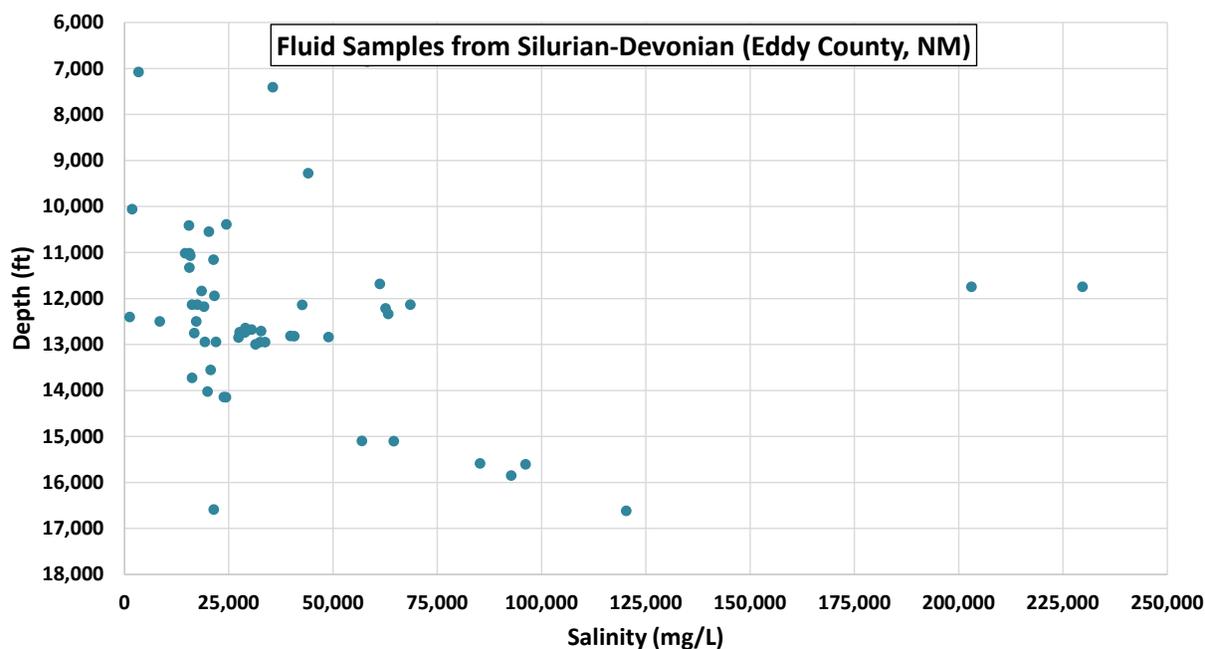


Figure 22 – Salinity vs. Depth

5.1.3.3 Fracture Pressure Calculation

The fracture pressure gradient, as shown in Equation 3, was calculated to be 0.764 psi/ft using Eaton’s equation (Eaton, 1969)—which needs three key assumptions: Poisson’s ratio ( $\nu$ ), pore pressure, and overburden pressure. Public literature, reviewed to provide insight into a range of Poisson’s ratios for the target formation, suggests that limestones/dolomites can have a

Poisson's ratio of 0.3 to 0.35 (Molina, Vilarras, and Zeidouni, 2016). The Poisson's ratio was estimated to be 0.32, corresponding with the literature estimates. The overburden and pore pressure gradients were assumed to be 1.1 psi/ft and 0.465 psi/ft, respectively. These values are considered to be best practice values when there is no site-specific data. The following calculations were then done to estimate the fracture gradient of the UCZ and LCZ.

Table 18 – Inputs for Eaton's Equation

Input	Value
Overburden Gradient	1.1 psi/ft
Pore Gradient	0.465 psi/ft
Poisson's Ratio	0.32

$$(Eq. 3) \quad FG = \frac{\nu}{1-\nu} (OBG - PG) + PG$$

$$FG = \frac{0.32}{1 - 0.32} (1.1 - 0.465) + 0.465$$

$$FG = 0.764 \text{ psi/ft}$$

For the upper and lower confining zones, a fracture gradient similar to that of the injection zone limestone was calculated. Shale has an increased chance of vertical fracture if the injection interval is fractured (Molina, Vilarras, and Zeidouni, 2016). A Poisson's ratio equal to the injection interval was used as a conservative estimate.

Table 19 – Fracture Gradient Calculations

	Upper Confining	Injection	Lower Confining
Overburden Gradient (psi/ft)	1.1	1.1	1.1
Pore Gradient (psi/ft)	0.465	0.465	0.465
Poisson's Ratio	0.32	0.32	0.32
Fracture Gradient (psi/ft)	0.764	0.764	0.764
<b>FG + 10% Safety Factor (psi/ft)</b>	<b>0.689</b>	<b>0.689</b>	<b>0.689</b>

## 5.2 Wellbore Model Construction

A wellbore model was also created to calculate the wellhead pressure (WHP). tNavigator's Well Designer module was coupled with the dynamic model to calculate the WHP using vertical flow performance (VFP) curves. This module calculates the TAG density, viscosity, and pressure drop as it flows through the tubing. For the purposes of this model, the Weymouth correlation was selected to determine the WHP of the proposed Kings Landing AGI No. 1 well.

To more accurately calculate the fluid properties of the TAG stream, a temperature profile was incorporated. Since the tubular separates the TAG from the reservoir, the temperature inside the tubing will differ from the reservoir temperature. This profile shows the expected temperature inside the tubing vs. depth, as shown in Figure 23. The TAG temperature was assumed to be 120°F at the wellhead to provide a more conservative WHP estimate.

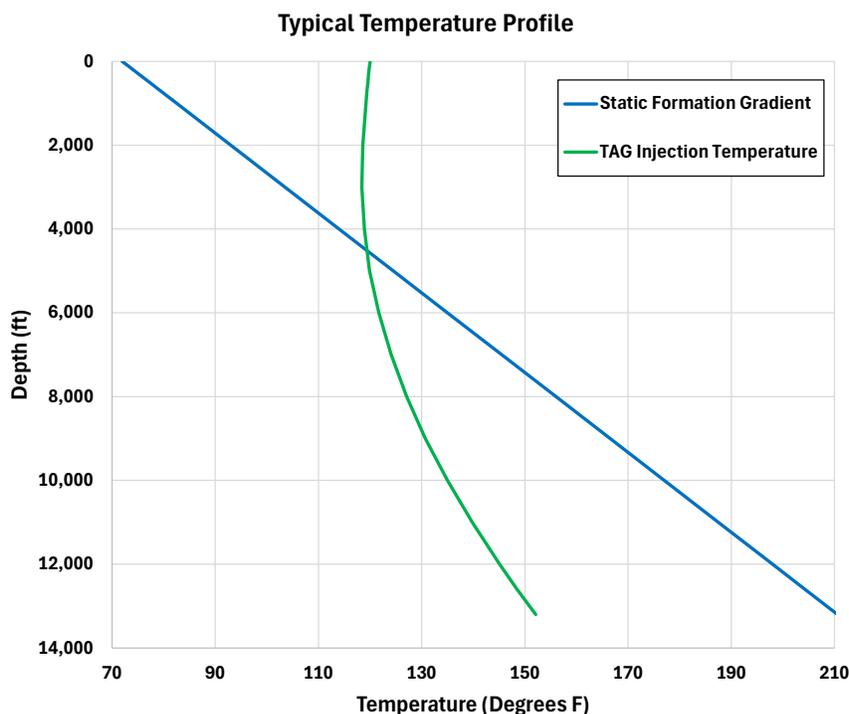


Figure 23 – Temperature Profile

The model also imposed three constraints on the well operations. First, the well could only inject at a maximum rate of 20 MMcf/D. A BHP constraint of 9,420 psi and a MAOP of 4,140 psi were imposed. The BHP constraint is equivalent to the fracture pressure with a 10% safety factor applied. These constraints were made to ensure that the model operation would not fracture the rock.

### 5.3 Model Results

A summary of the well operations for Kings Landing AGI No. 1 is shown in Figure 24, which indicates that injection activities will remain below the fracture pressure throughout the well's operational life. The injection rate is forecast to be the maximum permitted rate, to allow for the most conservative pressure response and AGI plume size. The pressure constraint was used to represent the fracture pressure value with a 10% safety factor applied.

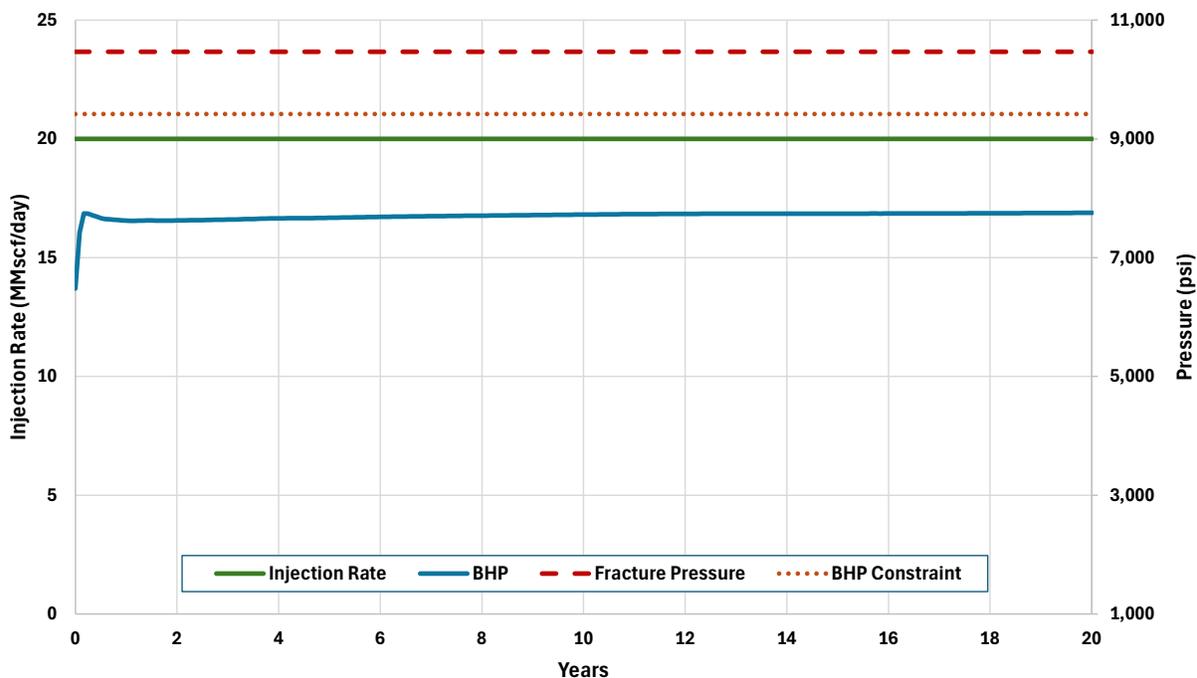


Figure 24 – Well Operations Summary for Kings Landing AGI No. 1

After 10 years of injection, the WHP has increased to 2,329 psi. The maximum WHP occurs at the end of AGI operations, resulting in 2,352 psi. Figure 25 highlights that the WHP will remain below the MAOP during injection operations.

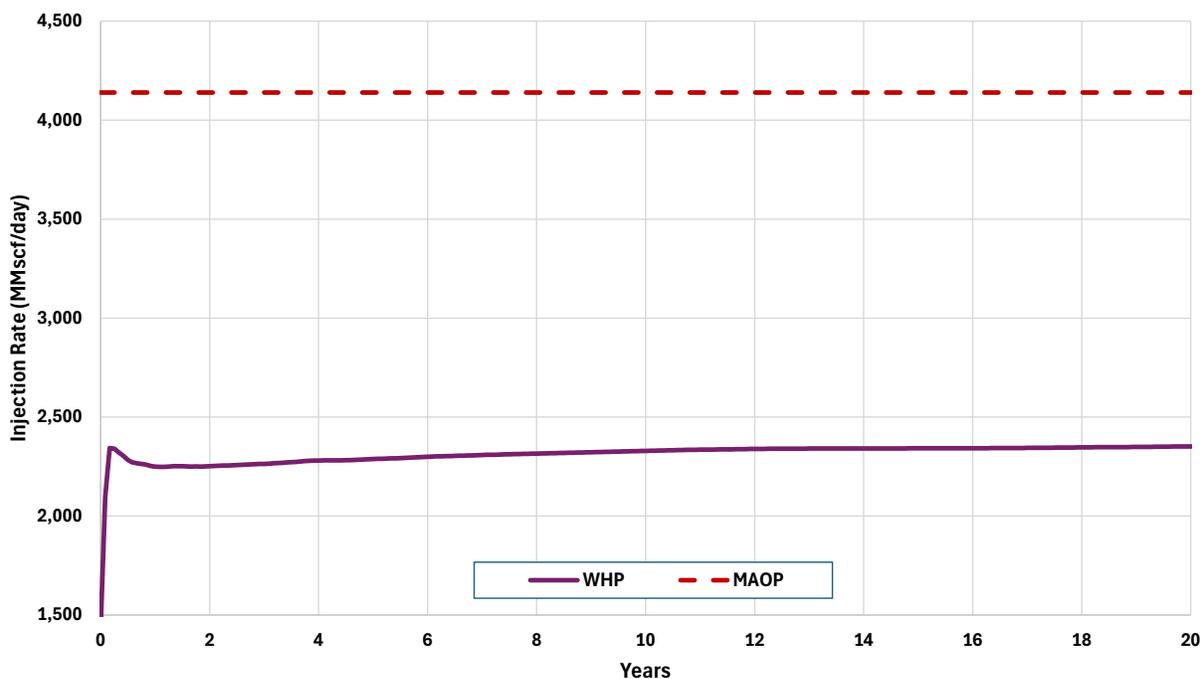


Figure 25 – Wellhead Pressure Time Series for Kings Landing AGI No. 1

The AOR was determined by the maximum extent of the acid gas plume, as shown in Figure 25. Kings Landing AGI No. 1 was run at a maximum rate of 20 MMcf/D for 20 years. The edge of the plume was delineated using a conservative gas saturation cutoff of 1%. The resulting plume has a maximum diameter of 1.08 miles (5,723 ft). The AOR is predicted to cover approximately 545 acres (0.85 square miles).

The results indicate that the acid gas will not reach any potential vertical pathways (i.e., offset wellbores). Nearby structural faults are present and may act as vertical migration pathways. However, the model predicts that the acid gas plume will not intersect any of the faults 50 years after injection operations cease. The nearest fault (west of proposed location) is approximately 600 ft away from the edge of the TAG plume, as shown in Figure 26.

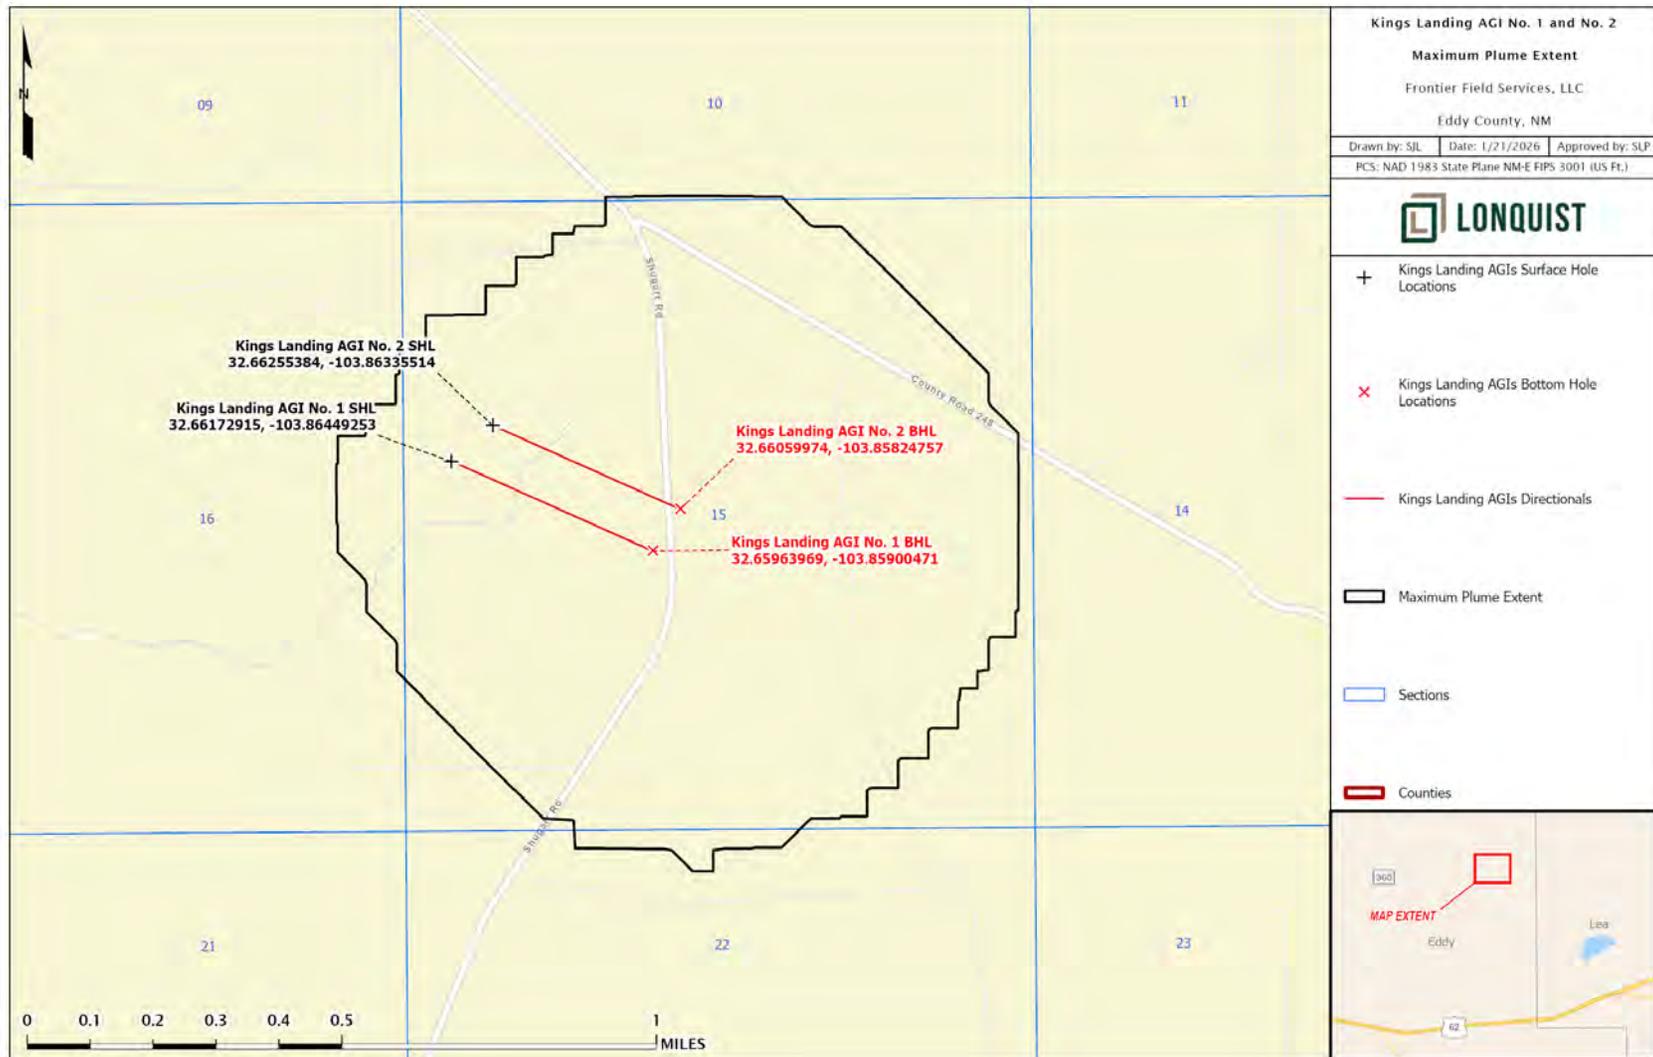


Figure 26 – Maximum Plume Extents (50 Years Post-Injection)

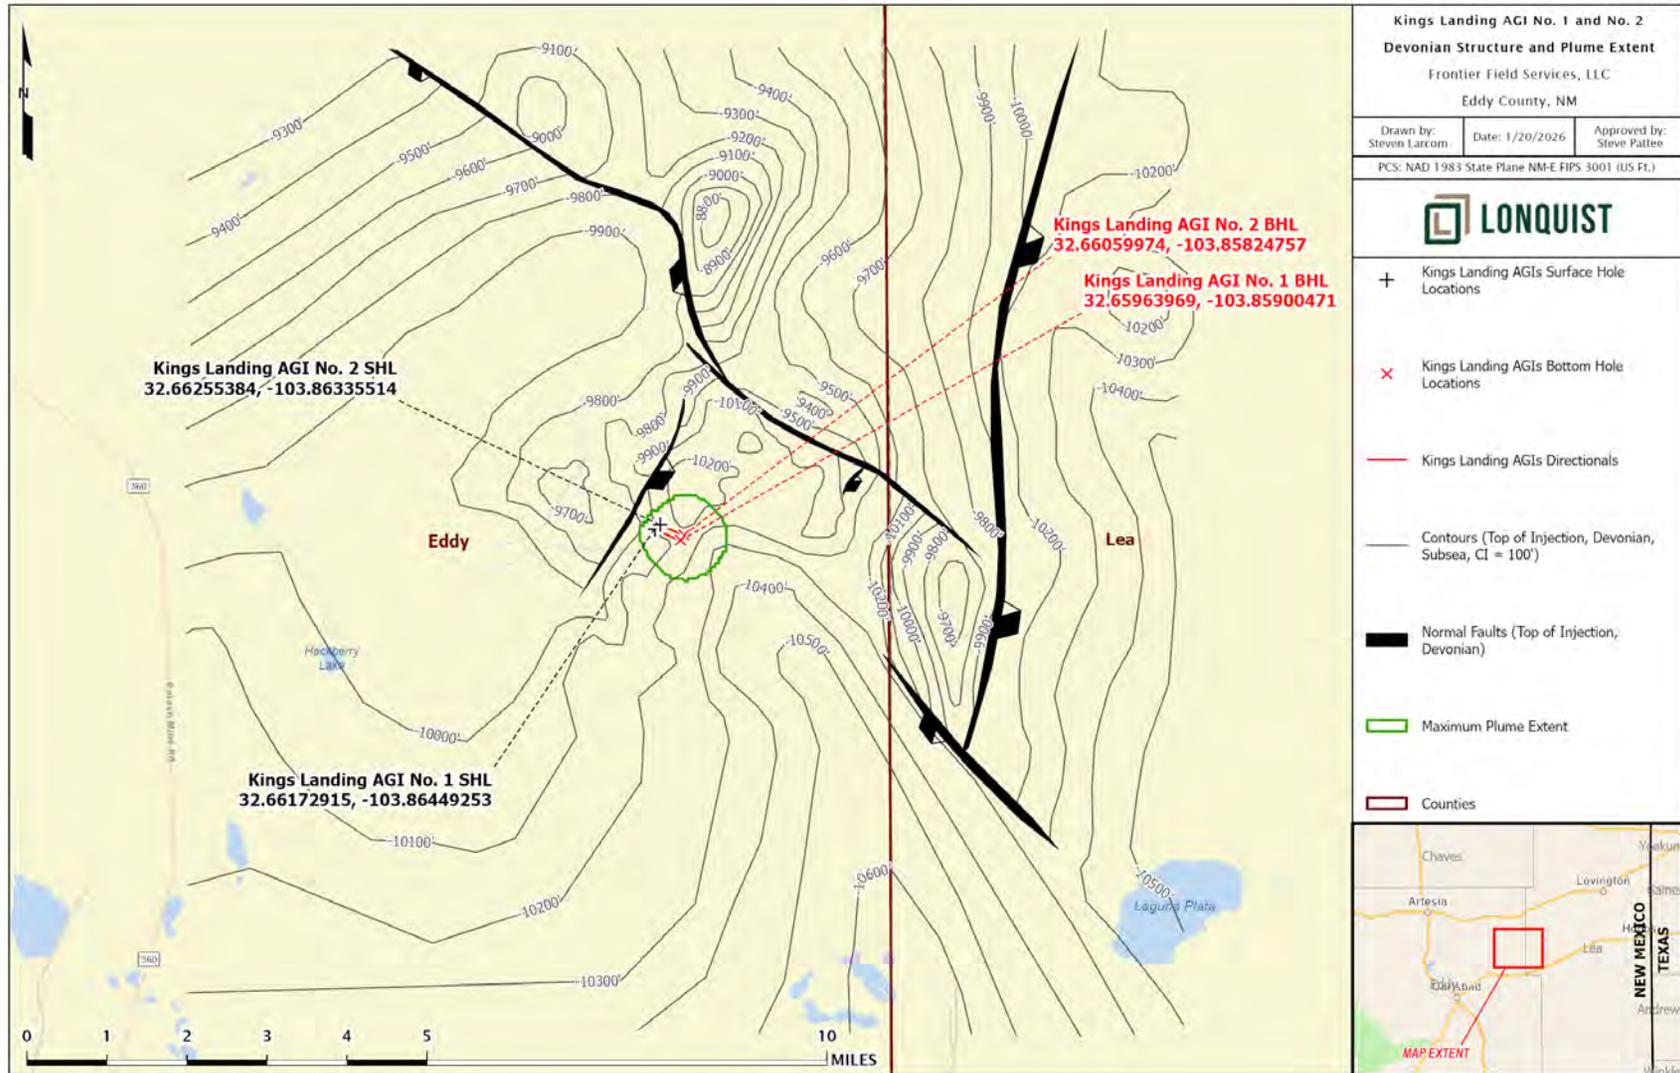


Figure 27 – Maximum Plume Extents with Offset Faults

## 6 Affirmative Statement of No Evidence of Connection to Underground Sources of Drinking Water

I have examined available geologic and engineering data and find no evidence of open faults or any other hydrologic connection between the disposal zone and any underground sources of drinking water.



---


Mitchell Dan  
Consulting Geologist for Frontier Field Services, LLC  
January 26, 2026

## 7 Determination and Notice of Affected Parties

### 7.1 Notice Parties Within the Area of Review

If an operator or mineral lessee has legal acreage or leases within 1 mile of the proposed disposal well, their contact information is collected for notification purposes. Legal acreage of offset operators is gathered from NMOCD's permitting website. Minerals leased from the federal government are determined by referencing the Bureau of Land Management's Land and Mineral System Reports database. Minerals leased from the state government are determined by referencing the New Mexico State Land Office's Data Access database. Contact information for the affected parties is then extracted from the reports that were filed with the appropriate regulatory agency. The maps generated to identify the operators and lessees are shown in Figures 28 and 29. The list of affected parties is provided in Table 20.

Updated notices will be sent for this application by mailing a copy of Form C-108 to the affected parties listed in Table 20. Receipt of each application will be monitored and presented to the NMOCD. All affected parties identified received notice of the initial application. Since that application was filed, Cimarex Energy merged with Cabot Oil; the new company is named Coterra Energy Operating Co.

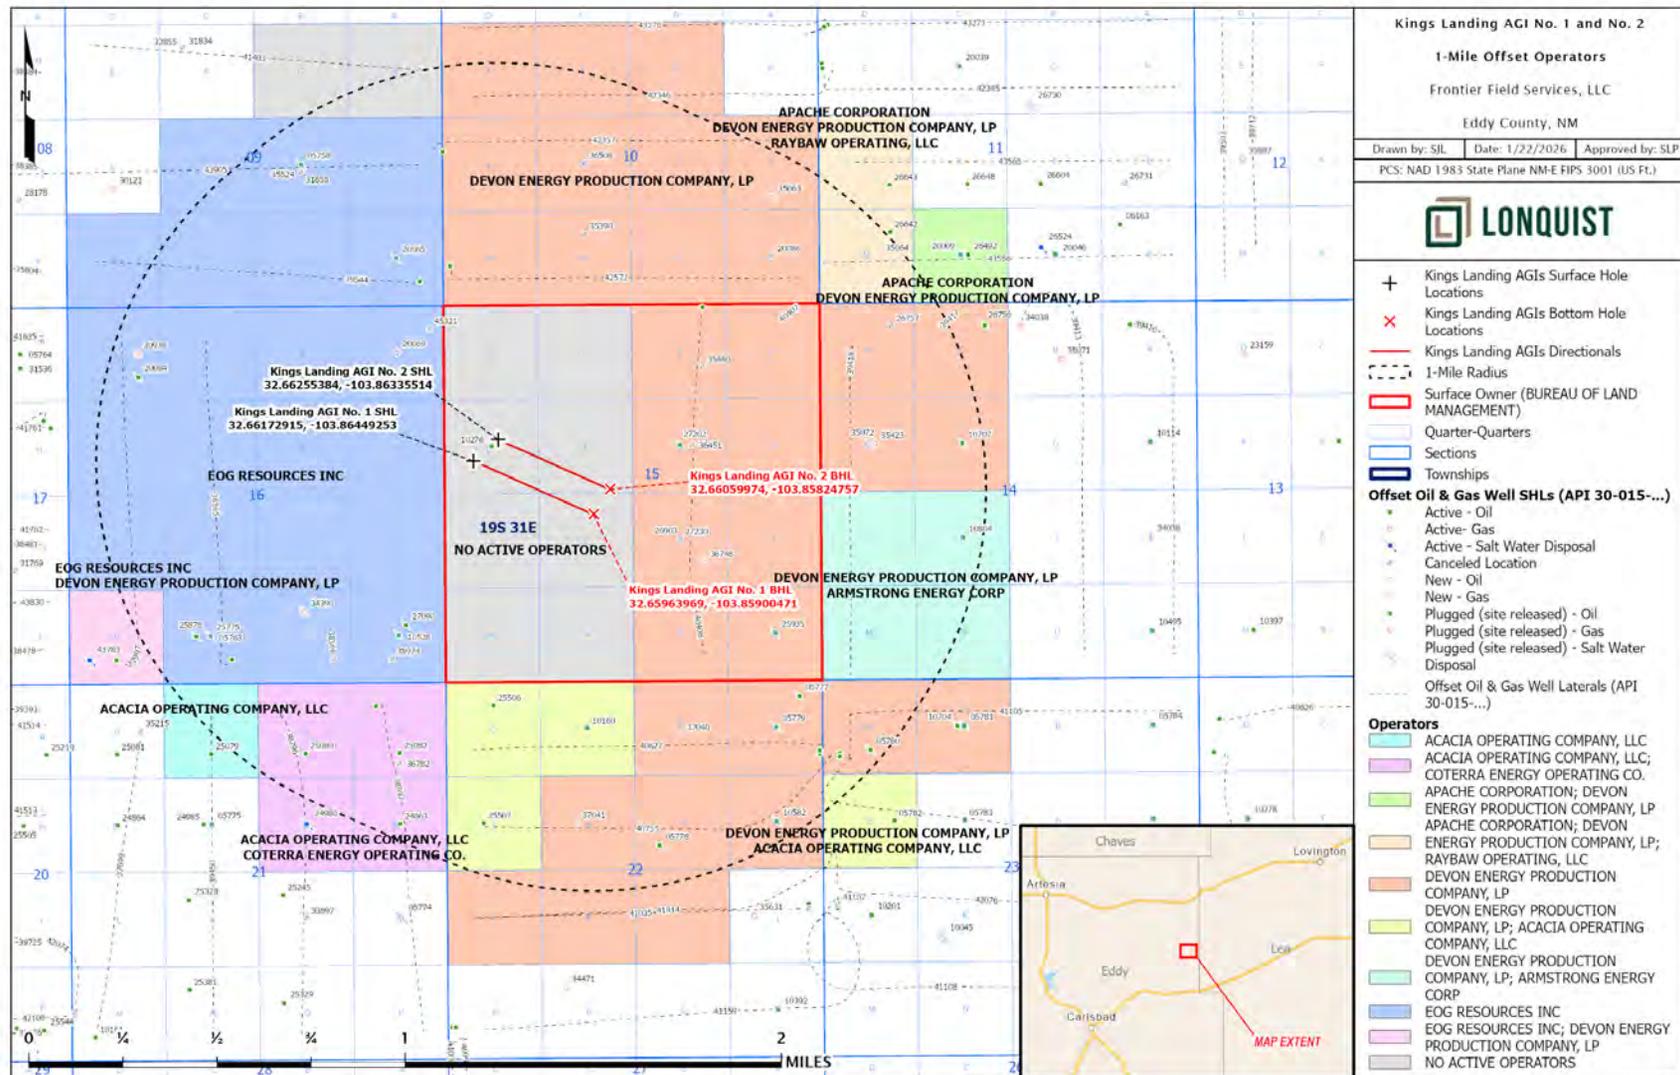

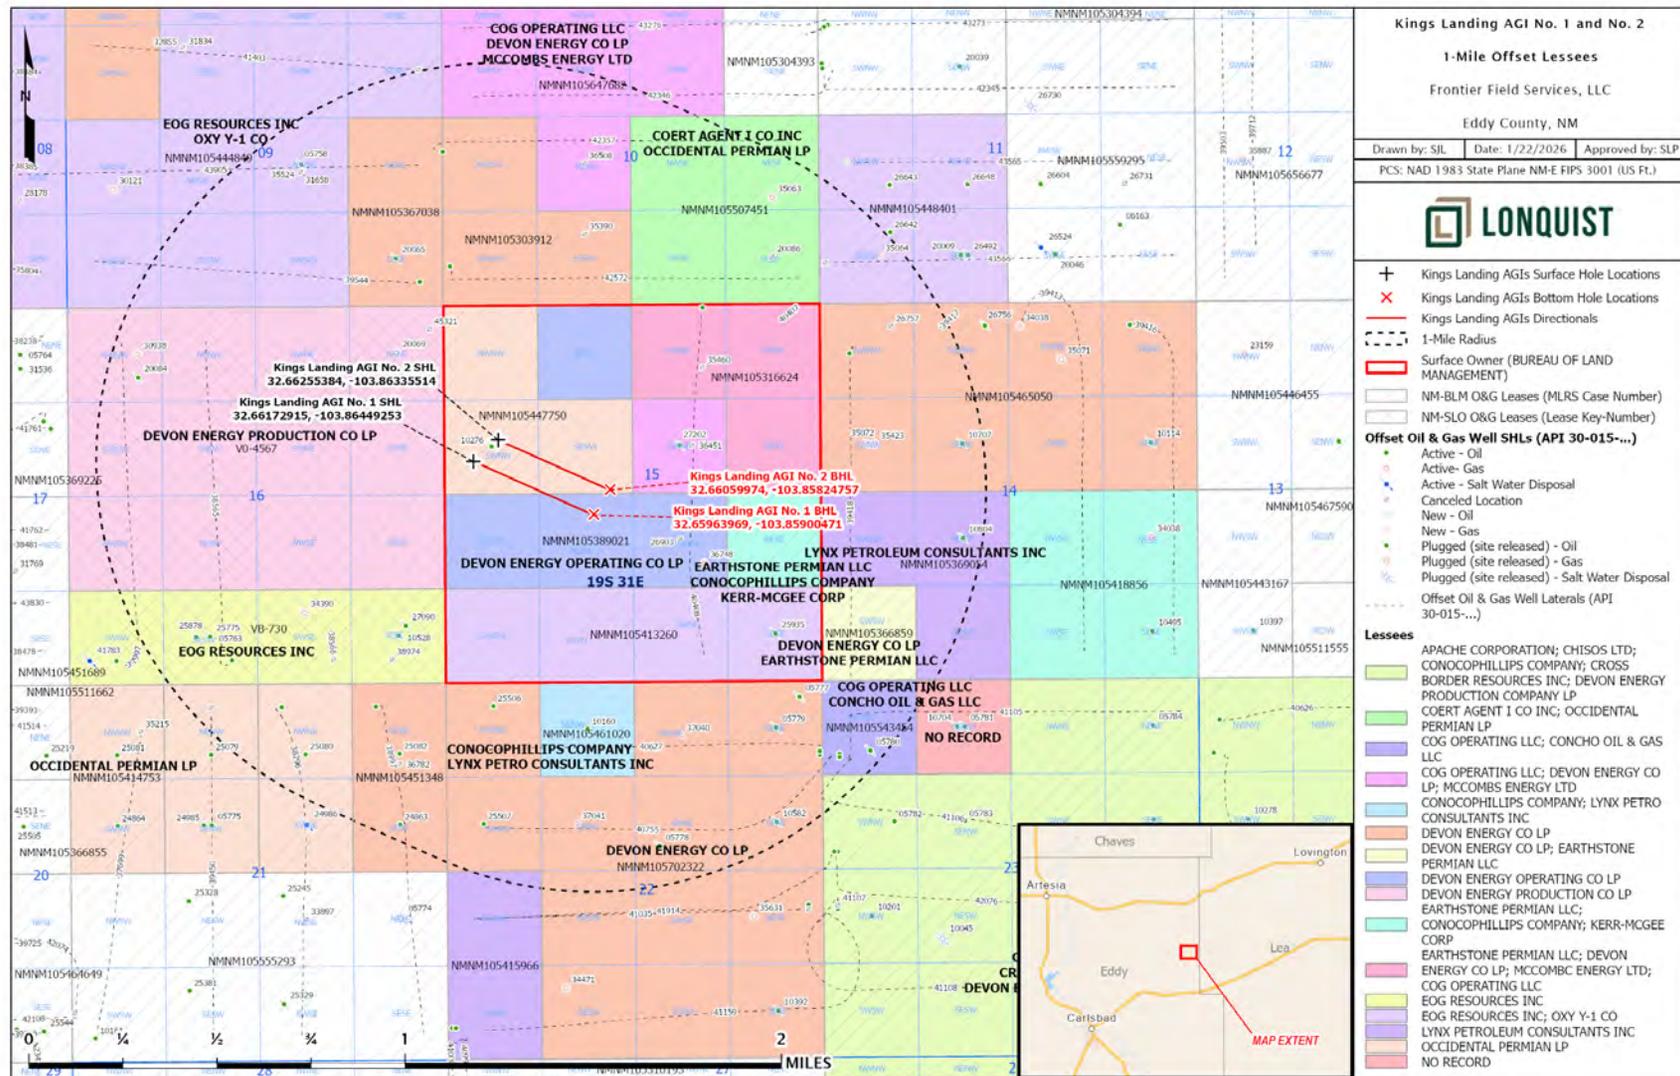


Figure 29 – Offset Lessees

Table 20 – Affected Parties

Section/Township/Range	REGULATORY	MAILING ADDRESS
	<b>SURFACE OWNER</b>	
	BUREAU OF LAND MANAGEMENT	620 E GREENE ST CARLSBAD, NM 88220
	<b>MINERAL LESSEE</b>	
9/19S/31E 15/19S/31E	OXY Y-1 CO	5 GREENWAY PLZ, STE 110 HOUSTON, TX 77046
15/19S/31E	OCCIDENTAL PERMIAN LP	5 GREENWAY PLZ, STE 110 HOUSTON, TX 77046
9/19S/31E 15/19S/31E	EOG RESOURCES INC	1111 BAGBY ST, SKY LOBBY 2 HOUSTON, TX 77002
	<b>OFFSET OPERATORS</b>	
9/19S/31E 16/19S/31E 15/19S/31E	EOG RESOURCES INC	5509 CHAMPIONS DR MIDLAND, TX 79706
10/19S/31E 14/19S/31E 15/19S/31E 16/19S/31E 22/19S/31E	DEVON ENERGY PRODUCTION COMPANY, LP	333 WEST SHERIDAN AVE OKLAHOMA CITY, OK 73102
14/19S/31E	ARMSTRONG ENERGY CORP	PO BOX 1973 ROSWELL, NM 88202
11/19S/31E	APACHE CORPORATION	303 VETERANS AIRPARK LN MIDLAND, TX 79705
11/19S/31E	RAYBAW OPERATING, LLC	2626 COLE AVE DALLAS, TX 75204
21/19S/31E 22/19S/31E	ACACIA OPERATING COMPANY, LLC	505 N BIG SPRING ST, SUITE 303 MIDLAND, TX 79701
22/19S/31E	COTERRA ENERGY OPERATING CO.	6001 DEAUVILLE BLVD, SUITE 300 N MIDLAND, TX 79706
	<b>OTHER PARTIES</b>	

## 8 Appendices

Appendix A – C-102 Plats

Appendix B – AOR Documents

Appendix C – Geologic Structure Maps and Cross Sections

Appendix D – Fault Slip Potential Model

Appendix E – Affected Party Identification

Appendix E – Well Construction Details


## 9 References

- Adams, J.E. 1965. Stratigraphic-Tectonic Development of Delaware Basin. *AAPG Bulletin*, Vol. 49, No. 11, 2140-2148.
- Broadhead, R.F. 2011. The Woodford Shale in southeastern New Mexico: Distribution and source rock characteristics. *AAPG Search and Discovery Article #80163*.
- Brokaw, A.L., Jones, C.L., Cooley, M.E., and Hays, W.H. 1972. Geology and Hydrology of the Carlsbad Potash Area, Eddy and Lea Counties, New Mexico. *USGS No. 4339-1*.
- Caf, A.B., and Pigott, J.D. 2021. Dolomitization geometry and reservoir quality from supervised Bayesian classification and probabilistic neural networks: Midland Basin Leonardian Wichita and Clear Fork Formations. *Society of Exploration Geophysicists and AAPG. Interpretation*, Vol. 9, No. 2, 1-14.
- Calle, A.Z., Smye, K.M., Horne, E.A. et al. 2024. Lithofacies and porosity heterogeneity of Ordovician – Pennsylvanian successions of the Midland Basin: Implications for wastewater disposal reservoir potential. *AAPG Bulletin*, Vol. 108, No. 12, 2241-2286.
- Fichera, M.M., Newton, B.T., Morton, C. et al. 2024. Three-Dimensional Hydrogeologic Framework of Aquifer Units in the Delaware Basin, Southeastern New Mexico. *New Mexico Bureau of Geology and Mineral Resources, Open-File Report No. 623*.
- Kibria, M.G., Hu, Q., Zhang, Y. (2017). Nanopore and Spontaneous Imbibition Characterization of the Woodford Shale from West Texas. *Gulf Coast Association of Geological Societies Transactions*, Vol. 67, 159-163.
- Lucia, F. J. (1993). Rock-Fabric / Petrophysical Classification of Carbonate Pore Space for Reservoir Characterization. *Bureau of Economic Geology, The University of Texas at Austin*.
- Ruppel, S.C., and Holtz, M.H. 1994. Depositional and Diagenetic Facies Patterns and Reservoir Development in Silurian and Devonian Rocks of the Permian Basin. *Bureau of Economic Geology, The University of Texas at Austin, Report of Investigations No. 216*.
- Ruppel, S.C., Jones, R.H., Breton, C.L., and Kane, J.A. 2005. Preparation of Maps Depicting Geothermal Gradient and Precambrian Structure in the Permian Basin. *Bureau of Economic Geology, The University of Texas at Austin*.

# APPENDICES

## Appendix A – C-102 Plats



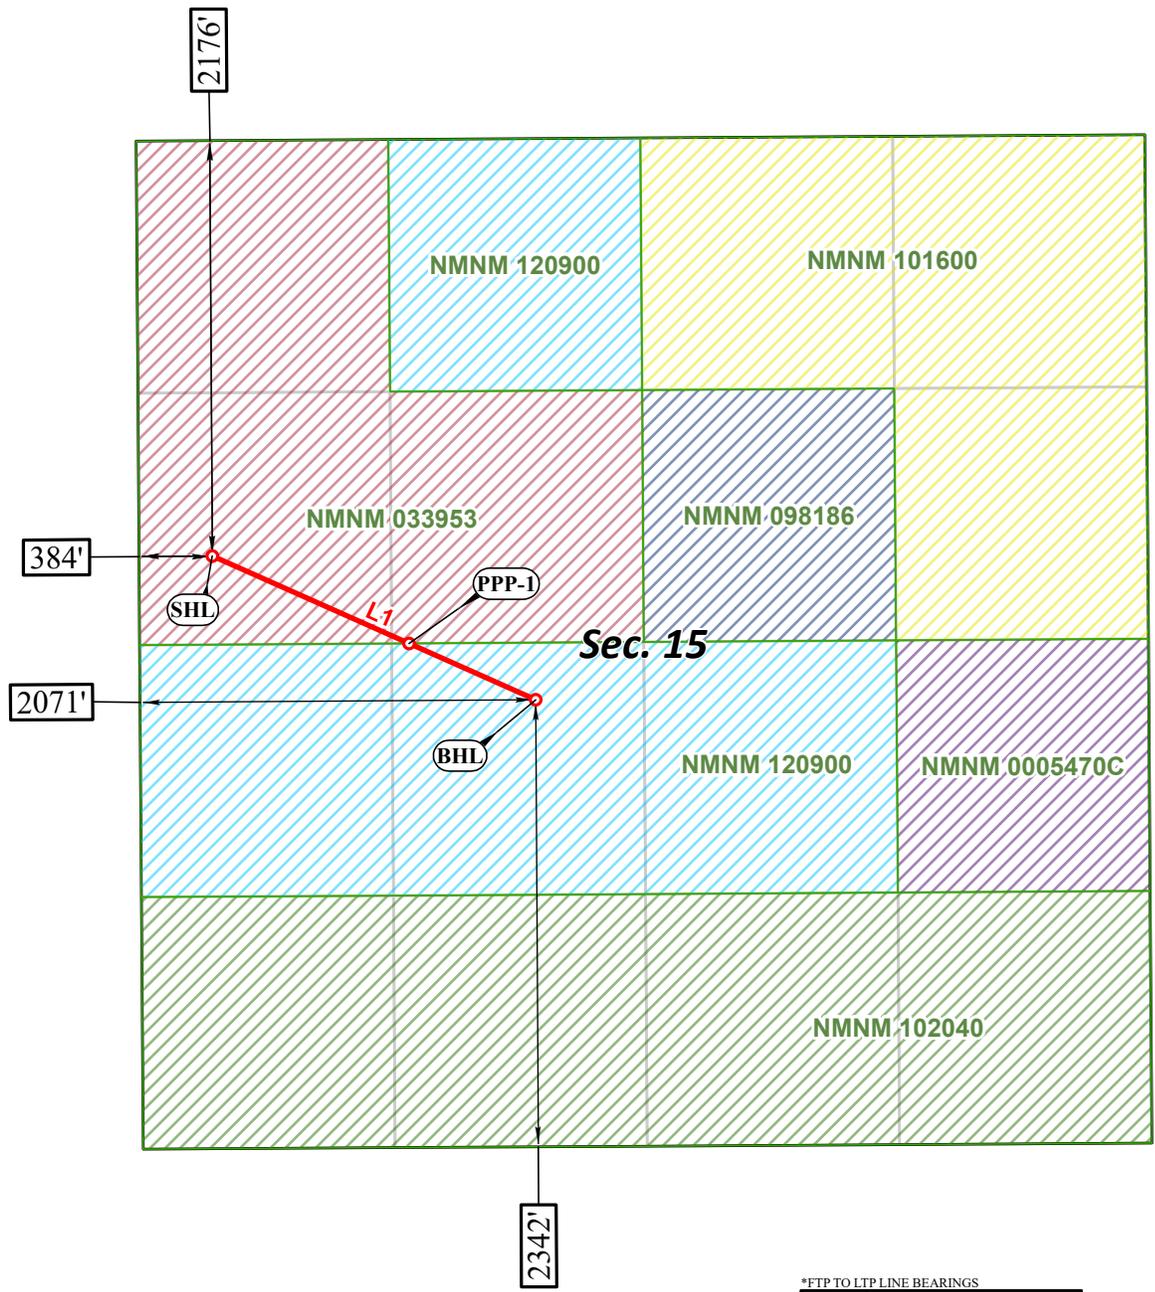

\*FTP TO LTP LINE BEARINGS

LINE	BEARING
L1	S 66°01'18" E ~ 1852.08'

**SHL**  
 FNL 2176' FWL 384', SECTION 15  
**NAD 83, SPCS NM EAST**  
 X:685619.75' / Y:604786.67'  
 LAT:32.66172915 / LON:-103.86449253  
**NAD 27, SPCS NM EAST**  
 X:644440.18' / Y:604723.91'  
 LAT:32.66160933 / LON:-103.86399018

**PPP-1**  
 FNL 2640' FWL 1410', SECTION 15  
**NAD 83, SPCS NM EAST**  
 X:686649.26' / Y:604328.77'  
 LAT:32.66045802 / LON:-103.86115389  
**NAD 27, SPCS NM EAST**  
 X:645469.68' / Y:604266.02'  
 LAT:32.66033816 / LON:-103.86065166

**BHL**  
 FSL 2342' FWL 2071', SECTION 15  
**NAD 83, SPCS NM EAST**  
 X:687312.00' / Y:604034.00'  
 LAT:32.65963969 / LON:-103.85900471  
**NAD 27, SPCS NM EAST**  
 X:646132.41' / Y:603971.25'  
 LAT:32.65951980 / LON:-103.85850255



○ Drill Line Events   ● Section Corners   — Drill Line   ← Dimension Lines   □ Federal Leases   □ NMSLO   □ HSU   ● HSU Corners  
 All bearings and coordinates refer to New Mexico State Plane Coordinate System, East Zone, U.S. Survey Feet.

JOB No. 20251078  
 REV 4 ANC 1/15/2026

Distances/areas relative to NAD 83 grid measurements. Combined Scale Factor: 0.999763946 and a Convergence Angle: 0.253386181°





\*FTP TO LTP LINE BEARINGS

LINE	BEARING
L1	S 65°55'06" E ~ 1,725.15'

**SHL**  
 FNL 1876' FWL 735', SECTION 15  
**NAD 83, SPCS NM EAST**  
 X:685968.45' / Y:605088.25'  
 LAT:32.66255384 / LON:-103.86335514  
**NAD 27, SPCS NM EAST**  
 X:644788.89' / Y:605025.48'  
 LAT:32.66243402 / LON:-103.86285279

**BHL**  
 FNL 2590' FWL 2305', SECTION 15  
**NAD 83, SPCS NM EAST**  
 X:687543.45' / Y:604384.32'  
 LAT:32.66059974 / LON:-103.85824757  
**NAD 27, SPCS NM EAST**  
 X:646363.87' / Y:604321.56'  
 LAT:32.66047986 / LON:-103.85774539



○ Drill Line Events   ● Section Corners   — Drill Line   ← Dimension Lines   □ Federal Leases   □ NMSLO   □ HSU   ● HSU Corners  
 All bearings and coordinates refer to New Mexico State Plane Coordinate System, East Zone, U.S. Survey Feet.

JOB No. 20251078  
 REV 5 JMW 1/20/2026

Distances/areas relative to NAD 83 grid measurements. Combined Scale Factor: 0.999763946 and a Convergence Angle: 0.253386181°

## Appendix B – AOR Documents

**Kings Landing AGI No. 1 and No. 2**

2-Mile Area of Review

Frontier Field Services, LLC

Eddy County, NM

Drawn by: SJL | Date: 1/22/2026 | Approved by: SLP

PCS: NAD 1983 State Plane NM-E FIPS 3001 (US Ft.)



- + Kings Landing AGIs Surface Hole Locations
- x Kings Landing AGIs Bottom Hole Locations
- Kings Landing AGIs Directionals

**Offset Oil & Gas Well SHLs (API 30-015-...)**

- Active - Oil
- \* Active - Gas
- ⊗ Active - Salt Water Disposal
- ∅ Canceled Location
- New - Oil
- New - Gas
- ⊗ Plugged (site released) - Oil
- \* Plugged (site released) - Gas
- ⊗ Plugged (site released) - Salt Water Disposal

--- Offset Oil & Gas Well Laterals (API 30-015-...)

--- 1/2-Mile Radius


--- 1-Mile Radius

--- 2-Mile Radius

□ Sections

▭ Townships

▭ Counties

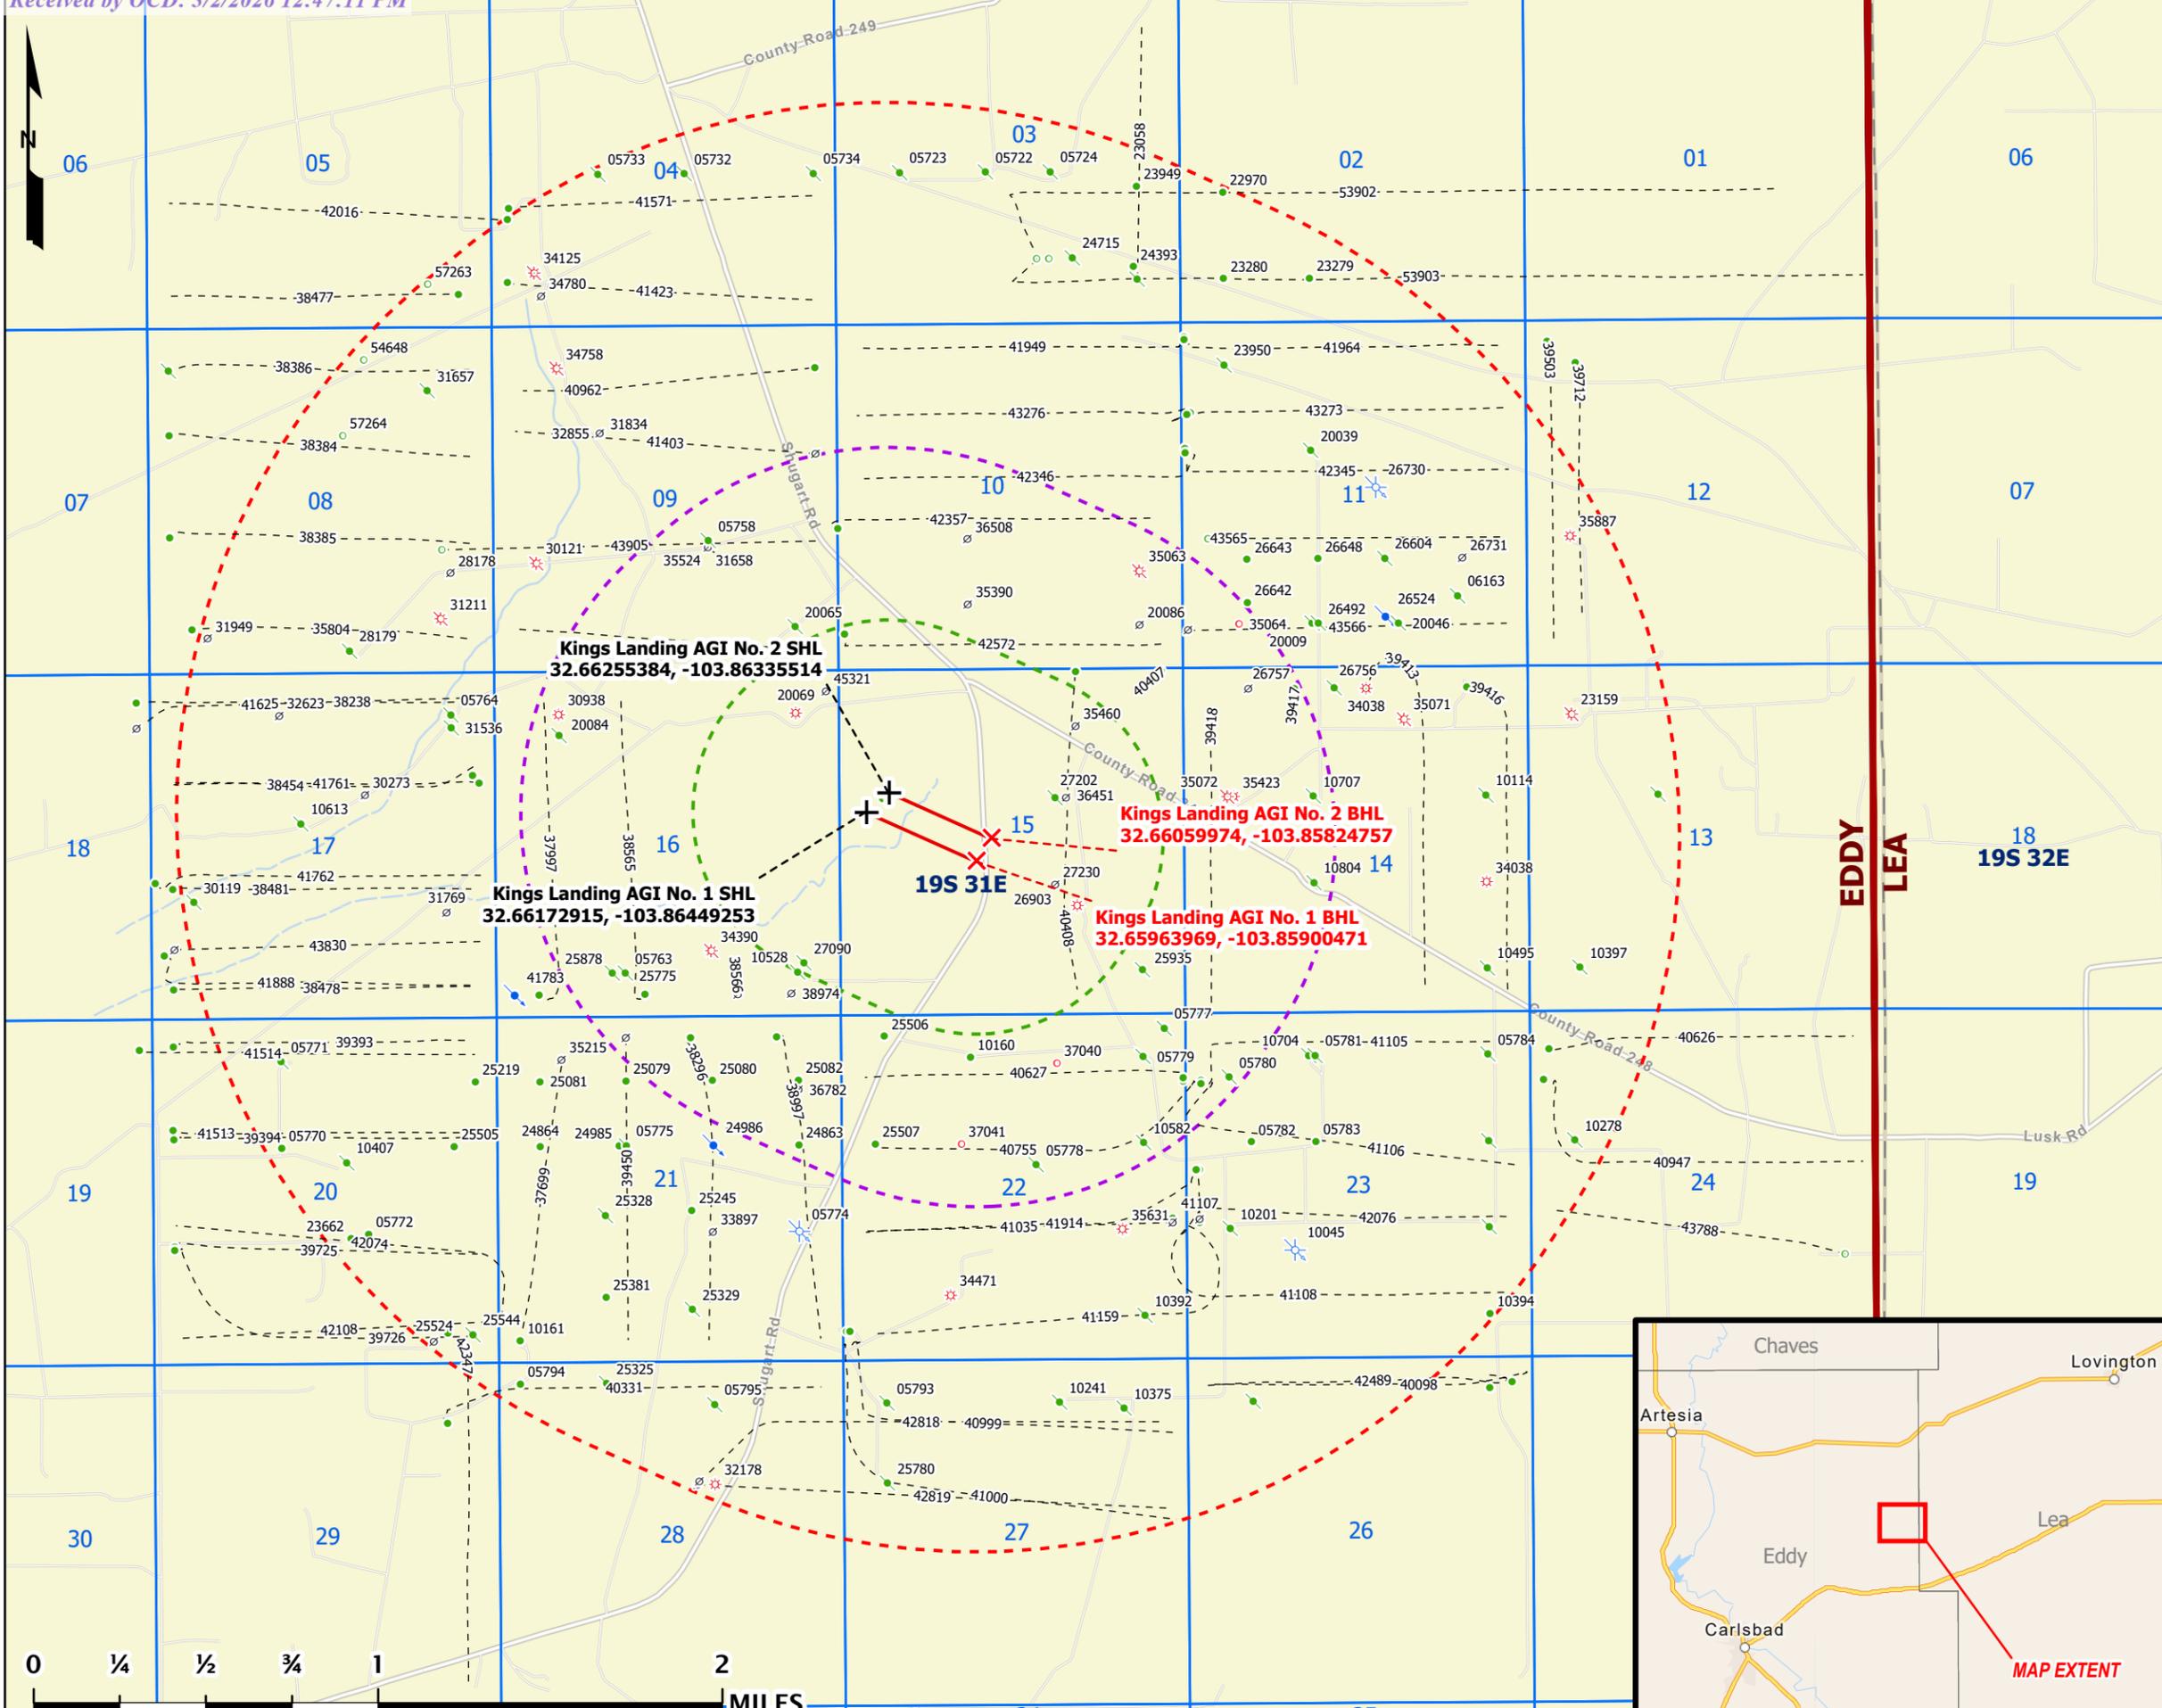

Kings Landing AGI No. 1 and No. 2  
2-Mile Area of Review List

API (30-015-...)	WELL NAME	WELL TYPE	STATUS	OPERATOR	TVD (FT.)	LATITUDE	LONGITUDE	DATE DRILLED	FIELD
05722	B I HANSON FEDERAL #001	Oil	Plugged (site released)	AGHORN OPERATING INC	3925	32.688625	-103.858360		[56439] SHUGART, YATES-7RS-QU-GRAYBURG
05723	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	4162	32.688625	-103.862648		
05724	B I HANSON FEDERAL #002	Oil	Plugged (site released)	PENROC OIL CORP	3900	32.688629	-103.855133	2/10/1960	[56439] SHUGART, YATES-7RS-QU-GRAYBURG
05732	FEATHERSTONE FEDERAL #001	Oil	Plugged (site released)	SWR OPERATING CO	3471	32.688602	-103.873375		[56439] SHUGART, YATES-7RS-QU-GRAYBURG
05733	PRE-ONGARD WELL #002	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	3372	32.688599	-103.877678		
05734	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	4115	32.688595	-103.866943		
05758	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	2761	32.673172	-103.872253		
05763	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	2479	32.655014	-103.876488		
05764	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	3610	32.665897	-103.885109		
05770	SUN FEDERAL #001	Oil	Active	Acacia Operating Company, LLC	3581	32.647728	-103.893639	10/20/1959	[29490] HACKBERRY, YATES-7 RVRS, NORTH
05771	PRE-ONGARD WELL #002	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	2238	32.651356	-103.893646		
05772	SUN FEDERAL #003	Oil	Active	Acacia Operating Company, LLC	2225	32.644096	-103.889320	1/4/1960	[29490] HACKBERRY, YATES-7 RVRS, NORTH
05774	TENNESSEE FEDERAL #001	Salt Water Disposal	Plugged (site released)	BASIC ENERGY SERVICES, LP	5010	32.644131	-103.867859	9/17/1990	[96131] SWD, SEVEN RIVERS
05775	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	2429	32.647755	-103.876465		
05777	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	2450	32.652603	-103.849640		
05778	PRE-ONGARD WELL #002	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	2584	32.646877	-103.856056		
05779	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	2599	32.651421	-103.850708		
05780	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	2468	32.650520	-103.846420		
05781	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	2452	32.651432	-103.842133		
05782	JONES FEDERAL #003	Oil	Active	Acacia Operating Company, LLC	3092	32.647800	-103.845337	11/27/1957	[42180] LUSK, YATES, WEST
05783	JONES FEDERAL #002	Oil	Active	Acacia Operating Company, LLC	2431	32.647804	-103.842117	7/25/1957	[42180] LUSK, YATES, WEST
05784	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	2943	32.651443	-103.833527		
05793	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	2763	32.636883	-103.863541		
05794	TENNECO FEDERAL #001	Oil	Active	Acacia Operating Company, LLC	2205	32.637760	-103.881790	8/15/1962	[29490] HACKBERRY, YATES-7 RVRS, NORTH
05795	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	2426	32.636868	-103.872124		
06163	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	468	32.670719	-103.834930		
10045	JONES FEDERAL #001	Salt Water Disposal	Plugged (site released)	LYNX PETROLEUM CONSULTANTS INC	12853	32.643261	-103.843178		[41589] LUSK, STRAWN; [96188] SWD, STRAWN
10114	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	625	32.662334	-103.833572		
10136	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	12,715	32.662346	-103.824989		
10160	BARTON A FEDERAL #001	Oil	Active	Acacia Operating Company, LLC	2412	32.651409	-103.859306	3/28/1963	[42180] LUSK, YATES, WEST
10161	TENNESSEE FEDERAL #002	Oil	Active	Acacia Operating Company, LLC	3860	32.639572	-103.881798	12/3/1962	[29490] HACKBERRY, YATES-7 RVRS, NORTH
10201	PRE-ONGARD WELL #002	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	2481	32.644161	-103.846397		
10238	PRE-ONGARD WELL #003	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	2,460	32.644180	-103.833504		
10241	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	2410	32.636894	-103.854950		
10276	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	2625	32.662296	-103.863632		
10278	JONES D FEDERAL #001	Oil	Plugged (site released)	DEVON ENERGY PRODUCTION COMPANY, LP	11,550	32.647819	-103.829224	3/11/1942	[41480] LUSK, BONE SPRING, WEST; [41589] LUSK, STRAWN
10375	DUNCAN FEDERAL #001	Oil	Plugged (site released)	SOUTHWEST ROYALTIES INC	11410	32.636623	-103.851730		[41540] LUSK, DELAWARE, WEST; [41589] LUSK, STRAWN
10392	PRE-ONGARD WELL #002	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	11378	32.640530	-103.850670		
10394	JONES FEDERAL B #003	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	4,797	32.640549	-103.833489	9/4/1964	[41480] LUSK, BONE SPRING, WEST; [41589] LUSK, STRAWN
10395	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	11,600	32.647812	-103.833511		
10397	SWEENY FEDERAL COM #001	Oil	Plugged (site released)	LYNX PETROLEUM CONSULTANTS INC	11,472	32.655079	-103.828926		[41589] LUSK, STRAWN
10407	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	2206	32.647102	-103.890404		
10495	PRE-ONGARD WELL #002	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	11575	32.655071	-103.833542		
10528	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	12575	32.655026	-103.867897		
10582	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	11385	32.647793	-103.850700		
10585	PRE-ONGARD WELL #004	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	11,539	32.636906	-103.845299		
10613	PRE-ONGARD WELL #002	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	2369	32.661350	-103.892609		
10704	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	11550	32.651432	-103.842461		
10707	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	11410	32.662327	-103.842171		
10804	DOZIER FEDERAL COM #001	Oil	Plugged (site released)	CIMAREX ENERGY CO. OF COLORADO	11390	32.658691	-103.842156	4/28/1966	[41480] LUSK, BONE SPRING, WEST
20009	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	11390	32.669586	-103.842194	4/28/1966	
20039	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	11333	32.676849	-103.842217		
20046	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	11310	32.669590	-103.837883		
20065	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	11300	32.669548	-103.867950		
20069	RUDOLPH ATX STATE #001	Gas	Active	EOG RESOURCES INC	135	32.665920	-103.867935		[80840] LUSK, MORROW, WEST (GAS)
20084	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	12491	32.664997	-103.879738	1/24/2000	
20086	PRE-ONGARD WELL #001	Oil	Cancelled	PRE-ONGARD WELL OPERATOR	2484	32.669571	-103.850786		
22970	NEW MEXICO STATE #002	Oil	Active	G and C Operating, LLC		32.687733	-103.846550	8/14/1969	[56439] SHUGART, YATES-7RS-QU-GRAYBURG
23058	LLANO FEDERAL #001	Oil	Plugged (site released)	ENDURANCE RESOURCES LLC	4235	32.684097	-103.850822	8/4/1979	[56439] SHUGART, YATES-7RS-QU-GRAYBURG
23159	TRAPPER 13 FEDERAL COM #003	Gas	Plugged (site released)	COG OPERATING LLC	4250	32.665722	-103.829292		[80759] LUSK, MORROW (GAS); [97167] GARDNER DRAW, MORROW, WEST (G)
23279	NEW MEXICO STATE #003	Oil	Active	G and C Operating, LLC	12660	32.684105	-103.842247	3/10/1980	[56439] SHUGART, YATES-7RS-QU-GRAYBURG
23280	NEW MEXICO STATE #004	Oil	Active	G and C Operating, LLC	4233	32.684101	-103.846535	10/30/1980	[56439] SHUGART, YATES-7RS-QU-GRAYBURG
23662	HANSON FEDERAL #001	Oil	Active	G and C Operating, LLC	4274	32.6439018	-103.8901978	6/21/1980	[29345] HACKBERRY, BONE SPRING
23949	FEDERAL R #001	Oil	Active	RUST OIL CORP	12500	32.6880035	-103.8508377	3/16/1981	[56439] SHUGART, YATES-7RS-QU-GRAYBURG
23950	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	4259	32.6804733	-103.8465195	10/19/1981	

**Kings Landing AGI No. 1 and No. 2  
2-Mile Area of Review List**

24393	MCFADDEN FEDERAL #005Y	Oil	Active	NUROC ENERGY INCORPORATED	4240	32.6846200	-103.8510200		[56439] SHUGART, YATES-7RS-QU-GRAYBURG
24715	AMOCO STATE #001	Oil	Plugged (site released)	JACK PLEMONS	3950	32.6850014	-103.8540497	1/31/1983	[56439] SHUGART, YATES-7RS-QU-GRAYBURG
24863	HILL FEDERAL #001	Oil	Active	Acacia Operating Company, LLC	3903	32.6477661	-103.8678741		[29490] HACKBERRY, YATES-7 RVRS, NORTH
24864	AMOCO FEDERAL #001	Oil	Active	Acacia Operating Company, LLC	2350	32.6477470	-103.8807526	5/14/1984	[29490] HACKBERRY, YATES-7 RVRS, NORTH
24985	AMOCO FEDERAL #002	Oil	Active	Acacia Operating Company, LLC	2330	32.6477547	-103.8768234	6/11/1984	[29490] HACKBERRY, YATES-7 RVRS, NORTH
24986	AMOCO FEDERAL #003	Salt Water Disposal	Active	Acacia Operating Company, LLC	2425	32.6477600	-103.8721400	11/21/1984	[29490] HACKBERRY, YATES-7 RVRS, NORTH; [96090] SWD, YATES
25079	AMOCO FEDERAL #005	Oil	Active	Acacia Operating Company, LLC	2400	32.6504784	-103.8764725	9/13/1984	[29490] HACKBERRY, YATES-7 RVRS, NORTH
25080	AMOCO FEDERAL #004	Oil	Active	Acacia Operating Company, LLC	2400	32.6504822	-103.8721695	9/13/1984	[29490] HACKBERRY, YATES-7 RVRS, NORTH
25081	AMOCO FEDERAL #006	Oil	Active	Acacia Operating Company, LLC	2425	32.6504707	-103.8807602	11/17/1984	[29490] HACKBERRY, YATES-7 RVRS, NORTH
25082	HILL FEDERAL #002	Oil	Active	Acacia Operating Company, LLC	2425	32.6504898	-103.8678818	12/27/1984	[29490] HACKBERRY, YATES-7 RVRS, NORTH
25219	PARLSEY FEDERAL #001	Oil	Active	Acacia Operating Company, LLC	2425	32.6504669	-103.8839798	12/31/1984	[29490] HACKBERRY, YATES-7 RVRS, NORTH
25245	TEXAS CRUDE #001	Oil	Active	Acacia Operating Company, LLC	2450	32.6450310	-103.8732224	11/13/1984	[29490] HACKBERRY, YATES-7 RVRS, NORTH
25325	TENNECO FEDERAL #003	Oil	Plugged (site released)	CANTRO EXPLORATION INC	2425	32.6377640	-103.8775024	3/29/1985	[29490] HACKBERRY, YATES-7 RVRS, NORTH
25328	PRE-ONGARD WELL #001	Oil	Plugged (site released)	PRE-ONGARD WELL OPERATOR	2425	32.6448326	-103.8775253	4/9/1985	
25329	TENNECO FEDERAL #002	Oil	Plugged (site released)	CANTRO EXPLORATION INC	2415	32.6408539	-103.8732071		[29490] HACKBERRY, YATES-7 RVRS, NORTH
25381	TEXAS CRUDE #002	Oil	Active	Acacia Operating Company, LLC	2310	32.6413956	-103.8775101		[29490] HACKBERRY, YATES-7 RVRS, NORTH
25505	LUSK 20 FEDERAL #001	Oil	Active	Acacia Operating Company, LLC	2397	32.6477432	-103.8850403		[29490] HACKBERRY, YATES-7 RVRS, NORTH
25506	LUSK 22 FEDERAL #001	Oil	Active	Acacia Operating Company, LLC	2425	32.6523094	-103.8636017	9/29/1985	[29490] HACKBERRY, YATES-7 RVRS, NORTH
25507	LUSK 22 FEDERAL #002	Oil	Active	Acacia Operating Company, LLC	2300	32.6477737	-103.8640671	12/27/1985	[29490] HACKBERRY, YATES-7 RVRS, NORTH
25524	PRE-ONGARD WELL #001	Oil	Cancelled	PRE-ONGARD WELL OPERATOR	2430	32.6395620	-103.8861001	12/20/1985	
25544	HANSON FEDERAL #002	Oil	Plugged (site released)	CANTRO EXPLORATION INC	2403	32.6398430	-103.8841400	12/31/1985	[29490] HACKBERRY, YATES-7 RVRS, NORTH
25775	B B STATE #001	Oil	Plugged (site released)	EL RAN INC		32.6550140	-103.8764877		[29348] HACKBERRY, DELAWARE
25780	FEDERAL HJ-27 #001	Oil	Plugged (site released)	DEVON ENERGY PRODUCTION COMPANY, LP	2332	32.6335258	-103.8635330	1/31/1986	[96746] HACKBERRY, BONE SPRING, EAST
25878	B B STATE #002	Oil	Plugged (site released)	EL RAN INC	6000	32.6550102	-103.8771362	7/31/1987	[29348] HACKBERRY, DELAWARE
25935	LUSK 15 FEDERAL #001	Oil	Plugged (site released)	DEVON SFS OPERATING INC	9200	32.6550484	-103.8507233	9/16/1987	[29348] HACKBERRY, DELAWARE; [41480] LUSK, BONE SPRING, WEST
26492	YATES FEDERAL #001	Oil	Plugged (site released)	SHACKELFORD OIL CO	5500	32.6695862	-103.8418732	2/28/1988	[56439] SHUGART, YATES-7RS-QU-GRAYBURG
26524	HADSON FEDERAL #001	Salt Water Disposal	Active	RAYBAW Operating, LLC	11500	32.6698647	-103.8385391	7/1/1988	[56439] SHUGART, YATES-7RS-QU-GRAYBURG; [96141] SWD, YATES-SEVEN RIVERS
26604	HADSON FEDERAL #002	Oil	Plugged (site released)	Contango Resources, LLC	11500	32.6723099	-103.8385468	7/1/1988	[56439] SHUGART, YATES-7RS-QU-GRAYBURG
26642	YATES FEDERAL #003	Oil	Active	RAYBAW Operating, LLC	2770	32.6704865	-103.8454132	8/24/1990	[56439] SHUGART, YATES-7RS-QU-GRAYBURG
26643	YATES FEDERAL #004	Oil	Active	RAYBAW Operating, LLC	2740	32.6723022	-103.8454208	10/20/1990	[56439] SHUGART, YATES-7RS-QU-GRAYBURG
26648	YATES FEDERAL #002	Oil	Active	RAYBAW Operating, LLC	2740	32.6723061	-103.8418808	10/20/1990	[56439] SHUGART, YATES-7RS-QU-GRAYBURG
26730	HADSON FEDERAL #003	Salt Water Disposal	Plugged (site released)	Contango Resources, LLC	2724	32.6753120	-103.8389816	1/5/1991	[96141] SWD, YATES-SEVEN RIVERS
26731	PRE-ONGARD WELL #004	Oil	Cancelled	PRE-ONGARD WELL OPERATOR	2718	32.6723107	-103.8346933	4/6/1991	
26756	ARRINGTON FEDERAL #001	Oil	Plugged (site released)	SHACKELFORD OIL CO	2731	32.6668625	-103.8411102	3/4/1991	[56439] SHUGART, YATES-7RS-QU-GRAYBURG
26757	PRE-ONGARD WELL #002	Oil	Cancelled	PRE-ONGARD WELL OPERATOR	2725	32.6668565	-103.8453893	12/6/1990	
26903	PRE-ONGARD WELL #002	Oil	Cancelled	PRE-ONGARD WELL OPERATOR	2,744	32.6586688	-103.8550570	5/3/1991	
27090	LUSK B #001	Oil	Plugged (site released)	RAY WESTALL		32.6554108	-103.8675766		[29348] HACKBERRY, DELAWARE
27202	RUNNING WOLF #001	Oil	Plugged (site released)	SANTA FE ENERGY OPERATING PARTNERS L P	2,850	32.6623116	-103.8550415	5/30/1991	[29348] HACKBERRY, DELAWARE
27230	PRE-ONGARD WELL #001	Oil	Cancelled	PRE-ONGARD WELL OPERATOR		32.6586688	-103.8550570		
28178	DOMINO AOJ FEDERAL #001	Oil	Cancelled	EOG Y RESOURCES, INC.		32.6718500	-103.8851100		
28179	DOMINO AOJ FEDERAL #002	Oil	Plugged (site released)	EOG Y RESOURCES, INC.	6,850	32.6686096	-103.8901520	7/14/1993	[56439] SHUGART, YATES-7RS-QU-GRAYBURG
30119	RANGER 17 FEDERAL #001	Oil	Plugged (site released)	DEVON ENERGY PRODUCTION COMPANY, LP	6,940	32.6580582	-103.8979645	11/29/1992	[78000] HACKBERRY, MORROW (GAS); [97020] HACKBERRY, BONE SPRING, NW (O); [97081] HACKBERRY, WOLFCAMP (O)
30121	DOMINO AOJ FEDERAL #003	Gas	Plugged (site released)	EOG RESOURCES INC		32.6722527	-103.8808365		[80840] LUSK, MORROW, WEST (GAS); [85300] SHUGART, MORROW (GAS); [97081] HACKBERRY, WOLFCAMP (O)
30273	RANGER 17 FEDERAL #002	Gas	Cancelled	DEVON ENERGY PRODUCTION CO.	4,350	32.6625329	-103.8894131		
30938	RUDOLPH ATX STATE #002	Gas	Active	EOG RESOURCES INC	2,555	32.6659050	-103.8797455	10/31/1994	[80840] LUSK, MORROW, WEST (GAS)
31211	DOMINO AOJ FEDERAL #004	Gas	Plugged (site released)	EOG RESOURCES INC	12,400	32.6699371	-103.8856049	3/11/1998	[78000] HACKBERRY, MORROW (GAS); [80840] LUSK, MORROW, WEST (GAS)
31536	RANGER 17 FEDERAL COM #003	Oil	Plugged (site released)	DEVON ENERGY PRODUCTION COMPANY, LP	12,400	32.6653481	-103.8851013	3/11/1998	[80840] LUSK, MORROW, WEST (GAS)
31657	DOMINO AOJ FEDERAL COM #005	Oil	Plugged (site released)	EOG RESOURCES INC	12,400	32.6795158	-103.8862305	3/11/1998	[80840] LUSK, MORROW, WEST (GAS)
31658	DOMINO AOJ FEDERAL COM #006C	Oil	Cancelled	EOG Y RESOURCES, INC.	12,340	32.6728924	-103.8722790	8/25/1998	
31769	RANGER 17 FEDERAL #004	Gas	Cancelled	DEVON ENERGY PRODUCTION COMPANY, LP	12,340	32.6575796	-103.8853801	8/25/1998	
31834	DOMINO AOJ FEDERAL COM #008	Gas	Cancelled	EOG Y RESOURCES, INC.	12,500	32.6777082	-103.8776138	7/29/1997	
31949	DOMINO AOJ FEDERAL COM #009C	Gas	Cancelled	EOG Y RESOURCES, INC.	12,500	32.6691400	-103.8972200	1/30/2000	
32178	PACER 28 FEDERAL #001	Gas	Active	DEVON ENERGY PRODUCTION COMPANY, LP	12,405	32.6335144	-103.8721085	8/4/2000	[80840] LUSK, MORROW, WEST (GAS); [96070] WC, MORROW (GAS)
32191	RED CLOUD 4 FEDERAL #001	Gas	Cancelled	NEARBURG PRODUCING CO	12,290	32.6844655	-103.8808703	2/1/2001	
32623	RANGER 17 FEDERAL #005	Gas	Cancelled	DEVON ENERGY PRODUCTION COMPANY, LP	12,400	32.6658799	-103.8936702	4/19/2001	
32677	DOMINO AOJ FEDERAL COM #006E	Gas	Cancelled	EOG Y RESOURCES, INC.	12,350	32.6728924	-103.8722790		[96068] DO NOT USE
32855	DOMINO AOJ FEDERAL COM #008Q	Gas	Cancelled	EOG Y RESOURCES, INC.	12,900	32.6777115	-103.8776398		[96542] WILDCAT, GRANITE
33897	MALIBU 21 FEDERAL #001E	Gas	Cancelled	LYNX PETROLEUM CONSULTANTS INC	12,400	32.6441220	-103.8721773		[80840] LUSK, MORROW, WEST (GAS)
34038	CHAPARRAL 14 FEDERAL COM #001	Gas	Active	ARMSTRONG ENERGY CORP	12,250	32.6586990	-103.8335571		[80840] LUSK, MORROW, WEST (GAS)
34038	CHAPARRAL 14 FEDERAL COM #001	Gas	Active	ARMSTRONG ENERGY CORP	12,709	32.6586999	-103.8335557	6/30/2005	[80840] LUSK, MORROW, WEST (GAS)
34125	BLUE THUNDER 4 FEDERAL #001	Gas	Plugged (site released)	COG OPERATING LLC	12,625	32.6844711	-103.8808823	7/11/2003	[80840] LUSK, MORROW, WEST (GAS); [97703] WC, HACKBERRY, WOLFCAMP (G)

Kings Landing AGI No. 1 and No. 2  
2-Mile Area of Review List

34390	TOP DOLLAR STATE COM #001	Gas	Plugged (site released)	MARBOB ENERGY CORP	12,700	32.6559258	-103.8721924		[29348] HACKBERRY, DELAWARE; [41480] LUSK, BONE SPRING, WEST; [80809] LUSK MORROW,NO.(GAS)(CONSOLIDATED)*; [80840] LUSK, MORROW, WEST (GAS)
34471	ARENOSO 22 FEDERAL COM #001	Gas	Active	DEVON ENERGY PRODUCTION COMPANY, LP	12,500	32.6414223	-103.8603439		[80840] LUSK, MORROW, WEST (GAS)
34758	CHECKER BIC FEDERAL COM #001	Gas	Plugged (site released)	EOG Y RESOURCES, INC.		32.6804314	-103.8797913		[96403] WILDCAT, BONE SPRING; [97338] WC: MISSISSIPPIAN GAS
34780	BLUE THUNDER 4 FEDERAL #002E	Oil	Cancelled	COG OPERATING LLC	12,400	32.6834765	-103.8805404		[96085] WC, WOLFCAMP DO NOT USE
35063	ACME 10 FEDERAL #001	Gas	Plugged (site released)	DEVON ENERGY PRODUCTION COMPANY, LP	12,500	32.6718292	-103.8507843		[41480] LUSK, BONE SPRING, WEST; [80840] LUSK, MORROW, WEST (GAS)
35064	ROADRUNNER 11 FEDERAL COM #001	Gas	New	DEVON ENERGY PRODUCTION COMPANY, LP	12,709	32.6695786	-103.8458328	6/30/2005	[80840] LUSK, MORROW, WEST (GAS)
35071	COYOTE 14 FEDERAL #001	Gas	Plugged (site released)	DEVON ENERGY PRODUCTION COMPANY, LP	12,300	32.6655464	-103.8376312	10/2/2005	[80840] LUSK, MORROW, WEST (GAS)
35072	COYOTE 14 FEDERAL #002	Gas	Plugged (site released)	DEVON ENERGY PRODUCTION COMPANY, LP	12,300	32.6623230	-103.8464584	10/2/2005	[80840] LUSK, MORROW, WEST (GAS)
35215	PENNY PINCHER FEDERAL #001C	Gas	Cancelled	MARBOB ENERGY CORP	12,300	32.6513764	-103.8796781	10/2/2005	[80840] LUSK, MORROW, WEST (GAS)
35390	ACME 10 FEDERAL COM #002C	Gas	Cancelled	DEVON ENERGY PRODUCTION COMPANY, LP	12,500	32.6704649	-103.8593396	6/24/2006	[80840] LUSK, MORROW, WEST (GAS)
35423	COYOTE 14 FEDERAL #002Y	Gas	Active	DEVON ENERGY PRODUCTION COMPANY, LP	12,500	32.6623230	-103.8461380	6/24/2006	[80759] LUSK, MORROW (GAS); [80840] LUSK, MORROW, WEST (GAS)
35460	ACME 15 FEDERAL COM #003C	Gas	Cancelled	DEVON ENERGY PRODUCTION COMPANY, LP	12,500	32.6653055	-103.8540031	6/24/2006	[80840] LUSK, MORROW, WEST (GAS)
35524	DOMINO AOJ FEDERAL COM #006	Gas	Cancelled	EOG Y RESOURCES, INC.	12,747	32.6728924	-103.8722790	10/22/2006	[96542] WILDCAT, GRANITE
35631	ARENOSO 22 FEDERAL #002	Gas	Active	DEVON ENERGY PRODUCTION COMPANY, LP	12,093	32.6441574	-103.8517609	5/7/2006	[80840] LUSK, MORROW, WEST (GAS)
35804	DOMINO AOJ FEDERAL COM #009H	Oil	Active	EOG RESOURCES INC	10,500	32.6695061	-103.8980026		[97056] HACKBERRY, BONE SPRING, NORTH; [97338] WC: MISSISSIPPIAN GAS
35887	AIRBUS FEDERAL #001	Gas	Active	COG OPERATING LLC	12,700	32.673225	-103.829315	11/10/2007	[85300] SHUGART, MORROW (GAS)
36451	ACME 15 FEDERAL COM #002G	Gas	Cancelled	DEVON ENERGY PRODUCTION COMPANY, LP	12,600	32.6623087	-103.8544986	4/27/2007	[80759] LUSK, MORROW (GAS)
36508	ACME 10 FEDERAL COM #002K	Gas	Cancelled	DEVON ENERGY PRODUCTION COMPANY, LP	12,600	32.6731861	-103.8593489	4/27/2007	[80840] LUSK, MORROW, WEST (GAS)
36748	ACME 15 FEDERAL COM #001	Gas	Active	DEVON ENERGY PRODUCTION COMPANY, LP	13,000	32.6577682	-103.8539505		[80840] LUSK, MORROW, WEST (GAS)
36782	CADILLAC FEDERAL #001A	Gas	Cancelled	CIMAREX ENERGY CO. OF COLORADO	12,725	32.6500740	-103.8678893	9/2/2008	[78060] HAPPY VALLEY, MORROW (GAS)
37040	IRON HORSE 22 FEDERAL #001	Gas	New	DEVON ENERGY PRODUCTION COMPANY, LP	1,322	32.6511383	-103.8550034	12/27/2006	[97080] GREENWOOD, MORROW (G)
37041	BAMBINO 22 FEDERAL COM #001	Gas	New	DEVON ENERGY PRODUCTION COMPANY, LP	12,700	32.6477776	-103.8597794		[97080] GREENWOOD, MORROW (G)
37699	PENNY PINCHER FEDERAL COM #001	Oil	Active	CIMAREX ENERGY CO. OF COLORADO		32.6513786	-103.8796921		[29345] HACKBERRY, BONE SPRING
37997	RUDOLPH ATX STATE COM #003H	Oil	Active	EOG RESOURCES INC	12,700	32.6540985	-103.8807755	2/1/2007	[41480] LUSK, BONE SPRING, WEST
38238	SIRIUS 17 FEDERAL #001H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	12,725	32.6664505	-103.9007874		[97020] HACKBERRY, BONE SPRING, NW (O)
38296	PENNY PINCHER FEDERAL COM #003H	Oil	Active	CIMAREX ENERGY CO. OF COLORADO	12,150	32.6522942	-103.8732529		[29345] HACKBERRY, BONE SPRING
38384	DOMINO AOJ FEDERAL #011H	Oil	Active	EOG RESOURCES INC	12,718	32.6776810	-103.8991013	3/10/2008	[97056] HACKBERRY, BONE SPRING, NORTH
38385	DOMINO AOJ FEDERAL COM #010H	Oil	Active	EOG RESOURCES INC	8,840	32.6734085	-103.8990860	4/7/2010	[97056] HACKBERRY, BONE SPRING, NORTH
38386	DOMINO AOJ FEDERAL COM #012H	Oil	Plugged (site released)	EOG RESOURCES INC	12,725	32.6804047	-103.8991165		[97056] HACKBERRY, BONE SPRING, NORTH
38454	SIRIUS 17 FEDERAL #002H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	12,500	32.6633415	-103.8840561		[97020] HACKBERRY, BONE SPRING, NW (O)
38477	BLUE THUNDER 5 FEDERAL COM #004H	Oil	Active	COG OPERATING LLC	12,600	32.6835594	-103.8846512	11/30/2008	[97056] HACKBERRY, BONE SPRING, NORTH
38478	SIRIUS 17 FEDERAL #004H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	12,550	32.6543999	-103.8989868		[97020] HACKBERRY, BONE SPRING, NW (O)
38481	SIRIUS 17 FEDERAL COM #003H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	12,650	32.6586075	-103.8990021		[97020] HACKBERRY, BONE SPRING, NW (O)
38565	RUDOLPH ATX STATE COM #004H	Oil	Active	EOG RESOURCES INC	12,650	32.6541061	-103.8755112		[41480] LUSK, BONE SPRING, WEST
38566	RUDOLPH ATX STATE COM #005H	Oil	Cancelled	EOG Y RESOURCES, INC.	8,970	32.6541138	-103.8708801	3/20/2010	[41480] LUSK, BONE SPRING, WEST
38974	RUDOLPH ATX STATE COM #006H	Oil	Cancelled	EOG Y RESOURCES, INC.	8,945	32.6541176	-103.8682175	7/30/2010	[41480] LUSK, BONE SPRING, WEST
38997	PENNY PINCHER FEDERAL COM #004H	Oil	Active	CIMAREX ENERGY CO. OF COLORADO	8,871	32.6523018	-103.8689575	11/6/2010	[29345] HACKBERRY, BONE SPRING
39393	RIGEL 20 FEDERAL COM #001H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,025	32.6519928	-103.8990173	12/7/2010	[97020] HACKBERRY, BONE SPRING, NW (O)
39394	RIGEL 20 FEDERAL COM #002H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	8,836	32.6480751	-103.8990021	7/25/2011	[97020] HACKBERRY, BONE SPRING, NW (O)
39413	CAPELLA 14 FEDERAL COM #002H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	8,835	32.6668663	-103.8395309	5/21/2011	[41480] LUSK, BONE SPRING, WEST
39416	CAPELLA 14 FEDERAL COM #001H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	8,833	32.6668701	-103.8344955	6/17/2011	[41480] LUSK, BONE SPRING, WEST
39417	CAPELLA 14 FEDERAL COM #003H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	8,945	32.6668625	-103.8430939	3/12/2011	[41480] LUSK, BONE SPRING, WEST
39418	CAPELLA 14 FEDERAL COM #004H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,091	32.6668587	-103.8473206	3/12/2011	[41480] LUSK, BONE SPRING, WEST
39450	PENNY PINCHER FEDERAL COM #002H	Oil	Cancelled	CIMAREX ENERGY CO. OF COLORADO	8,839	32.6522903	-103.8764801	2/19/2011	[29345] HACKBERRY, BONE SPRING
39503	AIRBUS 12 FEDERAL #002H	Oil	Active	COG OPERATING LLC	8,945	32.6813965	-103.8304214	12/24/2011	[29290] GREENWOOD, BONE SPRING
39544	DOMINO AOJ FEDERAL COM #013H	Oil	Active	EOG RESOURCES INC	8,884	32.6686440	-103.8668747	9/4/2011	[29345] HACKBERRY, BONE SPRING; [97056] HACKBERRY, BONE SPRING, NORTH
39712	POPTART 12 FEDERAL #004H	Oil	Active	COG OPERATING LLC	10,390	32.680489	-103.829018	12/11/2011	[29320] GREENWOOD, WOLFCAMP; [97489] WILDCAT, WOLFCAMP GAS (ABOLISHED)
39725	RIGEL 20 FEDERAL COM #003H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	8,953	32.6435814	-103.8989868	4/16/2011	[29345] HACKBERRY, BONE SPRING
39726	RIGEL 20 FEDERAL COM #004H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	4,400	32.6434441	-103.8989868	6/10/2011	[29345] HACKBERRY, BONE SPRING
40098	REGULUS 26 FEDERAL #001H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	13,460	32.6376915	-103.8324051		[41480] LUSK, BONE SPRING, WEST
40331	BELLATRIX 28 FEDERAL #001H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,064	32.6361313	-103.8854218	7/7/2011	[29345] HACKBERRY, BONE SPRING
40407	BOOTES 15 FEDERAL COM #001H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,017	32.6676254	-103.8497314	7/7/2011	[41480] LUSK, BONE SPRING, WEST
40408	BOOTES 15 FEDERAL COM #002H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	8,902	32.6676178	-103.8539886	11/24/2011	[41480] LUSK, BONE SPRING, WEST
40626	MIMOSA 24 FEDERAL COM #001H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,309	32.651661	-103.830490	12/25/2012	[41480] LUSK, BONE SPRING, WEST
40627	AQUILA 22 FEDERAL COM #001H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,179	32.6505165	-103.8487244	11/24/2011	[41480] LUSK, BONE SPRING, WEST
40755	AQUILA 22 FEDERAL #002H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,179	32.6503792	-103.8487244	11/24/2011	[41480] LUSK, BONE SPRING, WEST
40947	MIMOSA 24 FEDERAL COM #002H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,312	32.650387	-103.830765	7/14/2013	[41480] LUSK, BONE SPRING, WEST
40962	CHECKER BIC FEDERAL COM #004H	Oil	Active	EOG RESOURCES INC	9,179	32.6804466	-103.8669128	11/24/2011	[97056] HACKBERRY, BONE SPRING, NORTH
40999	AGASTI 27 FEDERAL #001H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	8,911	32.6399040	-103.8653717	1/24/2012	[96746] HACKBERRY, BONE SPRING, EAST
41000	AGASTI 27 FEDERAL #002H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,147	32.6399040	-103.865396	1/8/2013	[96746] HACKBERRY, BONE SPRING, EAST
41035	AQUILA 22 FEDERAL COM #003C	Oil	Cancelled	DEVON ENERGY PRODUCTION COMPANY, LP	9,157	32.6444313	-103.8492761	6/6/2012	[41480] LUSK, BONE SPRING, WEST
41105	ANTARES 23 FEDERAL COM #001H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,120	32.6504059	-103.8478317	9/28/2013	[41480] LUSK, BONE SPRING, WEST
41106	ANTARES 23 FEDERAL #002H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,116	32.6502686	-103.8478317	7/9/2012	[41480] LUSK, BONE SPRING, WEST

Kings Landing AGI No. 1 and No. 2  
2-Mile Area of Review List

41107	ANTARES 23 FEDERAL #003C	Oil	Cancelled	DEVON ENERGY PRODUCTION COMPANY, LP	8,981	32.6445706	-103.8479382		[41480] LUSK, BONE SPRING, WEST
41108	ANTARES 23 FEDERAL #004H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,055	32.6444359	-103.8479385	10/23/2011	[41480] LUSK, BONE SPRING, WEST
41159	AQUILA 22 FEDERAL COM #004H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,008	32.6445999	-103.8492737	2/21/2012	[41480] LUSK, BONE SPRING, WEST
41403	CHECKER BIC FEDERAL COM #003H	Oil	Cancelled	EOG Y RESOURCES, INC.	8,900	32.6768188	-103.8668976	1/27/2012	[97020] HACKBERRY, BONE SPRING, NW (O)
41423	FIREFOX 4 FEDERAL COM #005H	Oil	Active	COG OPERATING LLC	8,954	32.6840820	-103.8822098	3/4/2012	[97056] HACKBERRY, BONE SPRING, NORTH
41513	RIGEL 20 FEDERAL COM #006H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,249	32.6484909	-103.8990479	4/23/2012	[97056] HACKBERRY, BONE SPRING, NORTH
41514	RIGEL 20 FEDERAL COM #005H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,069	32.6518402	-103.9007034	7/10/2012	[97056] HACKBERRY, BONE SPRING, NORTH
41571	FIREFOX FEDERAL COM #004H	Oil	Active	COG OPERATING LLC	9,179	32.6871910	-103.8821411	2/14/2013	[97056] HACKBERRY, BONE SPRING, NORTH
41625	SIRIUS 17 FEDERAL #005H	Oil	Cancelled	DEVON ENERGY PRODUCTION COMPANY, LP	9,185	32.6653633	-103.9007797	3/21/2013	[97020] HACKBERRY, BONE SPRING, NW (O)
41761	SIRIUS 17 FEDERAL #006H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	8,494	32.6630402	-103.8837280	3/21/2013	[97020] HACKBERRY, BONE SPRING, NW (O)
41762	SIRIUS 17 FEDERAL #007H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,160	32.6588783	-103.8998795	10/27/2012	[97020] HACKBERRY, BONE SPRING, NW (O)
41783	HACKBERRY 16 SWD #001	Salt Water Disposal	Active	DEVON ENERGY PRODUCTION COMPANY, LP	8,474	32.6540985	-103.8820114	10/27/2012	[97775] SWD, DEV-FUS-MON-SIMP-ELL
41888	SIRIUS 17 FEDERAL COM #008H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,148	32.6558075	-103.8994522	11/20/2012	[97020] HACKBERRY, BONE SPRING, NW (O)
41914	AQUILA 22 FEDERAL COM #013H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,045	32.6466408	-103.8480911	8/30/2013	[41480] LUSK, BONE SPRING, WEST
41949	HADAR 10 FEDERAL COM #001H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,178	32.6816673	-103.8485107	2/9/2013	[97056] HACKBERRY, BONE SPRING, NORTH
41964	MIZAR 11 FED COM #001H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,214	32.6815300	-103.8485107	3/14/2013	[29290] GREENWOOD, BONE SPRING
42016	BLUE THUNDER 5 FEDERAL COM #005H	Oil	Active	COG OPERATING LLC	9,040	32.6867218	-103.8822021	3/14/2013	[97056] HACKBERRY, BONE SPRING, NORTH
42074	RIGEL 20 FEDERAL COM #007H	Oil	Cancelled	DEVON ENERGY PRODUCTION COMPANY, LP	9,140	32.6405487	-103.8827286		[29345] HACKBERRY, BONE SPRING
42076	ANTARES 23 FEDERAL #013H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,218	32.6466408	-103.8479309	8/22/2013	[41480] LUSK, BONE SPRING, WEST
42108	RIGEL 20 FEDERAL COM #008H	Oil	Cancelled	DEVON ENERGY PRODUCTION COMPANY, LP	9,242	32.6404114	-103.8827286	9/21/2013	[29345] HACKBERRY, BONE SPRING
42345	MIZAR 11 FED COM #002H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	13,698	32.6767942	-103.8484745		[29290] GREENWOOD, BONE SPRING
42346	HADAR 10 FEDERAL COM #002H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,309	32.6769791	-103.8484955	4/23/2013	[97056] HACKBERRY, BONE SPRING, NORTH
42347	VEGA 29 FEDERAL #004H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,253	32.6399231	-103.8853912	5/27/2013	[29345] HACKBERRY, BONE SPRING
42357	HADAR 10 FEDERAL COM #003H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	9,019	32.6736603	-103.8657990		[41480] LUSK, BONE SPRING, WEST
42489	REGULUS 26 FEDERAL #005H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	8,878	32.6376915	-103.8335037	6/16/2013	[41480] LUSK, BONE SPRING, WEST
42572	HADAR 10 FEDERAL COM #004H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	8,017	32.6692314	-103.8654938	5/5/2014	[41480] LUSK, BONE SPRING, WEST
42818	AGASTI 27 FEDERAL #003H	Oil	Cancelled	DEVON ENERGY PRODUCTION COMPANY, LP	8,023	32.6336208	-103.8729125	2/25/2014	[97650] WC WILLIAMS SINK, BONE SPRING
42819	AGASTI 27 FEDERAL #004H	Oil	Cancelled	DEVON ENERGY PRODUCTION COMPANY, LP	8,904	32.6334970	-103.8729872	5/23/2015	[97650] WC WILLIAMS SINK, BONE SPRING
43273	MIZAR 11 FEDERAL COM #021H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	8,050	32.6764527	-103.9487249		[29290] GREENWOOD, BONE SPRING
43276	HADAR 10 FEDERAL COM #021H	Oil	Active	DEVON ENERGY PRODUCTION COMPANY, LP	8,050	32.6784711	-103.8482210	1/30/2014	[97056] HACKBERRY, BONE SPRING, NORTH
43565	LA BONITA 11 FEDERAL #001H	Oil	New	APACHE CORPORATION	7,973	32.6731769	-103.8473724	3/19/2015	[29290] GREENWOOD, BONE SPRING
43566	LA BONITA 11 FEDERAL #002H	Oil	Expired	APACHE CORPORATION	14,756	32.6693149	-103.8483803	6/16/2014	[29290] GREENWOOD, BONE SPRING
43788	SCREWDRIVER 24 FEDERAL COM #001H	Oil	New	COG OPERATING LLC	9,210	32.642984	-103.815796		[41480] LUSK, BONE SPRING, WEST
43830	SIRIUS 17 FEDERAL COM #022C	Oil	Cancelled	DEVON ENERGY PRODUCTION COMPANY, LP	8,022	32.6261160	-103.8992854	10/6/2014	[97020] HACKBERRY, BONE SPRING, NW (O)
43905	CHECKER BIC FEDERAL COM #005H	Oil	New	EOG RESOURCES INC	9,144	32.6728456	-103.8855348	6/12/2014	[97056] HACKBERRY, BONE SPRING, NORTH
45321	I'M YOUR HACKBERRY STATE SWD #001	Salt Water Disposal	Cancelled	Summit Midstream Permian, LLC	9,040	32.6668270	-103.8664380	8/27/2014	[97869] SWD, DEVONIAN-SILURIAN
53902	JIMMY ANDERSON 0301 FEDERAL COM #127H	Oil	New	MATADOR PRODUCTION COMPANY	9,044	32.6849585	-103.8552335	7/27/2014	[63345] WATKINS, BONE SPRING; [97056] HACKBERRY, BONE SPRING, NORTH
53903	JIMMY ANDERSON 0301 FEDERAL COM #124H	Oil	New	MATADOR PRODUCTION COMPANY	8,888	32.6849583	-103.8558340	2/25/2014	[97056] HACKBERRY, BONE SPRING, NORTH
54648	HAYMAKER FEDERAL #001	Oil	New	Manzanita Operating, LLC	8,144	32.6808405	-103.8893957		[97083] BENSON, DELAWARE(O)
57263	RAINMAKER FEDERAL #004	Oil	New	Manzanita Operating, LLC	5,600	32.684005	-103.886190		[97083] BENSON, DELAWARE(O)
57264	HAYMAKER FEDERAL #003	Oil	New	Manzanita Operating, LLC	5,600	32.677651	-103.890457		[97083] BENSON, DELAWARE(O)

**Kings Landing AGI No. 1 and No. 2**

**1-Mile Offset Water Wells**

Frontier Field Services, LLC

Eddy County, NM

Drawn by: SJL | Date: 1/21/2026 | Approved by: SLP

PCS: NAD 1983 State Plane NM-E FIPS 3001 (US Ft.)



+ Kings Landing AGIs Surface Hole Locations

x Kings Landing AGIs Bottom Hole Locations

— Kings Landing AGIs Directionals



• Water Wells

- - - Distance Call (to closest water well)


⋯ 1-Mile Radius

□ Quarter-Quarters

⋯ Sections

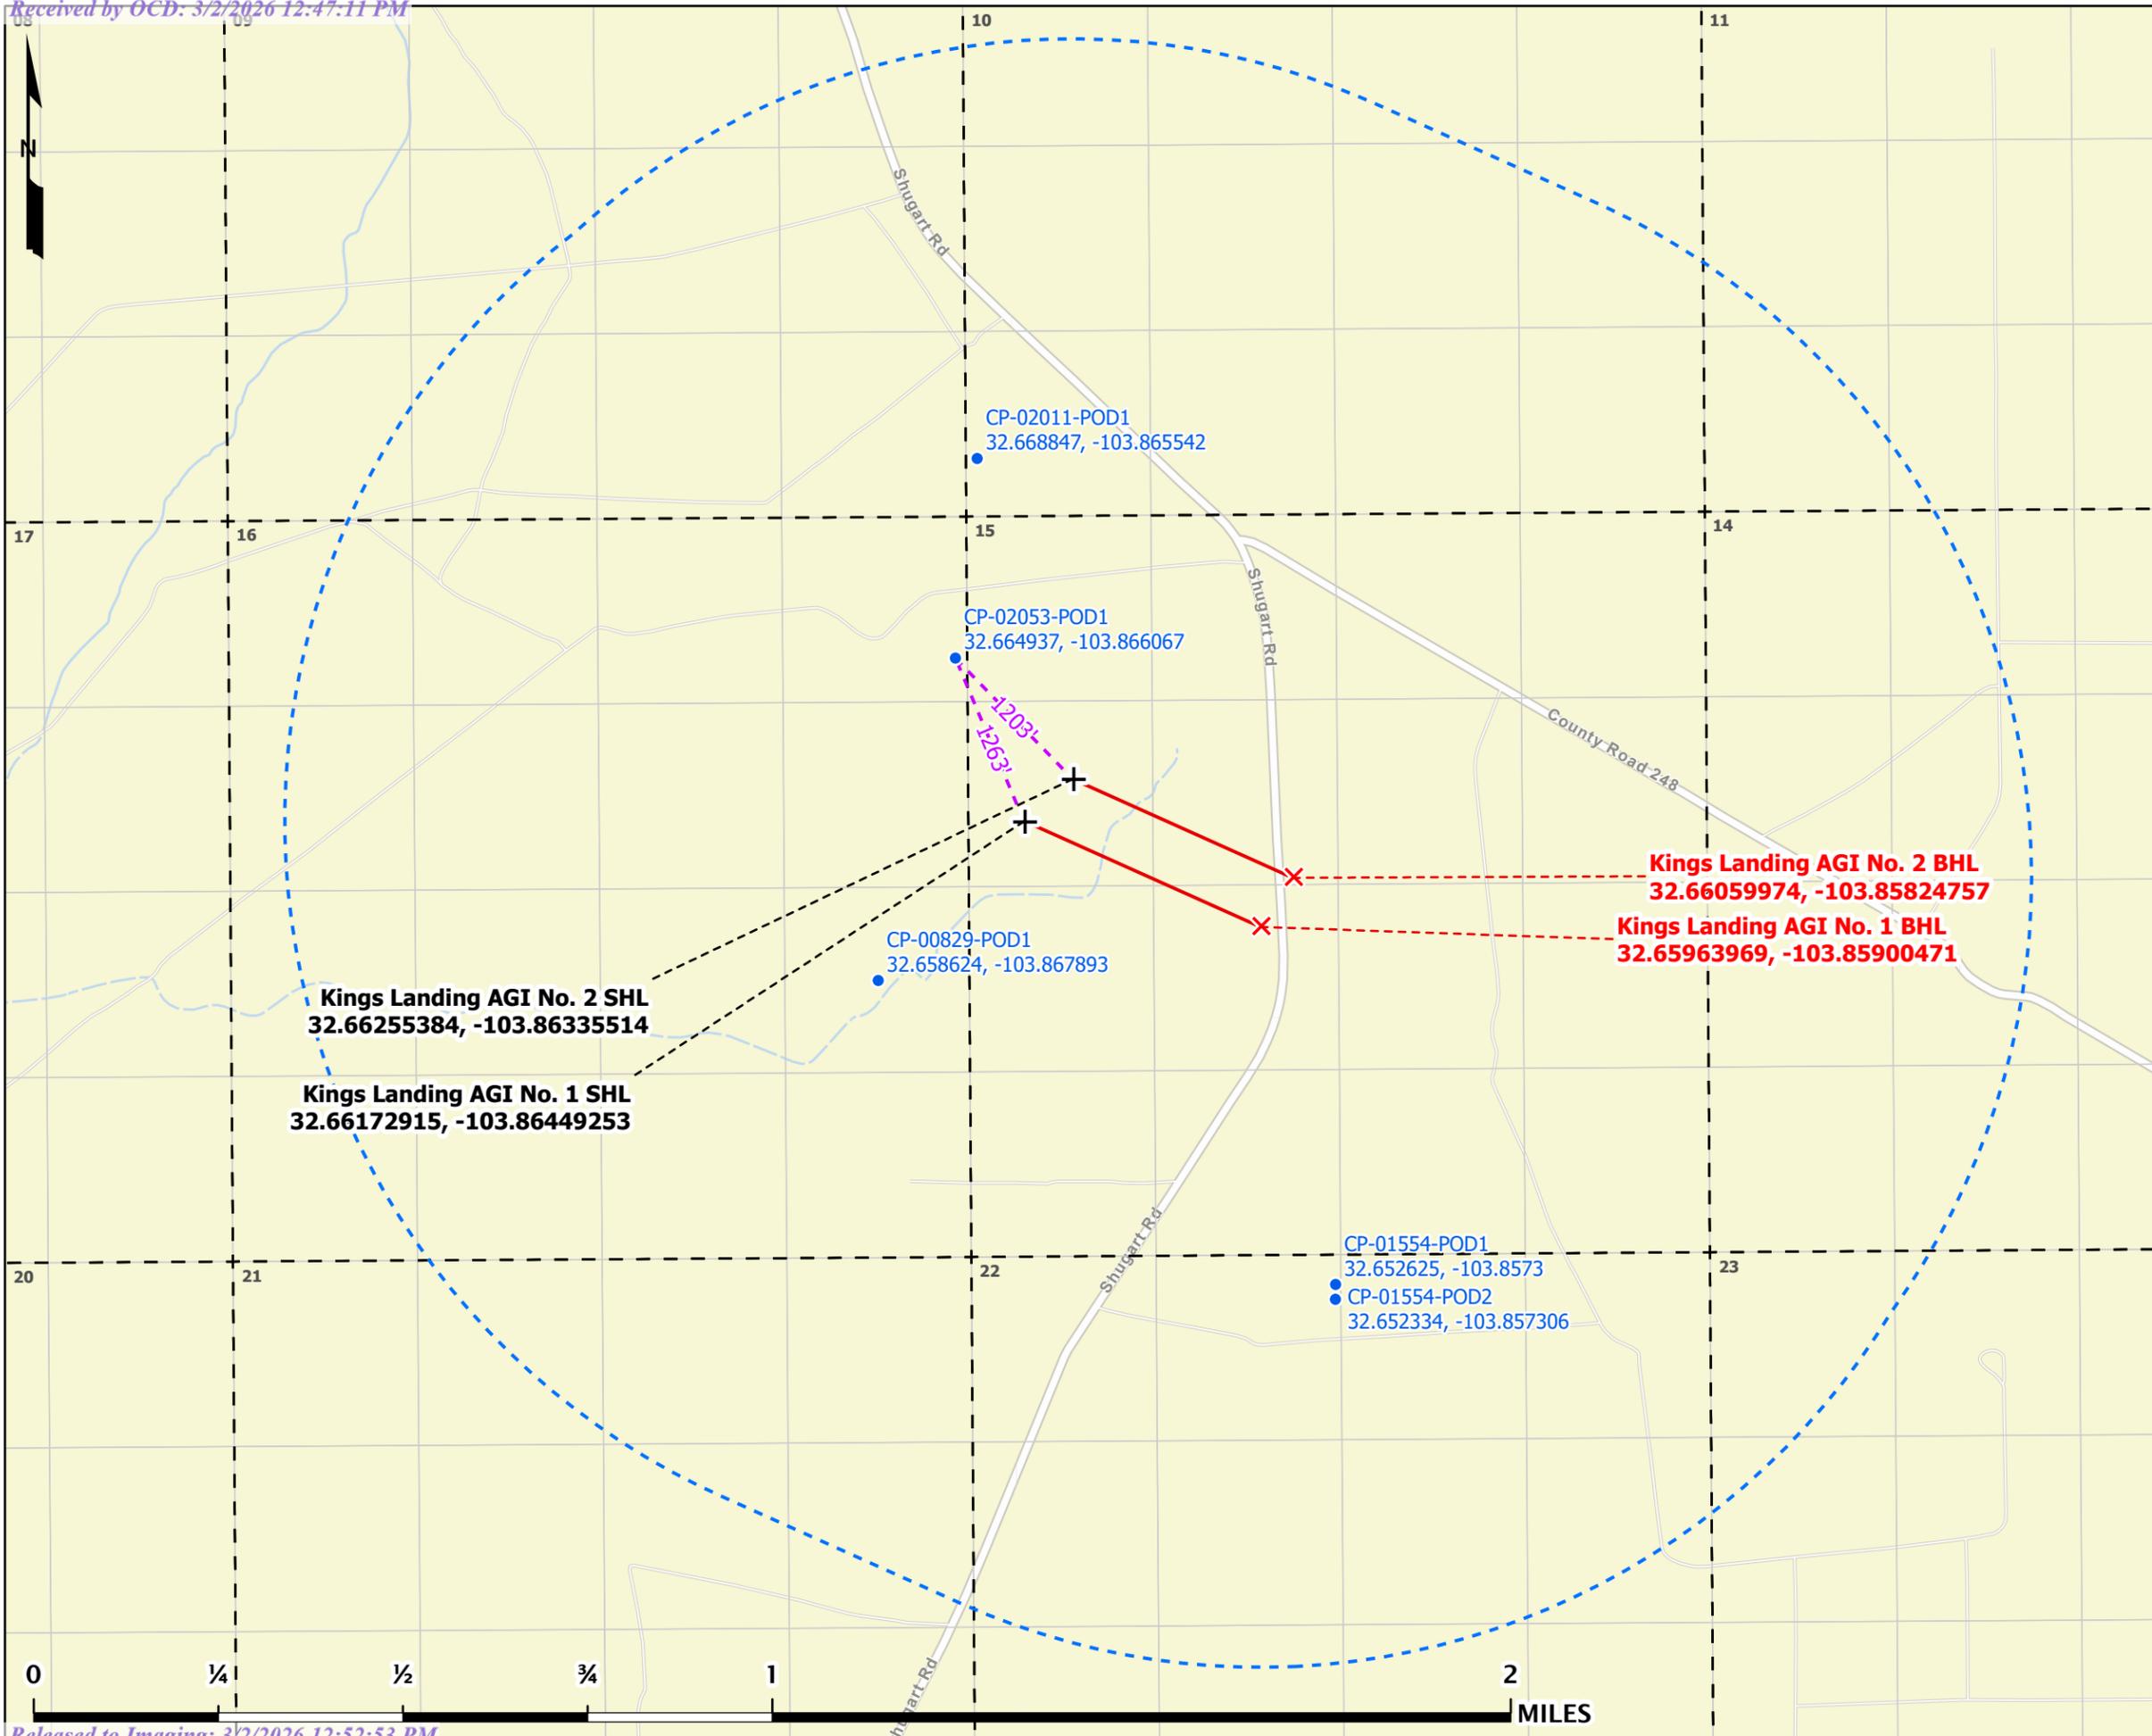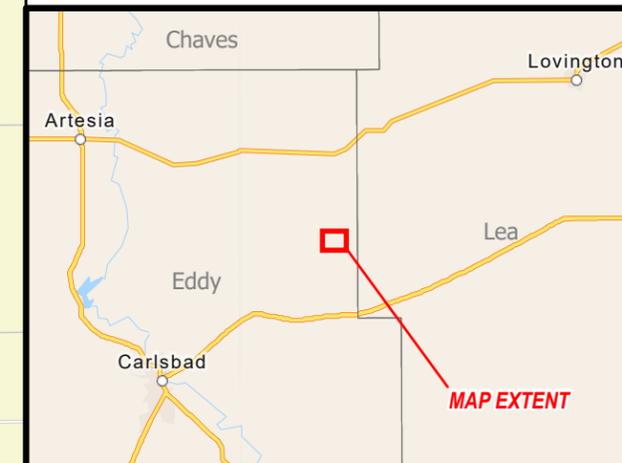

## Appendix C – Geologic Structure Maps and Cross Sections

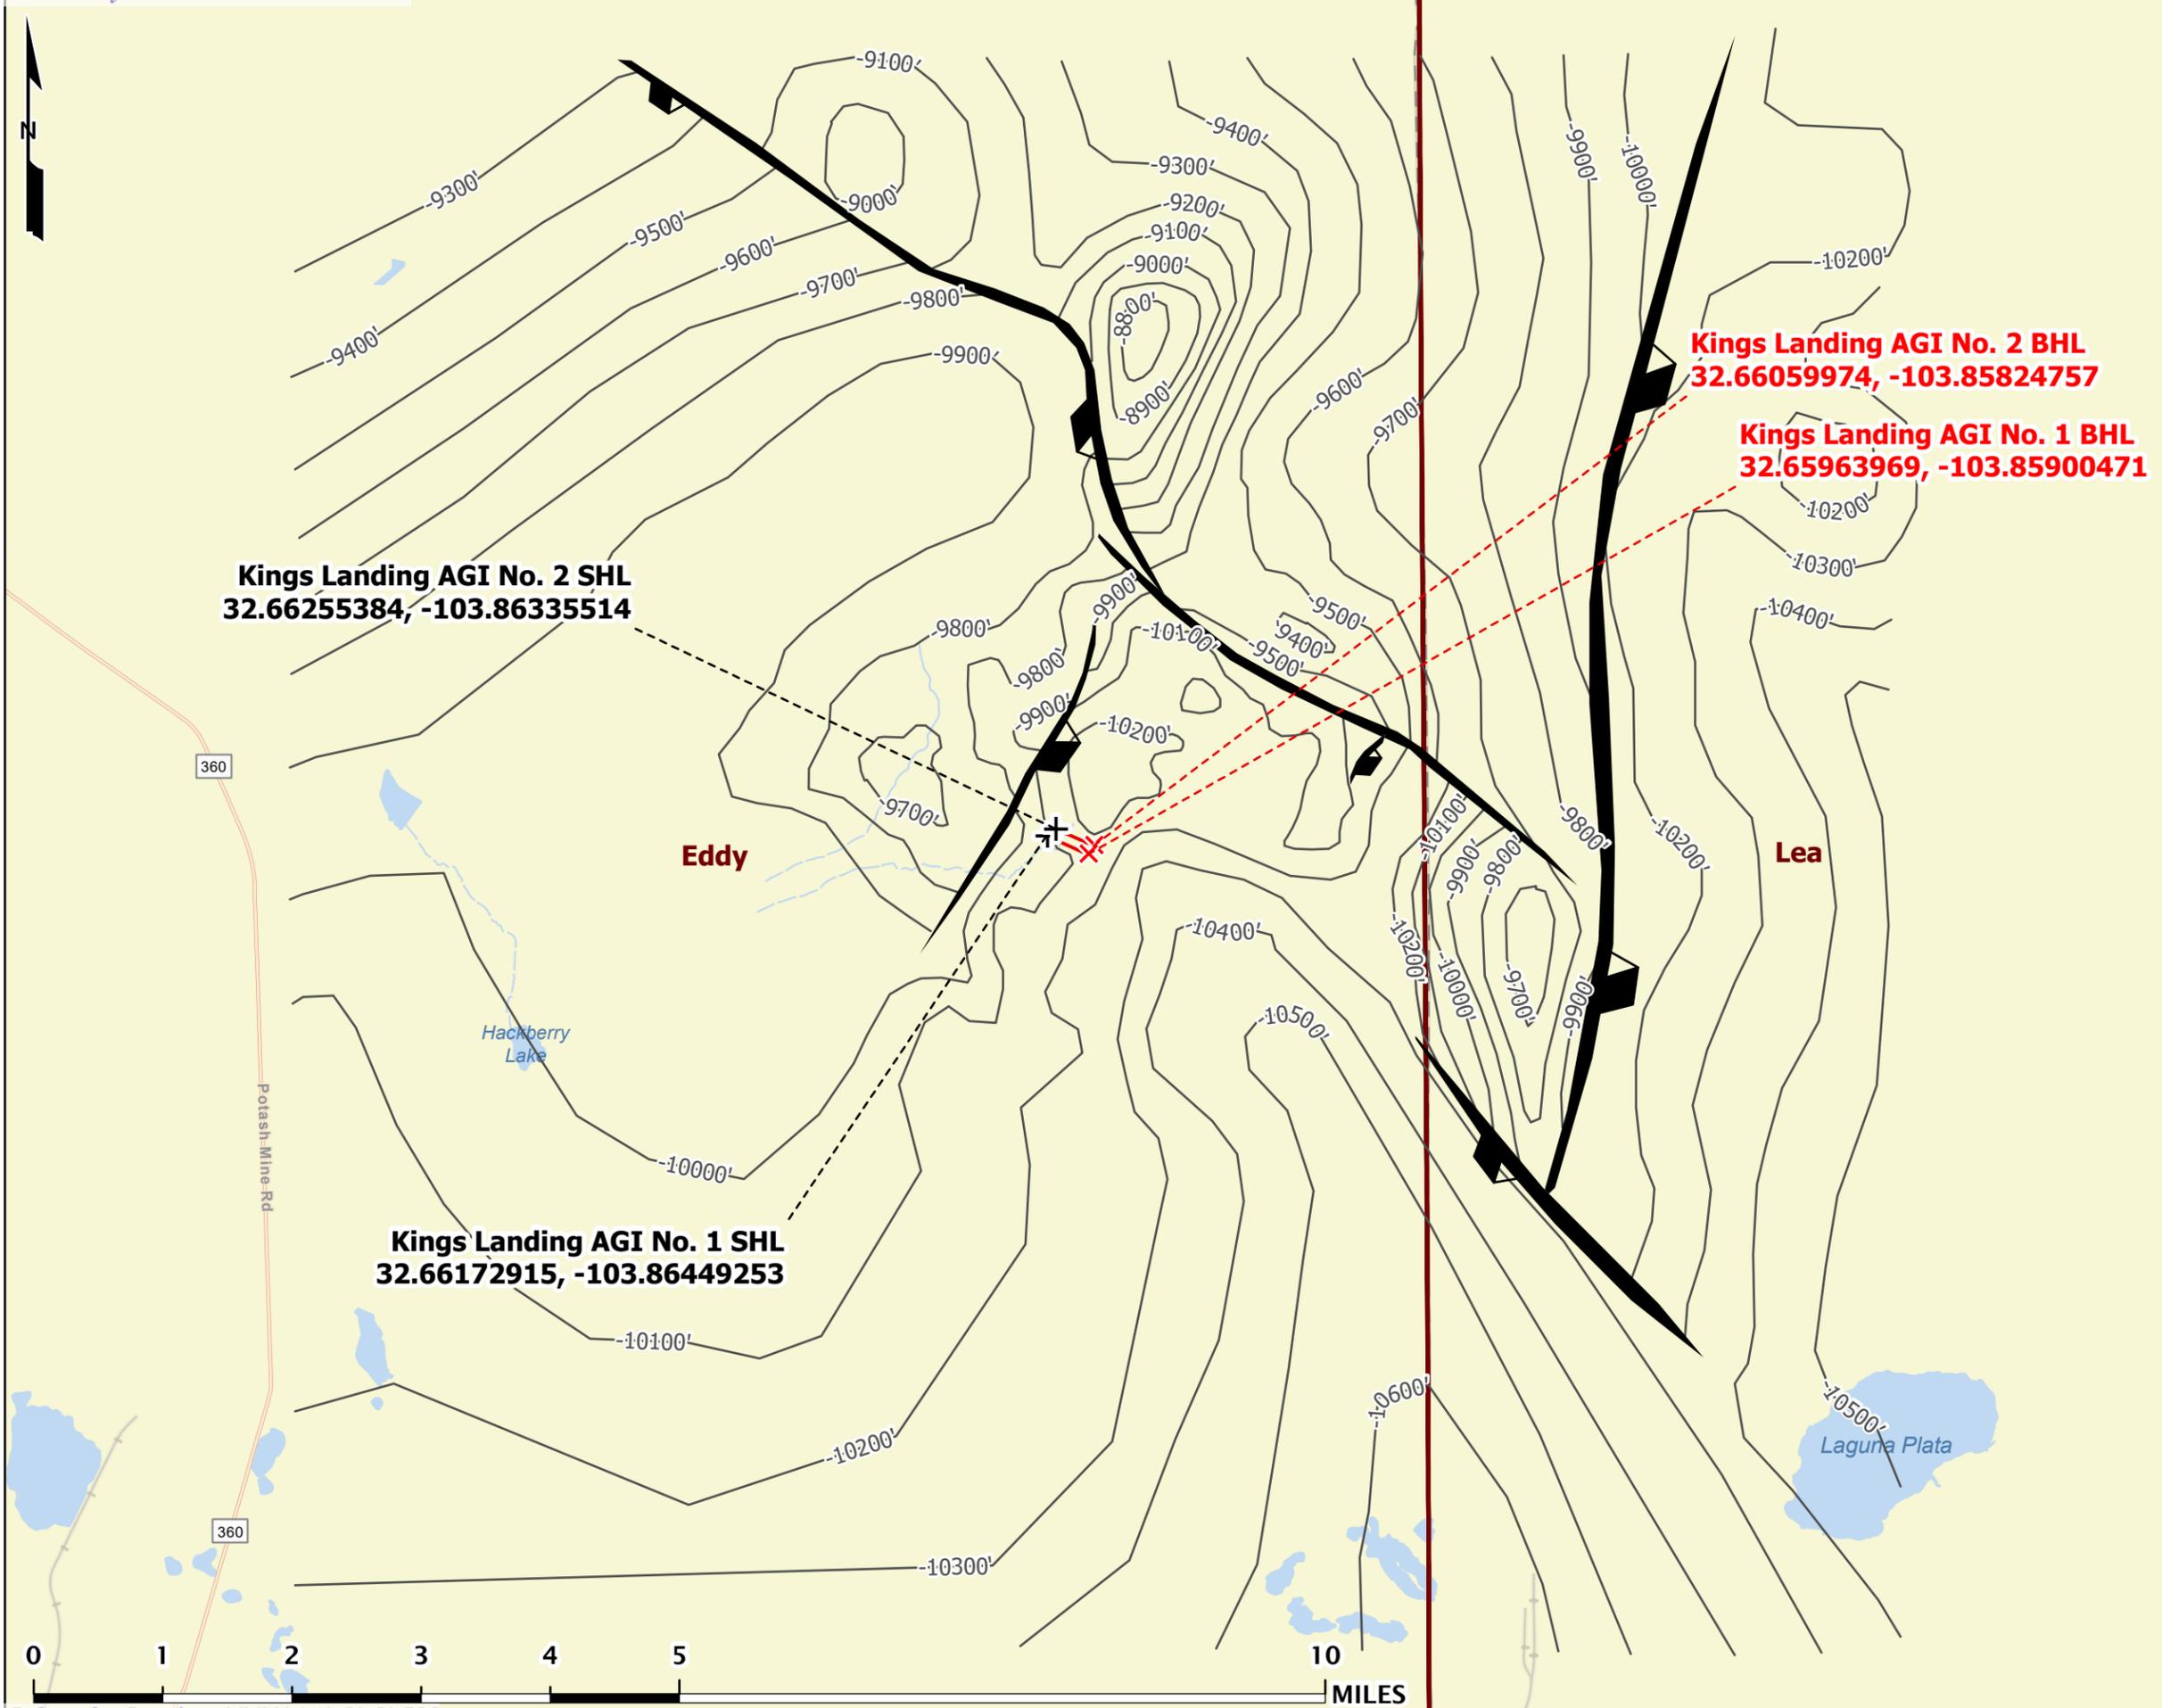

**Kings Landing AGI No. 1 and No. 2**

**Top of Devonian Structure**

Frontier Field Services, LLC

Eddy County, NM

Drawn by:  
Steven Larcom

Date: 1/20/2026

Approved by:  
Steve Pattee

PCS: NAD 1983 State Plane NM-E FIPS 3001 (US Ft.)



+ Kings Landing AGIs Surface Hole Locations


x Kings Landing AGIs Bottom Hole Locations

— Kings Landing AGIs Directionals



— Contours (Top of Injection, Devonian, Subsea, CI = 100')

█ Normal Faults (Top of Injection, Devonian)

▭ Counties

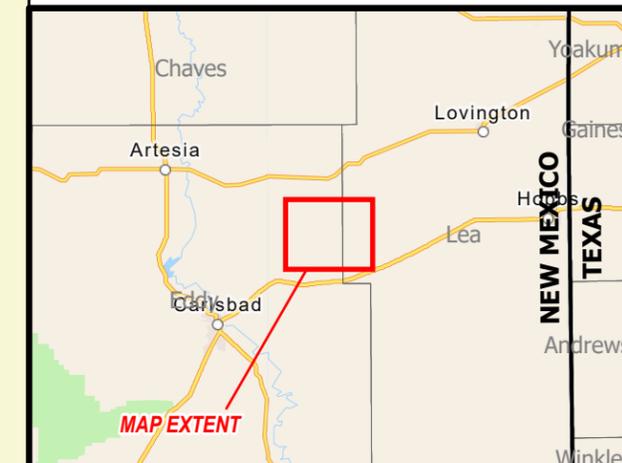



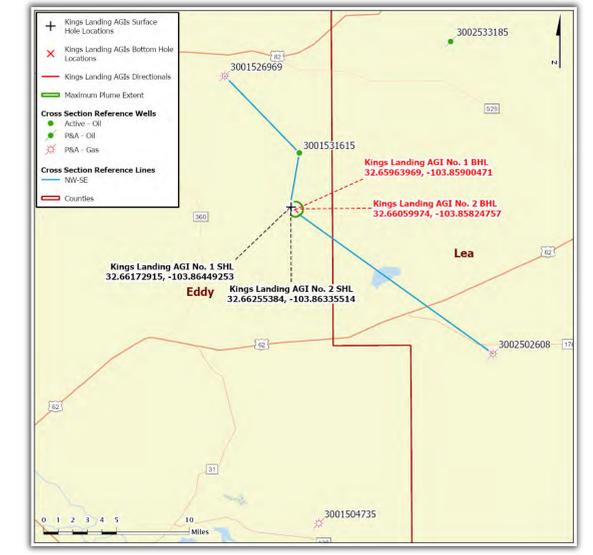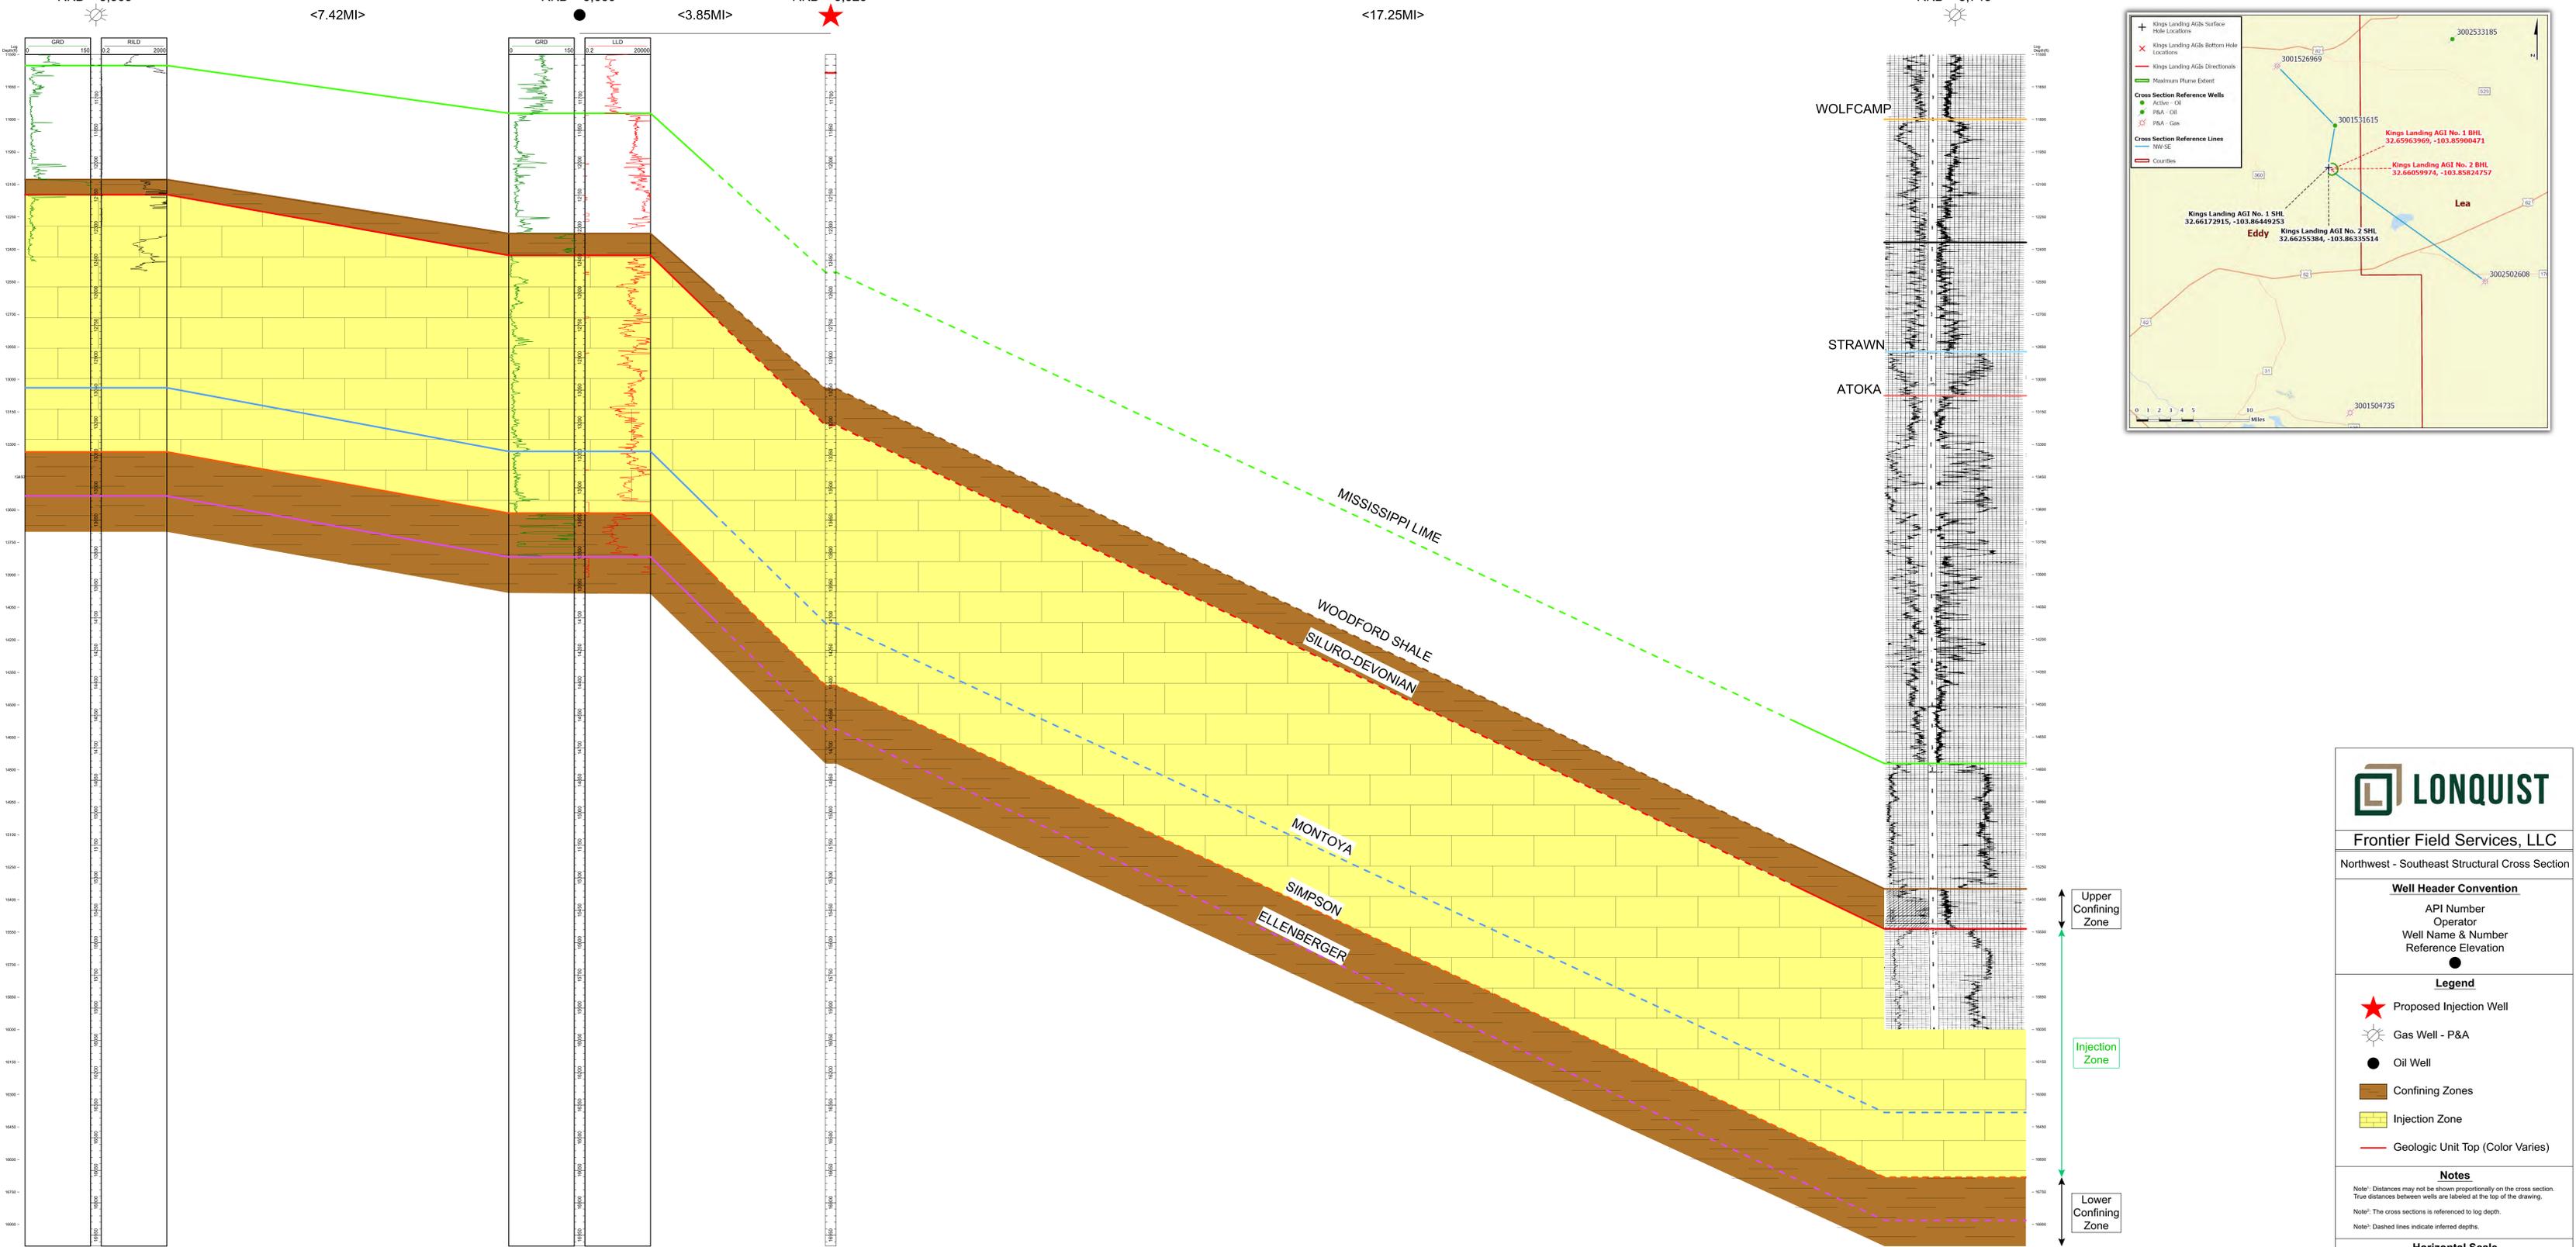

**LONQUIST**  
 Frontier Field Services, LLC  
 Northwest - Southeast Structural Cross Section

**Well Header Convention**  
 API Number  
 Operator  
 Well Name & Number  
 Reference Elevation  
 ●

**Legend**  
 ★ Proposed Injection Well  
 ☼ Gas Well - P&A  
 ● Oil Well  
 ■ Confining Zones  
 ■ Injection Zone  
 — Geologic Unit Top (Color Varies)

**Notes**  
 Note<sup>1</sup>: Distances may not be shown proportionally on the cross section. True distances between wells are labeled at the top of the drawing.  
 Note<sup>2</sup>: The cross sections is referenced to log depth.  
 Note<sup>3</sup>: Dashed lines indicate inferred depths.

**Horizontal Scale**  
 0' 2,658' 5,316' 10,632'

Horizontal Scale = 2,658'  
 Vertical Scale = 150'  
 Vertical Exaggeration = 17.7x  
 By: Mitchell Dan  
 January 21, 2026

**Kings Landing AGI No. 1 and No. 2**  
**Devonian Structure and Plume Extent**  
 Frontier Field Services, LLC  
 Eddy County, NM

Drawn by: Steven Larcom    Date: 1/20/2026    Approved by: Steve Pattee

PCS: NAD 1983 State Plane NM-E FIPS 3001 (US Ft.)



+ Kings Landing AGIs Surface Hole Locations

x Kings Landing AGIs Bottom Hole Locations


— Kings Landing AGIs Directionals

— Contours (Top of Injection, Devonian, Subsea, CI = 100')

█ Normal Faults (Top of Injection, Devonian)

▭ Maximum Plume Extent

▭ Counties

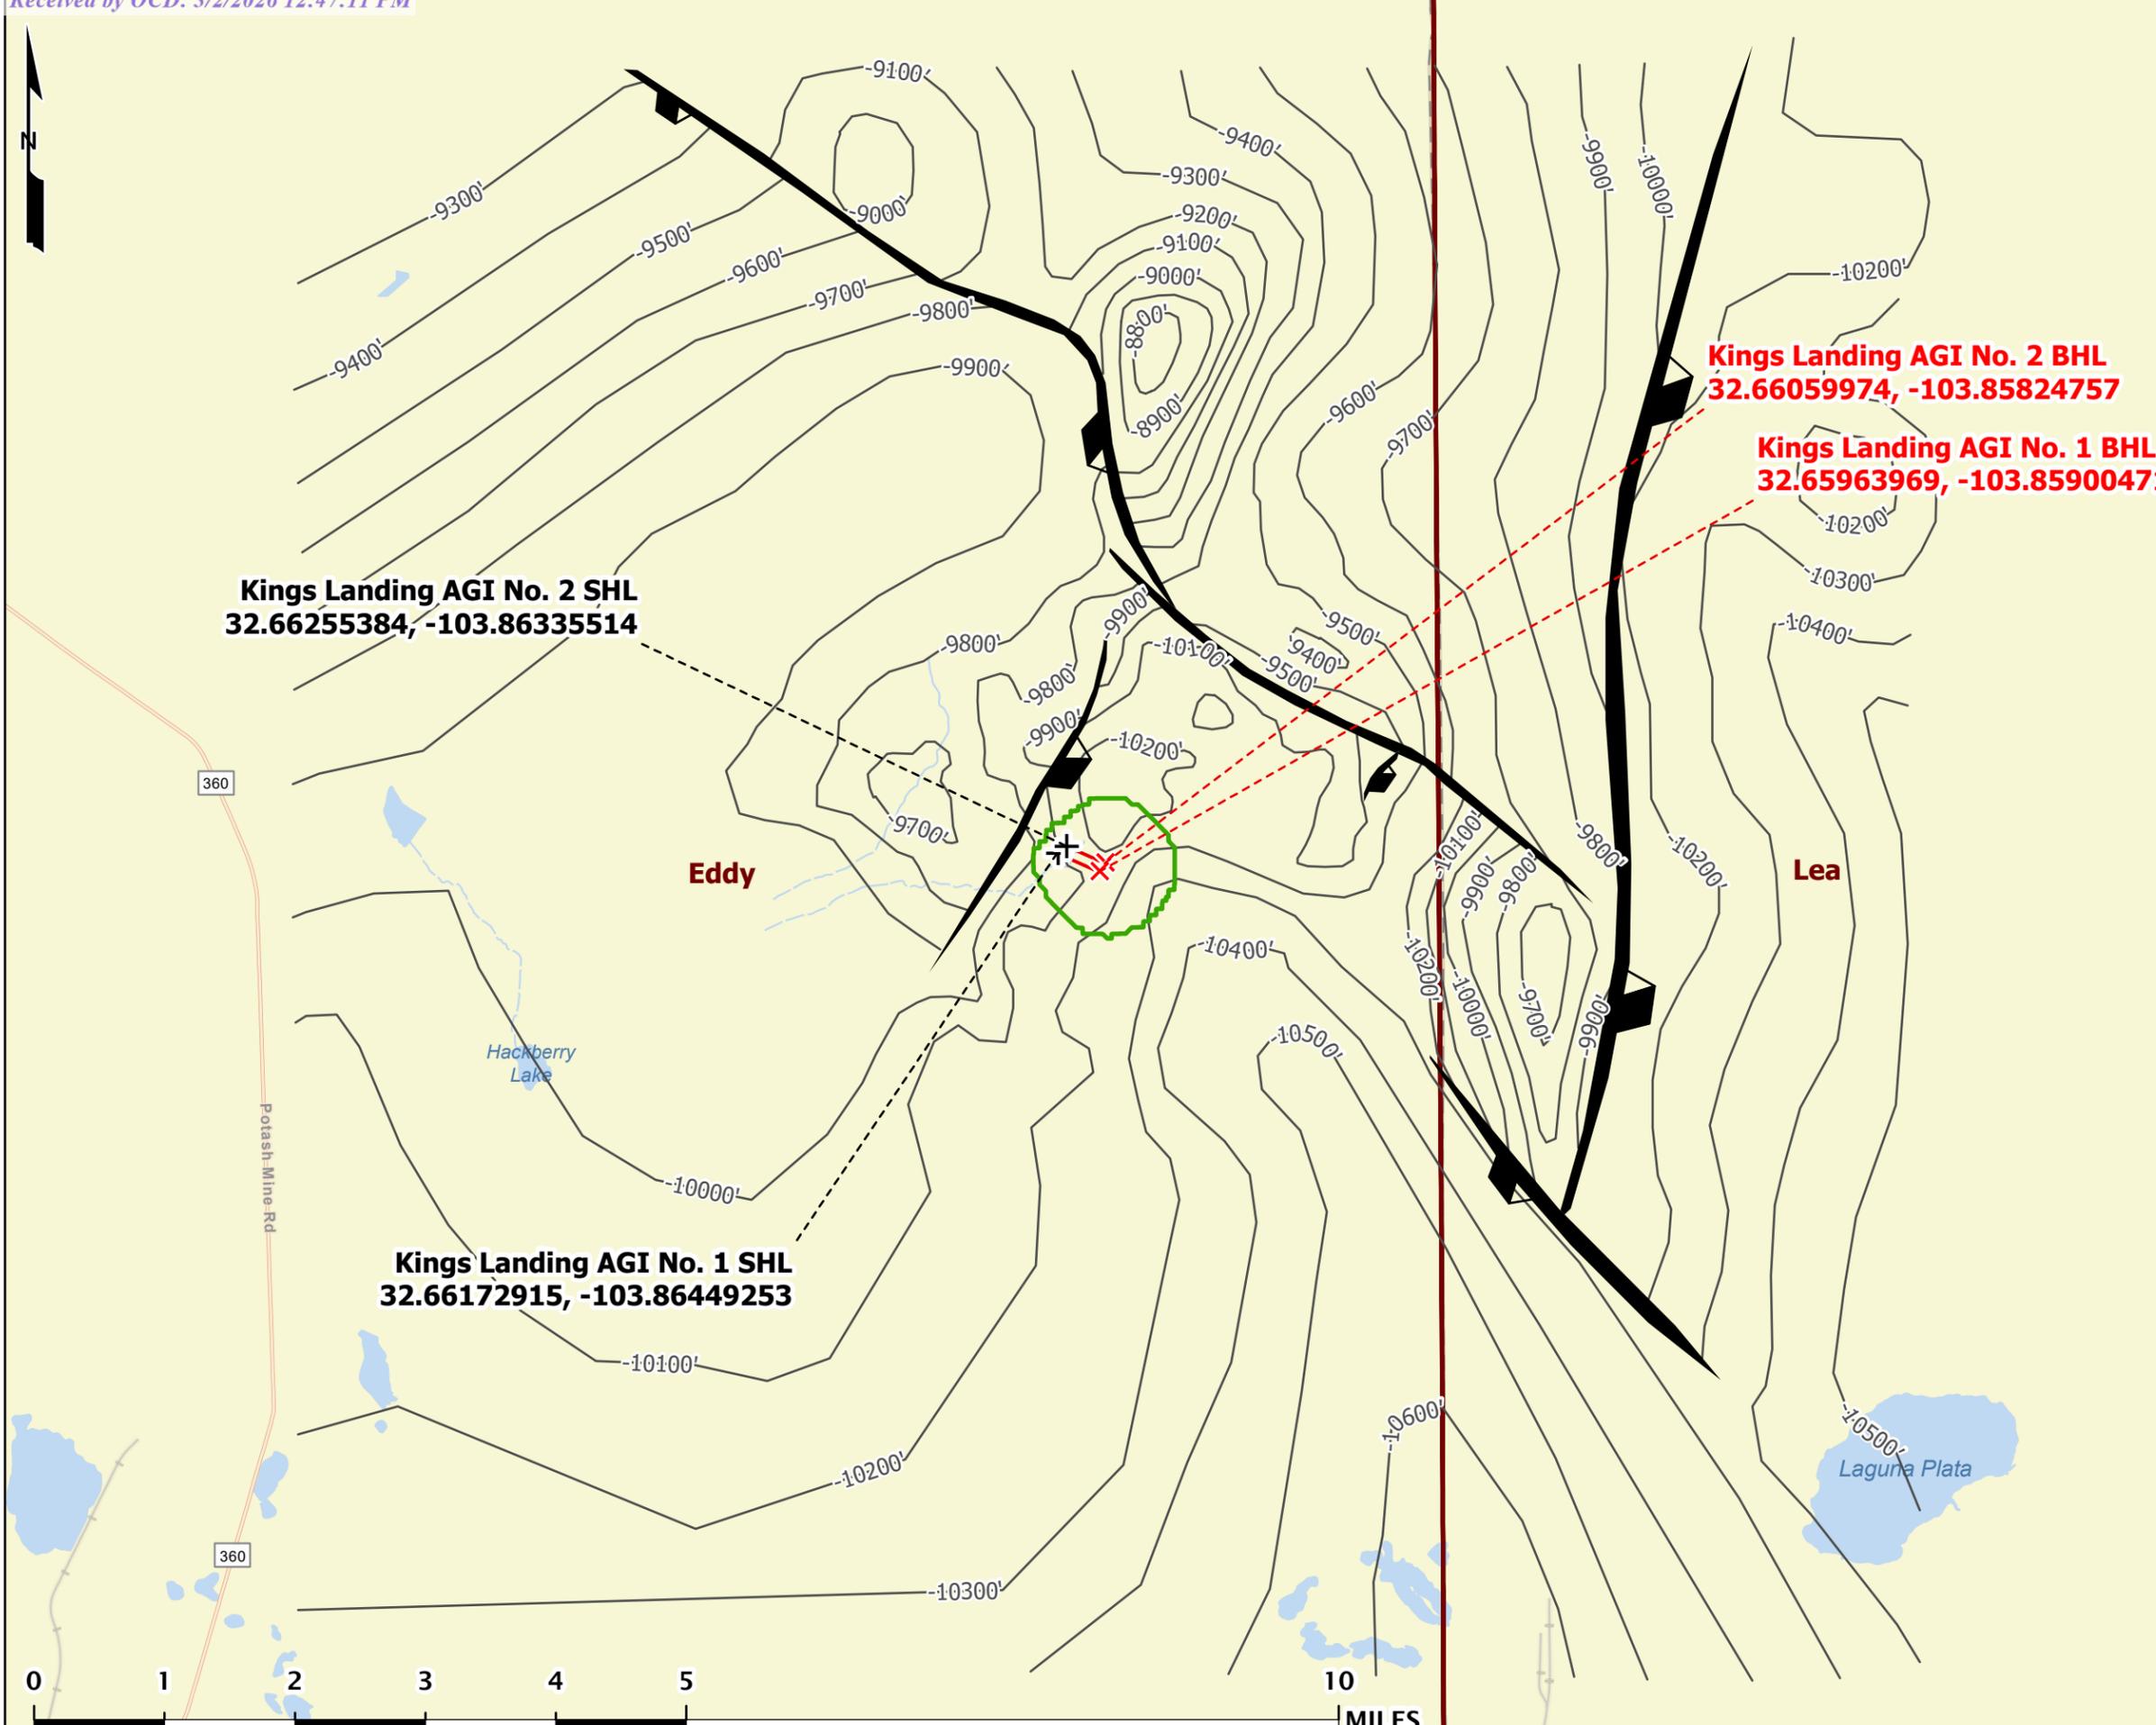


**Kings Landing AGI No. 2 SHL**  
**32.6625384, -103.8633514**

**Kings Landing AGI No. 2 BHL**  
**32.66059974, -103.85824757**

**Kings Landing AGI No. 1 BHL**  
**32.65963969, -103.85900471**

**Kings Landing AGI No. 1 SHL**  
**32.66172915, -103.86449253**

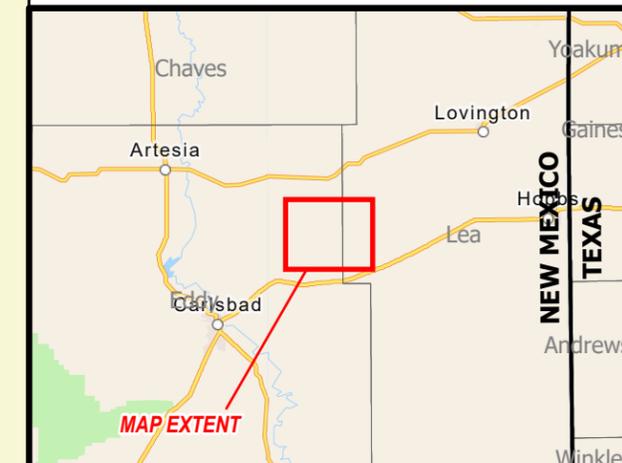

## Appendix D – Fault Slip Potential Model

# **Class II AGI Fault Slip Potential Analysis for Kings Landing AGI No. 1 and No. 2 Eddy County, New Mexico**

Prepared for *Frontier Field Services, LLC.*  
*Houston, Texas*

By  
*Lonquist & Co. LLC*

**Updated: January 2026**



**Table of Contents**

Fault Slip Potential Model Overview ..... 4

Executive summary ..... 4

Fault Slip Potential Modeling ..... 5

    Model 1 – Siluro-Devonian Faults with Kings Landing AGI wells only, modeled injection rate over time ..... 11

    Model 2 – Sil-Dev faults, Five Offset SWDs and Proposed AGI well(s)..... 20

    Model 3 – Sil-Dev faults, All Offset SWDs and Proposed AGI well(s) ..... 26

    Model 4 – Strawn faults above injection zone, AGI wells only ..... 32

    Model 5 – Delaware Mountain Group faults above injection zone, AGI wells only ..... 41

**Figures**

Figure 1 – General stratigraphic column for the Delaware Basin and fault zones (Smye et al, 2024) ..... 7

Figure 2 – Kings Landing AGI AOI, Deep SWD wells and Faults ..... 8

Figure 3 – The relative stress magnitude ( $A_{\phi}$ ), and  $Sh_{max}$  was derived from Lund Snee and Zoback, (2018) Zone 2. .... 9

Figure 4 – Sil-Dev Fault segments (less than 3 km in length) and used wells Model 1. .... 11

Figure 5 – Model 1 ..... 12

Figure 6 – Geomechanics for Model 1 and 2 ..... 13

Figure 7 – Prob Geomechanics for Model 1 and 2..... 14

Figure 8 – Distribution and Probabilistic Data ..... 15

Figure 9 – Prob Hydrology in Jan 2025..... 15

Figure 10 – Model 1 Integrated Tab PP and FSP results in 2025..... 16

Figure 11 – Model 1 Integrated Tab PP results in 2045 ..... 17

Figure 12 – Model 1 Integrated Tab FSP results in 2045..... 18

Figure 13 – Model 1 Integrated Tab PP and FSP results in 2065..... 19

Figure 14 – Sil-Dev Fault segments (less than 3 km in length) and used wells Model 2. .... 20

Figure 15 – Model 2 ..... 21

Figure 16 – Model 2 Integrated Tab PP and FSP results in 2025..... 22

Figure 17 – Model 2 Integrated Tab PP results in 2045 ..... 23

Figure 18 – Model 2 Integrated FSP results in 2045 ..... 24

Figure 19 – Model 2 Integrated Tab PP and FSP results in 2065..... 25

Figure 20 – Sil-Dev Fault segments (less than 3 km in length) and used wells Model 3. .... 26

Figure 21 – Model 3 ..... 27

Figure 22 – Model 3 Integrated Tab PP and FSP results in 2025..... 28

Figure 23 – Model 3 Integrated Tab PP results in 2045 ..... 29

Figure 24 – Model 3 Integrated FSP results in 2045 ..... 30

Figure 25 – Model 3 Integrated Tab PP and FSP results in 2065..... 31

Figure 26 – Penn Fault segments less than 4 km in length..... 32

Figure 27 – Model 4 ..... 33

Figure 28 – Geomechanics for Model 4 ..... 34

Figure 29 – Prob Geomechanics for Model 4 ..... 35

Figure 30 – Prob Hydrology in Jan 2025..... 36

Figure 31 – Model 4 Integrated Tab PP and FSP results in Jan, 2025 ..... 37

Figure 32 – Model 4 Integrated Tab PP results in 204 ..... 38

Figure 33 – Model 4 Integrated FSP results in 2045 ..... 39

Figure 34 – Model 4 Integrated Tab PP and FSP results in 2065..... 40

Figure 35 – Delaware Mt. group fault segments less than 3 km in length. .... 41

Figure 36 – Model 5 ..... 42

Figure 37 – Geomechanics for Model 5 ..... 43

Figure 38 – Prob Geomechanics for Model 5 ..... 44

Figure 39 – Prob Hydrology in Jan 2025..... 45

Figure 40 – Model 5 Integrated Tab PP and FSP results in Jan, 2025 ..... 46

Figure 41 – Model 5 Integrated Tab PP and FSP results in 2045..... 47

Figure 42 – Model 5 Integrated Tab PP and FSP results in 2065..... 48

**Tables**

Table 1 – Model Scenarios ..... 4

Table 2 – Executive Results summary ..... 5

Table 3 – Model Input Parameters..... 6

Table 4 – SWD Wells..... 10

## Fault Slip Potential Model Overview

Frontier Field Services, LLC is submitting this fault slip potential report to support their Class II application for Kings Landing AGI No. 1 and No. 2. This report is designed to meet the requirements set by the Underground Injection Control (UIC) group of the Texas Railroad Commission. The FSP model inputs includes:

- Known fault locations derived from subsurface data and acquired 3D seismic lines covering an area of 20 sq miles.
- Fault locations within faults segmented to a maximum length of 3 km
- At least two model runs, at least 20 years into the future.
  - Only the proposed injection well(s)
  - Include all permitted injection well volumes from nearby salt water disposal (SWD) wells in the AOI (15.53 miles or 25 km) plus the proposed injection well(s)

Additional sensitivity model runs were performed, including for shallow faults. Analysis of the deeper faults indicate that the deeper faults are stable and will likely not impact potential for induced seismicity from the Kings Landing AGI No. 1 and No. 2.

Reservoir modeling indicates that Kings Landing AGI wells can inject at the requested maximum volume of 20,000 mcf/day (270,000 bbls/month), for the proposed 20 years of injection. Table 1 provides a description of each case.

*Table 1 – Model Scenarios*

Model No.	Wells Included	Volumes Modeled	Faults Included
1	AGI No. 1 or 2 Only	Maximum	Sil-Dev
2	AGI Wells + 5 Sil-Dev Offset SWDs	Maximum	Sil-Dev
3	AGI Wells + All Sil-Dev Offset SWDs	Maximum	Sil-Dev
4	AGI No. 1 or 2 Only	Maximum	Strawn
5	AGI No. 1 or 2 Only	Maximum	Delaware Mt Group

## Executive summary

The AGI area of review (AOR), indicates that the reservoir and stress conditions associated with the proposed injection intervals (AGI No. 1 or No.2) do not increase the likelihood of fault slippage. The five models developed for the various fault traces demonstrate overall fault stability. Table 2, showcase the calculated PPF (pore pressure needed to slip), projected tNavigator reservoir pressure model, and achieved pore pressure in the FSP model. Among them, Fault No. 13 in Model 2 shows the highest fault slip potential at 5%; however, only 0.3% of this potential is attributed to the proposed wells, based on Model 1 results. Additionally, the absence of seismic events within the AOR (25 km), as reported by both TexNet and the USGS catalog, suggests a low seismic risk in the area.

Table 2 – Executive Results summary

Model No.	Wells Included	Fault Segment	Pore Pressure to Slip (PSI)	tNavigator (PSI)	FSP Model Pore Pressure (PSI)	Fault Slip Potential %	Fault	Faults level
1	AGI No. 1 or 2 Only	12	677	160	179	0.2	Sealing	Sil-Dev
		13	751	200	220	0.3		
		14	805	240	250	0.2		
		27	1730	80	92	0.1		
2	AGI Wells + 5 Sil-Dev Offset SWDs	12	677	230	257	2	Sealing	Sil-Dev
		13	751	380	384	5		
		14	805	350	336	1		
		27	1730	210	208	0		
3	AGI Wells + ALL Sil-Dev Offset SWDs	12	677	-	259	2	Sealing	Sil-Dev
		13	751	-	386	5		
		14	805	-	338	1		
		27	1730	-	215	0		
4	AGI No. 1 or 2 Only	8	621	-	133	0	Transmissible	Strawn
5	AGI No. 1 or 2 Only	3	646	-	0	0	Transmissible	Delaware Mt Group

### Fault Slip Potential Modeling

The Fault Slip Potential (FSP) tool is a simple reservoir geomechanics model that calculates the cumulative probability of a known fault exceeding Mohr-Coulomb slip criteria caused by fluid injection.

Table 3 lists the parameters used for  $Sh_{max}$ ,  $A\text{-}\phi$ , friction coefficient, maximum horizontal principal stress etc. There are 19 SWDs within a 25 km radius from the Project site that inject into the Siluro-Devonian formation (Figure 1, Table 4) plus the two proposed Kings Landing AGI wells. In total, five FSP models were run to illustrate the pore pressure changes at the Siluro-Devonian, Strawn Lime and Delaware Mountain Group fault levels caused by the proposed injection well and SWDs.

Table 3 – Model Input Parameters

<b>Data</b>	<b>Value</b>
Total time (years)	20
Requested maximum volume (BBL/Month)	270,000
AGI No. 1 Injection Interval (ft)	
AGI No. 2 Injection Interval (ft)	
Reference depth (ft)	14,167
Vertical Stress Gradient (psi/ft)	1.10
A-Phi Parameters <sup>1</sup>	0.65
Maximum Horizontal Stress Direction (deg) <sup>1</sup>	60
Initial Res. Pressure Gradient (psi/ft)	0.44
density fluid (kg/m <sup>3</sup> )	1,000
dynamic viscosity (Pa.s)	4.1e-04
Fluid compressibility (Pa <sup>-1</sup> )	3.6e-10
Rock compressibility (Pa-1)	7.3e-09
Friction Coeff (Mu)	0.6
<b>HYDROLOGY</b>	
Aquifer Thickness (ft <sup>2</sup> )	780
Porosity (%)	8.5
Permeability (mD)	6.0
<b>PROB. GEOMECHANICS</b>	
Vertical Stress	0.1
Initial PP Grad	0.05
Strike angles	5
Dip angles	10
Max Hor Stress	10
Friction Coeff (Mu)	0.05
A Phi Parameter	0.05
<b>PROB. HYDROLOGY</b>	
Aquifer Thickness	130
Porosity	3
Perm	2

<sup>1</sup> Lund Snee and Zoback (2018) Figure 3.

<sup>2</sup> The aquifer thickness was reduced from 910 ft to 780±130 ft, to matched the reservoir pressure model (Navigator).

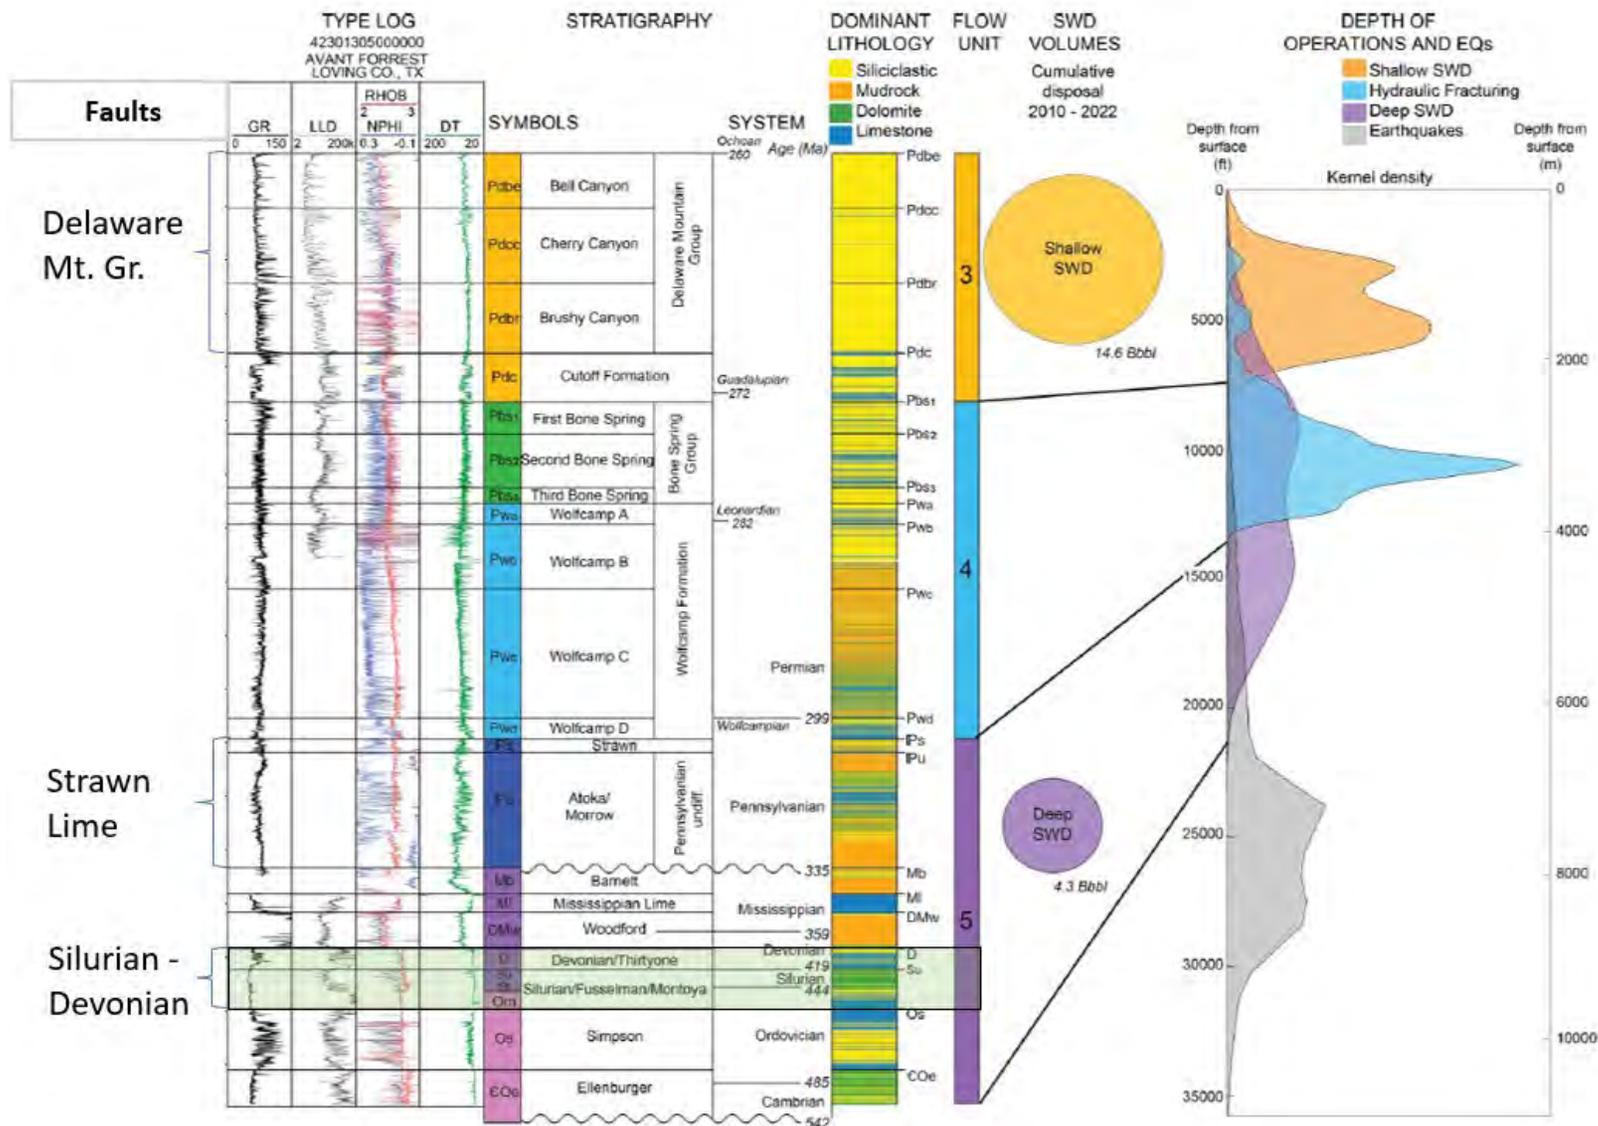


Figure 1 – General stratigraphic column for the Delaware Basin and fault zones (Smye et al, 2024)

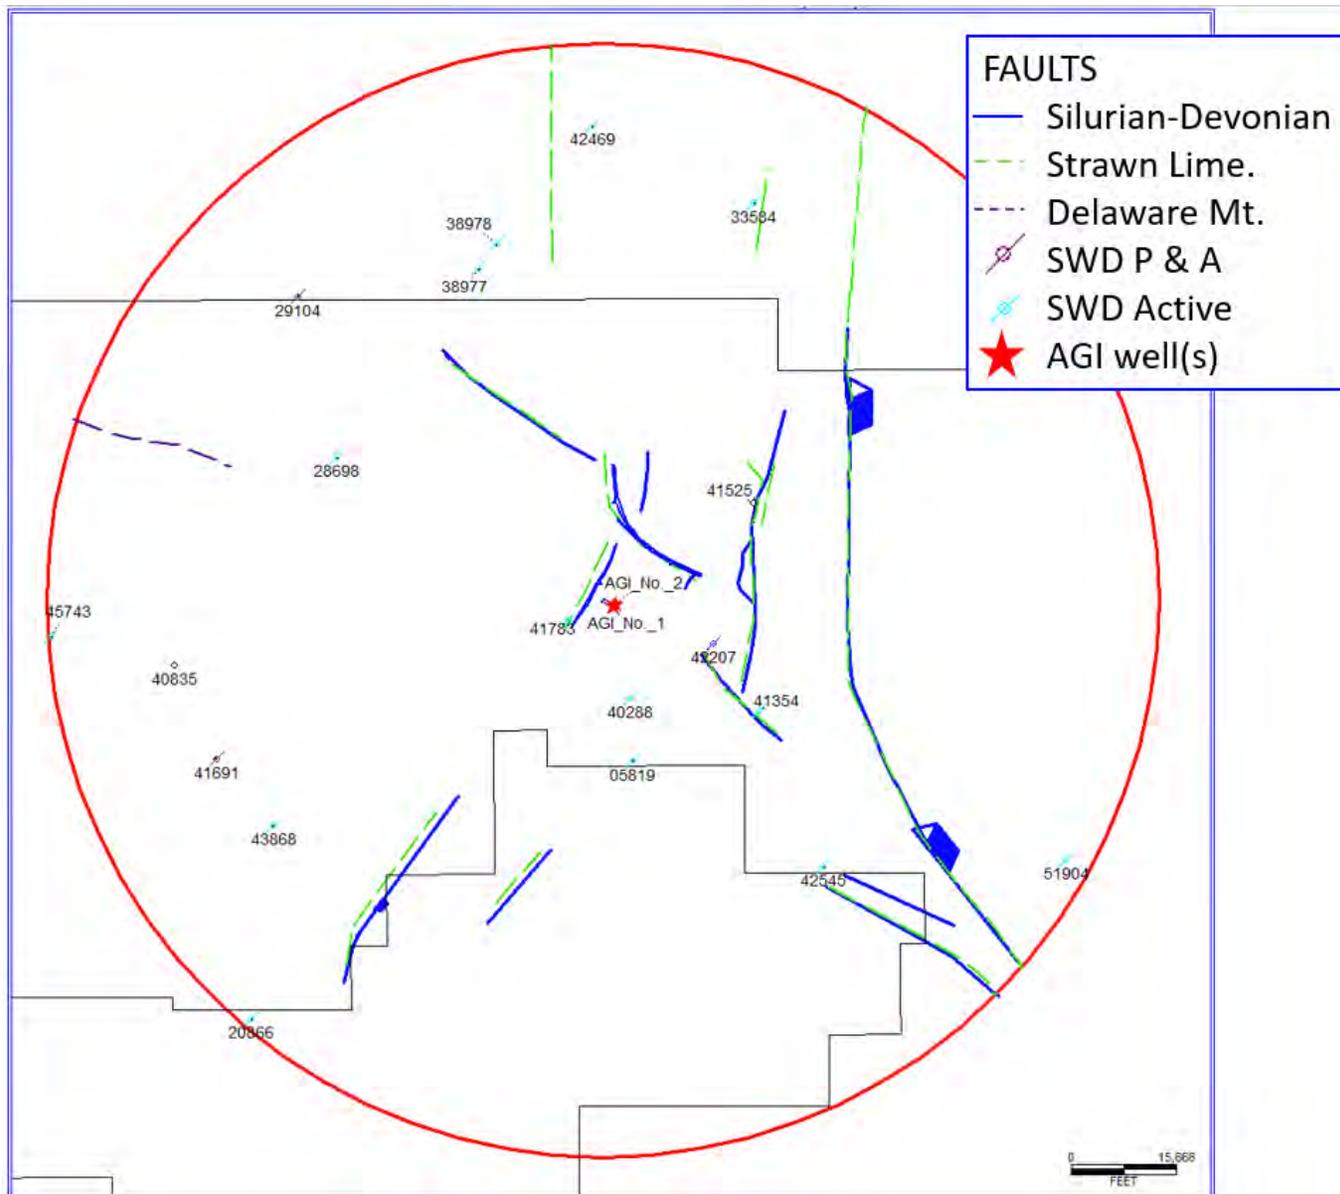


Figure 2 – Kings Landing AGI AOI, Deep SWD wells and Faults

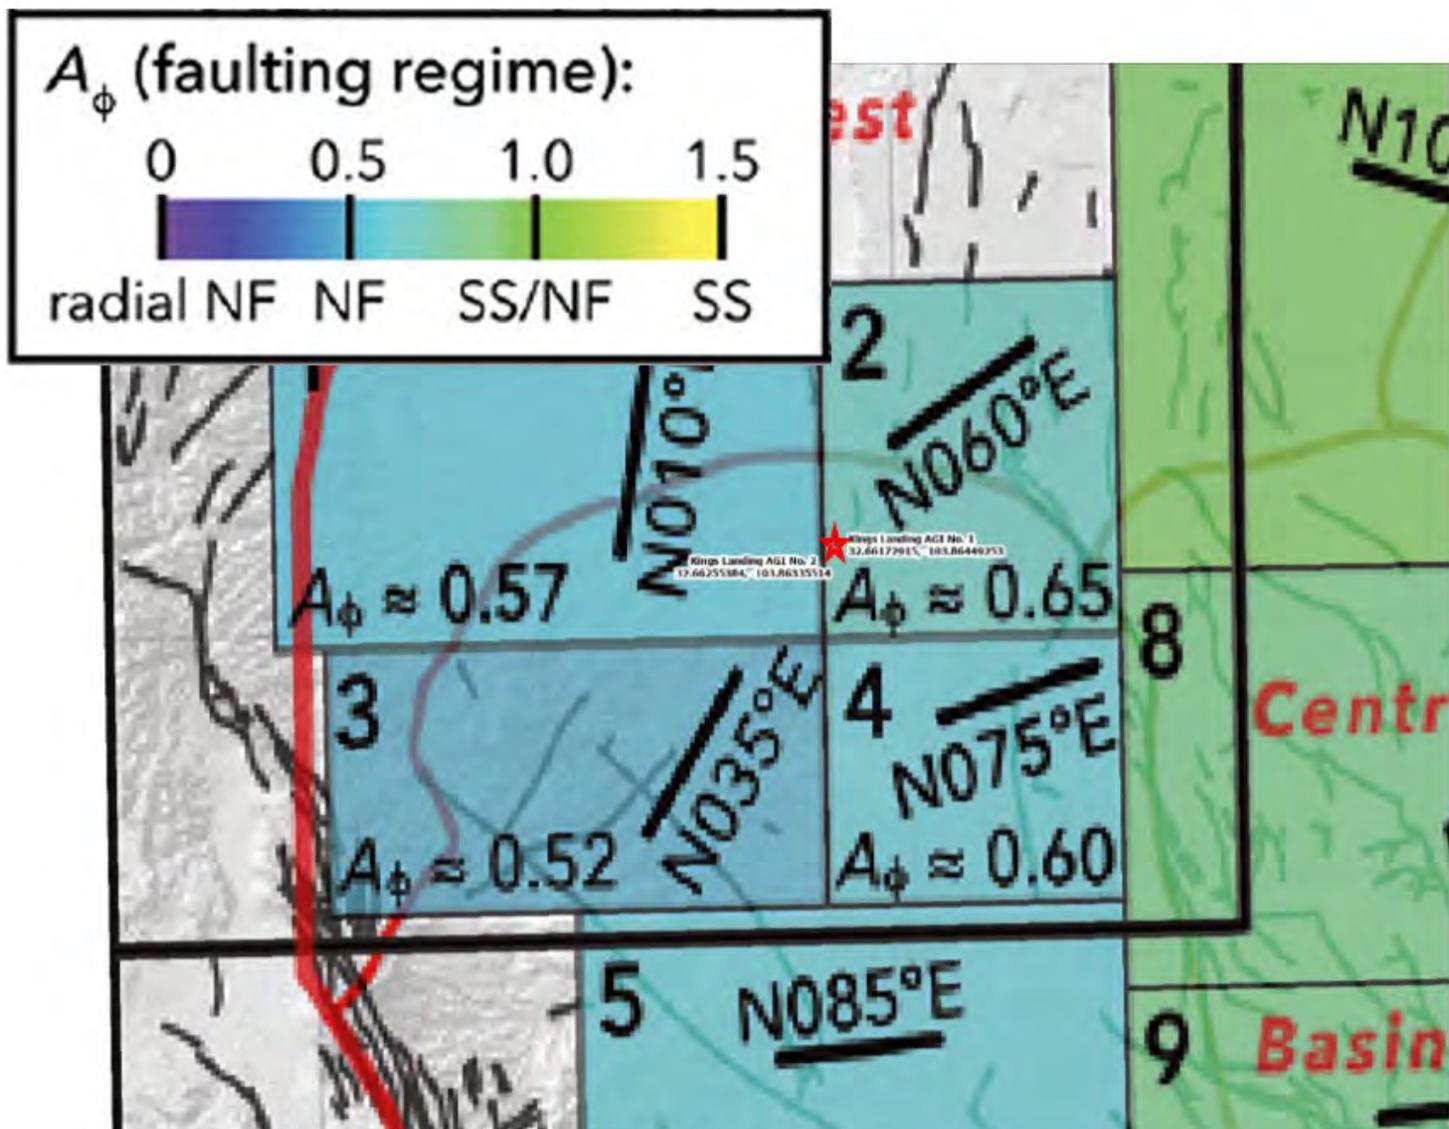


Figure 3 – The relative stress magnitude ( $A_\phi$ ), and  $Sh_{max}$  was derived from Lund Snee and Zoback, (2018) Zone 2.

Table 4 – SWD Wells

	API/UWI	FSP label	Type	Producing Status	Measured Depth (TVD)	Upper Perforation	Lower Perforation	Reservoir
SIL-DEV SWD WELLS	30015058190000	5819	SWD	INJ-ACT	14,205	13,980	14,205	DEVONIAN
	30015208660000	866	SWD	INJ-ACT	14,858			DEVONIAN
	30015286980000	8698	SWD	INJ-ACT	13,338	12,680	13,338	DEVONIAN
	30015291040000	9104	SWD	INJ-PA	13,600	12,449	12,751	DEVONIAN
	30015389770000	8977	SWD	INJ-ACT	13,500	12,844	13,292	DEVONIAN
	30015389780000	8978	SWD	INJ-ACT	13,943	13,045	13,943	DEVONIAN-ELLENBERGER
	30015402880000	288	SWD	INJ-ACT	14,847			DEVONIAN
	30015408350000	835	SWD	INJ-ACT	13,469	12,580	13,469	SILURIAN-ORDOVICIAN
	30015416910000	1691	SWD	INJ-PA	13,400	12,910	13,400	DEVONIAN
	30015417830000	1783	SWD	INJ-ACT	14,650			DEV-FUS-MON-SIMP-ELL
	30015424690000	2469	SWD	INJ-ACT	13,914	13,300	13,500	DEVONIAN-ELLENBERGER
	30015438680000	3868	SWD	INJ-ACT	14,220	13,135	14,220	DEVONIAN
	30015457430000	5743	SWD	INJ-ACT	12,900	12,135	12,900	DEVONIAN
	30025335840000	3584	SWD	INJ-ACT	13,900	13,800	13,840	DEVONIAN
	30025413540000	1354	SWD	INJ-ACT	14,812	13,620	14,812	DEV-FUS-MON-SIMP-ELL
	30025415250000	1525	SWD	TA	15,131	13,955	15,131	DEV-FUS-MON-SIMP-ELL
	30025422070000	277	STG	INJ-ACT	7780			DEV-FUS-MON
	30025425450000	2545	SWD	INJ-ACT	16,009	14,543	16,000	DEVONIAN
30025519040000	1904	SWD	INJ-ACT	16,150	15,278	16,150	DEVONIAN-SILURIAN	

Model 1 – Siluro-Devonian Faults with Kings Landing AGI wells only, modeled injection rate over time

Model 1 focuses exclusively on deep faults, using a reference depth of 14,167 ft MD. It incorporates only the Kings Landing AGI wells, operating at a constant injection rate of 270,000 barrels per month, consistent with the reservoir pressure model. To replicate the sealing fault conditions used in that model, three image wells were included. Figure 4 illustrates the fault traces and well locations used in Model 1, with fault segments limited to lengths of 3 km or less.

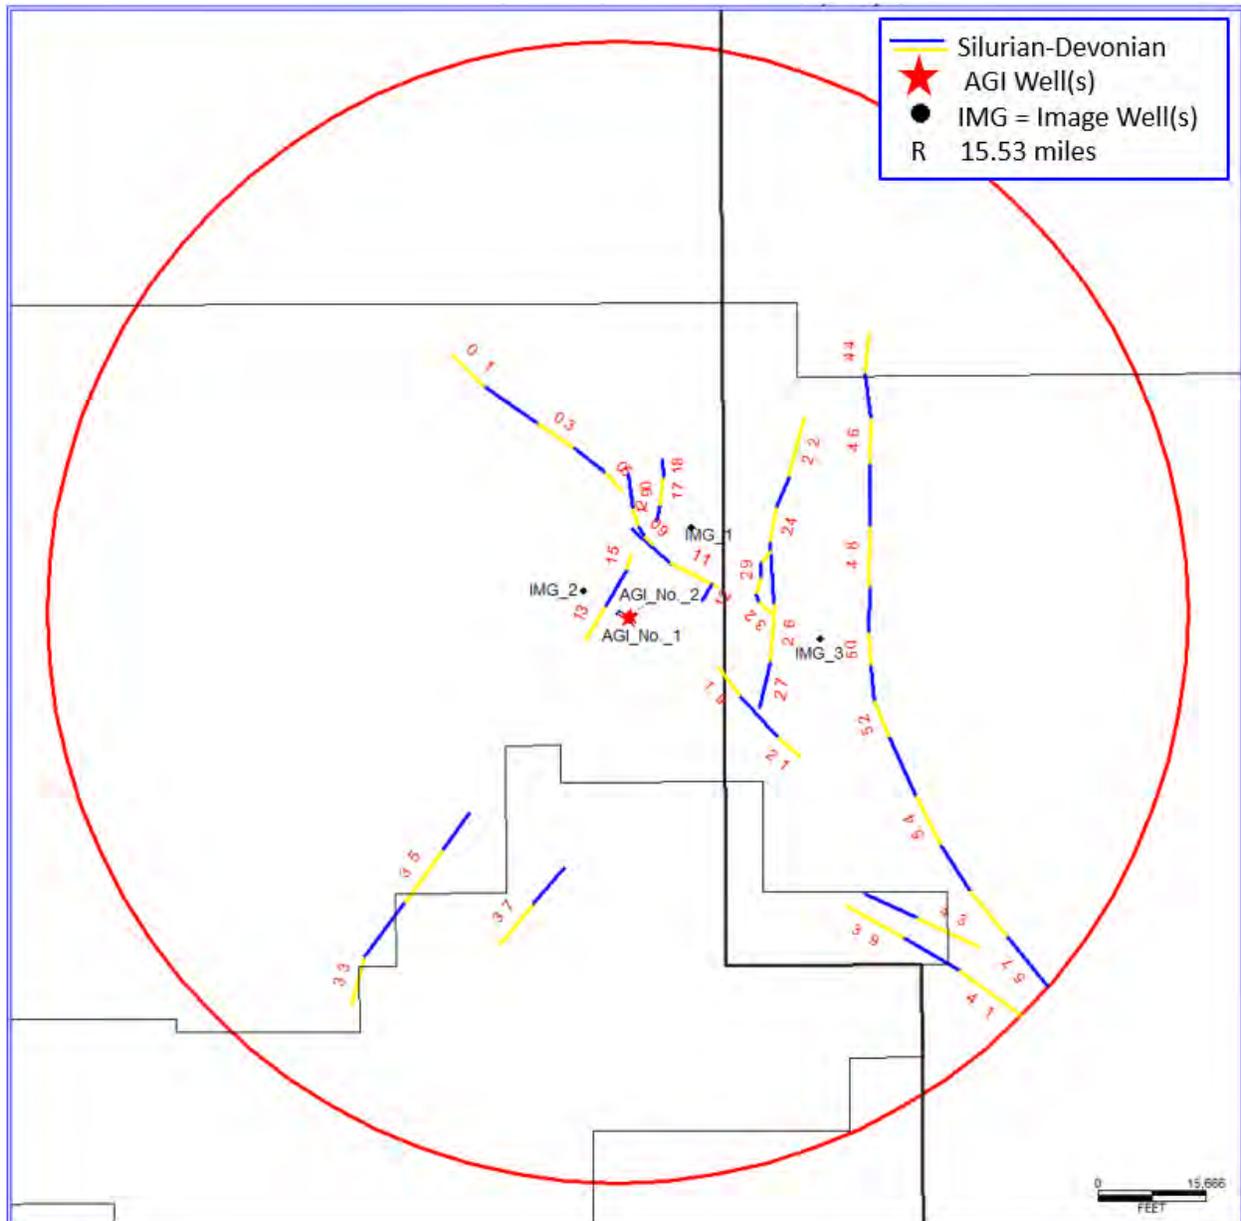


Figure 4 – Sil-Dev Fault segments (less than 3 km in length) and used wells Model 1.

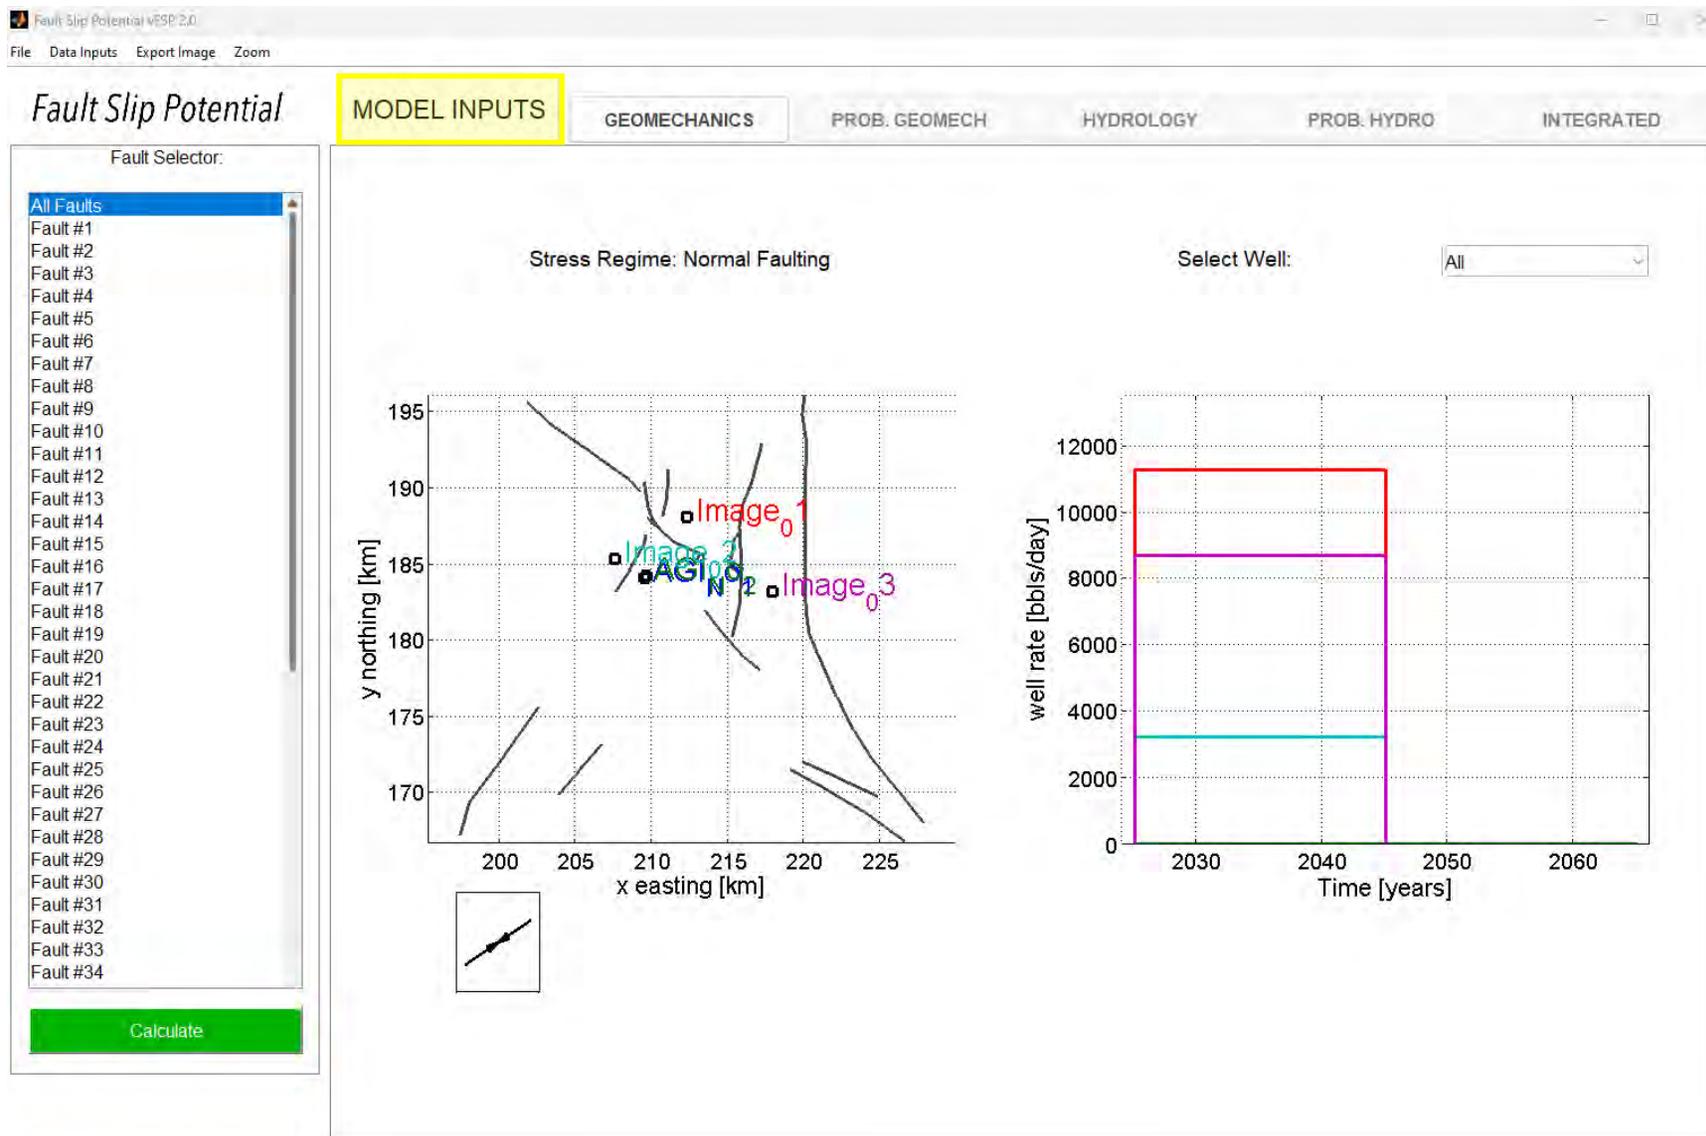


Figure 5 – Model 1


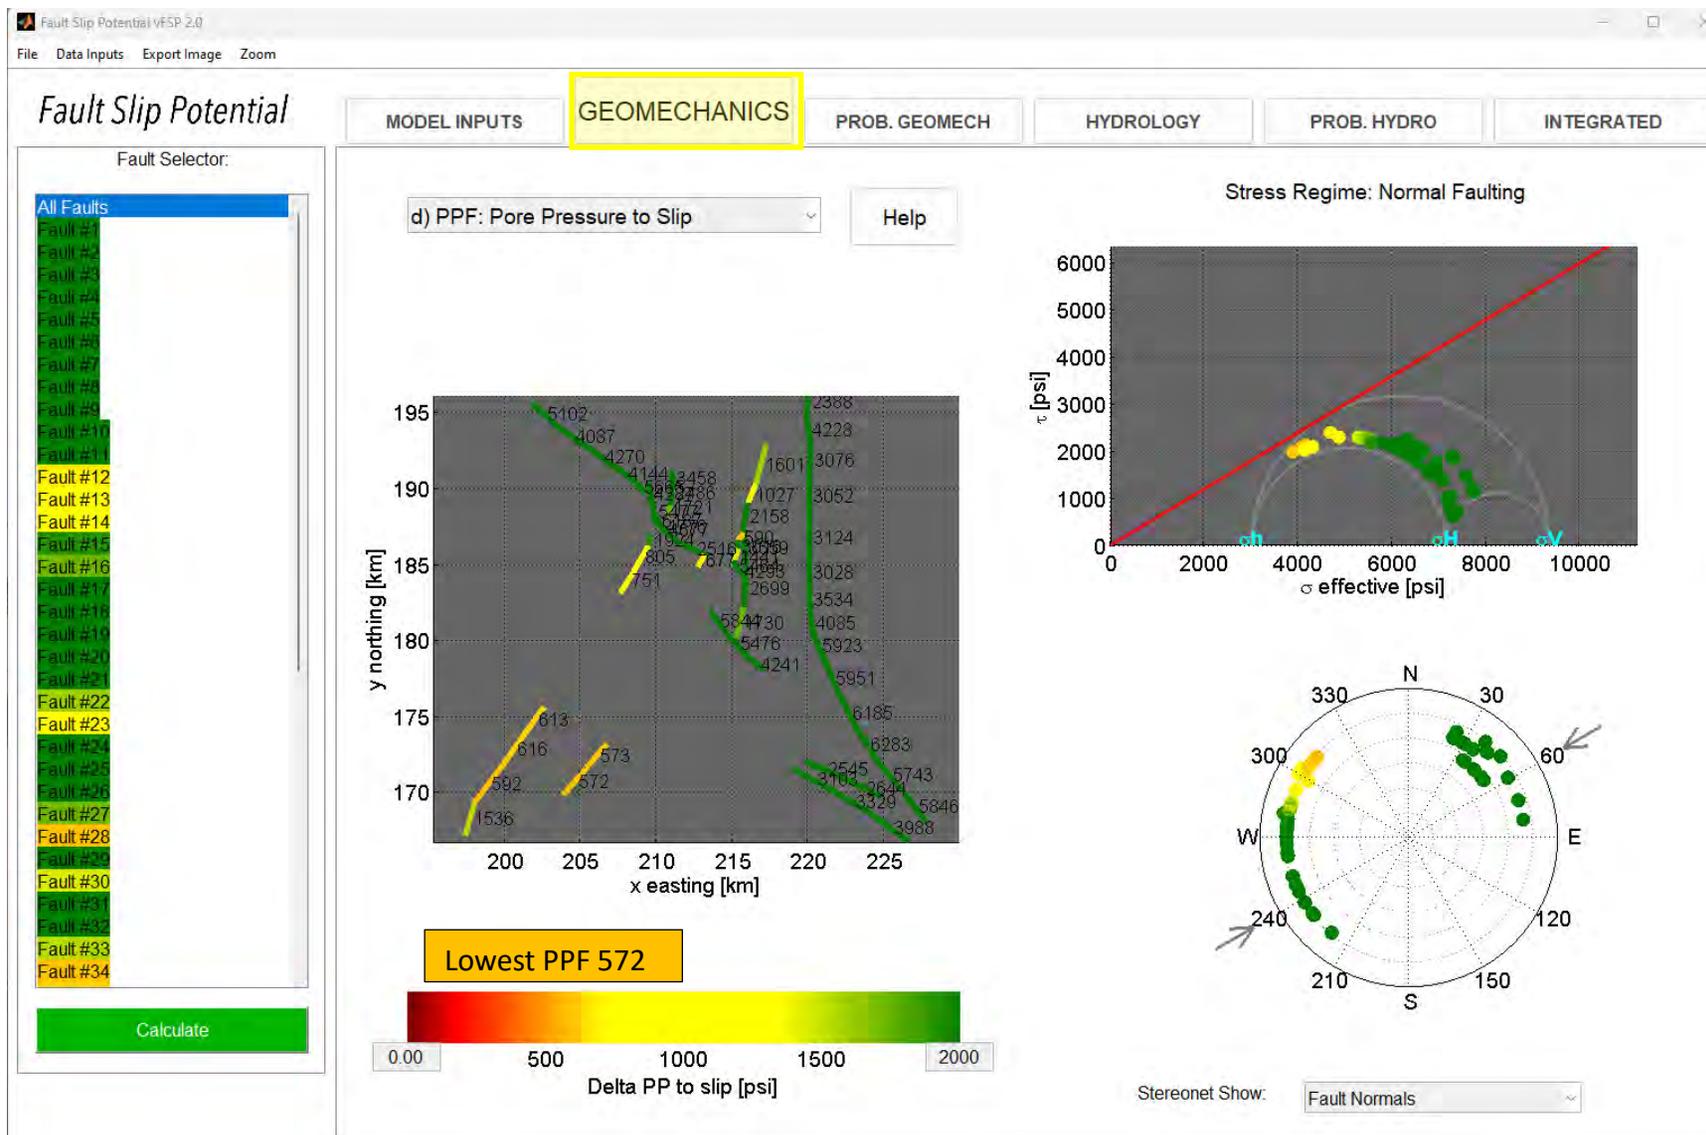


Figure 6 – Geomechanics for Model 1 and 2

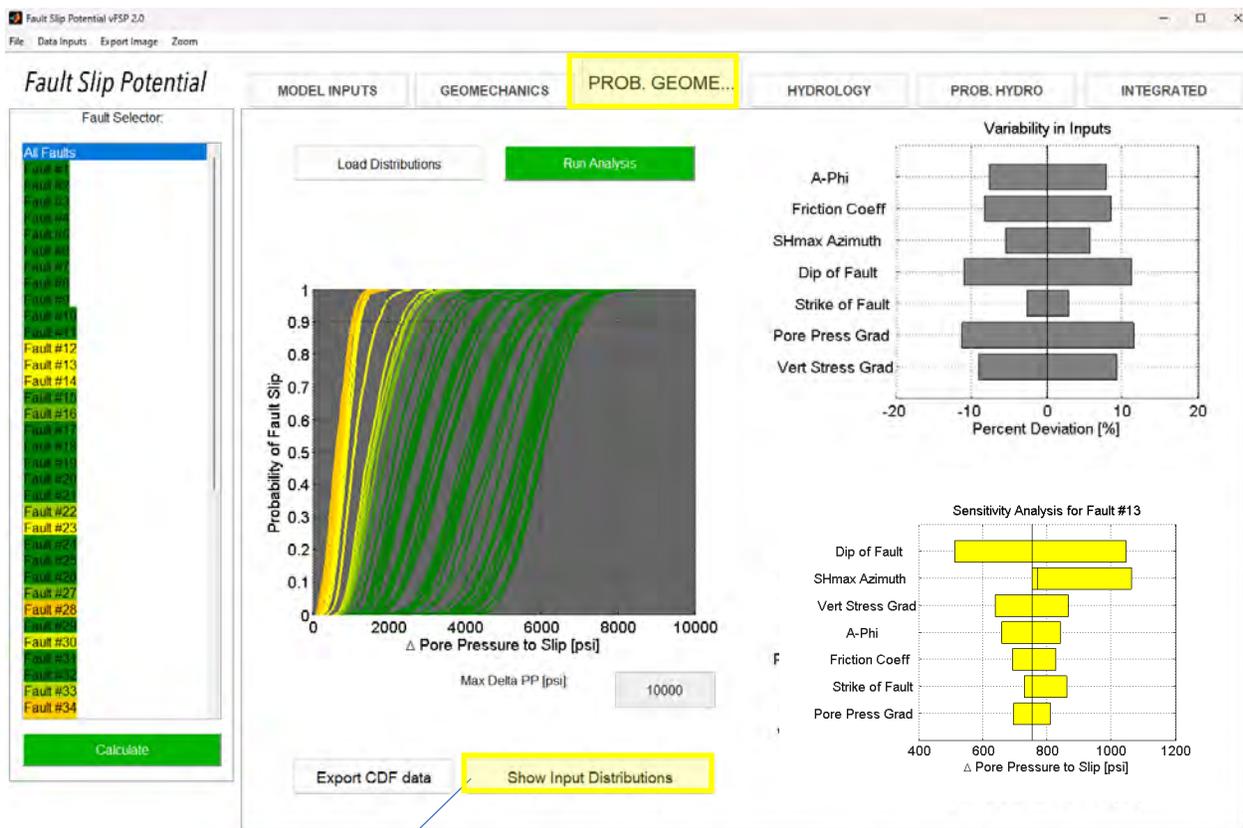

Fault #13 "Show Input Distribution"

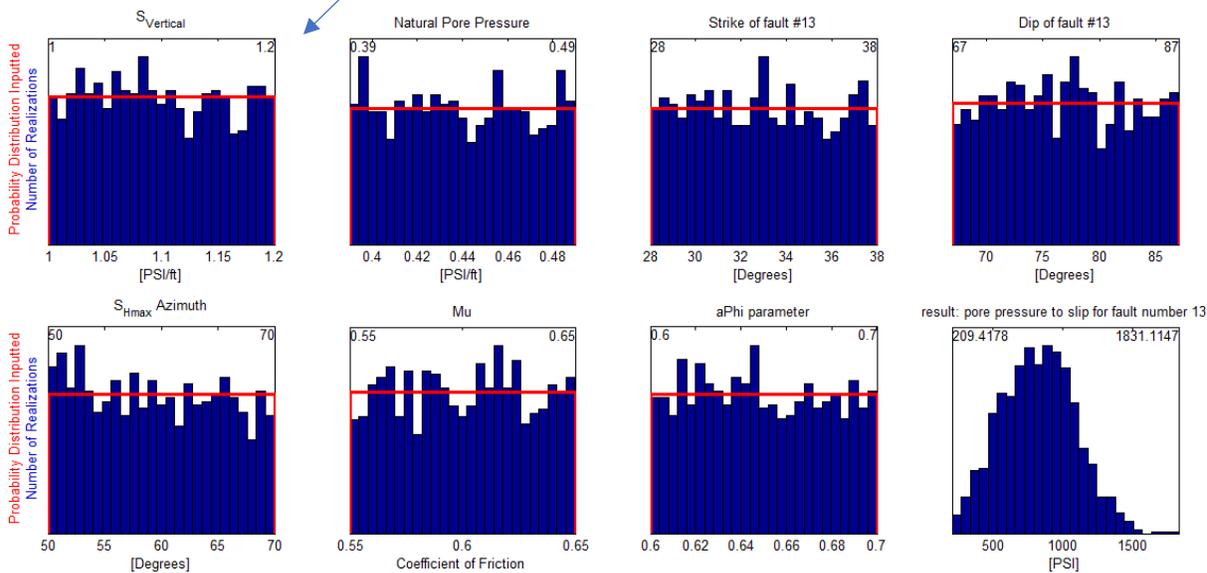


Figure 7 – Prob Geomechanics for Model 1 and 2

Uniform Distribution bounds

A Phi stress model is being used

Probabilistic Hydrology  
 Deterministic Hydrology

Vertical Stress Grad [1.1 psi/ft]	Plus/Minus: 0.1	Aquifer Thickness [780 ft]	Plus/Minus: 130
Initial PP Grad [0.44 psi/ft]	0.05	Porosity [8.5 %]	3
Strike Angles [varying, degrees]	5	Perm [6 mD]	2
Dip Angles [varying, degrees]	10	fluid density [1000 kg/(m <sup>3</sup> )]	10
Max Horiz. Stress Dir [90 degrees]	10	dynamic viscosity [0.00041387 Pa s]	0
Friction Coeff Mu [0.6]	0.05	Fluid Compressibility [3.6e-10 Pa <sup>-1</sup> ]	0
A Phi Parameter [0.65]	0.05	Rock Compressibility [7.2519e-10 Pa <sup>-1</sup> ]	0
OK		#Hydrologic iterations=200, change?	Change Computations? 200

Figure 8 – Distribution and Probabilistic Data

Prob Hydrology in Jan 2025

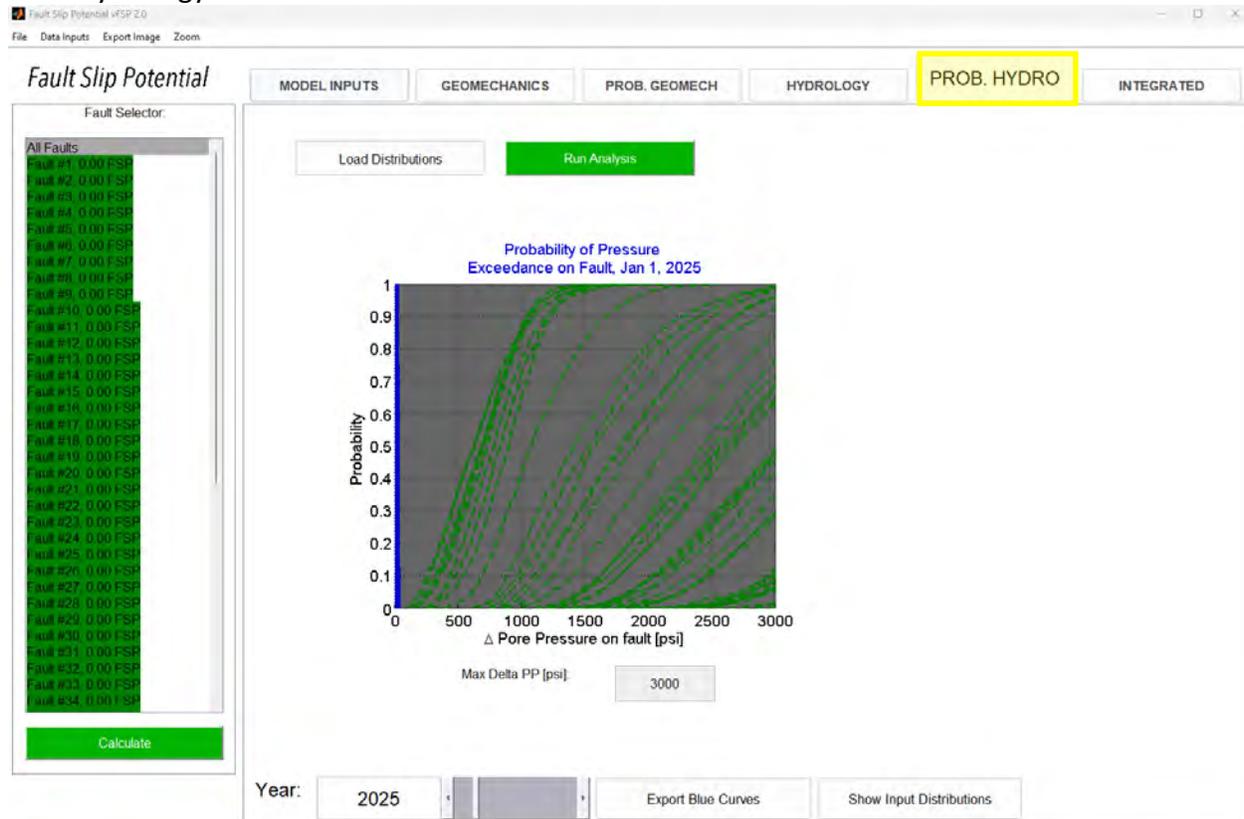


Figure 9 – Prob Hydrology in Jan 2025

Integrated Tab showing Pore Pressure and FSP in January 2025.

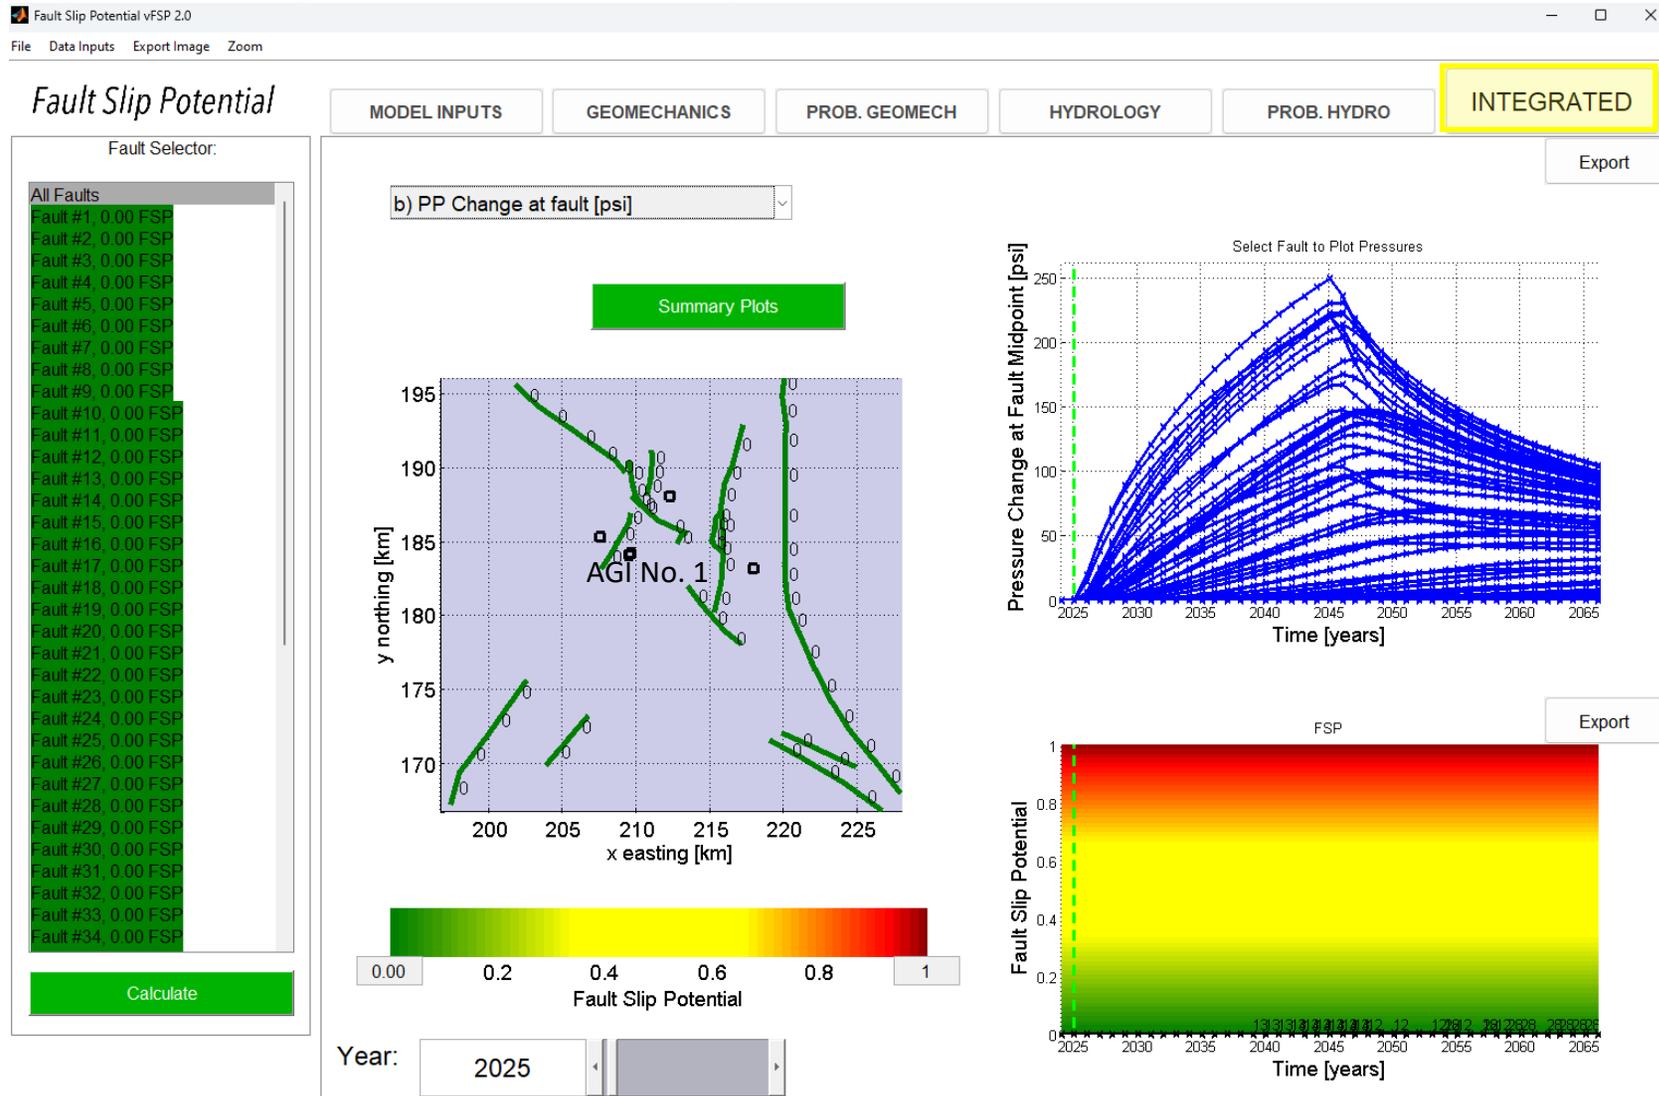


Figure 10 – Model 1 Integrated Tab PP and FSP results in 2025

Integrated Tab PP results; conditions for the year 2045, after the proposed 20 years injection, matching the projected reservoir pressure model.

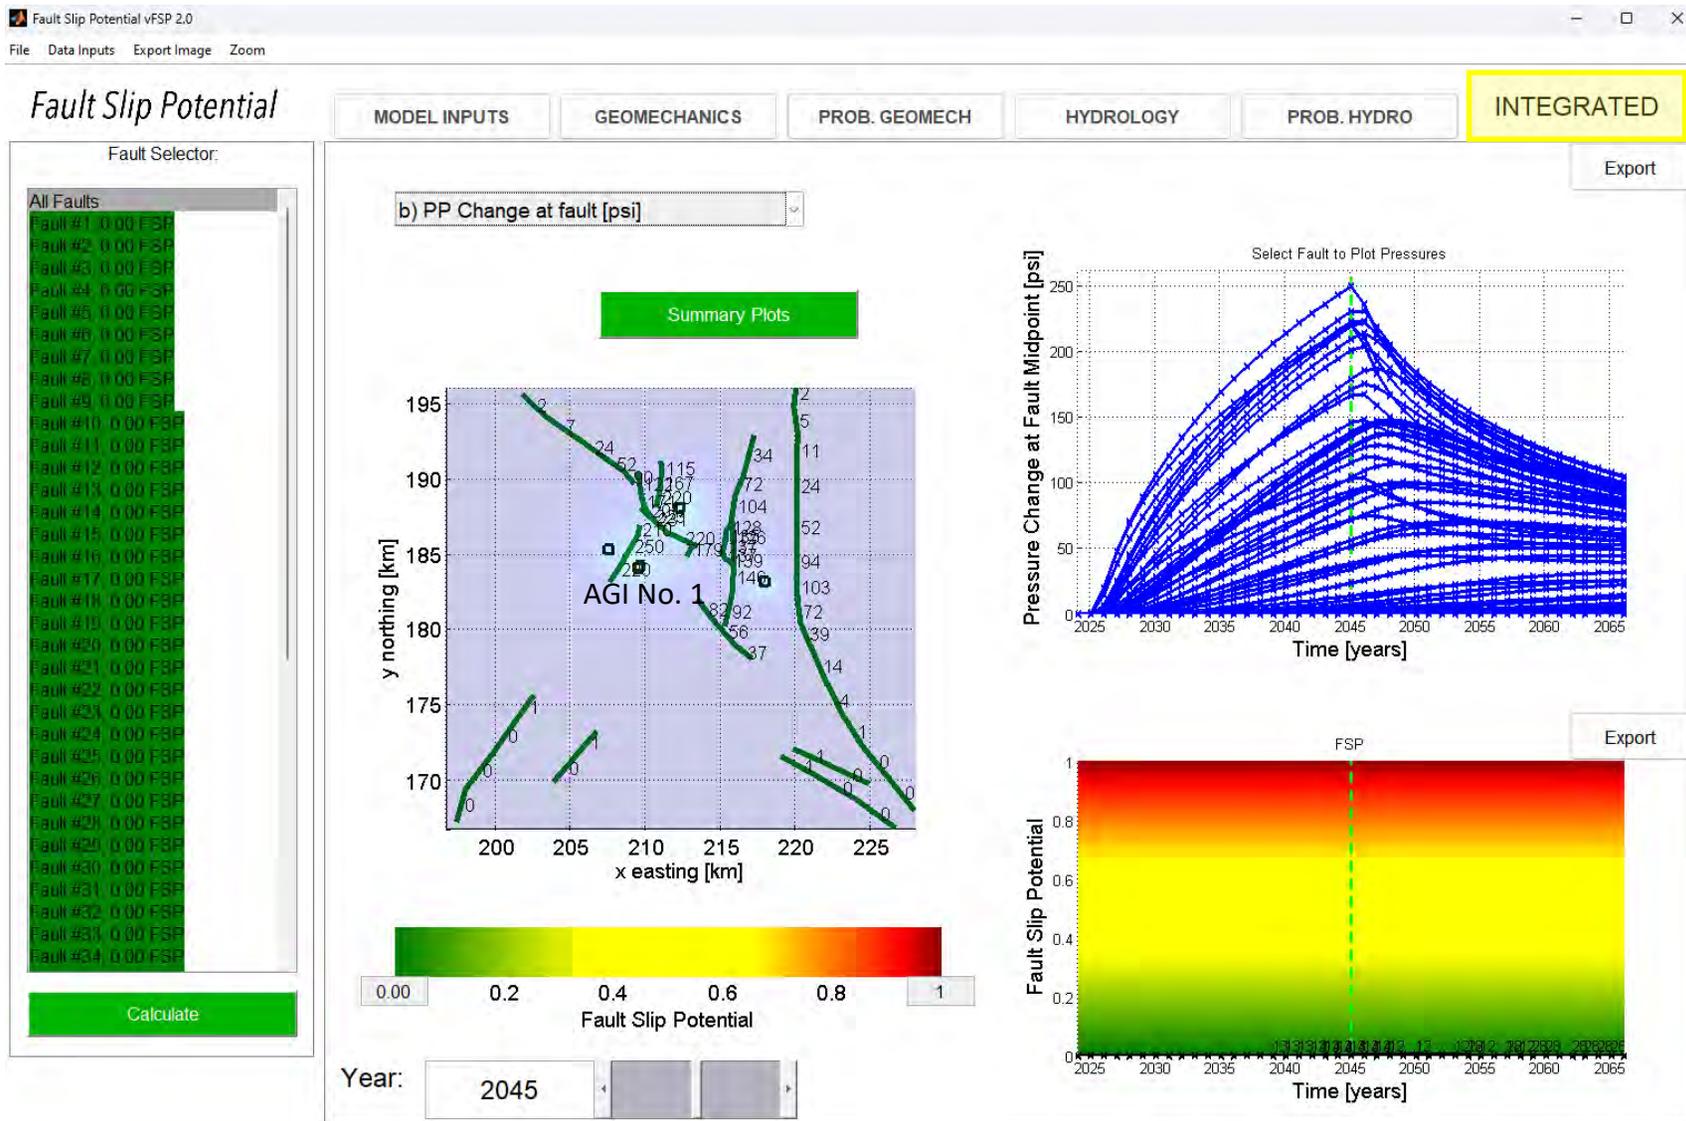


Figure 11 – Model 1 Integrated Tab PP results in 2045

Integrated Tab FSP results; conditions for the year 2045, after the proposed 20 years injection.

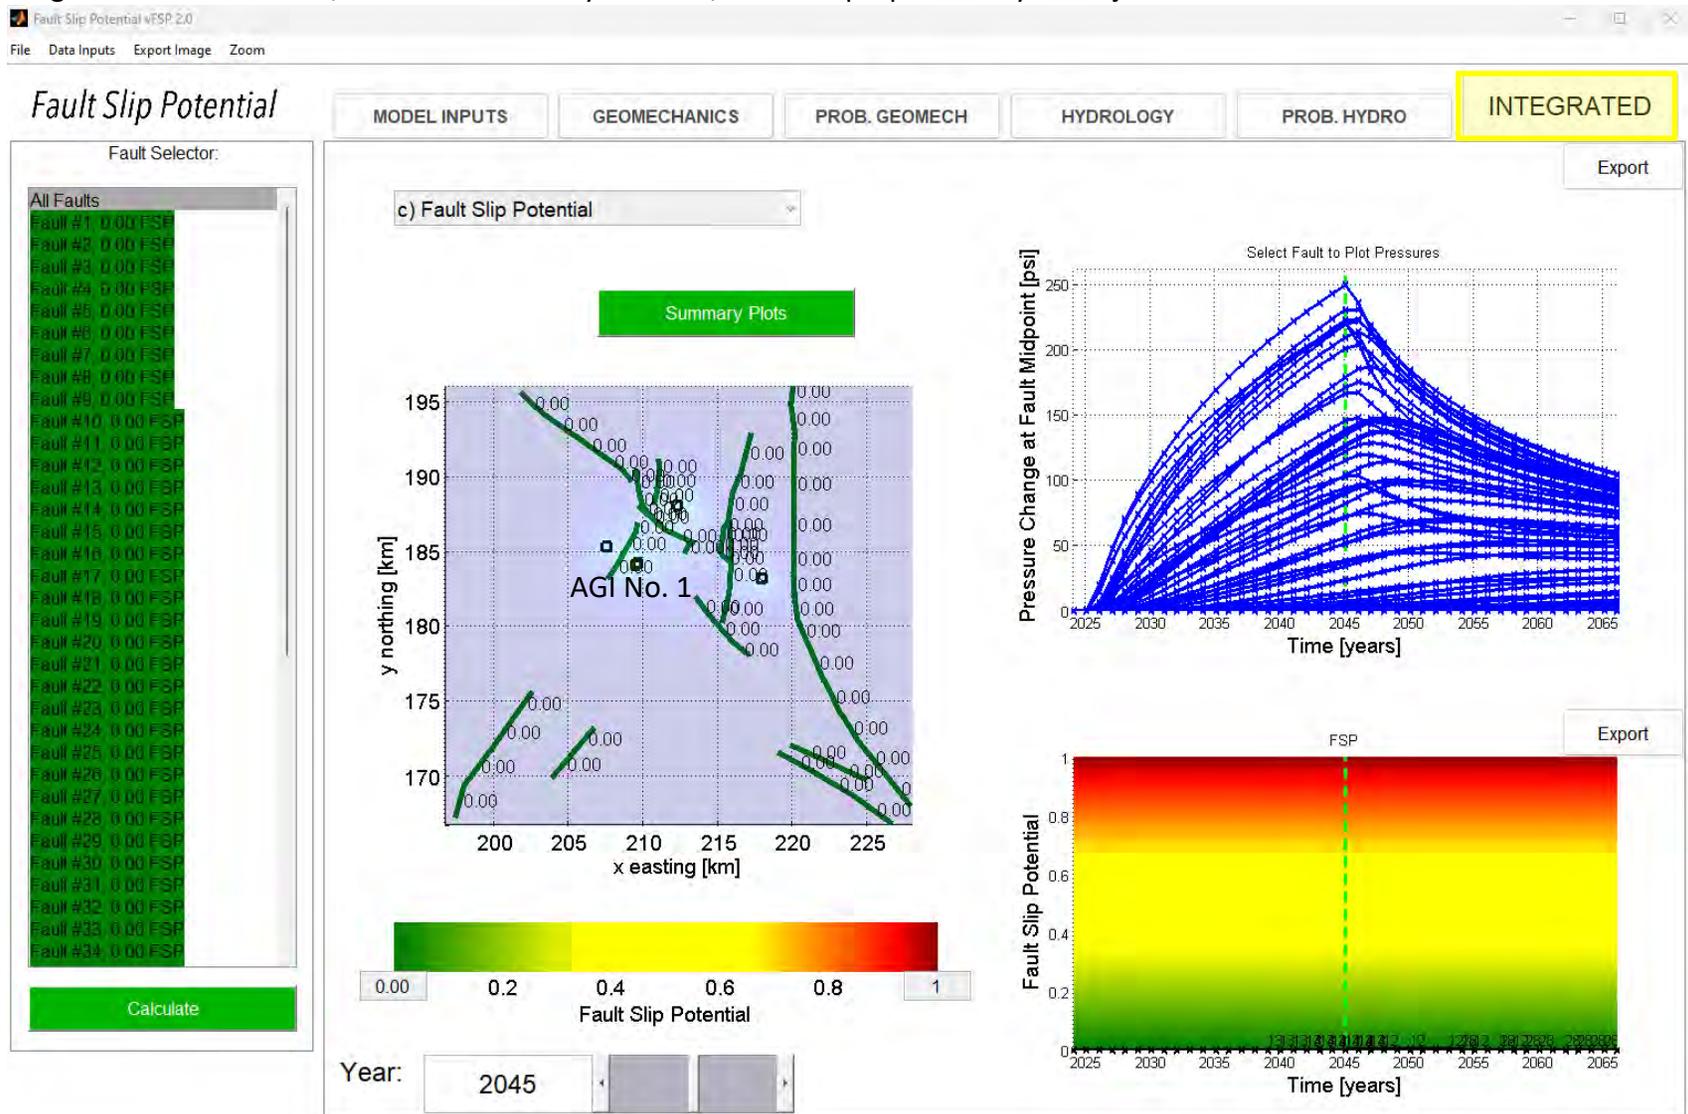


Figure 12 – Model 1 Integrated Tab FSP results in 2045

Integrated Tab PP and FSP results; conditions for the year 2065, 20 years into the future.

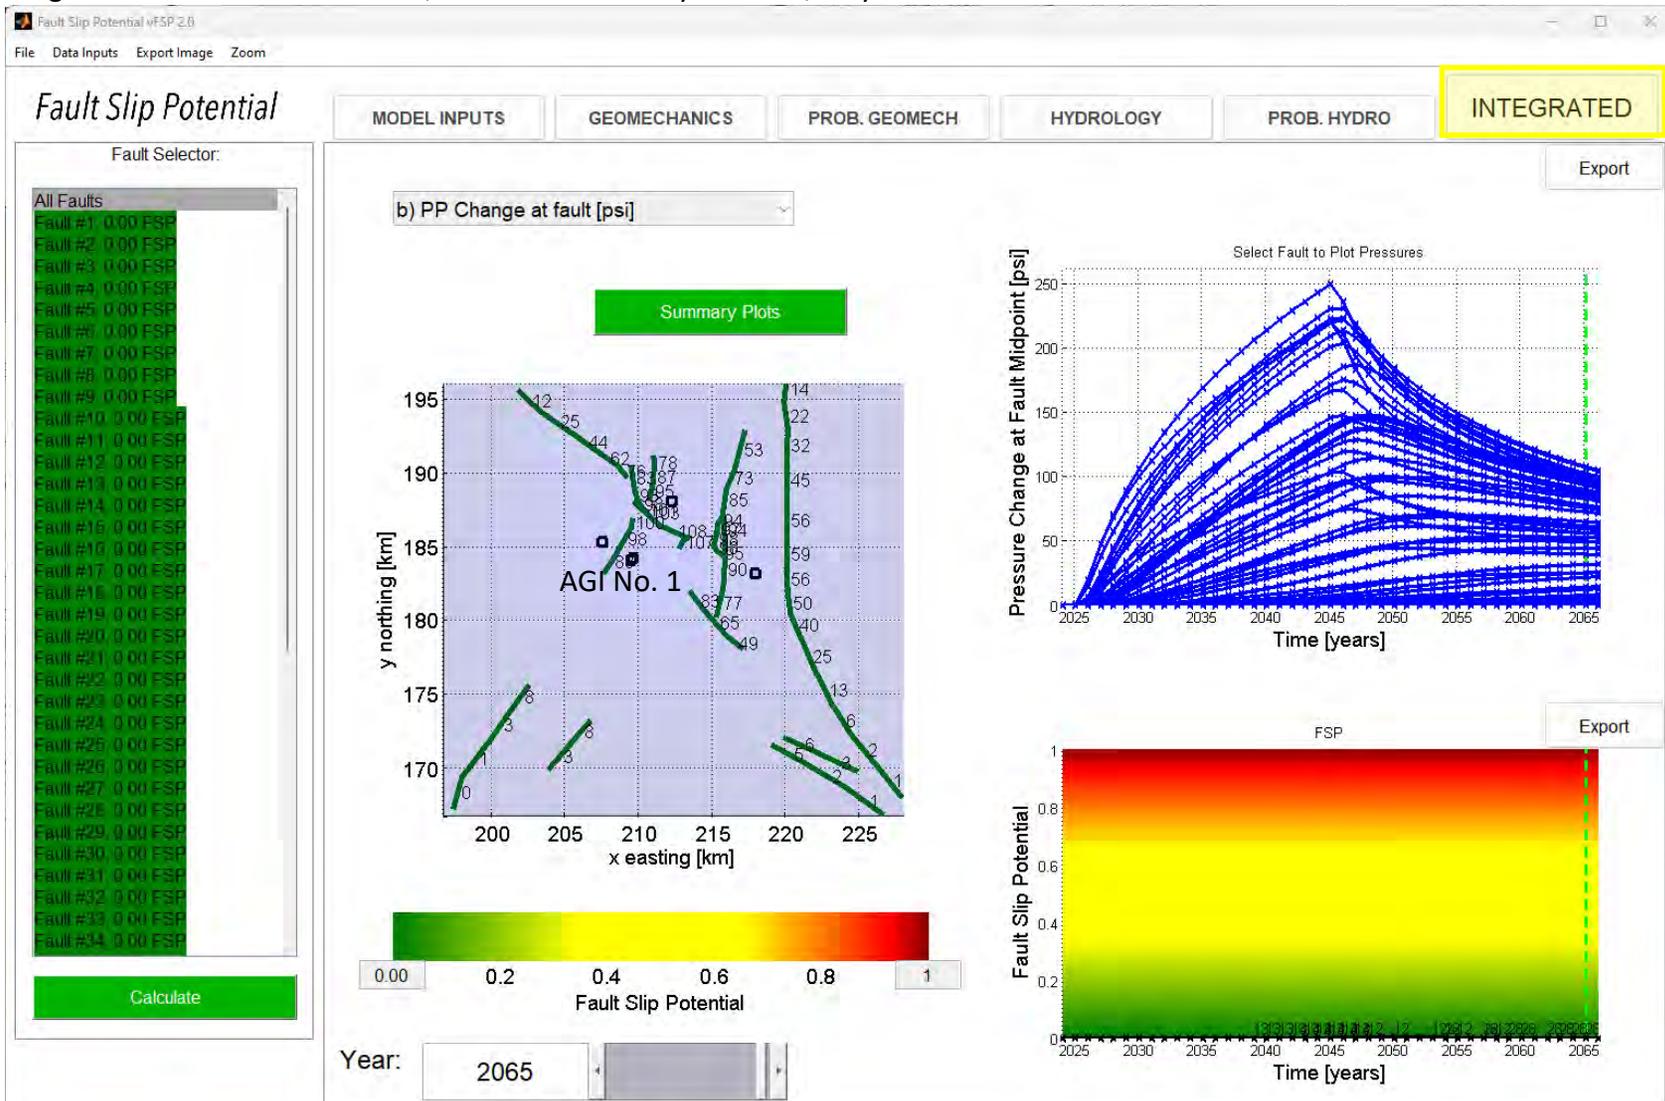


Figure 13 – Model 1 Integrated Tab PP and FSP results in 2065

Model 2 – Sil-Dev faults, Five Offset SWDs, and Proposed AGI well(s)

This model uses the same parameters, uncertainties, and geomechanics inputs as Model 1. However, it incorporates five of the closest offset SWD wells, the proposed maximum injection rate for AGI Well No. 1 or No. 2, and the associated image well(s).

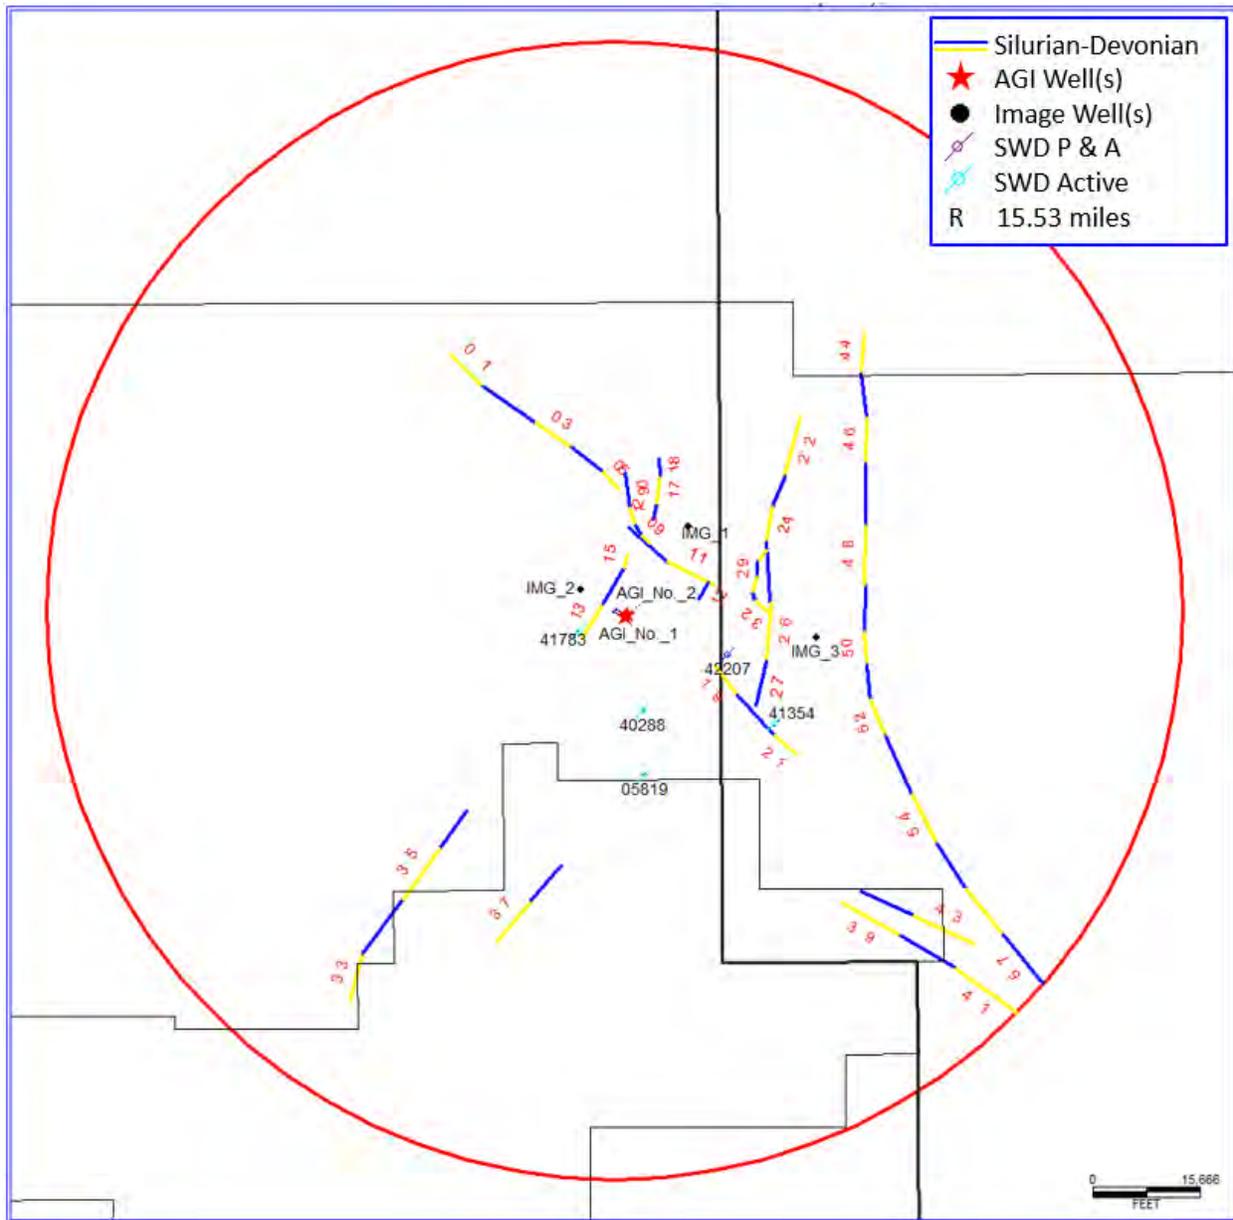


Figure 14 – Sil-Dev Fault segments (less than 3 km in length) and used wells Model 2.

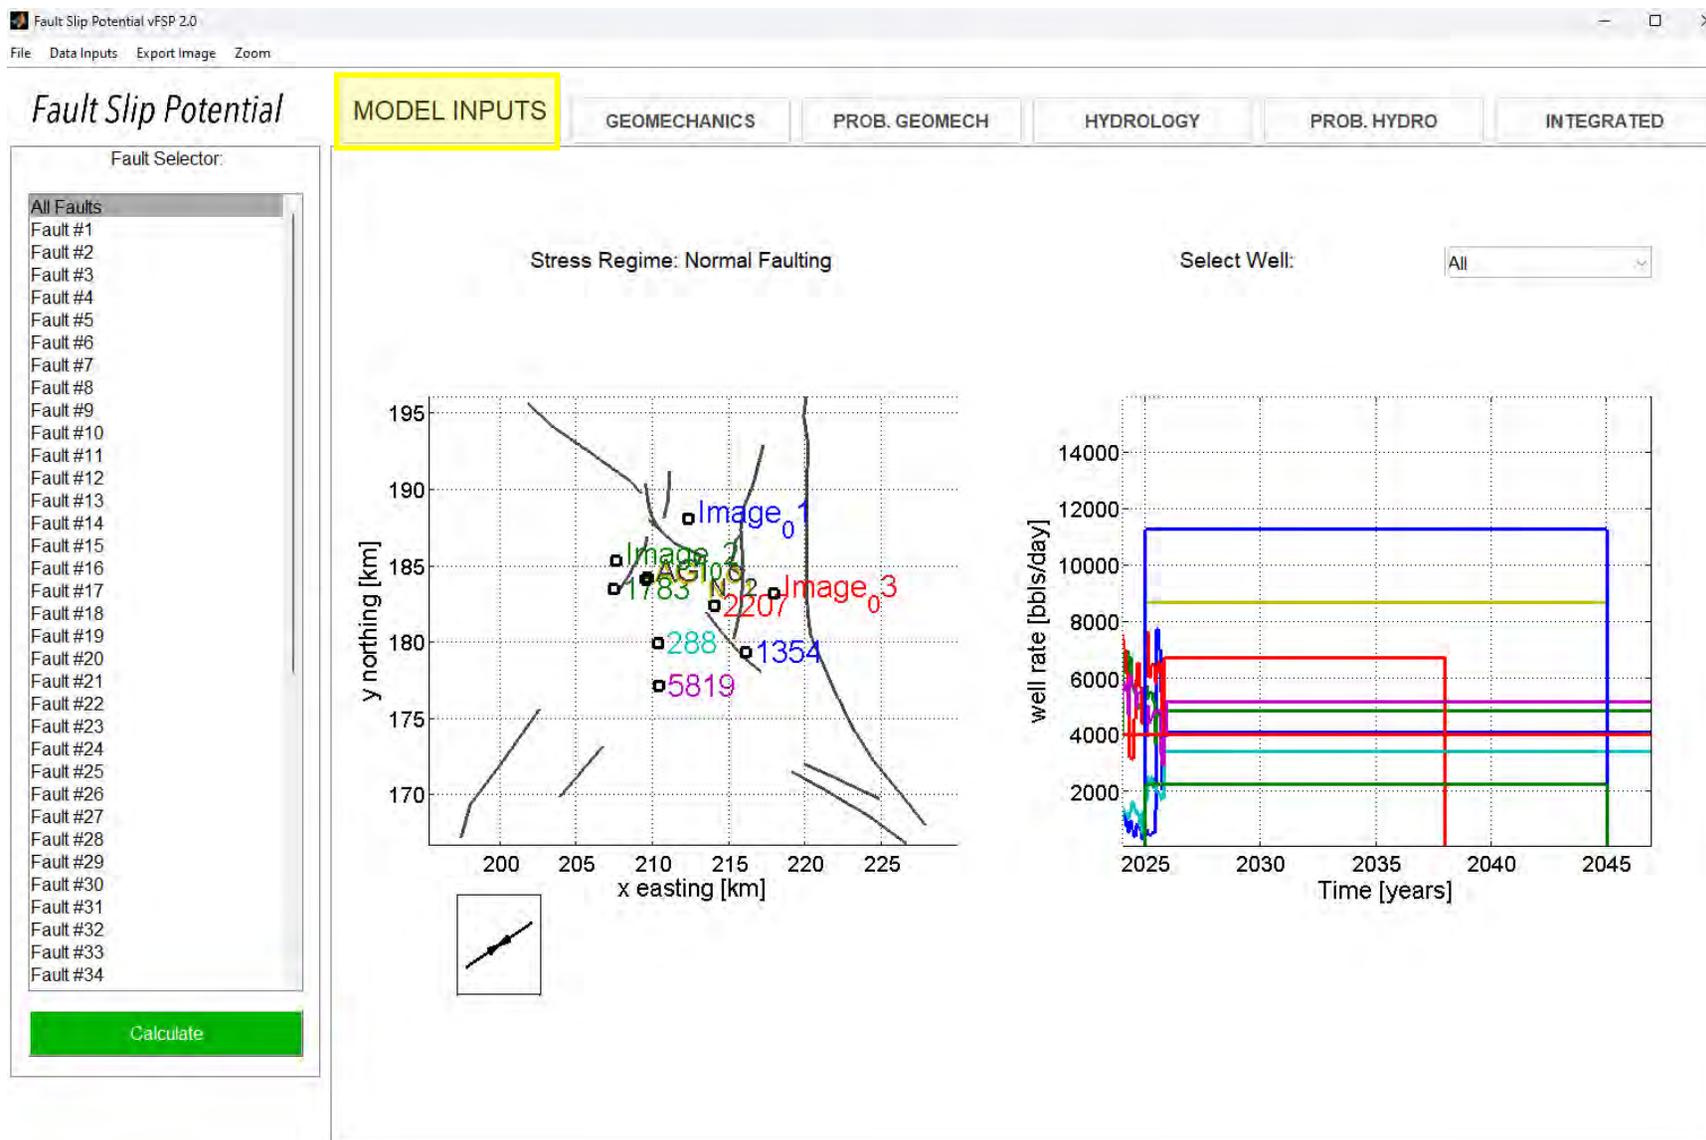


Figure 15 – Model 2

Integrated Tab PP and FSP results; original conditions in Jan, 2025.

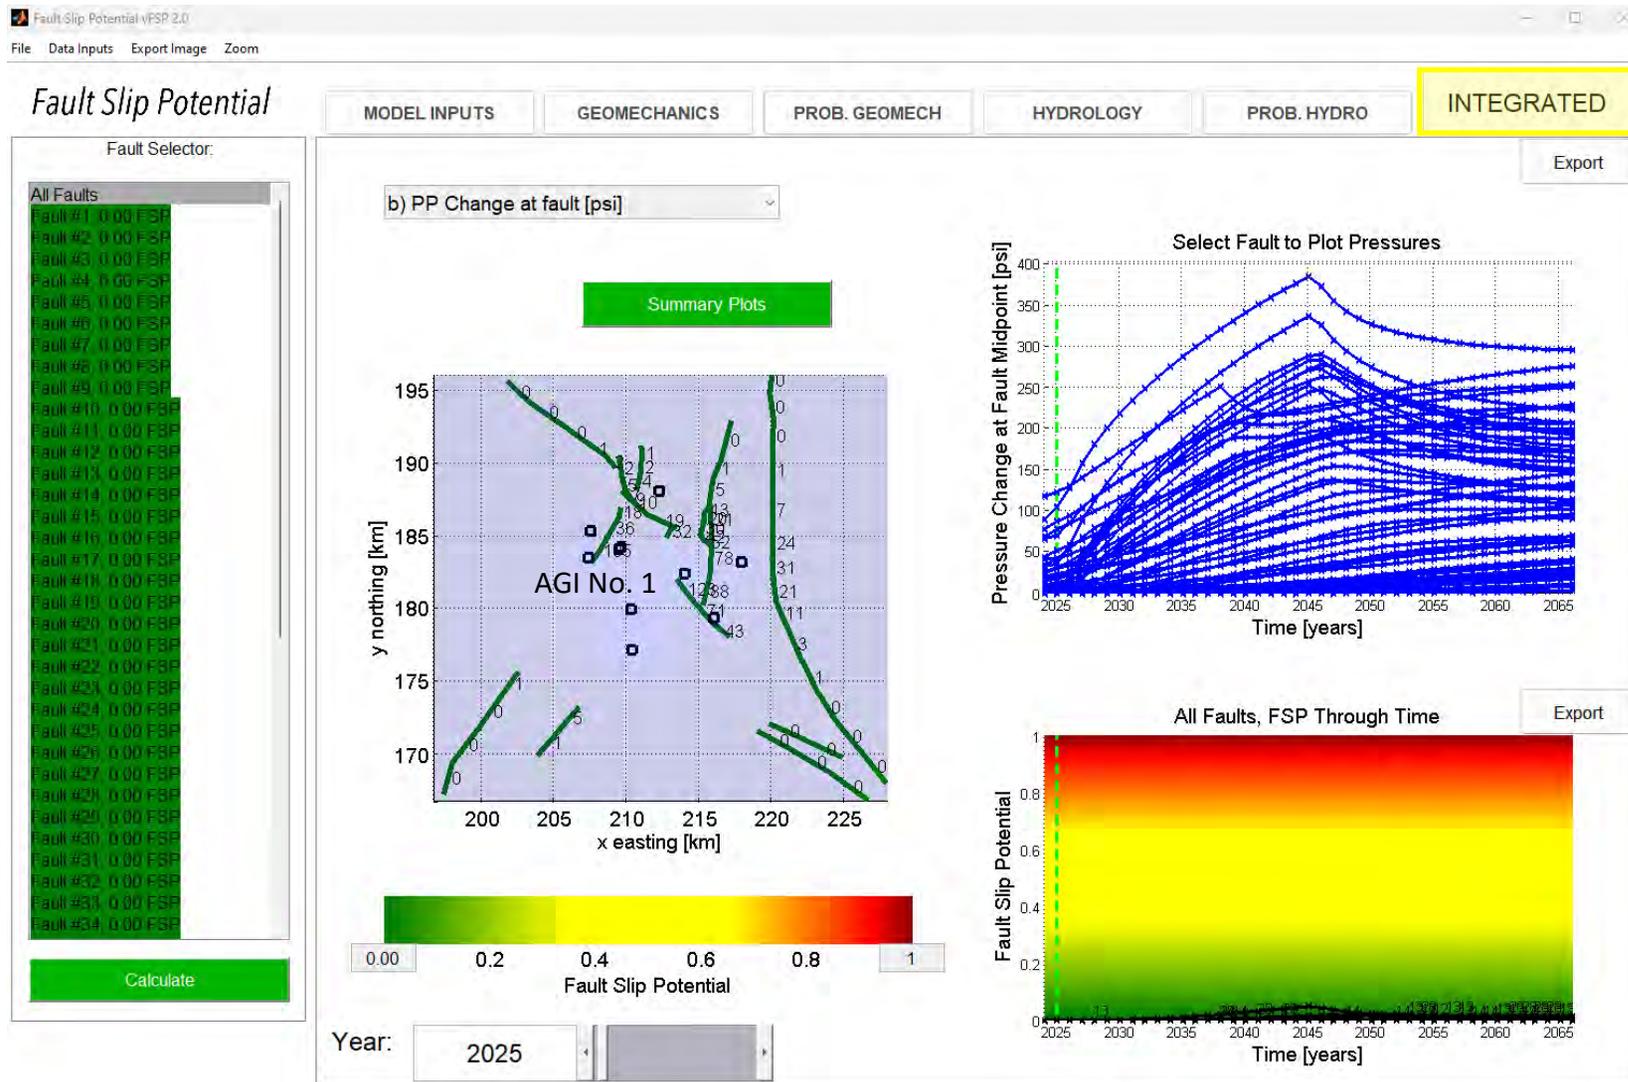


Figure 16 – Model 2 Integrated Tab PP and FSP results in 2025

Integrated Tab PP results; conditions for the year 2045.

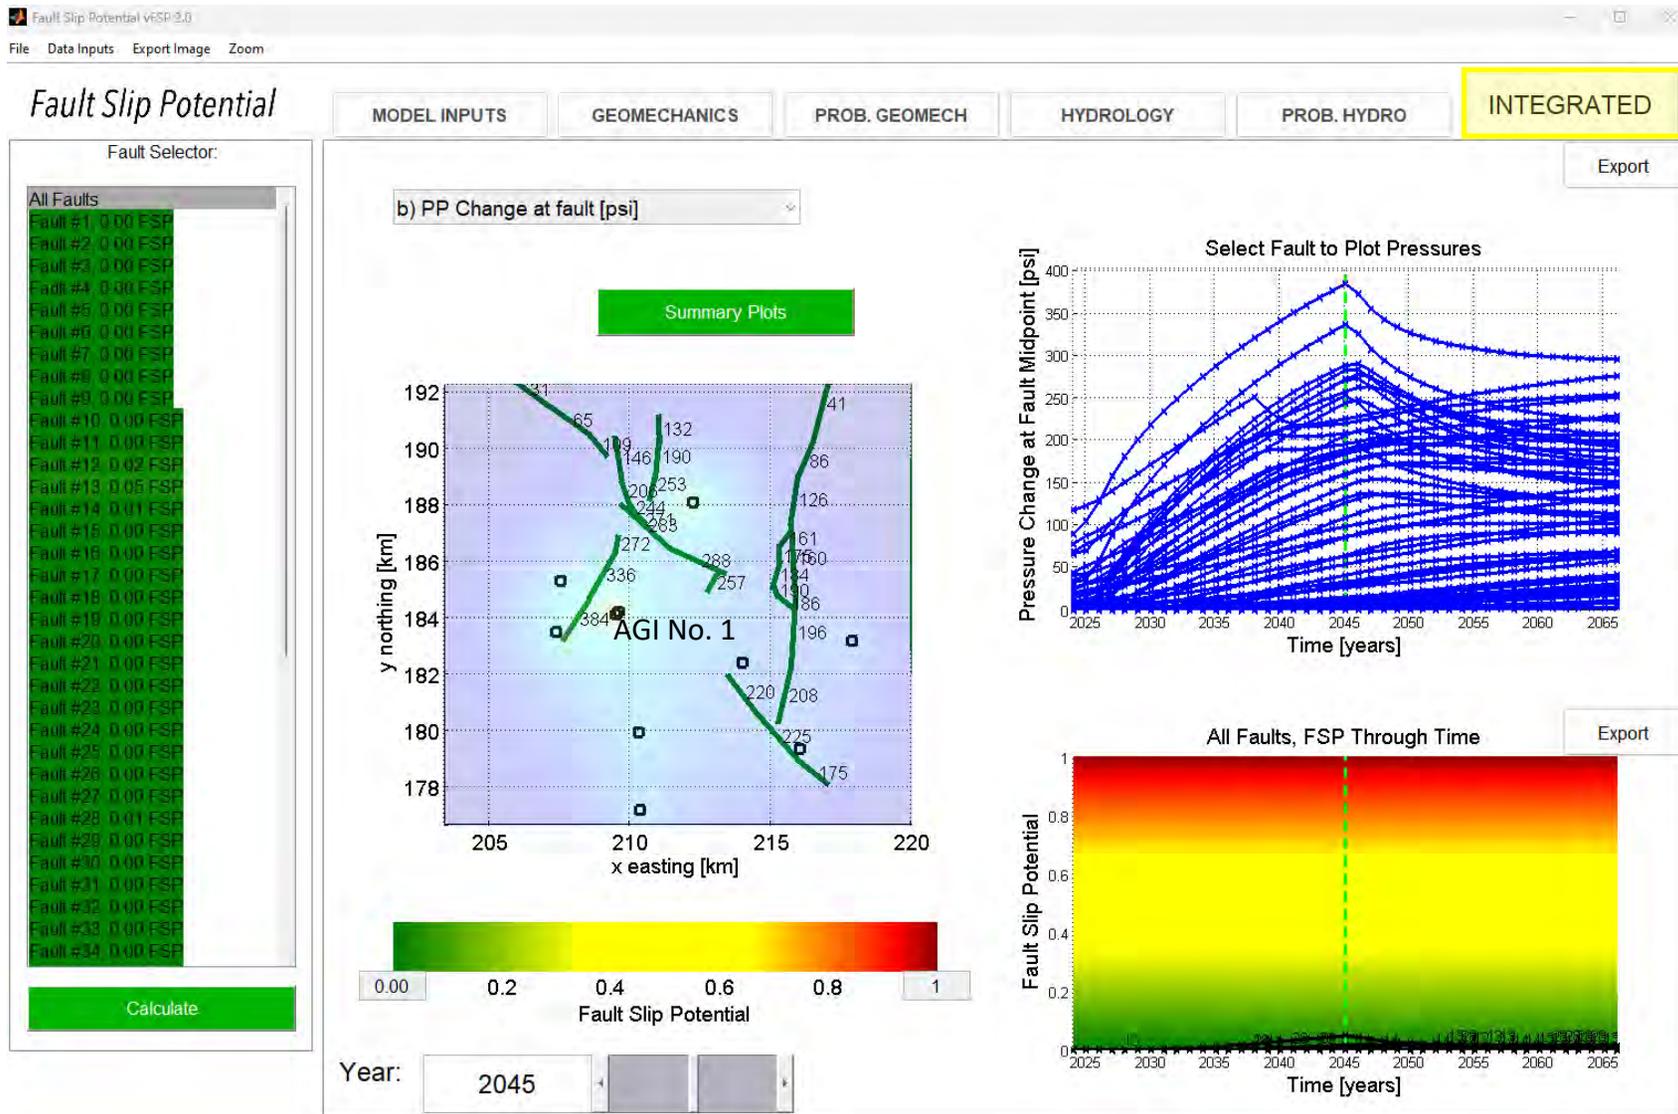


Figure 17 – Model 2 Integrated Tab PP results in 2045

Integrated Tab FSP results; conditions for the year 2045.

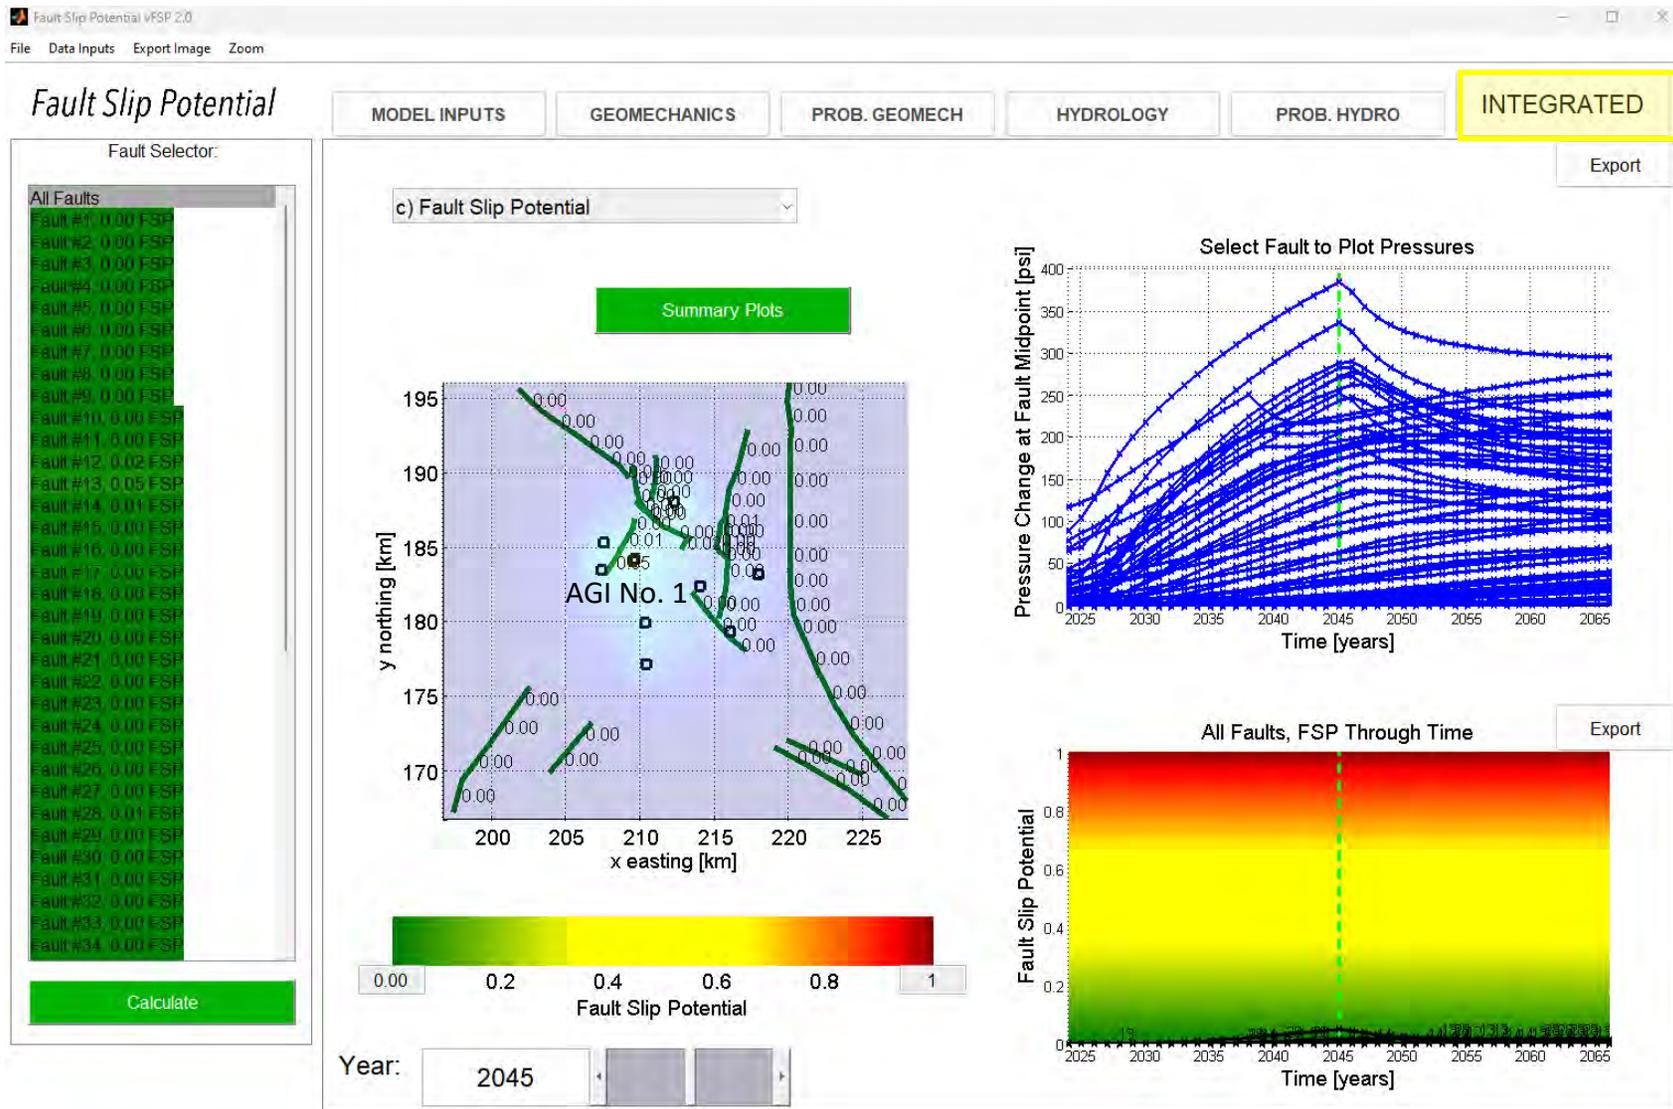


Figure 18 – Model 2 Integrated FSP results in 2045

Integrated Tab PP and FSP results; conditions for the year 2065, 20 years after the proposed injection is completed

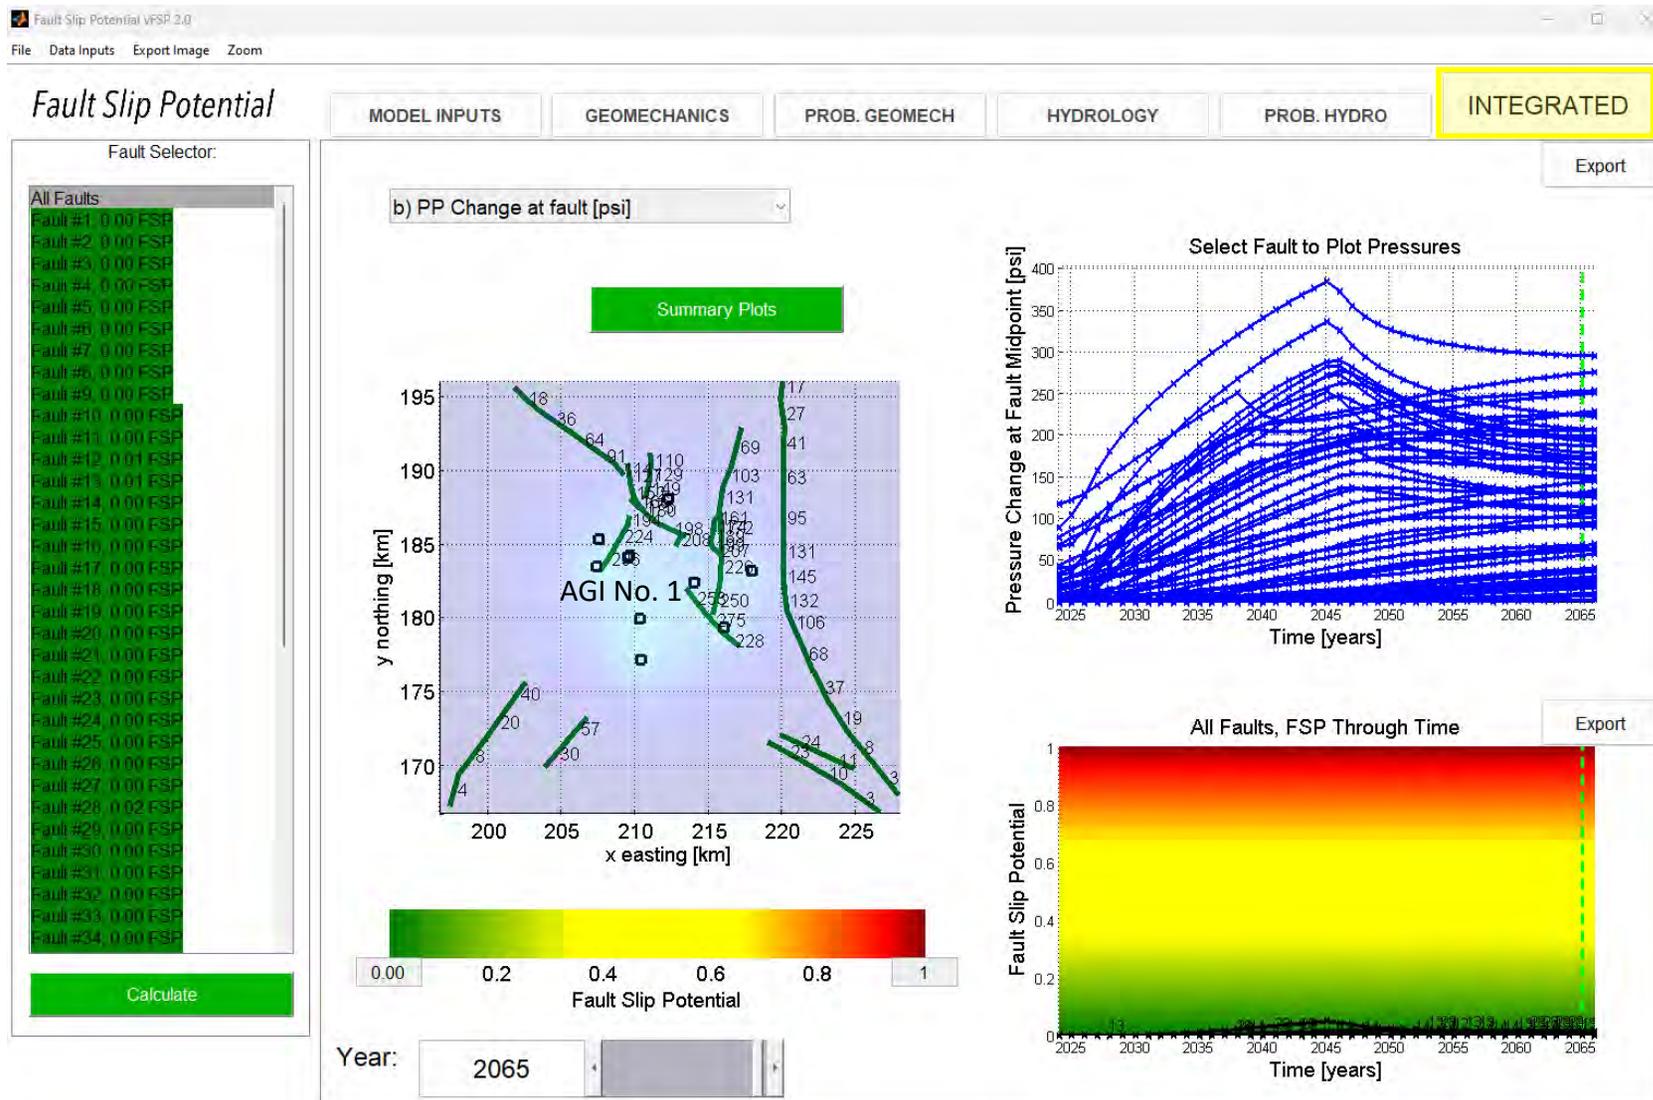


Figure 19 – Model 2 Integrated Tab PP and FSP results in 2065

Model 3 – Sil-Dev faults, All Offset SWDs and Proposed AGI well(s)

This model uses the same parameters, uncertainties, and geomechanics inputs as Model 1. However, it incorporates 19 offset SWD wells, the proposed maximum injection rate for AGI Well No. 1 or No. 2, and the associated image well(s).

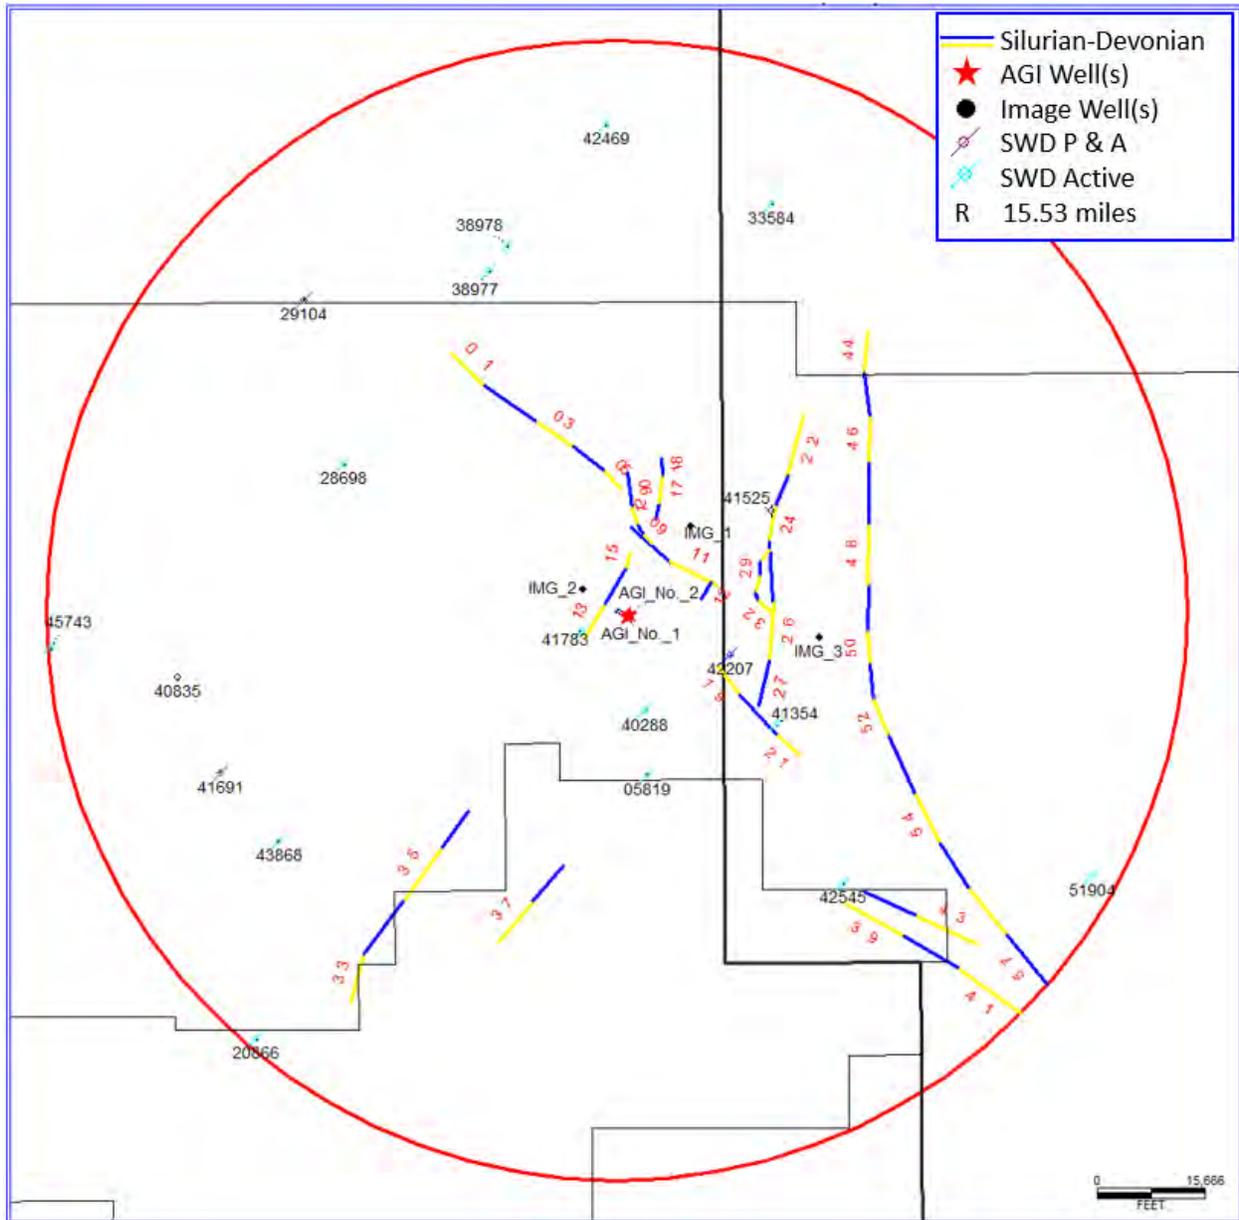


Figure 20 – Sil-Dev Fault segments (less than 3 km in length) and used wells Model 3.

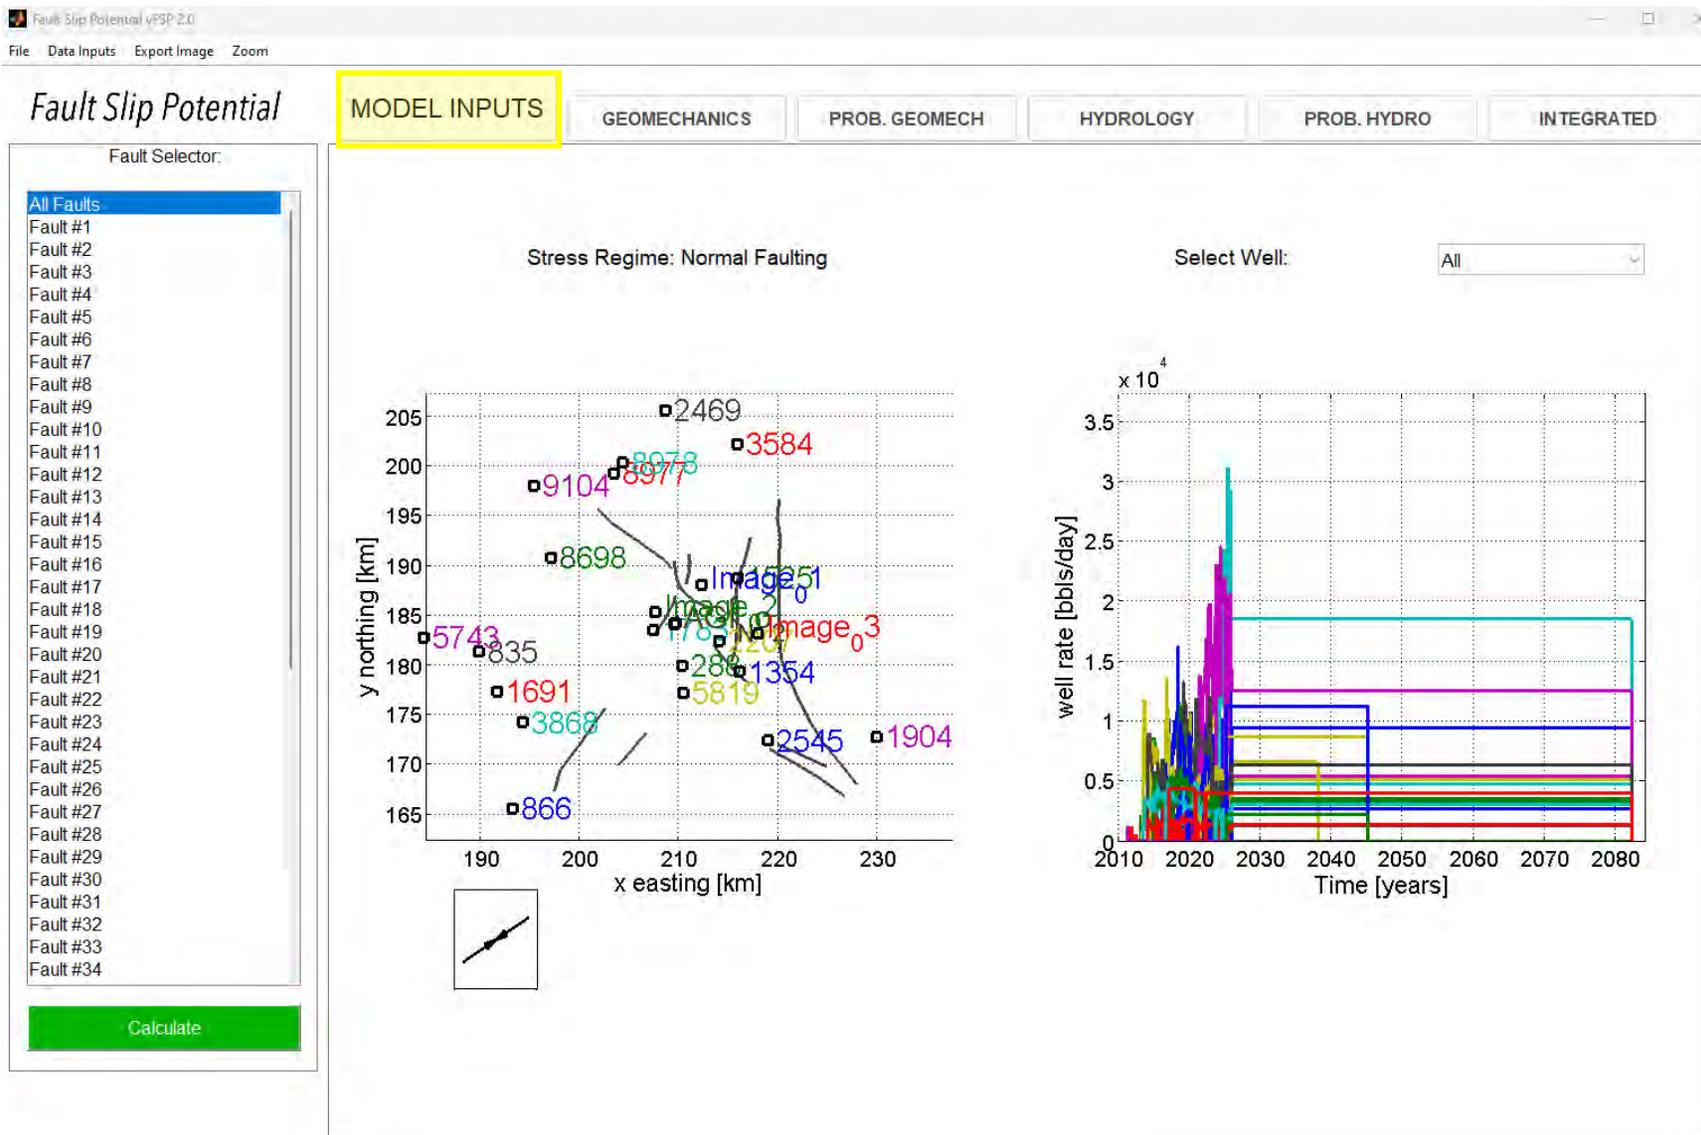


Figure 21 – Model 3

Integrated Tab PP and FSP results; original conditions in Jan, 2025.

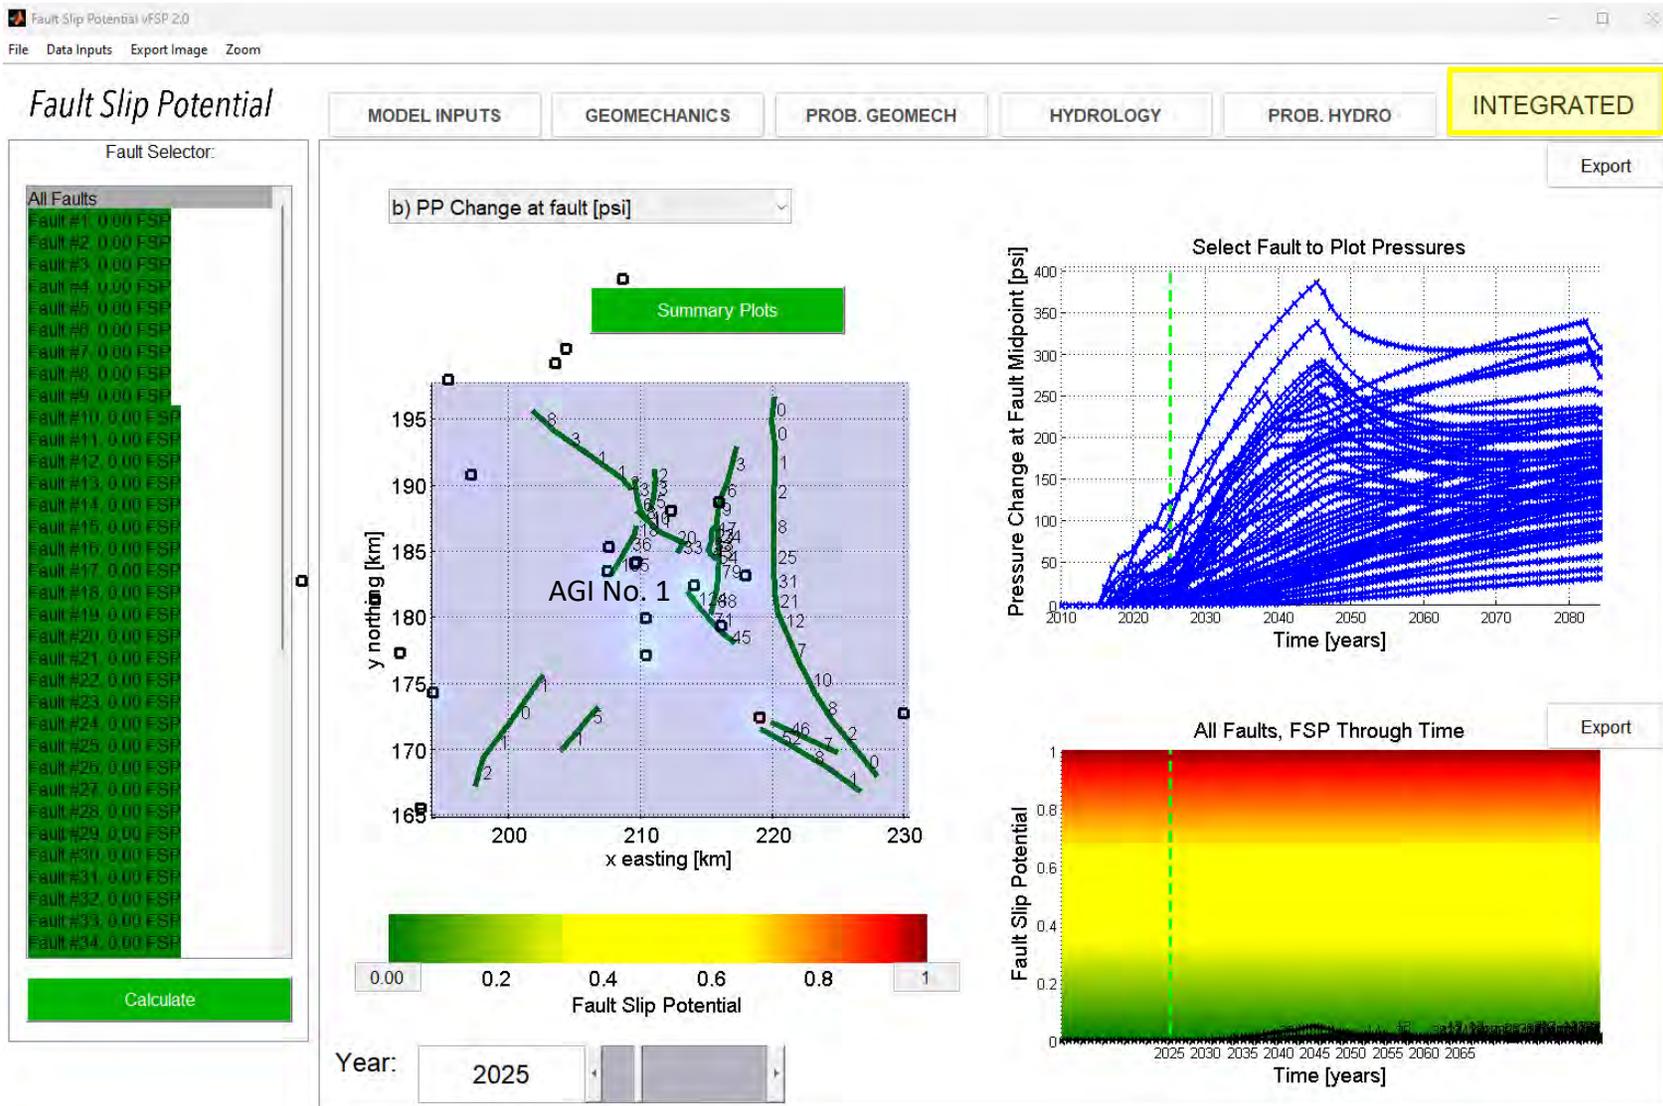


Figure 22 – Model 3 Integrated Tab PP and FSP results in 2025

Integrated Tab PP results; conditions for the year 2045.

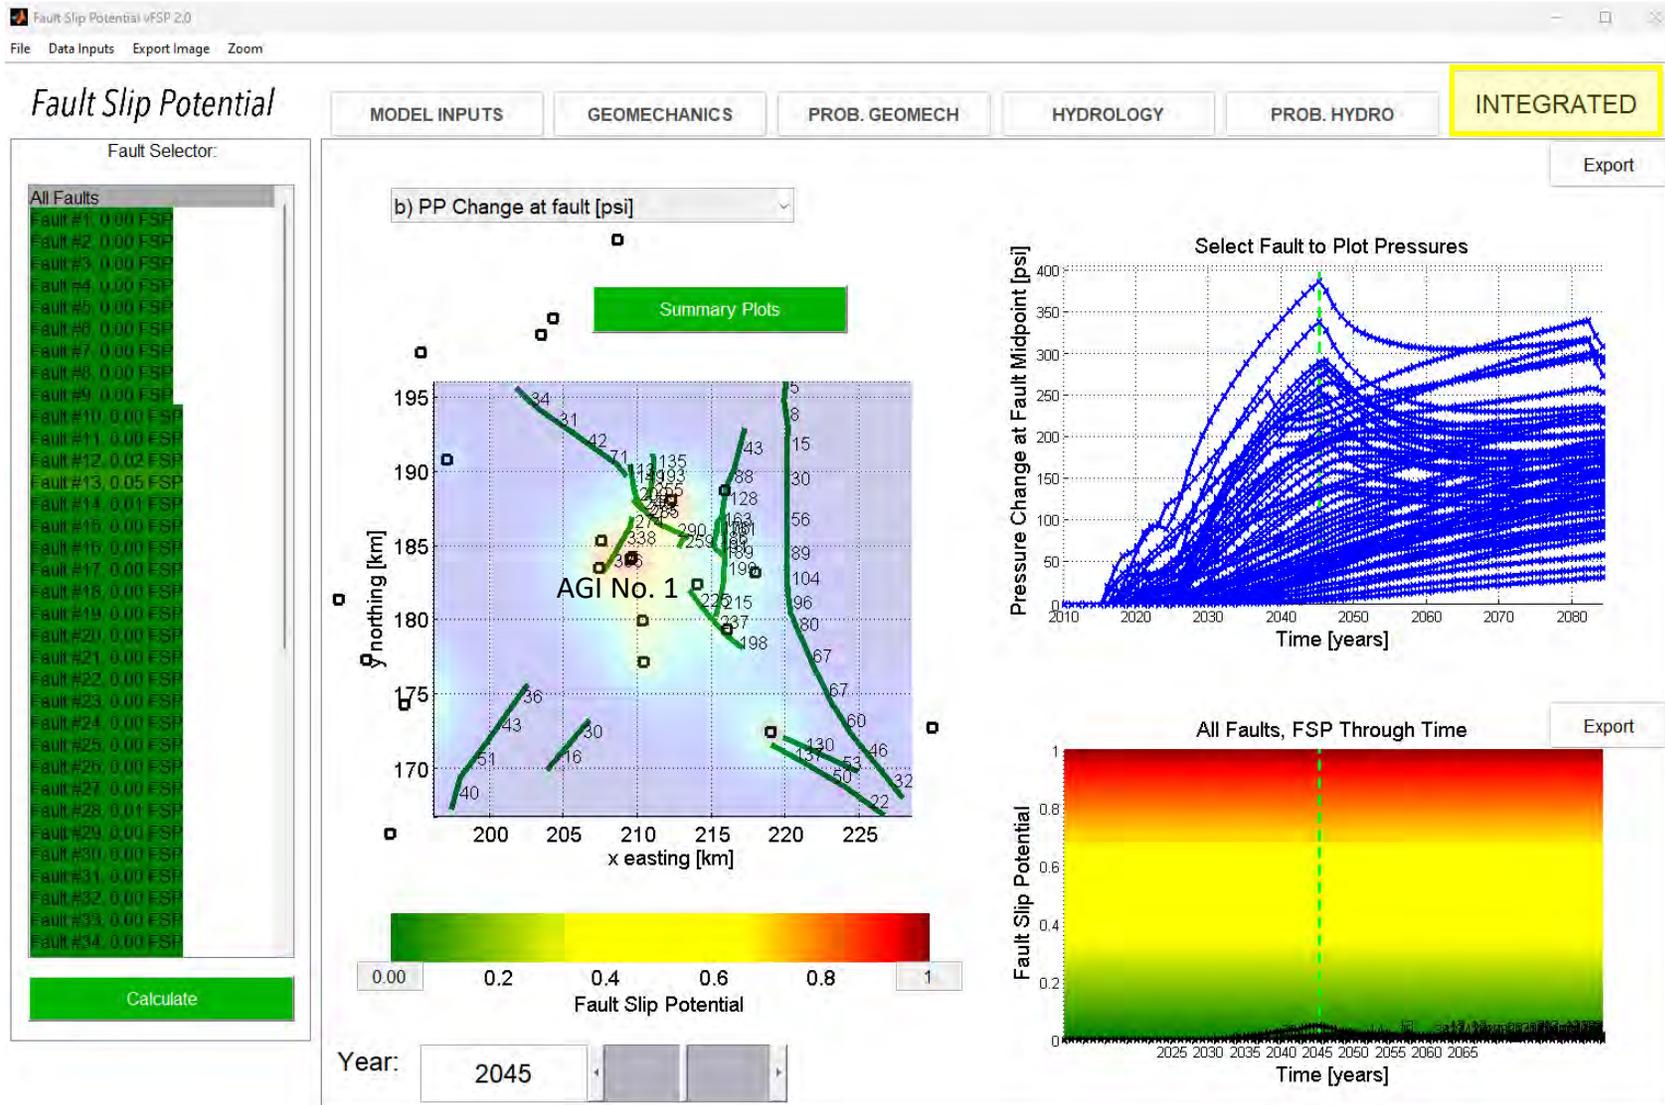


Figure 23 – Model 3 Integrated Tab PP results in 2045

Integrated Tab FSP results; conditions for the year 2045.

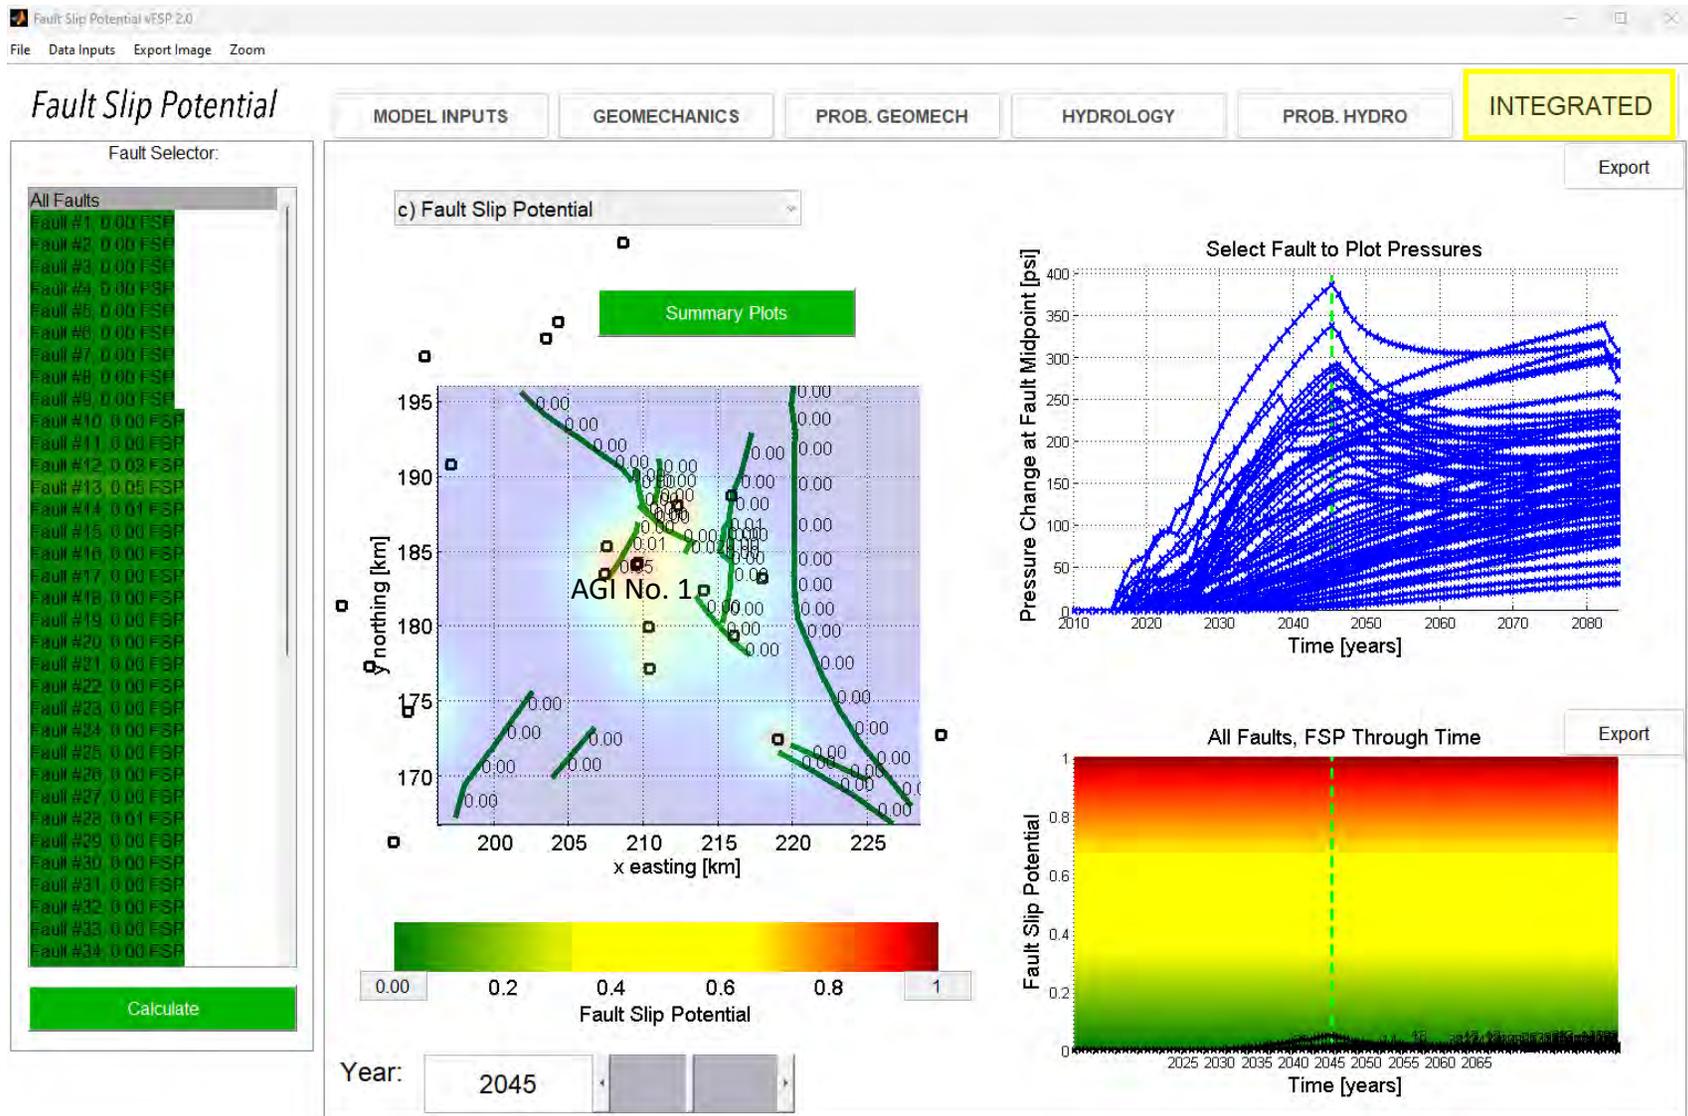


Figure 24 – Model 3 Integrated FSP results in 2045

Integrated Tab PP and FSP results; conditions for the year 2065, 20 years after the proposed injection is completed

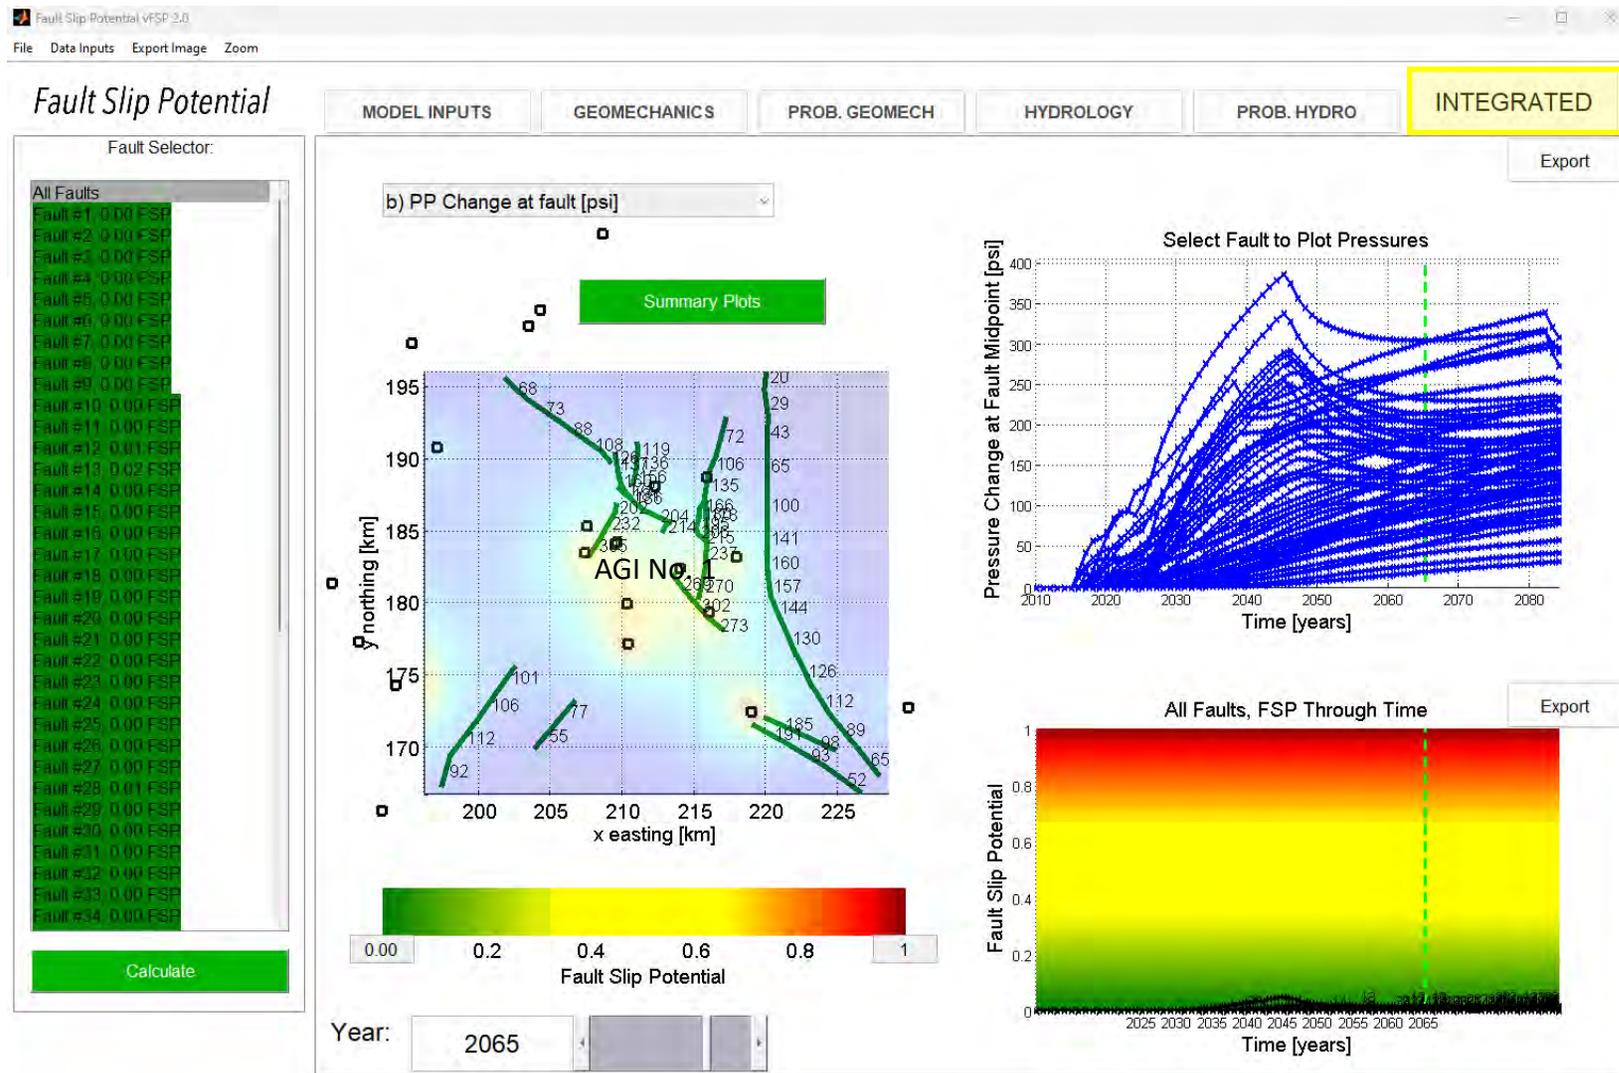


Figure 25 – Model 3 Integrated Tab PP and FSP results in 2065

Model 4 – Strawn faults above injection zone, AGI wells only

Model 4 consists solely of AGI well(s) operating at an injection rate of 270,000 bbl/month, starting in 2025, at the Pennsylvanian-Strawn level (approximately 11,165 ft MD, over 2,500 ft above the injection interval). This model is primarily intended to evaluate the potential effects of the well at this fault level, which is associated with a pressure increase of less than 133 psi and zero fault slip potential. The parameters and uncertainties are consistent with those in Model 1.

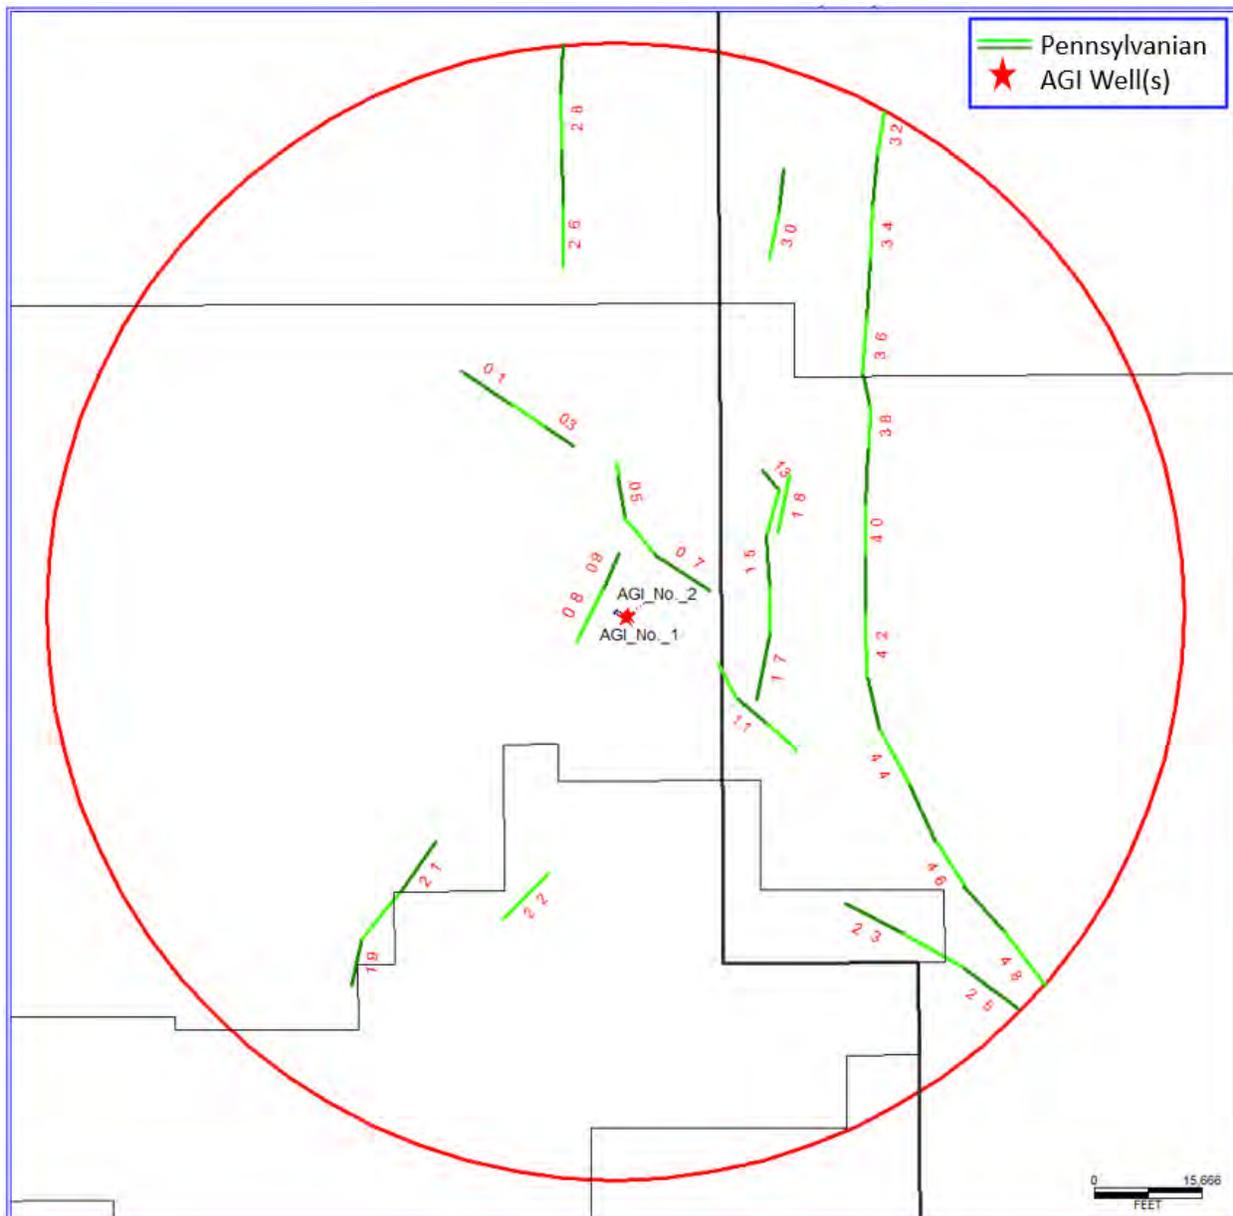


Figure 26 – Penn Fault segments less than 4 km in length.

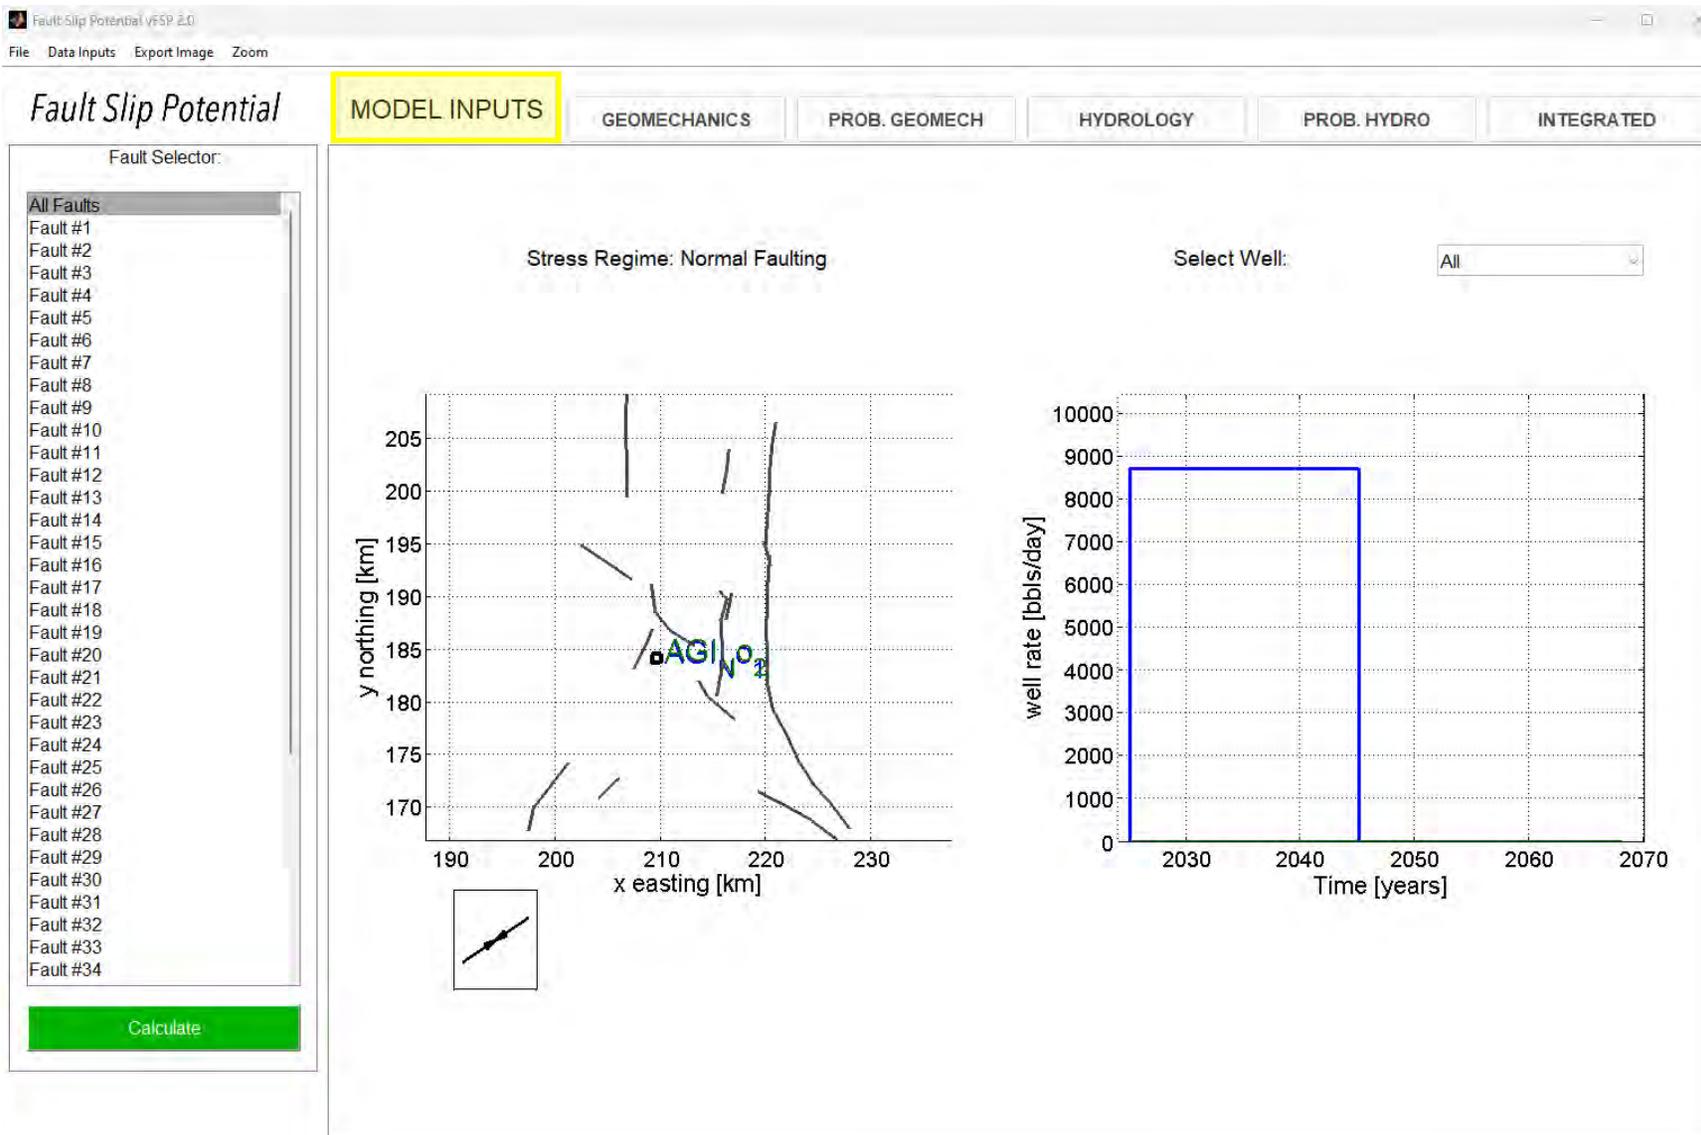


Figure 27 – Model 4


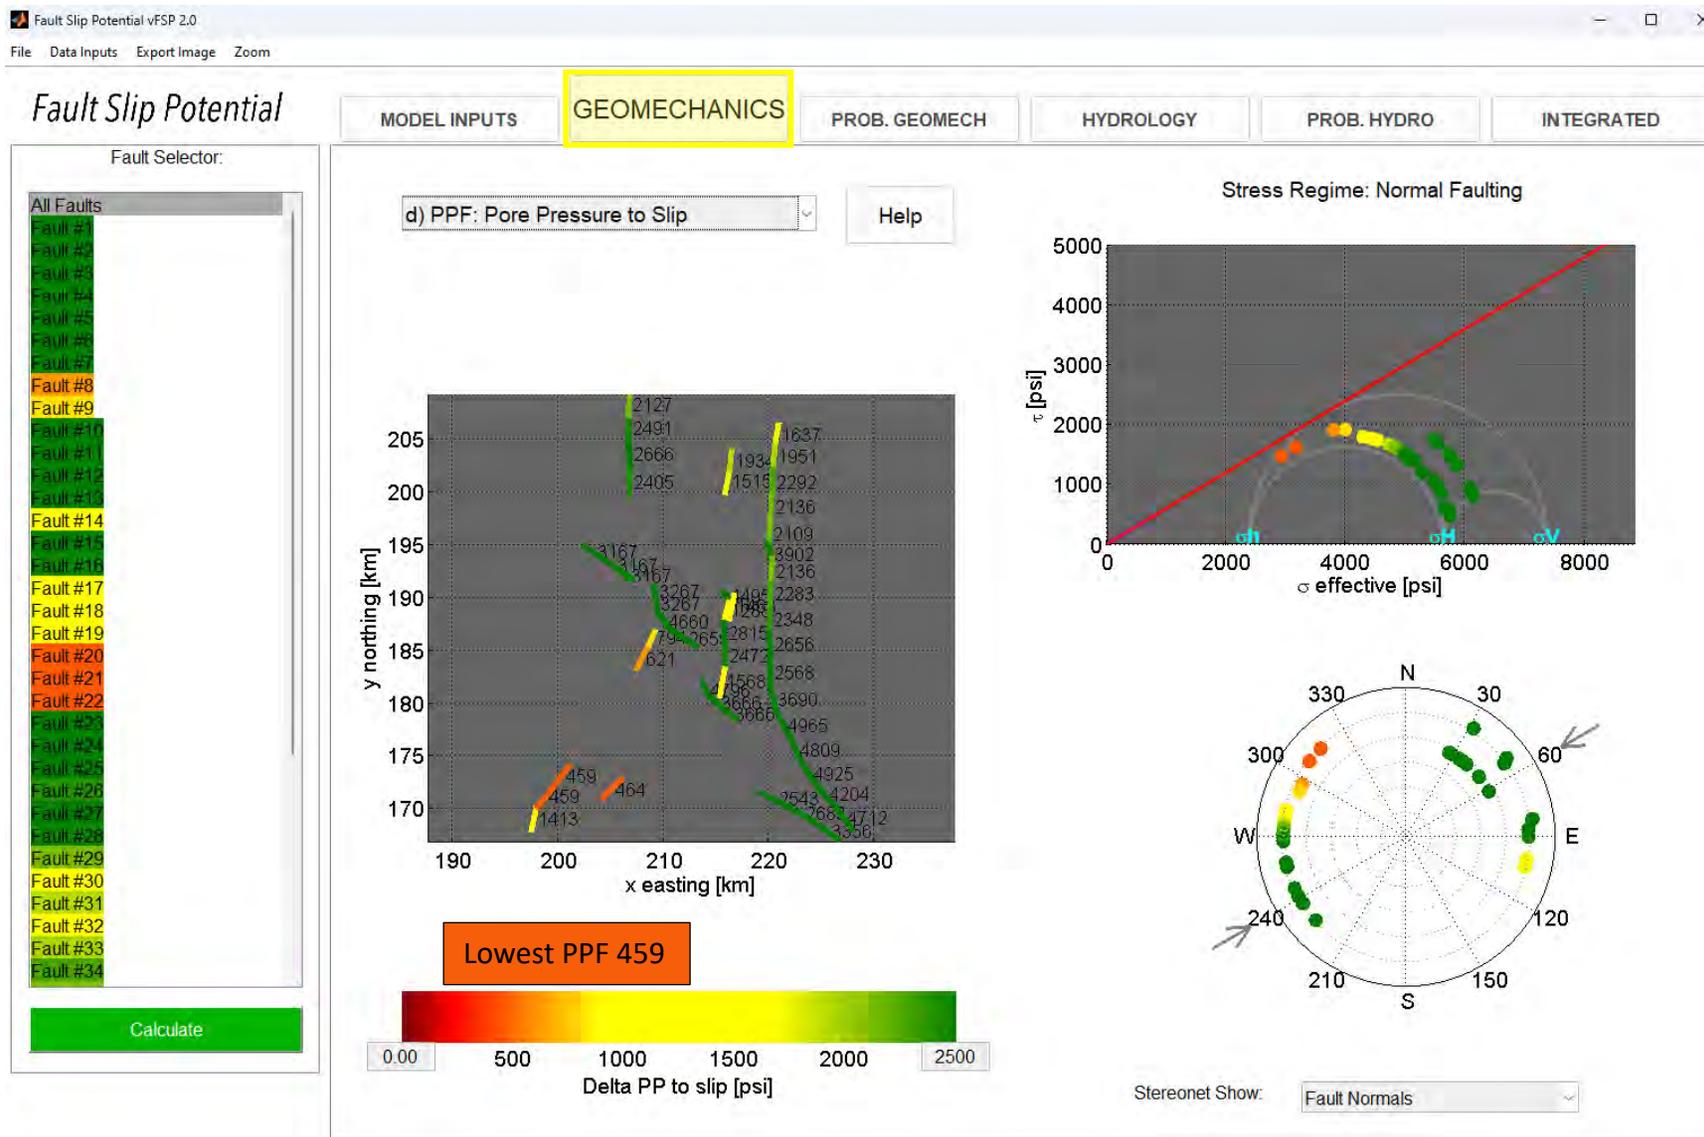


Figure 28 – Geomechanics for Model 4

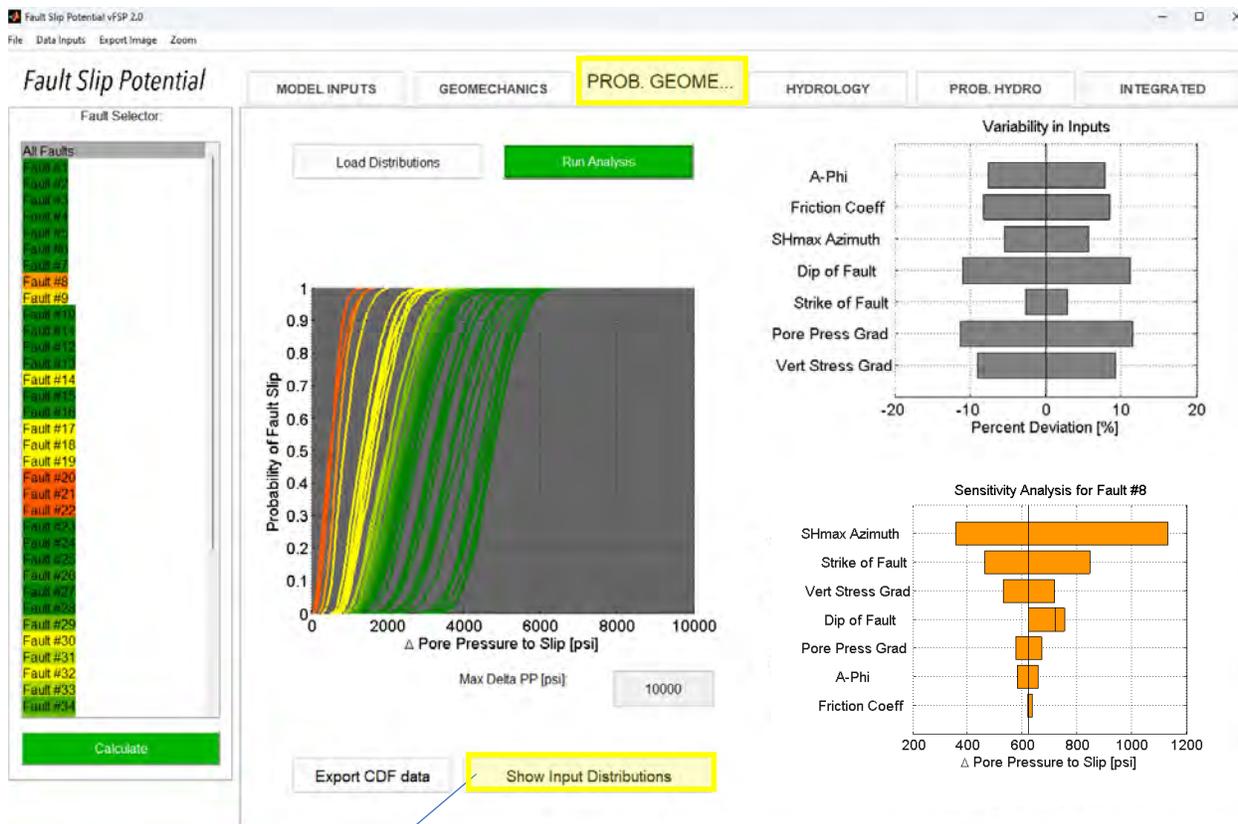

Fault #8 "Show Input Distribution"

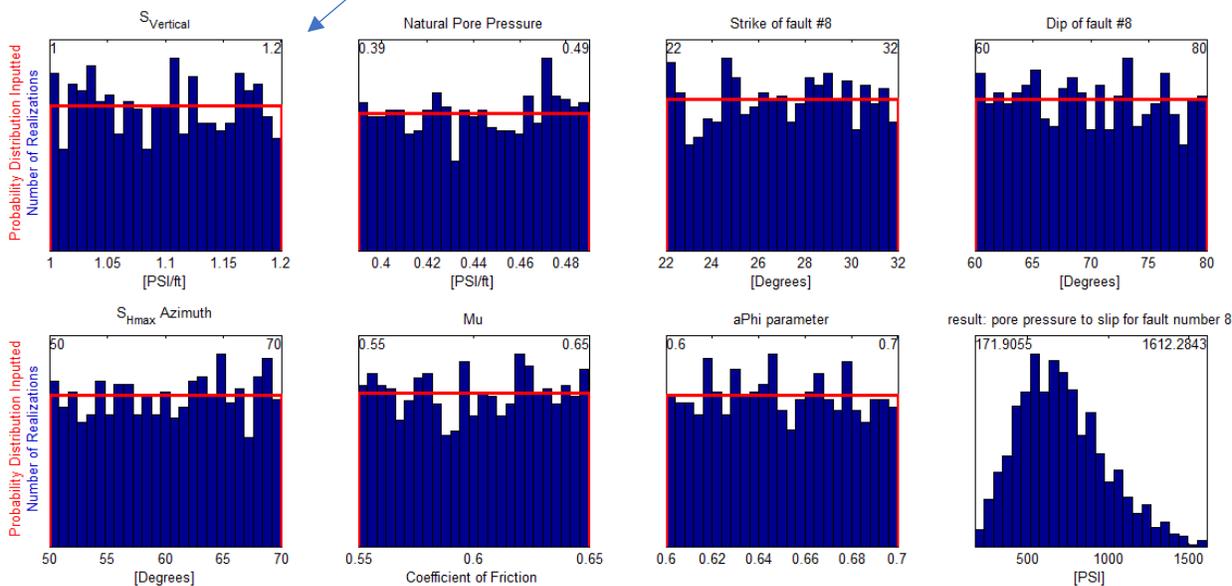


Figure 29 – Prob Geomechanics for Model 4

### Prob Hydrology in Jan 2025

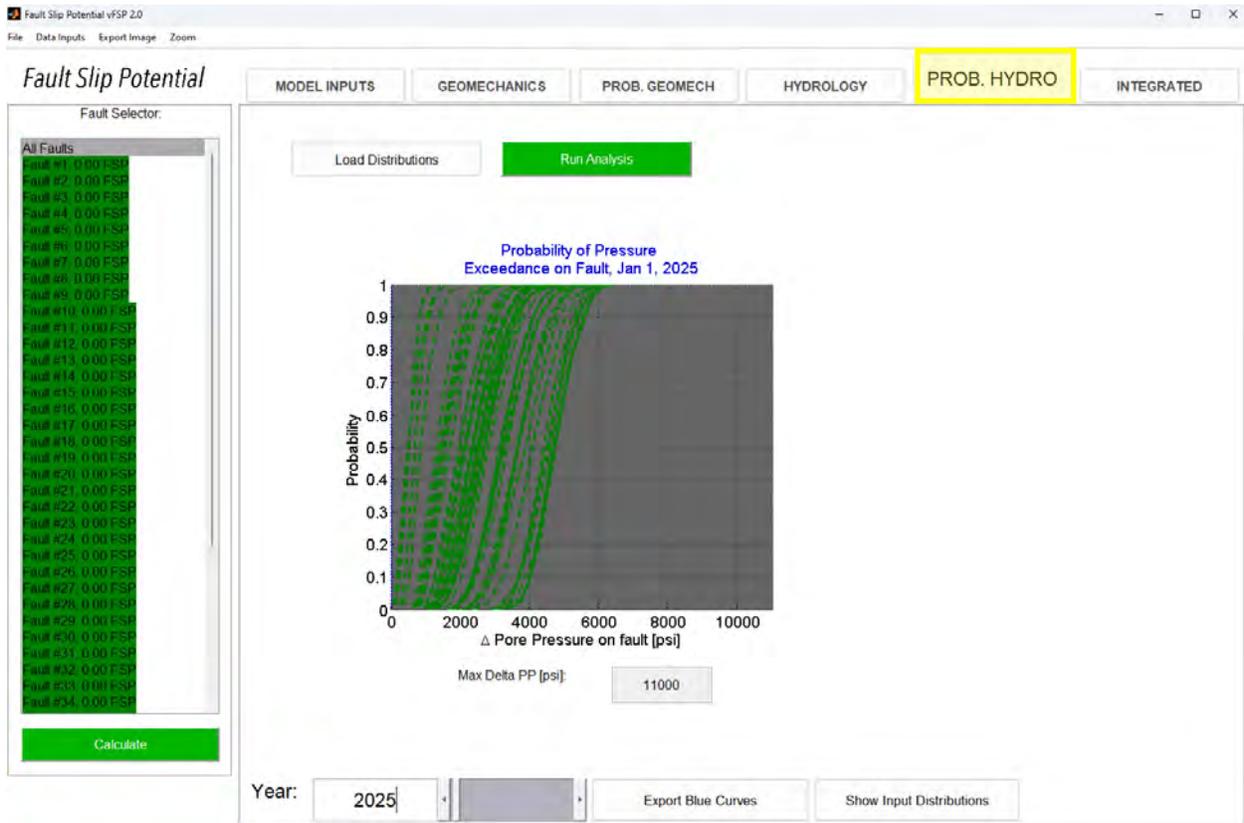


Figure 30 – Prob Hydrology in Jan 2025

Integrated Tab showing Pore Pressure and Fault Slip Potential in January, 2025.

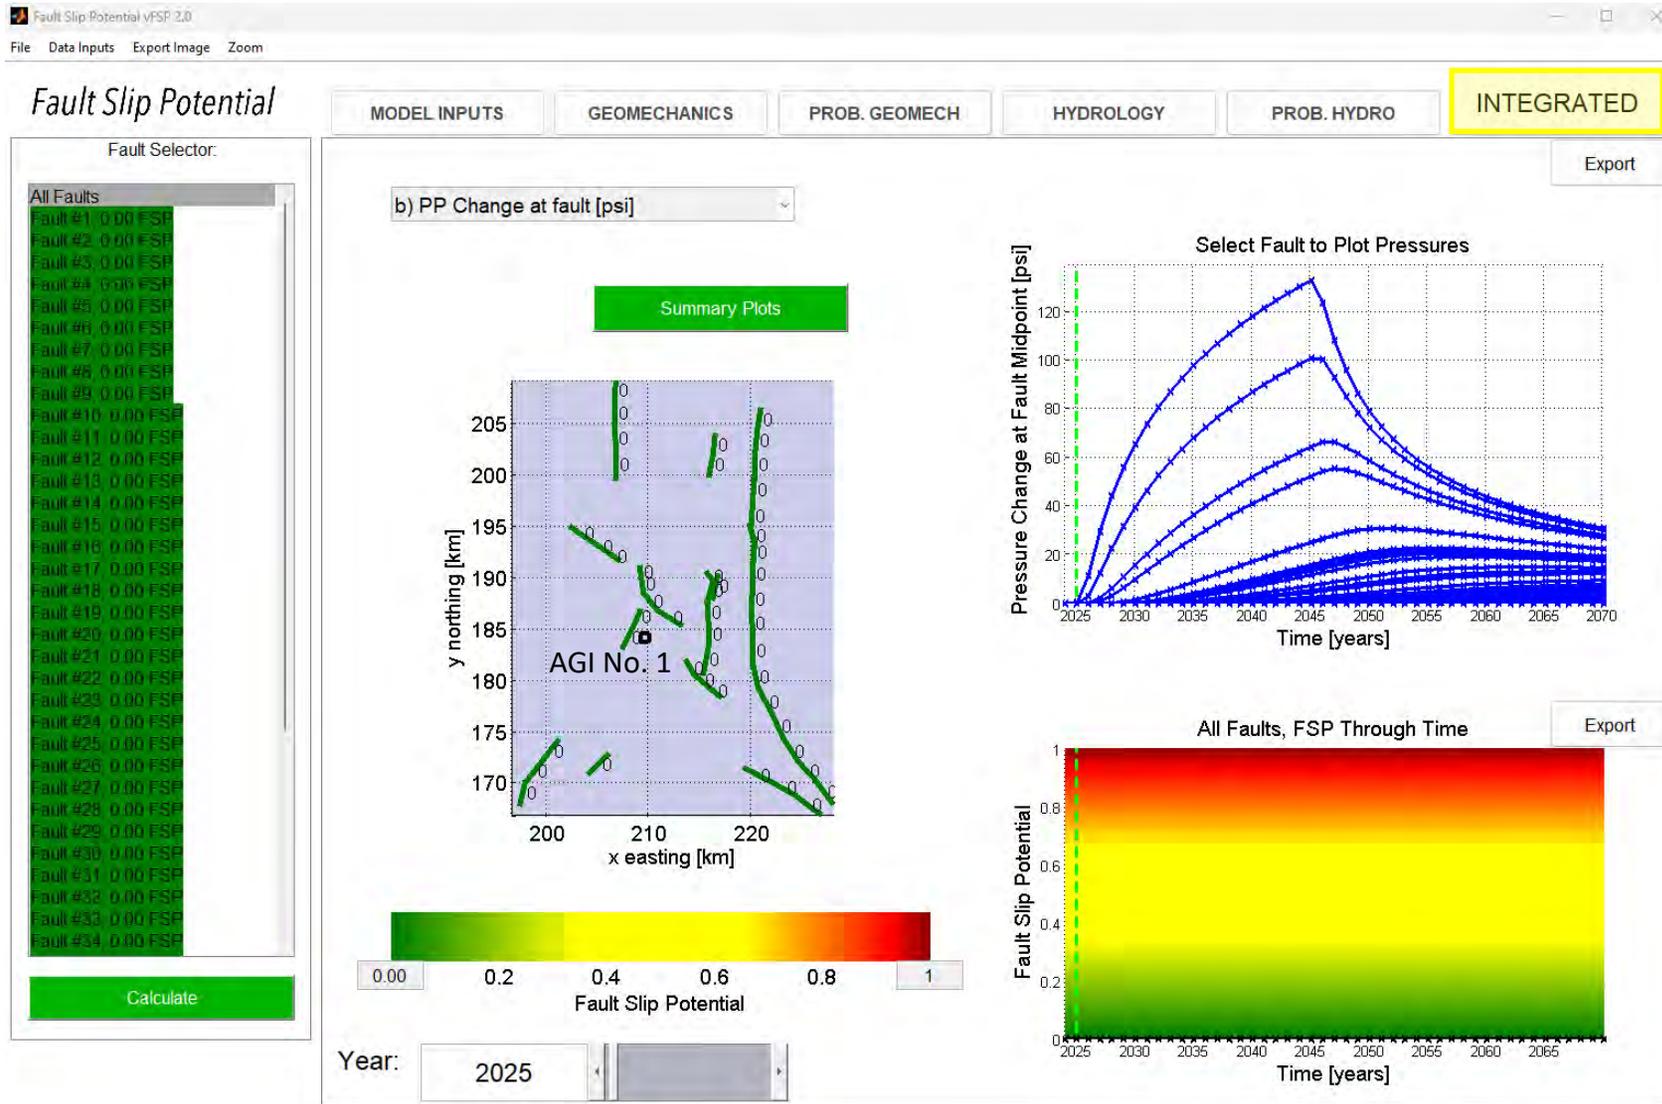


Figure 31 – Model 4 Integrated Tab PP and FSP results in Jan, 2025

Integrated Tab PP results; conditions for the year 2045, after the proposed 20 years injection.

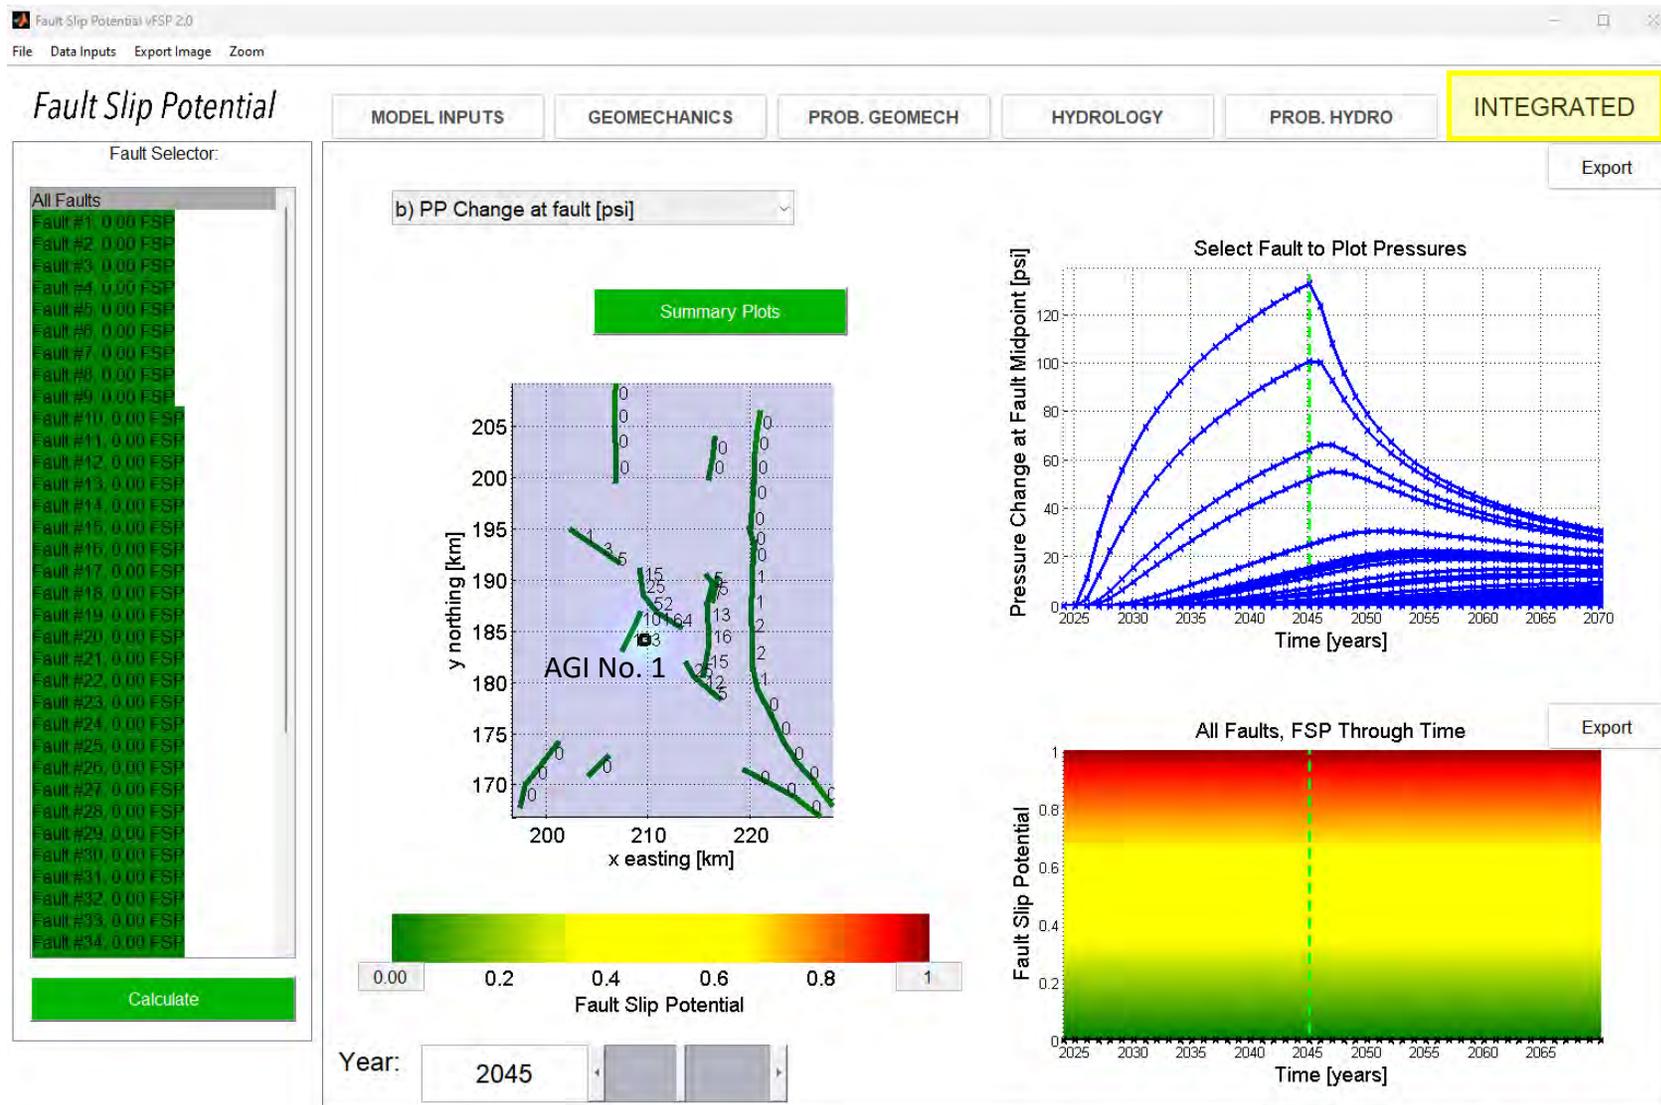


Figure 32 – Model 4 Integrated Tab PP results in 204

Integrated Tab FSP results; conditions for the year 2045, after the proposed 20 years injection.

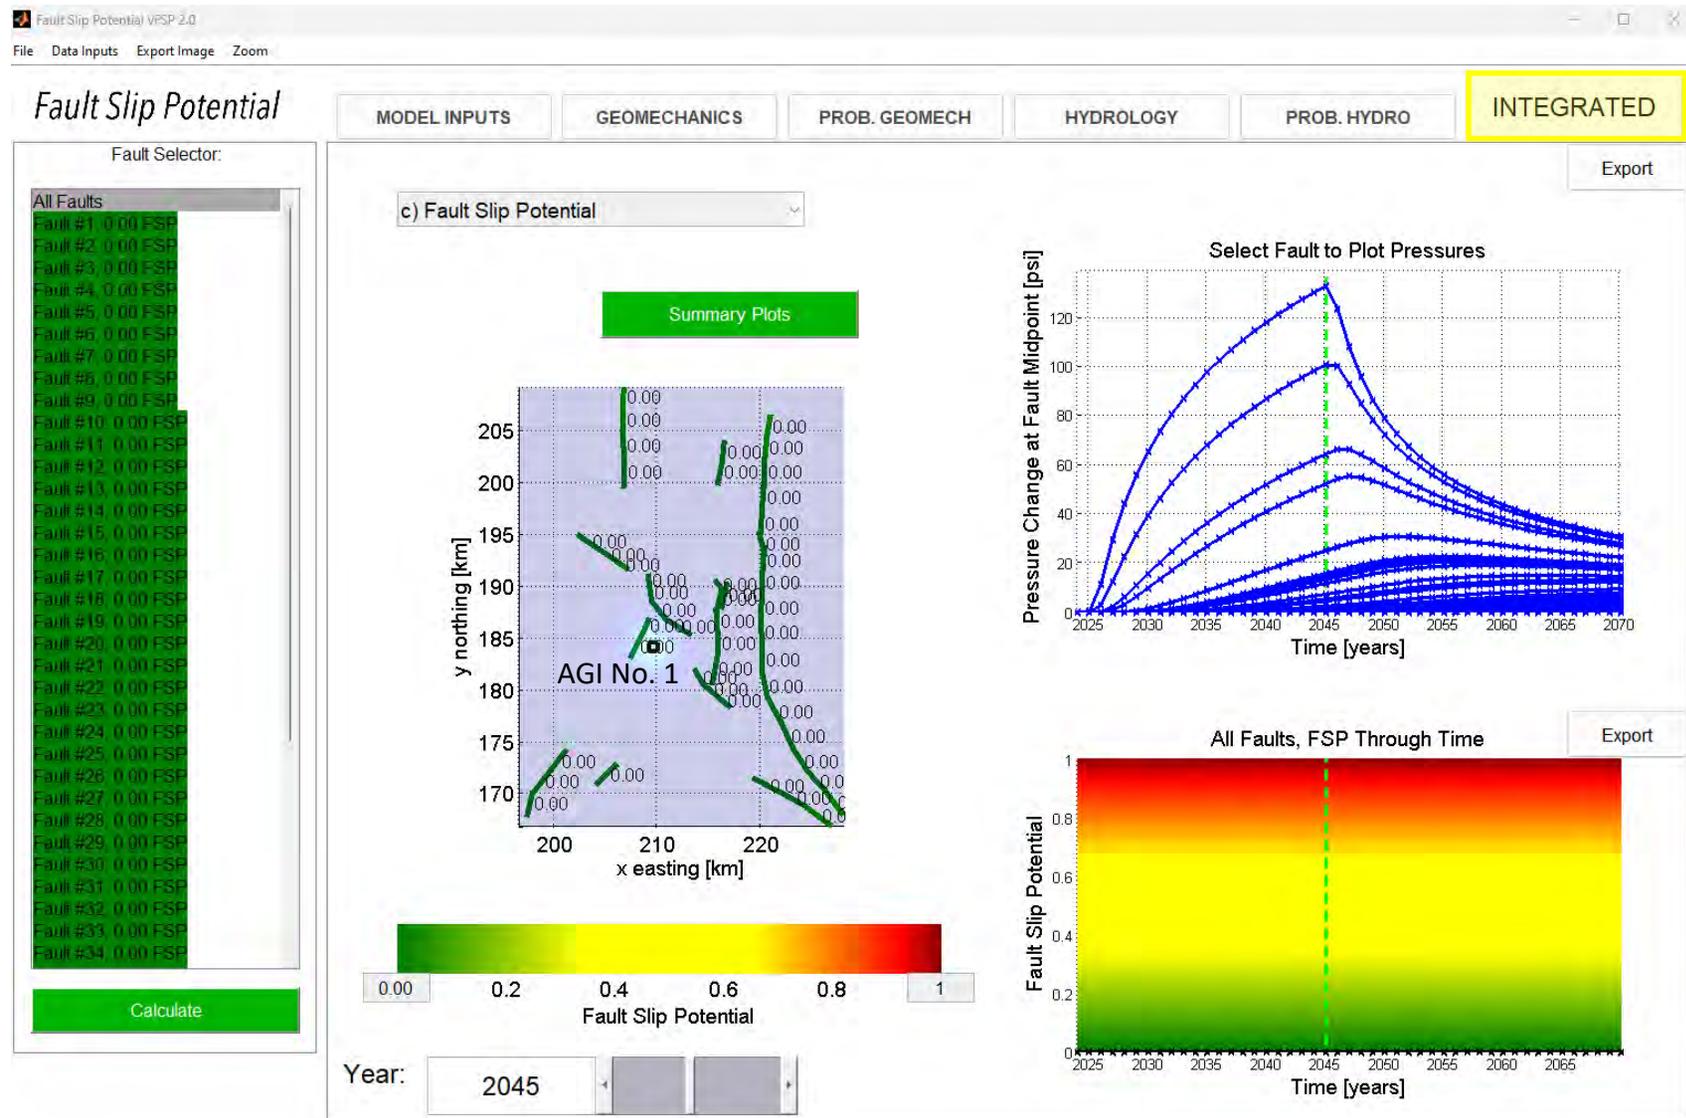


Figure 33 – Model 4 Integrated FSP results in 2045

Integrated Tab PP and FSP results; conditions for the year 2065, 20 years into the future.

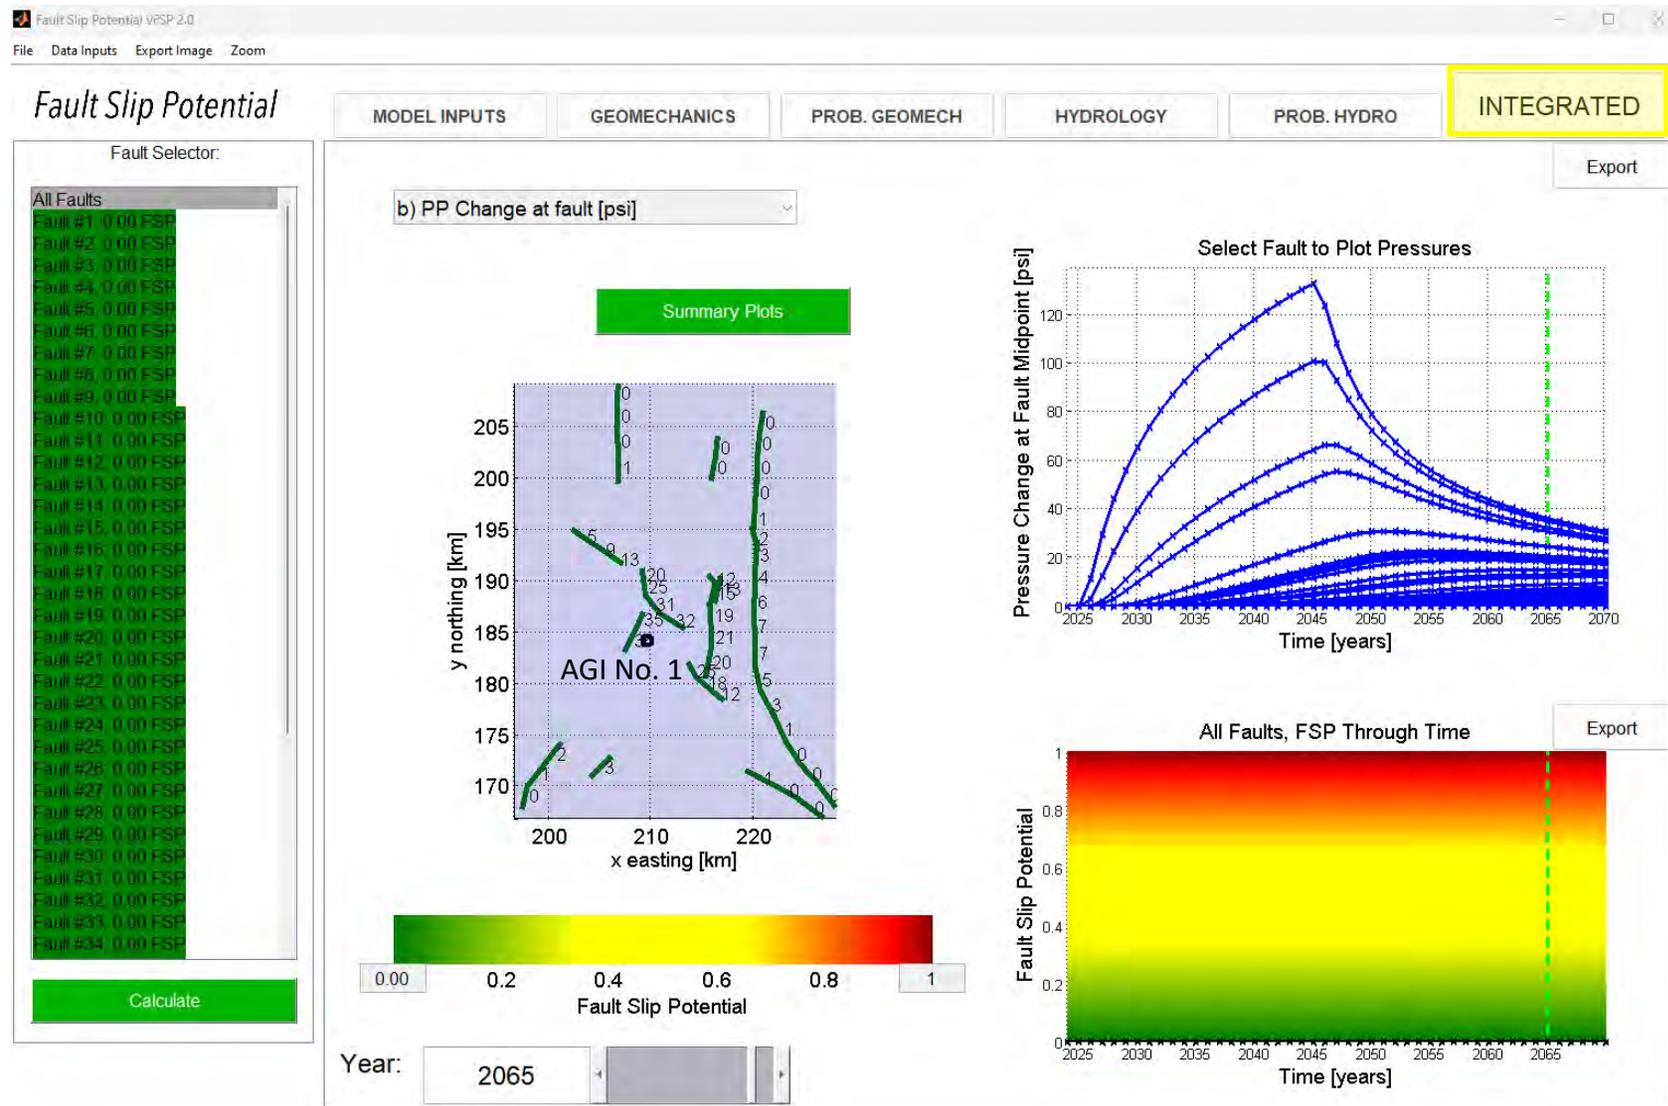


Figure 34 – Model 4 Integrated Tab PP and FSP results in 2065

Model 5 – Delaware Mountain Group faults above injection zone, AGI wells only

Model 5 consists solely of AGI wells operating at an injection rate of 270,000 bbl/month, starting in 2025, at the Delaware Mountain Group level (approximately 3,500 ft MD, which is over 10,100 ft above the injection interval). This model is primarily intended to evaluate the potential effects of the well at this fault level, which is associated with less than 1 psi pressure increase and zero fault slip potential. The parameters and uncertainties are consistent with those used in Model 1.

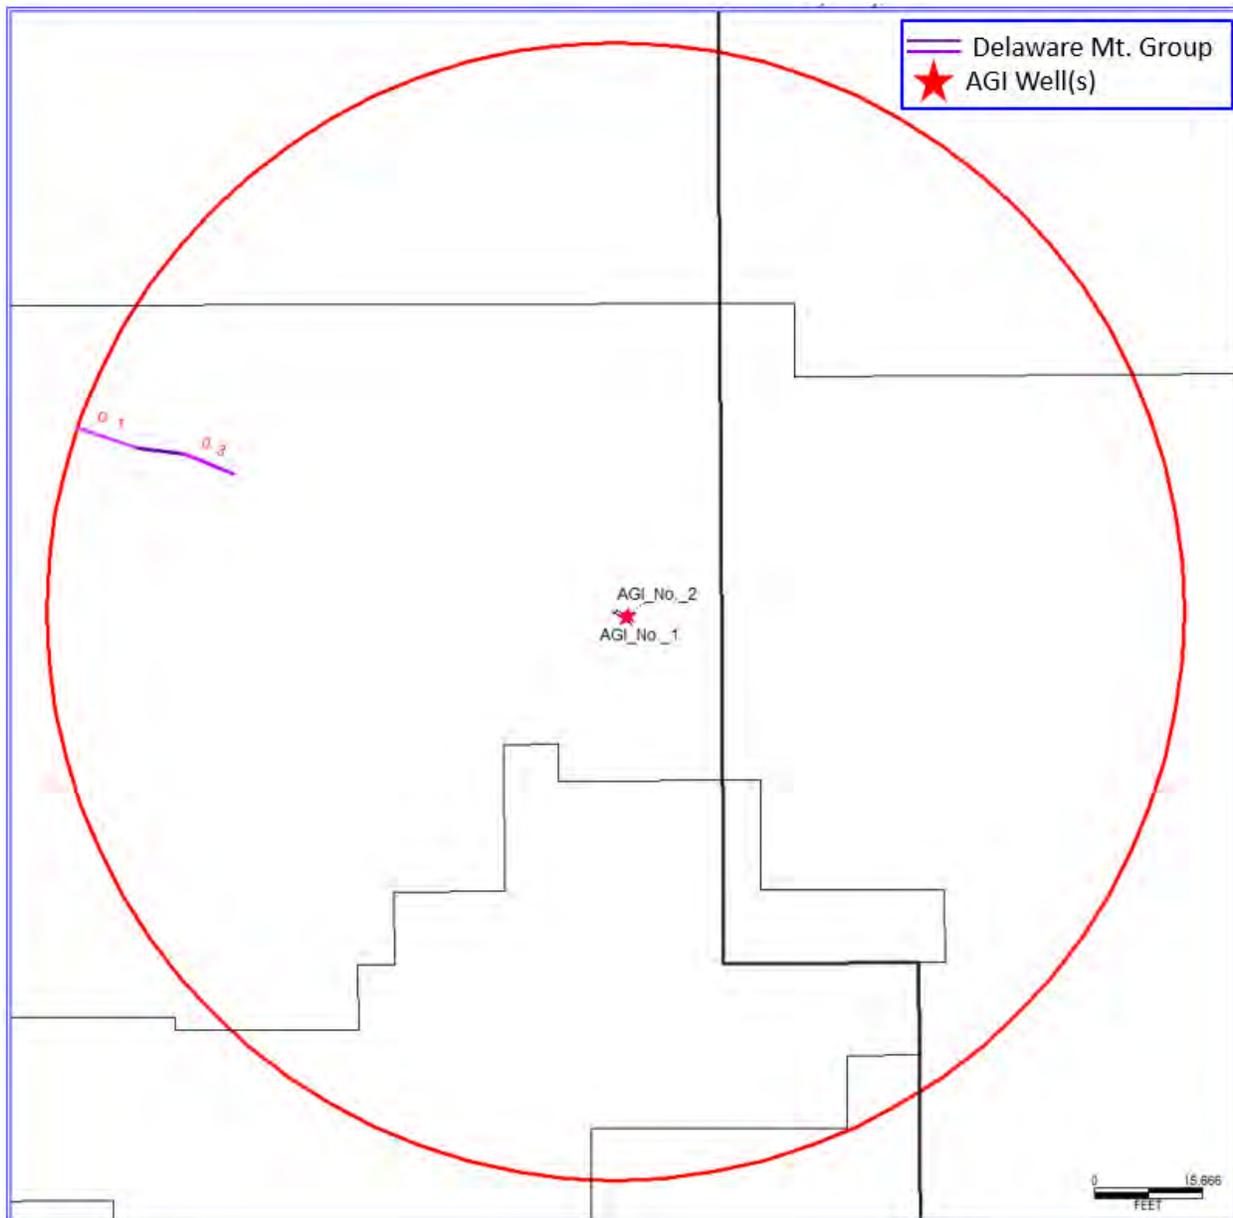


Figure 35 – Delaware Mt. group fault segments less than 3 km in length.

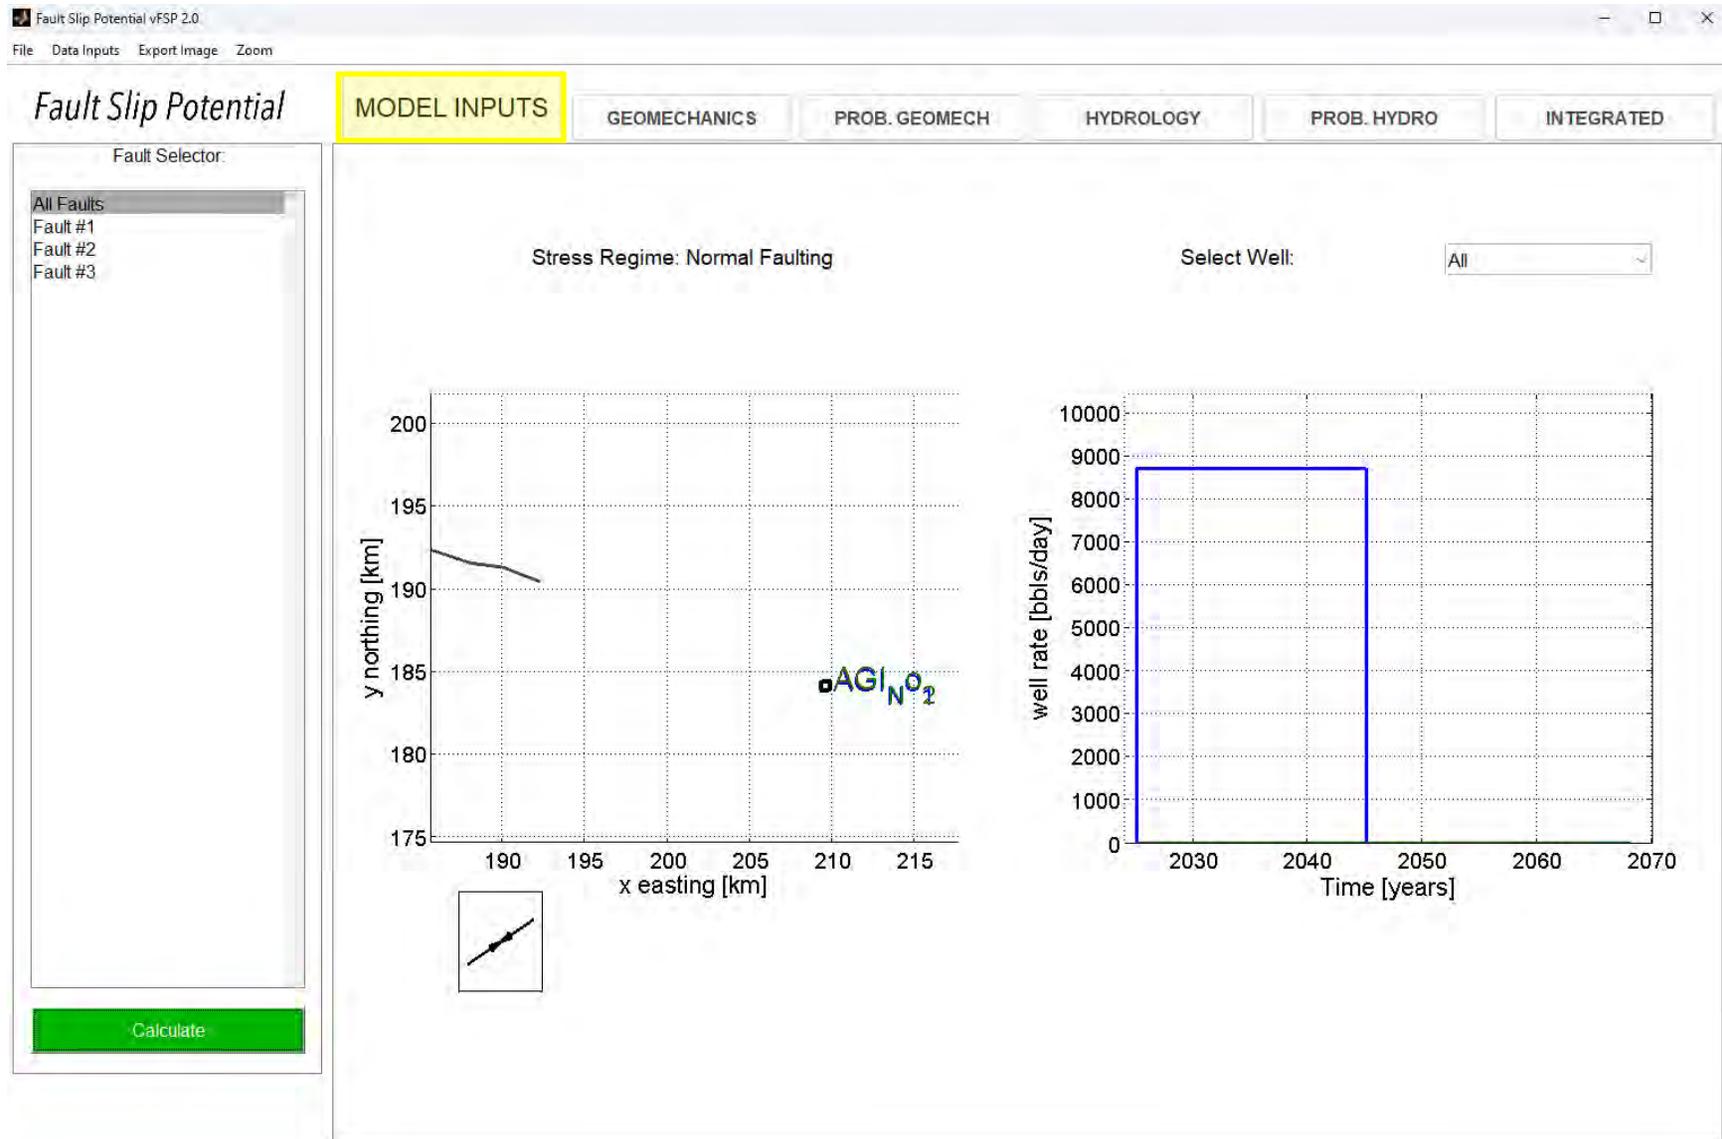


Figure 36 – Model 5


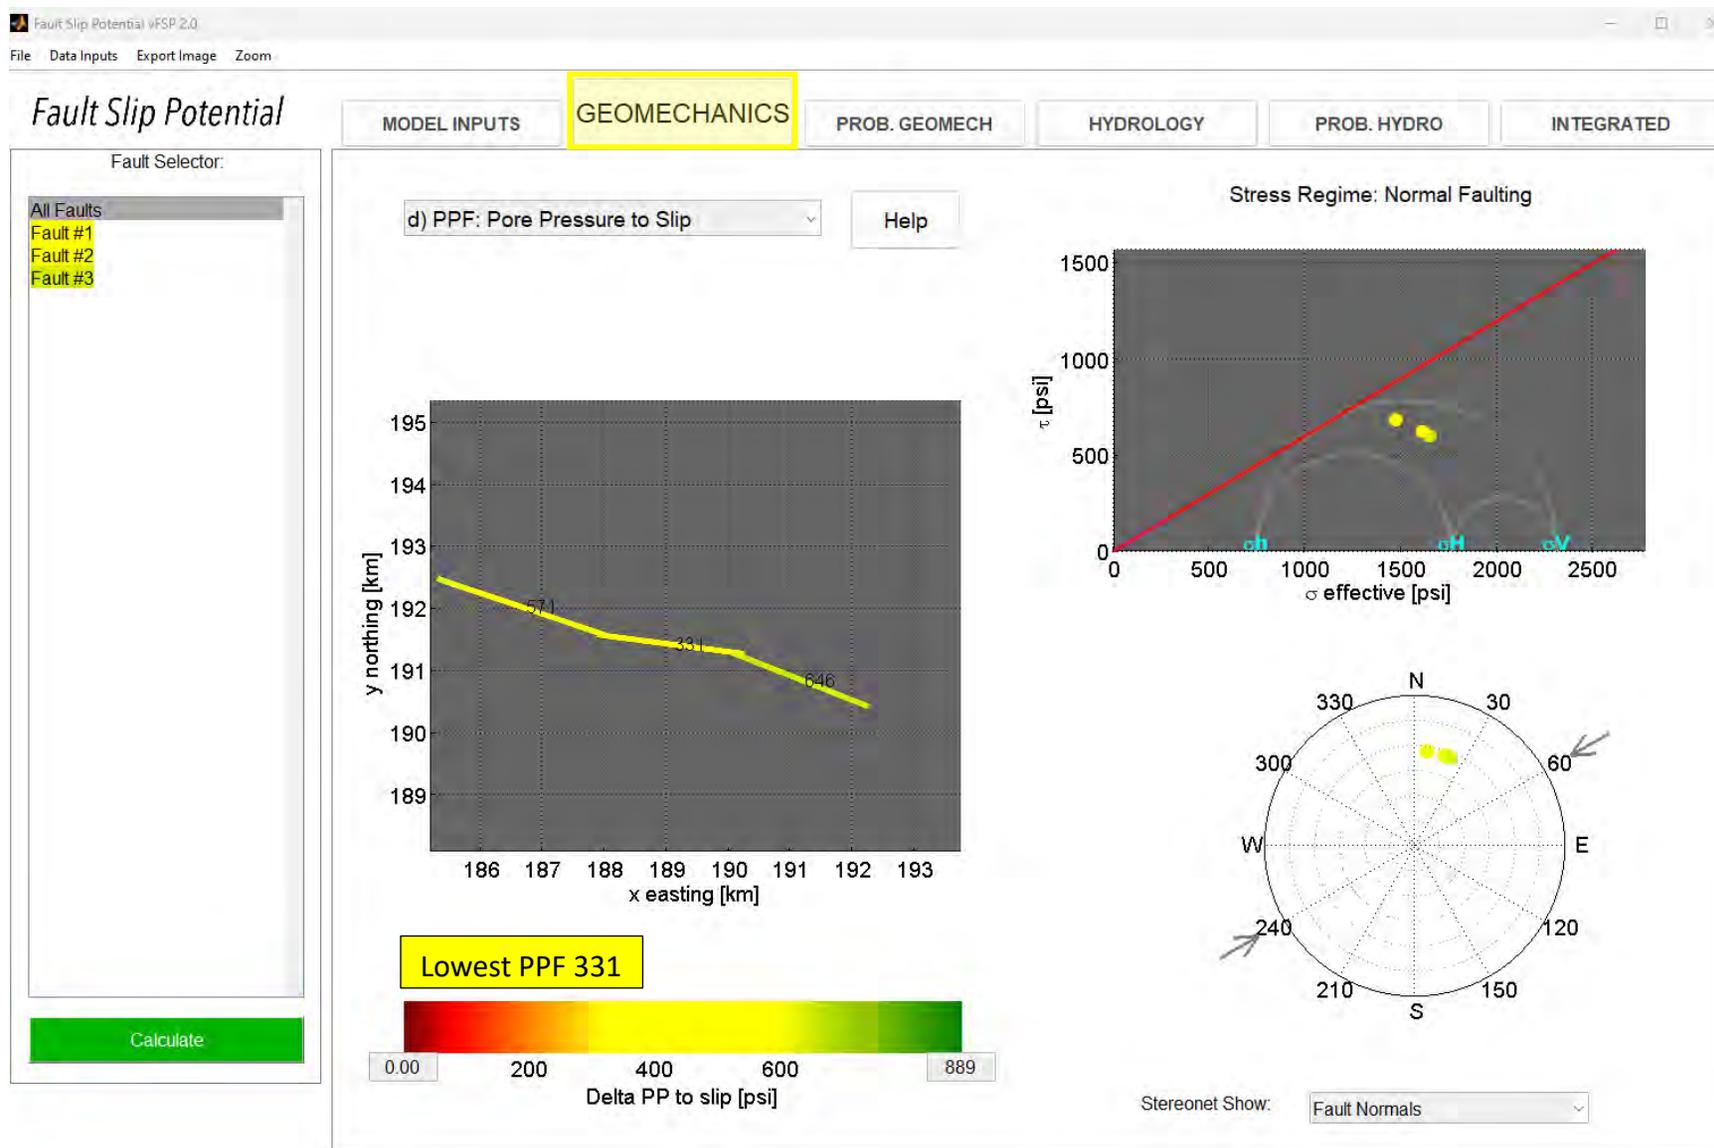


Figure 37 – Geomechanics for Model 5

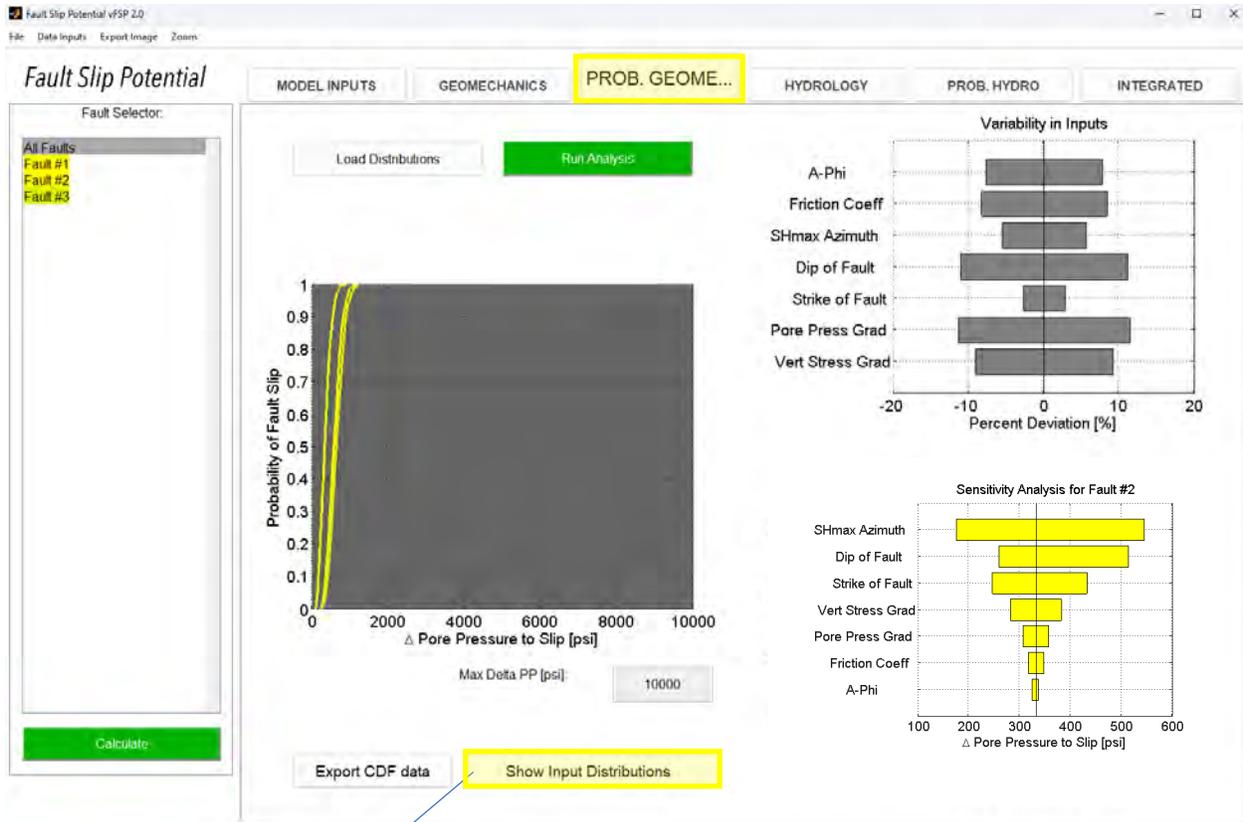

Fault #2 "Show Input Distribution"

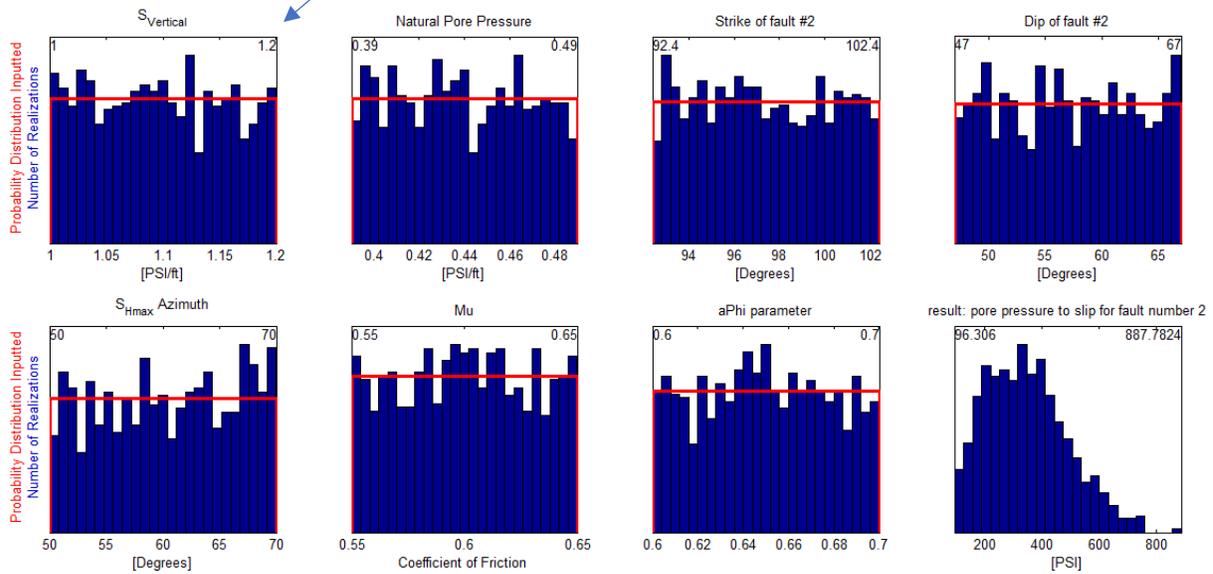


Figure 38 – Prob Geomechanics for Model 5

### Prob Hydrology in Jan 2025



Figure 39 – Prob Hydrology in Jan 2025

Integrated Tab showing Pore Pressure and Fault Slip Potential in January, 2025.

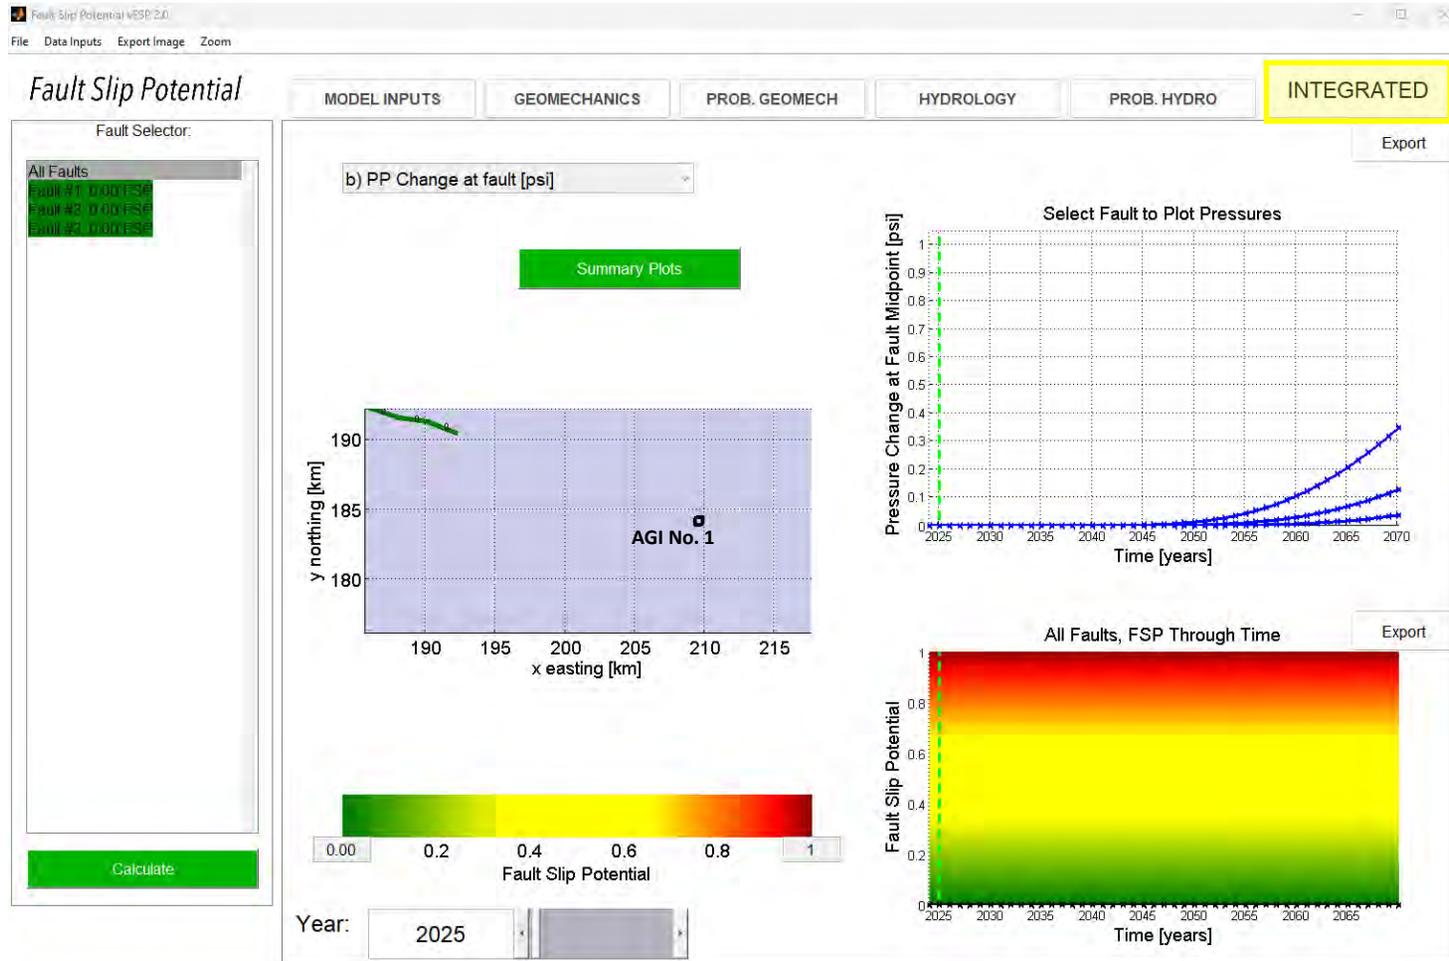


Figure 40 – Model 5 Integrated Tab PP and FSP results in Jan, 2025

Integrated Tab PP and FSP results; conditions for the year 2045, after the proposed 20 years injection.

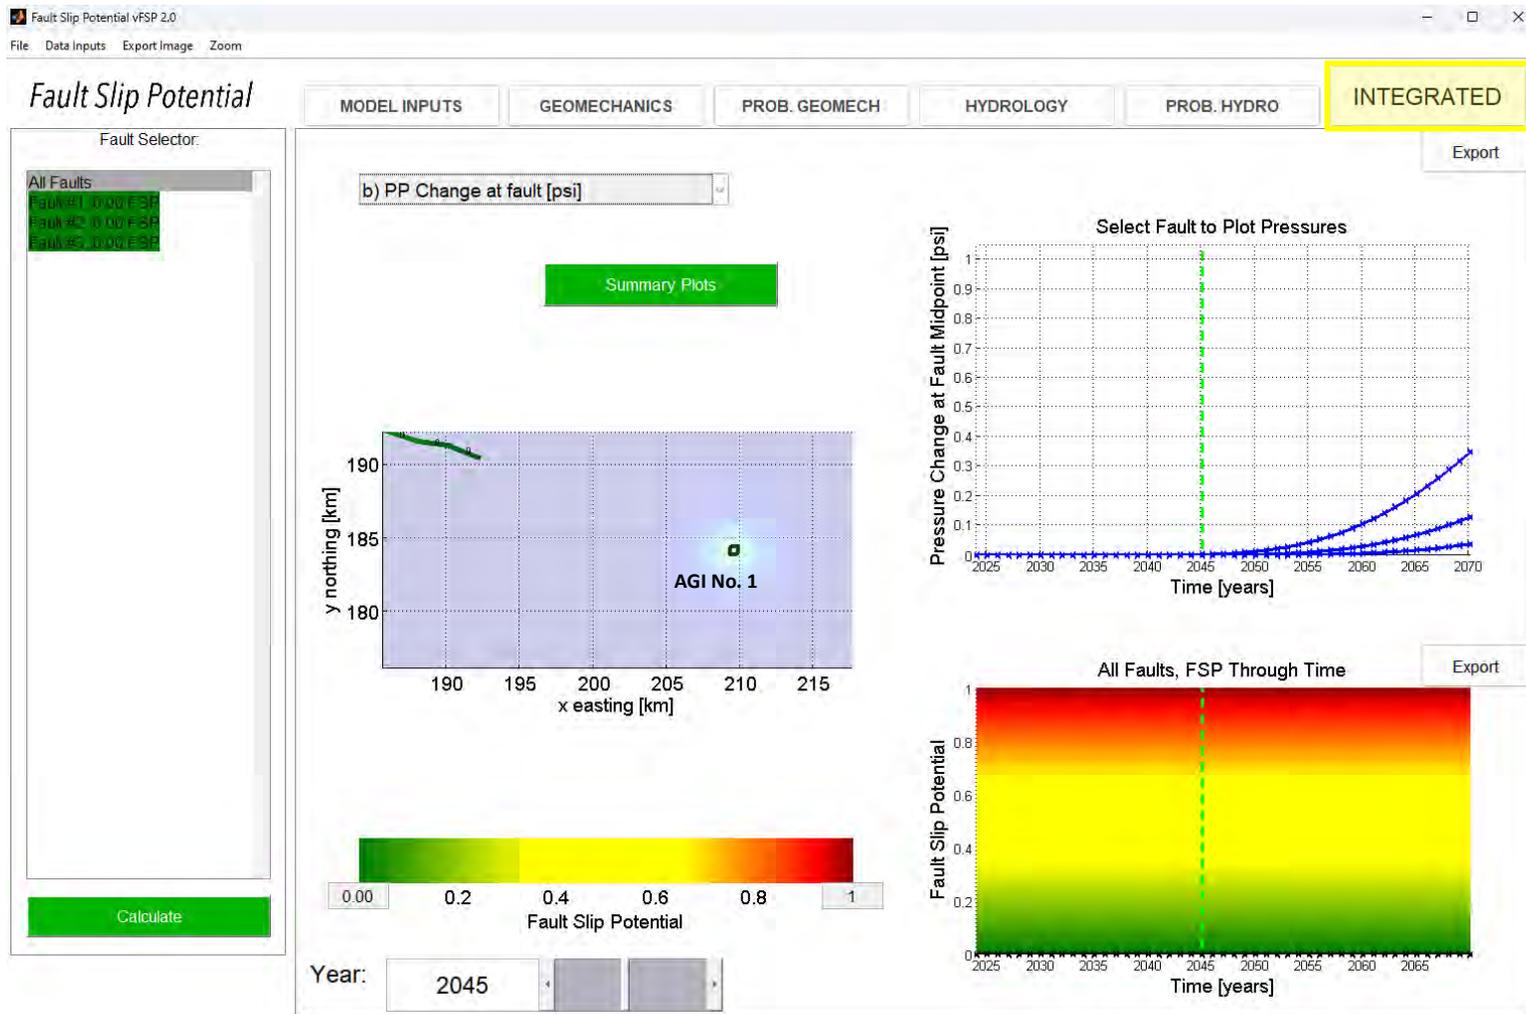


Figure 41 – Model 5 Integrated Tab PP and FSP results in 2045

Integrated Tab PP and FSP results; conditions for the year 2065, 20 years into the future.


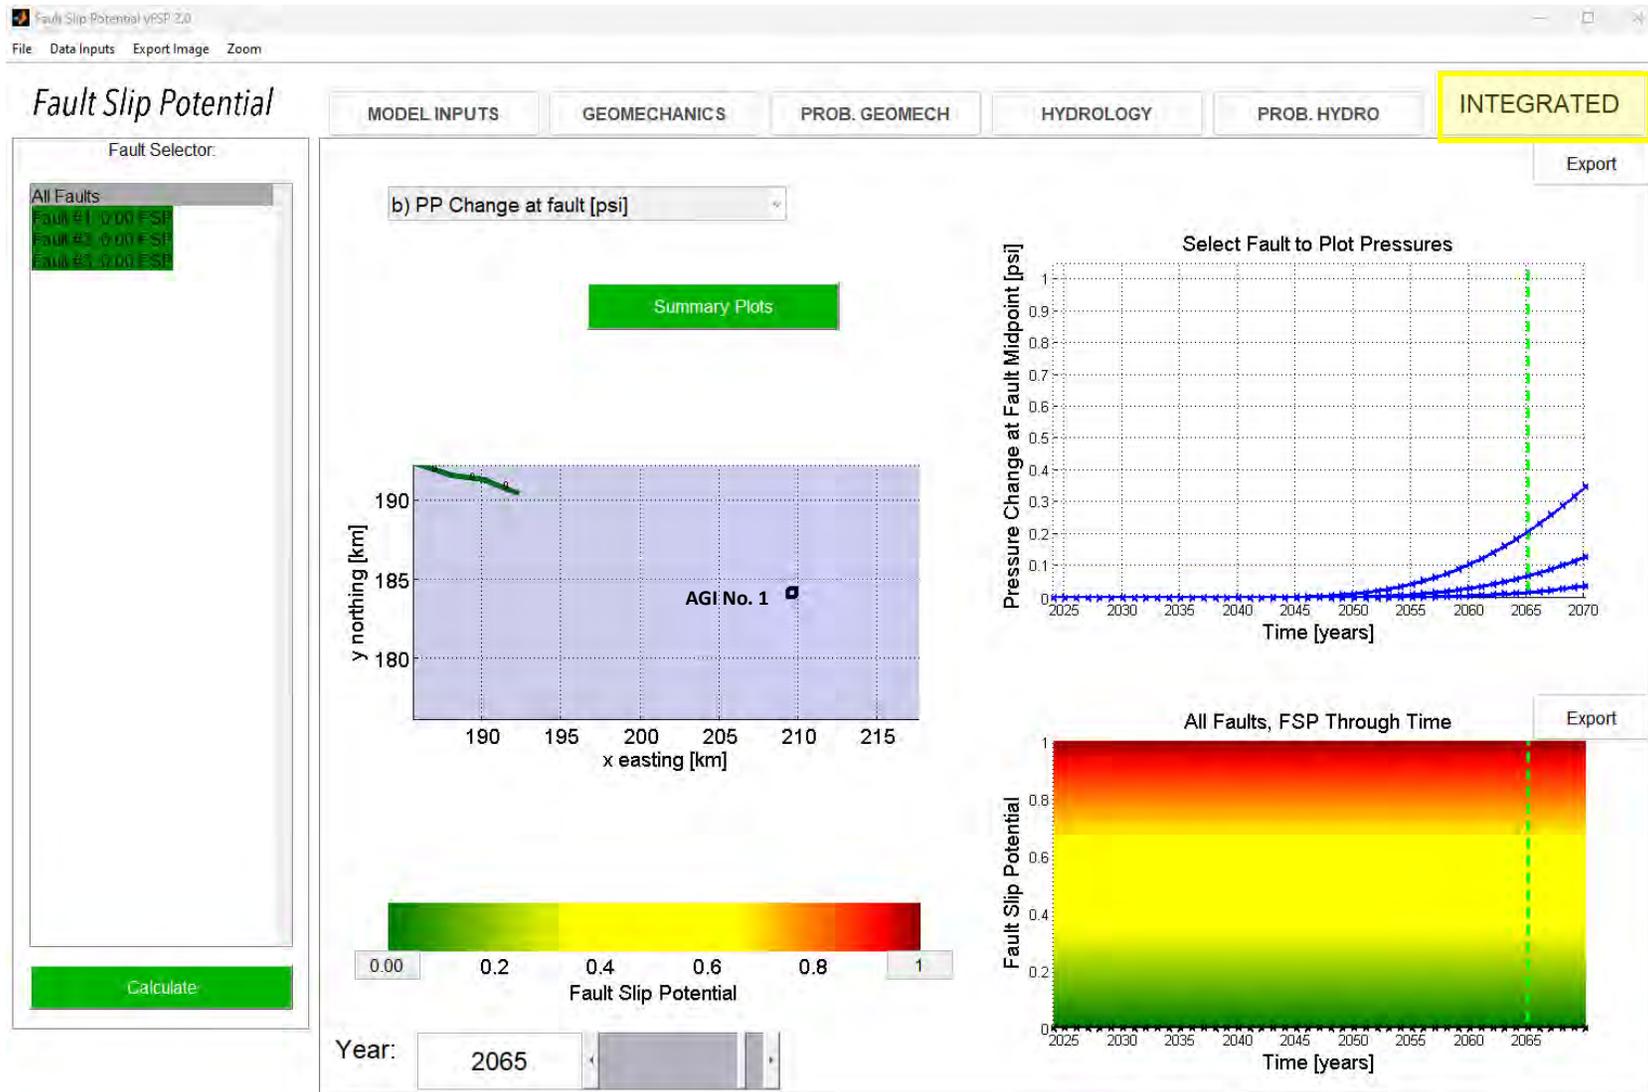


Figure 42 – Model 5 Integrated Tab PP and FSP results in 2065


## Appendix E – Affected Party Identification



**Kings Landing AGI No. 1 and No. 2**  
**Surface Ownership & Artificial Penetrations**  
 Frontier Field Services, LLC  
 Eddy County, NM  
 Drawn by: SJL | Date: 1/20/2026 | Approved by: SLP  
 PCS: NAD 1983 State Plane NM-E FIPS 3001 (US Ft.)

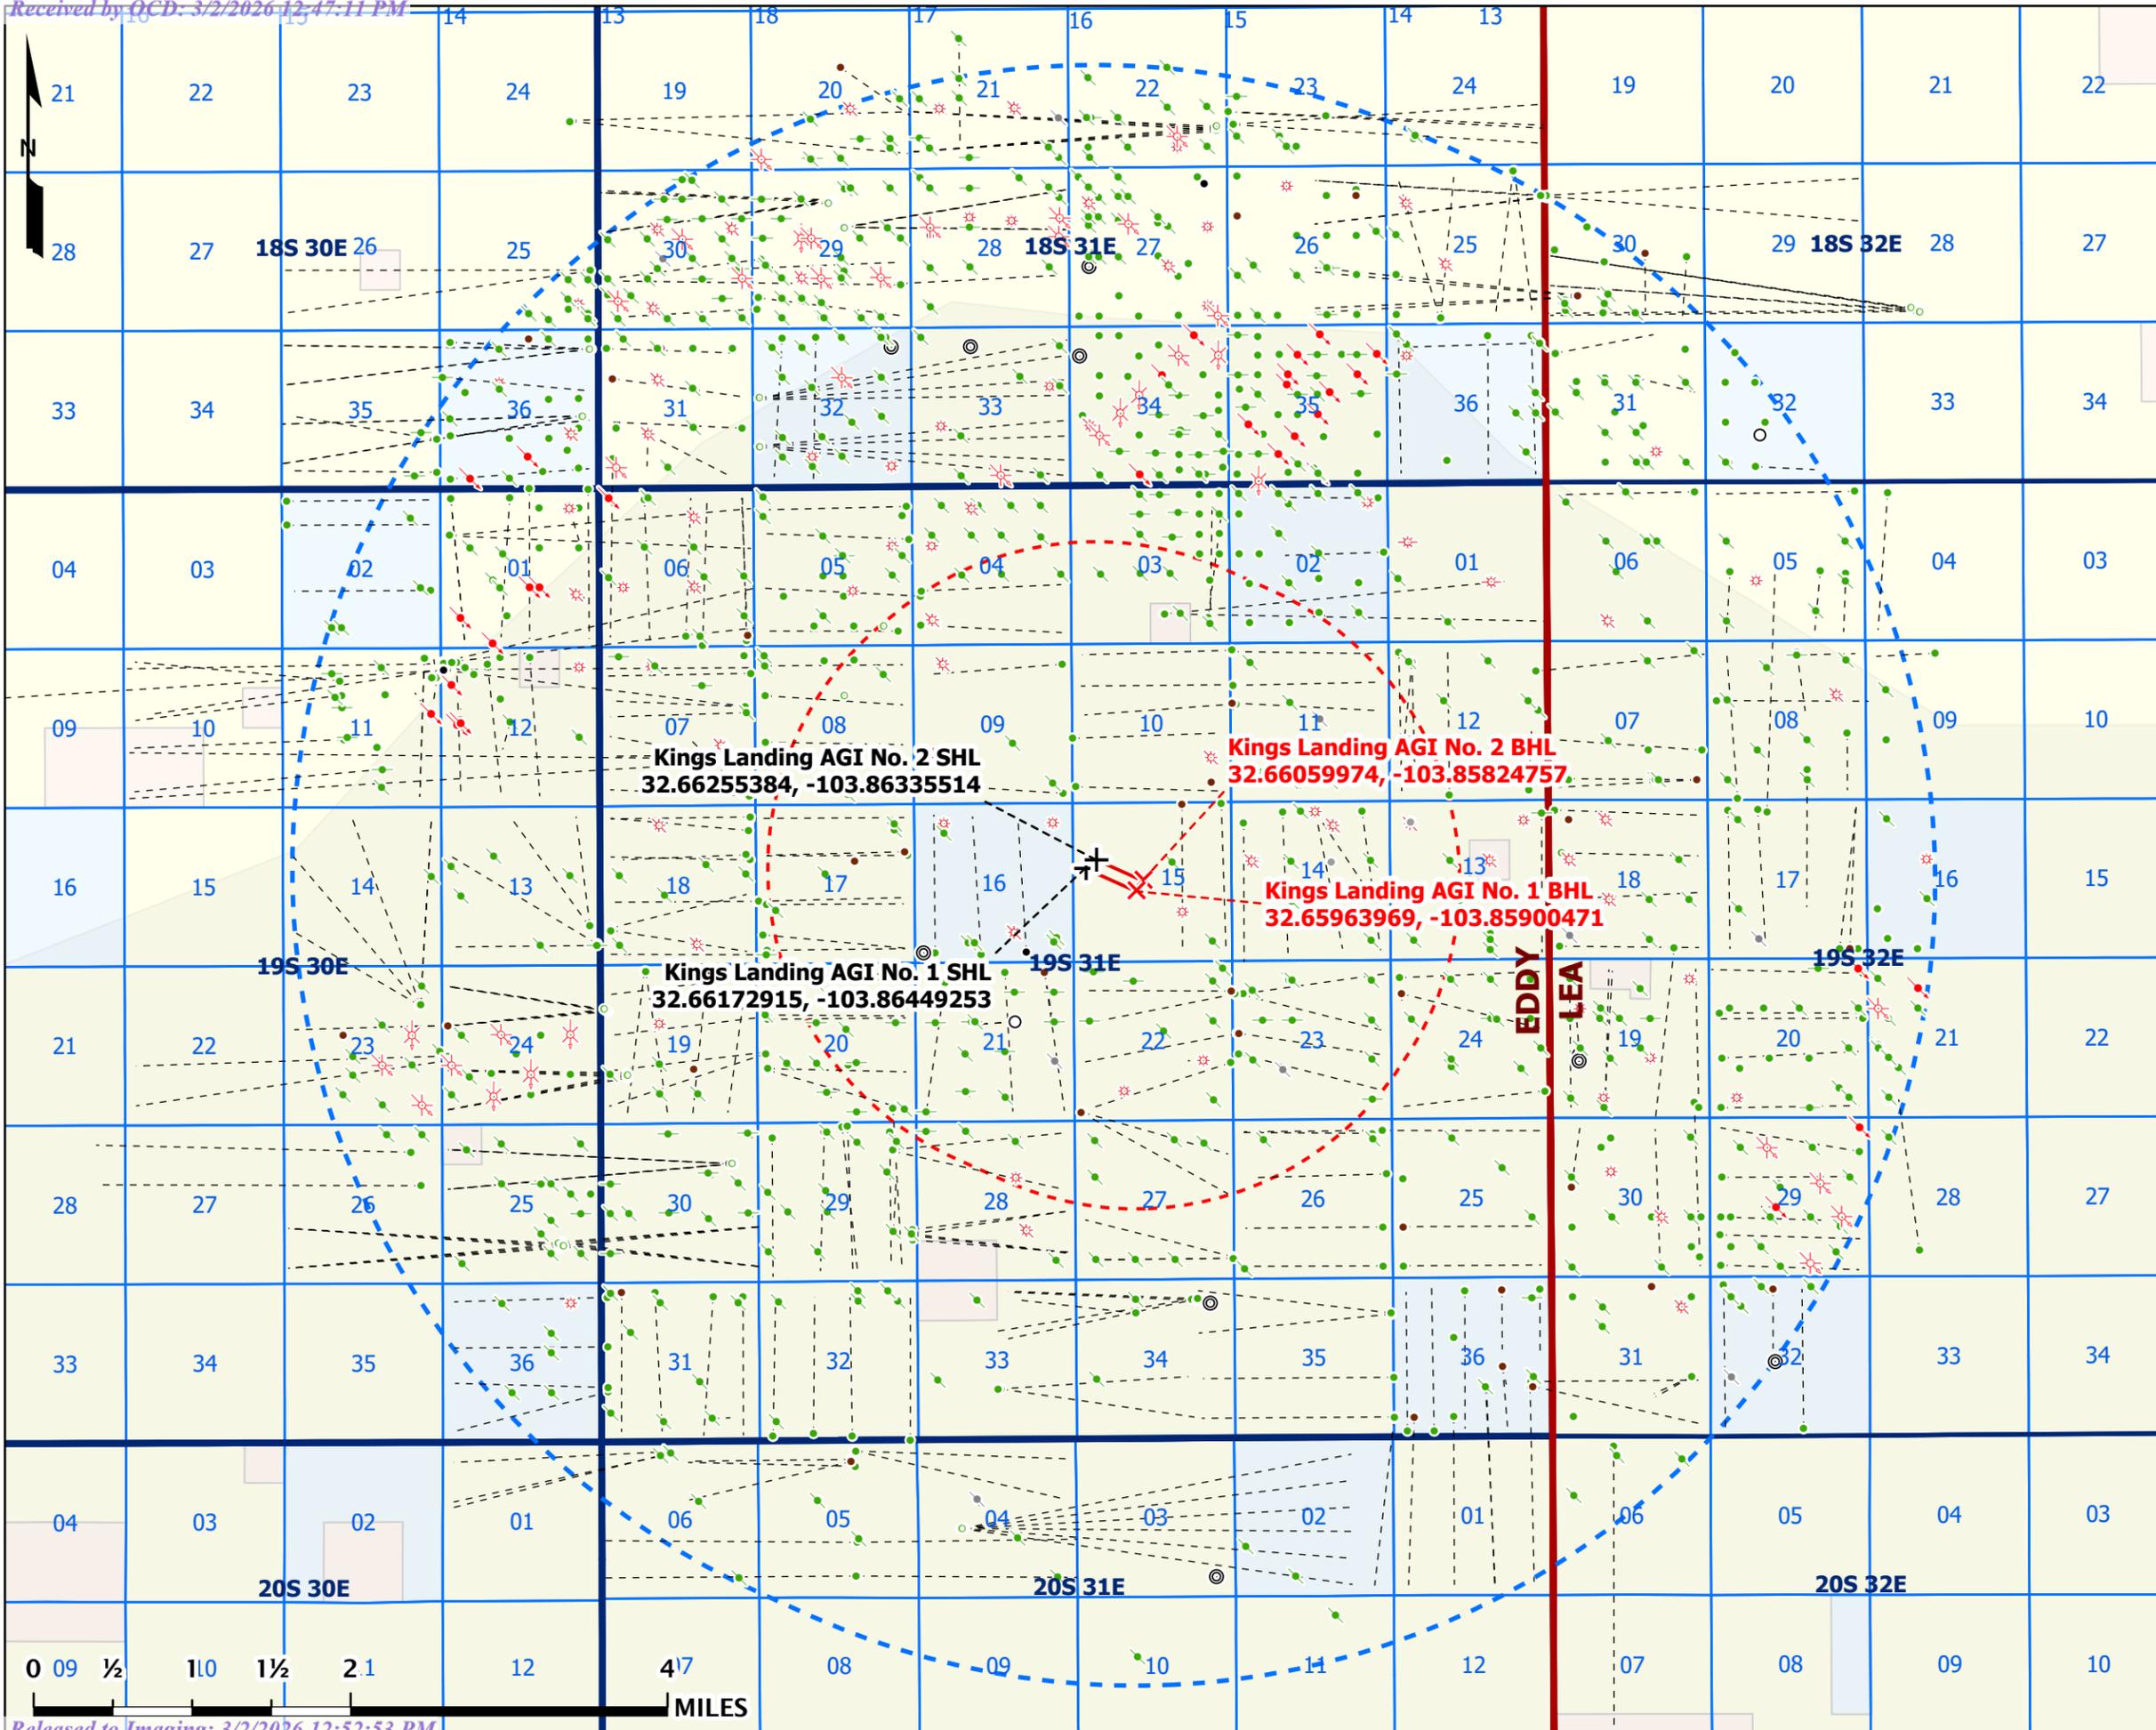

- +** Kings Landing AGIs Surface Hole Locations
- x** Kings Landing AGIs Bottom Hole Locations
- Kings Landing AGIs Directionals
- - -** 2-Mile Radius
- - -** 5-Mile Radius
- Sections
- ▭** Townships
- ▭** Counties
- ▭** Capitan Reef
- Surface Ownership**
- ▭** BLM
- ▭** Private
- ▭** SLO
- 5-Mile AOR Well SHLs**
- ACTIVE - OIL
- \*** ACTIVE - GAS
- ACTIVE - INJECTION
- ⊙** ACTIVE, STORAGE
- COMPLETED
- DRILLED
- INACTIVE - OIL
- \*** INACTIVE - GAS
- INACTIVE - INJECTION
- INACTIVE - STORAGE
- PERMITTED - OIL
- P & A - OIL
- \*** P & A - GAS
- P & A - INJECTION
- P & A, STORAGE
- UNKNOWN
- - -** 5-Mile AOR Wellbore Trajectories

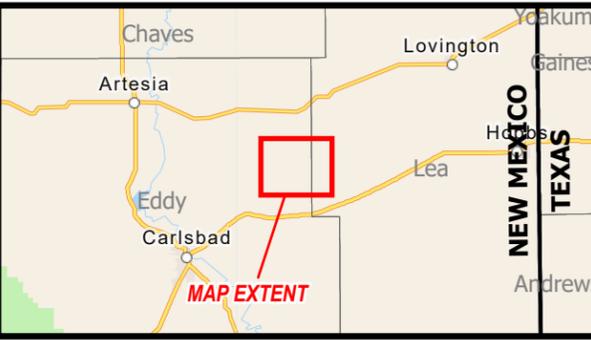

**Kings Landing AGI No. 1 and No. 2**

**1-Mile Offset Operators**

Frontier Field Services, LLC

Eddy County, NM



Drawn by: SJL | Date: 1/22/2026 | Approved by: SLP

PCS: NAD 1983 State Plane NM-E FIPS 3001 (US Ft.)



- +** Kings Landing AGIs Surface Hole Locations
- X** Kings Landing AGIs Bottom Hole Locations
- Kings Landing AGIs Directionals
- ⋯** 1-Mile Radius
- ▭** Surface Owner (BUREAU OF LAND MANAGEMENT)
- Quarter-Quarters
- ▭** Sections
- ▭** Townships
- Offset Oil & Gas Well SHLs (API 30-015-...)**
- Active - Oil
- \*** Active - Gas
- ⊖** Active - Salt Water Disposal
- ⊖** Canceled Location
- New - Oil
- New - Gas
- ⊖** Plugged (site released) - Oil
- \*** Plugged (site released) - Gas
- ⊖** Plugged (site released) - Salt Water Disposal
- ⋯** Offset Oil & Gas Well Laterals (API 30-015-...)

- Operators**
- ▭** ACACIA OPERATING COMPANY, LLC
  - ▭** ACACIA OPERATING COMPANY, LLC; COTERRA ENERGY OPERATING CO.
  - ▭** APACHE CORPORATION; DEVON ENERGY PRODUCTION COMPANY, LP
  - ▭** APACHE CORPORATION; DEVON ENERGY PRODUCTION COMPANY, LP; RAYBAW OPERATING, LLC
  - ▭** DEVON ENERGY PRODUCTION COMPANY, LP
  - ▭** DEVON ENERGY PRODUCTION COMPANY, LP; ACACIA OPERATING COMPANY, LLC
  - ▭** DEVON ENERGY PRODUCTION COMPANY, LP; ARMSTRONG ENERGY CORP
  - ▭** EOG RESOURCES INC
  - ▭** EOG RESOURCES INC; DEVON ENERGY PRODUCTION COMPANY, LP
  - ▭** NO ACTIVE OPERATORS

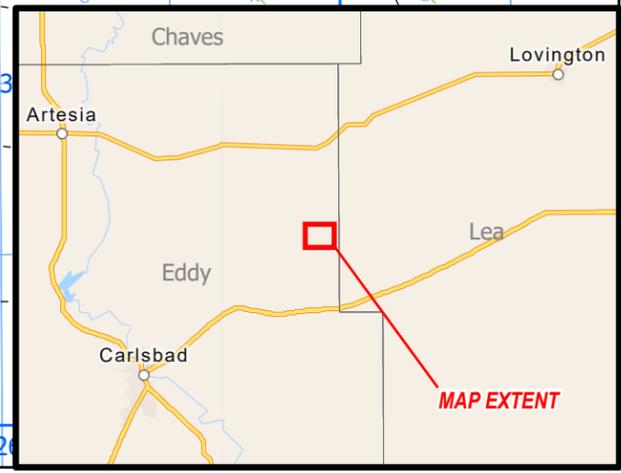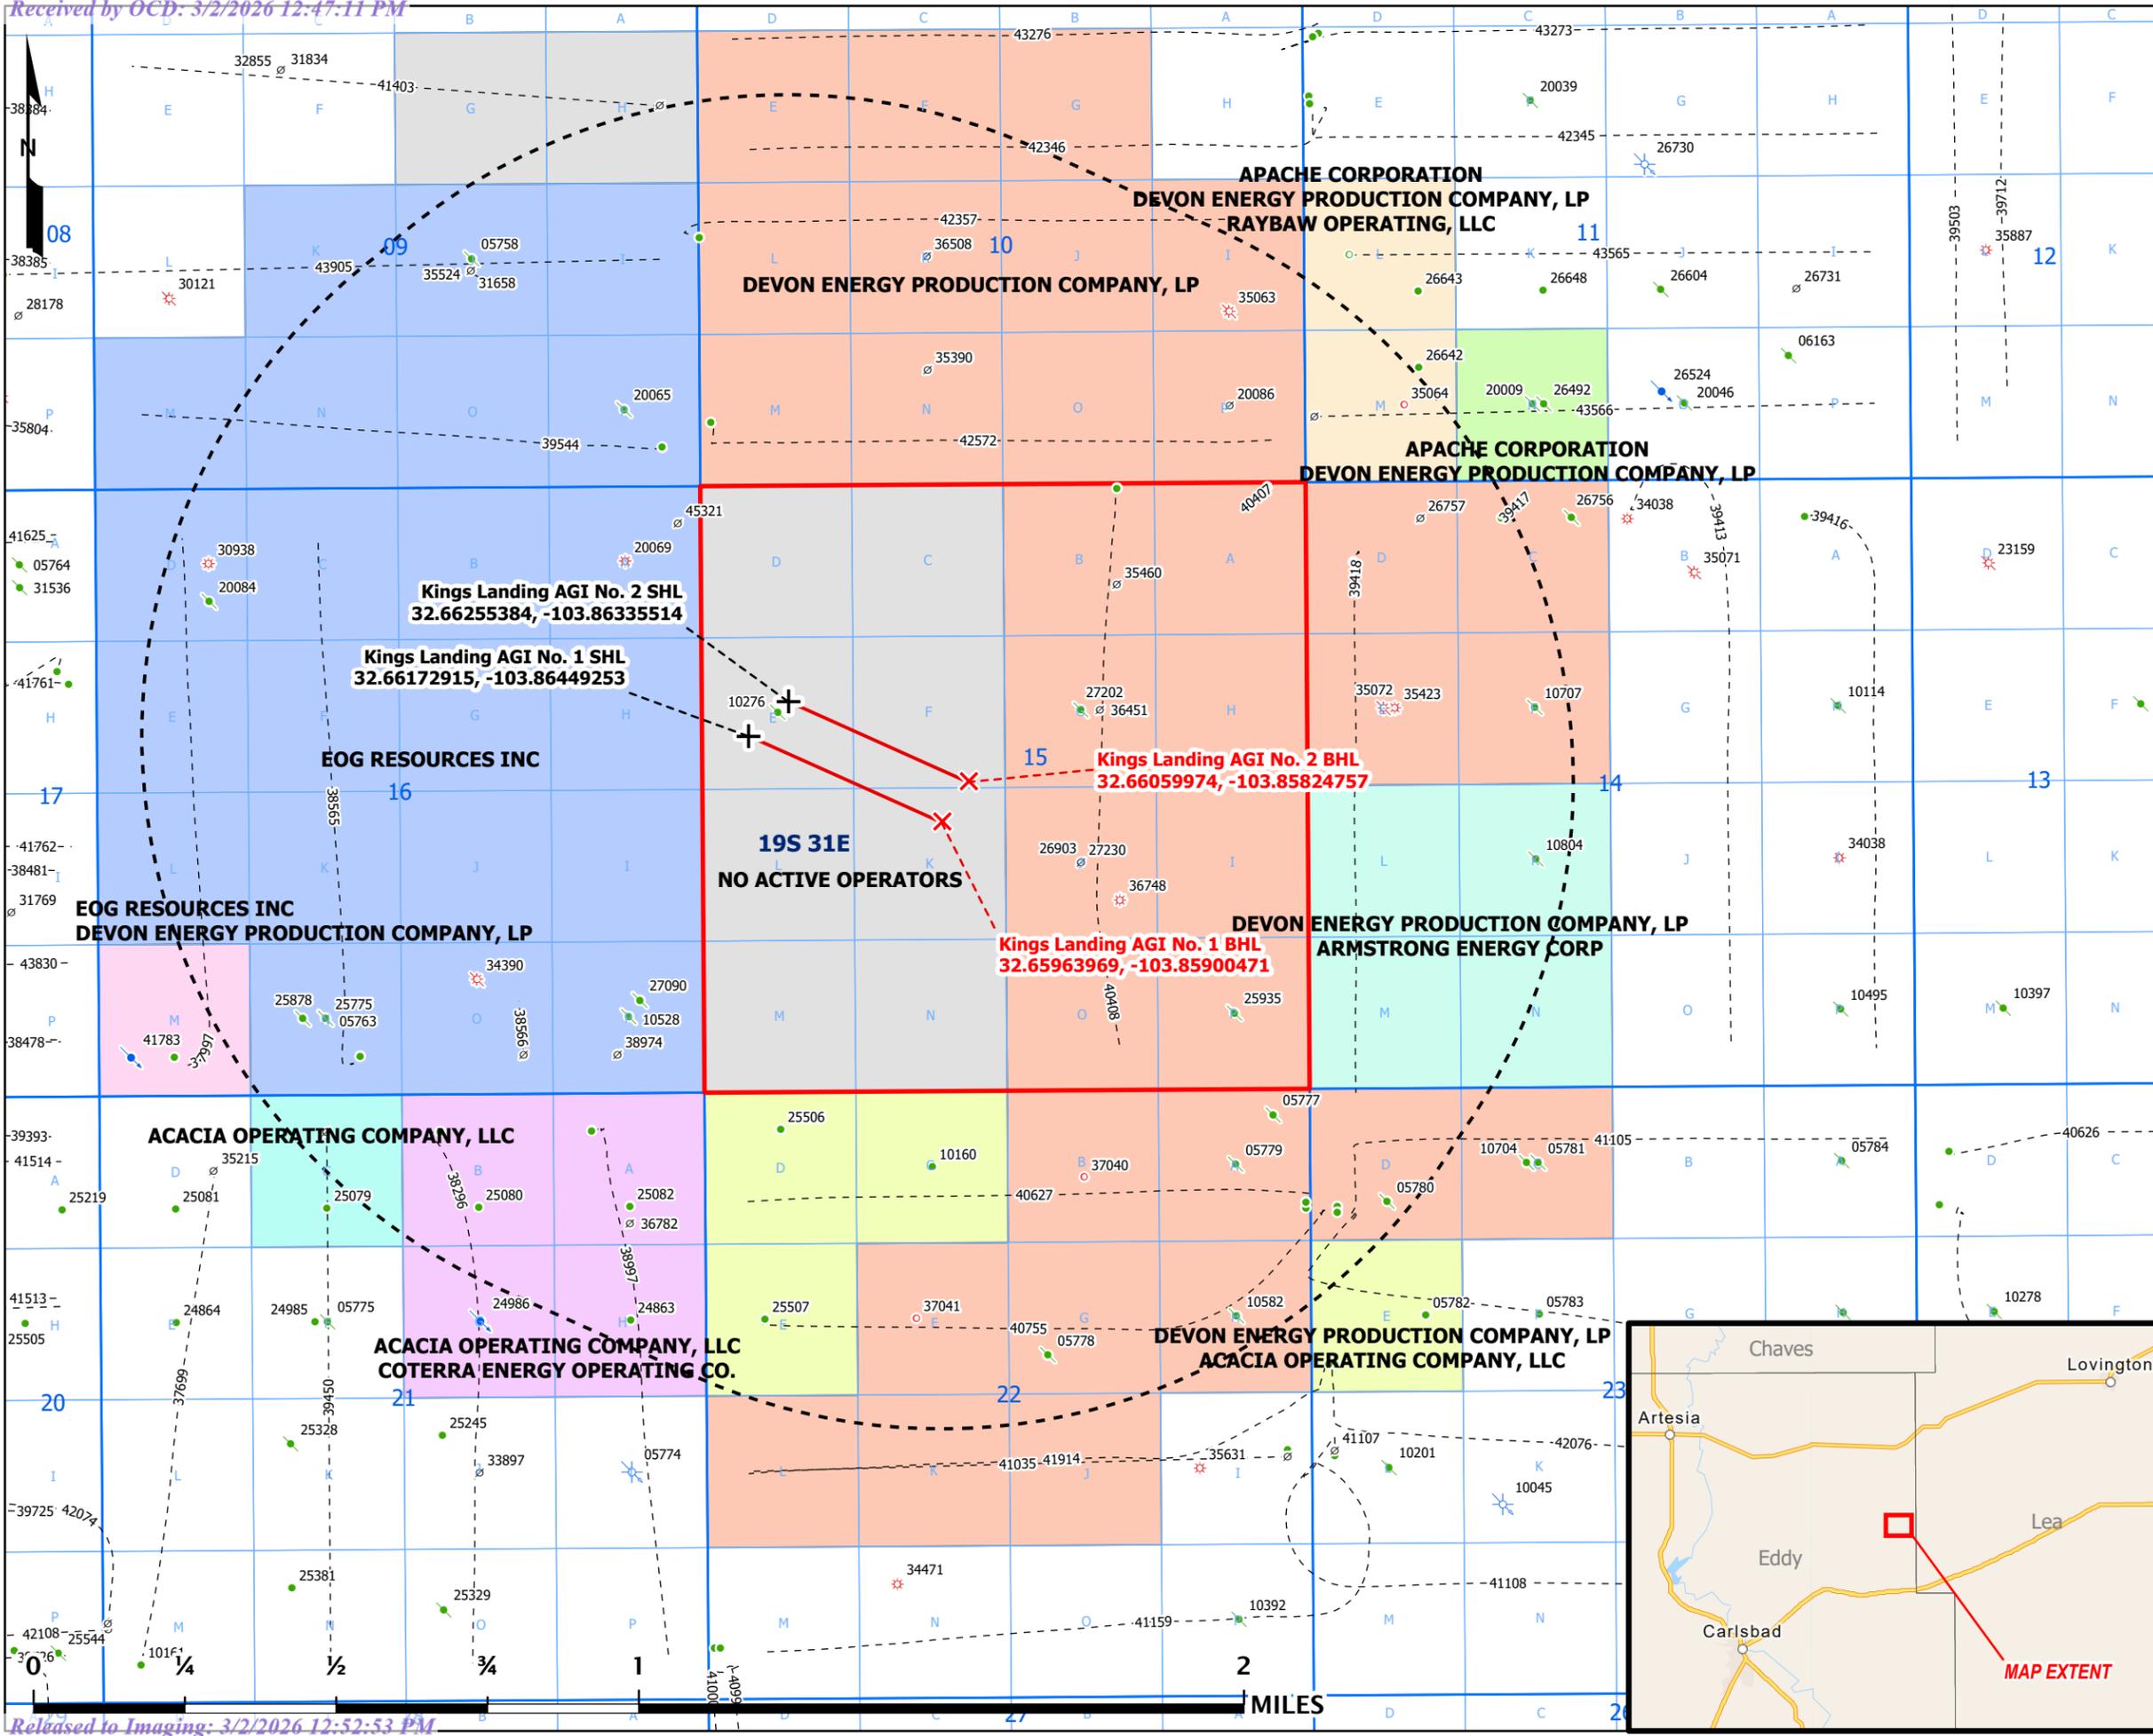

MILES

Kings Landing AGI No. 1 and No. 2

1-Mile Offset Lessees

Frontier Field Services, LLC

Eddy County, NM


Drawn by: SJL Date: 1/22/2026 Approved by: SLP

PCS: NAD 1983 State Plane NM-E FIPS 3001 (US Ft.)



- Kings Landing AGIs Surface Hole Locations
- Kings Landing AGIs Bottom Hole Locations
- Kings Landing AGIs Directionals
- 1-Mile Radius
- Surface Owner (BUREAU OF LAND MANAGEMENT)
- NM-BLM O&G Leases (MLRS Case Number)
- NM-SLO O&G Leases (Lease Key-Number)
- Offset Oil & Gas Well SHLs (API 30-015-...)**
- Active - Oil
- Active - Gas
- Active - Salt Water Disposal
- Canceled Location
- New - Oil
- New - Gas
- Plugged (site released) - Oil
- Plugged (site released) - Gas
- Plugged (site released) - Salt Water Disposal
- Offset Oil & Gas Well Laterals (API 30-015-...)


- Lessees**
- APACHE CORPORATION; CHISOS LTD; CONOCOPHILLIPS COMPANY; CROSS BORDER RESOURCES INC; DEVON ENERGY PRODUCTION COMPANY LP
  - COERT AGENT I CO INC; OCCIDENTAL PERMIAN LP
  - COG OPERATING LLC; CONCHO OIL & GAS LLC
  - COG OPERATING LLC; DEVON ENERGY CO LP; MCCOMBS ENERGY LTD
  - CONOCOPHILLIPS COMPANY; LYNX PETRO CONSULTANTS INC
  - DEVON ENERGY CO LP
  - DEVON ENERGY CO LP; EARTHSTONE PERMIAN LLC
  - DEVON ENERGY OPERATING CO LP
  - DEVON ENERGY PRODUCTION CO LP
  - EARTHSTONE PERMIAN LLC; CONOCOPHILLIPS COMPANY; KERR-MCGEE CORP
  - EARTHSTONE PERMIAN LLC; DEVON ENERGY CO LP; MCCOMBS ENERGY LTD; COG OPERATING LLC
  - EOG RESOURCES INC
  - EOG RESOURCES INC; OXY Y-1 CO
  - LYNX PETROLEUM CONSULTANTS INC
  - OCCIDENTAL PERMIAN LP
  - NO RECORD

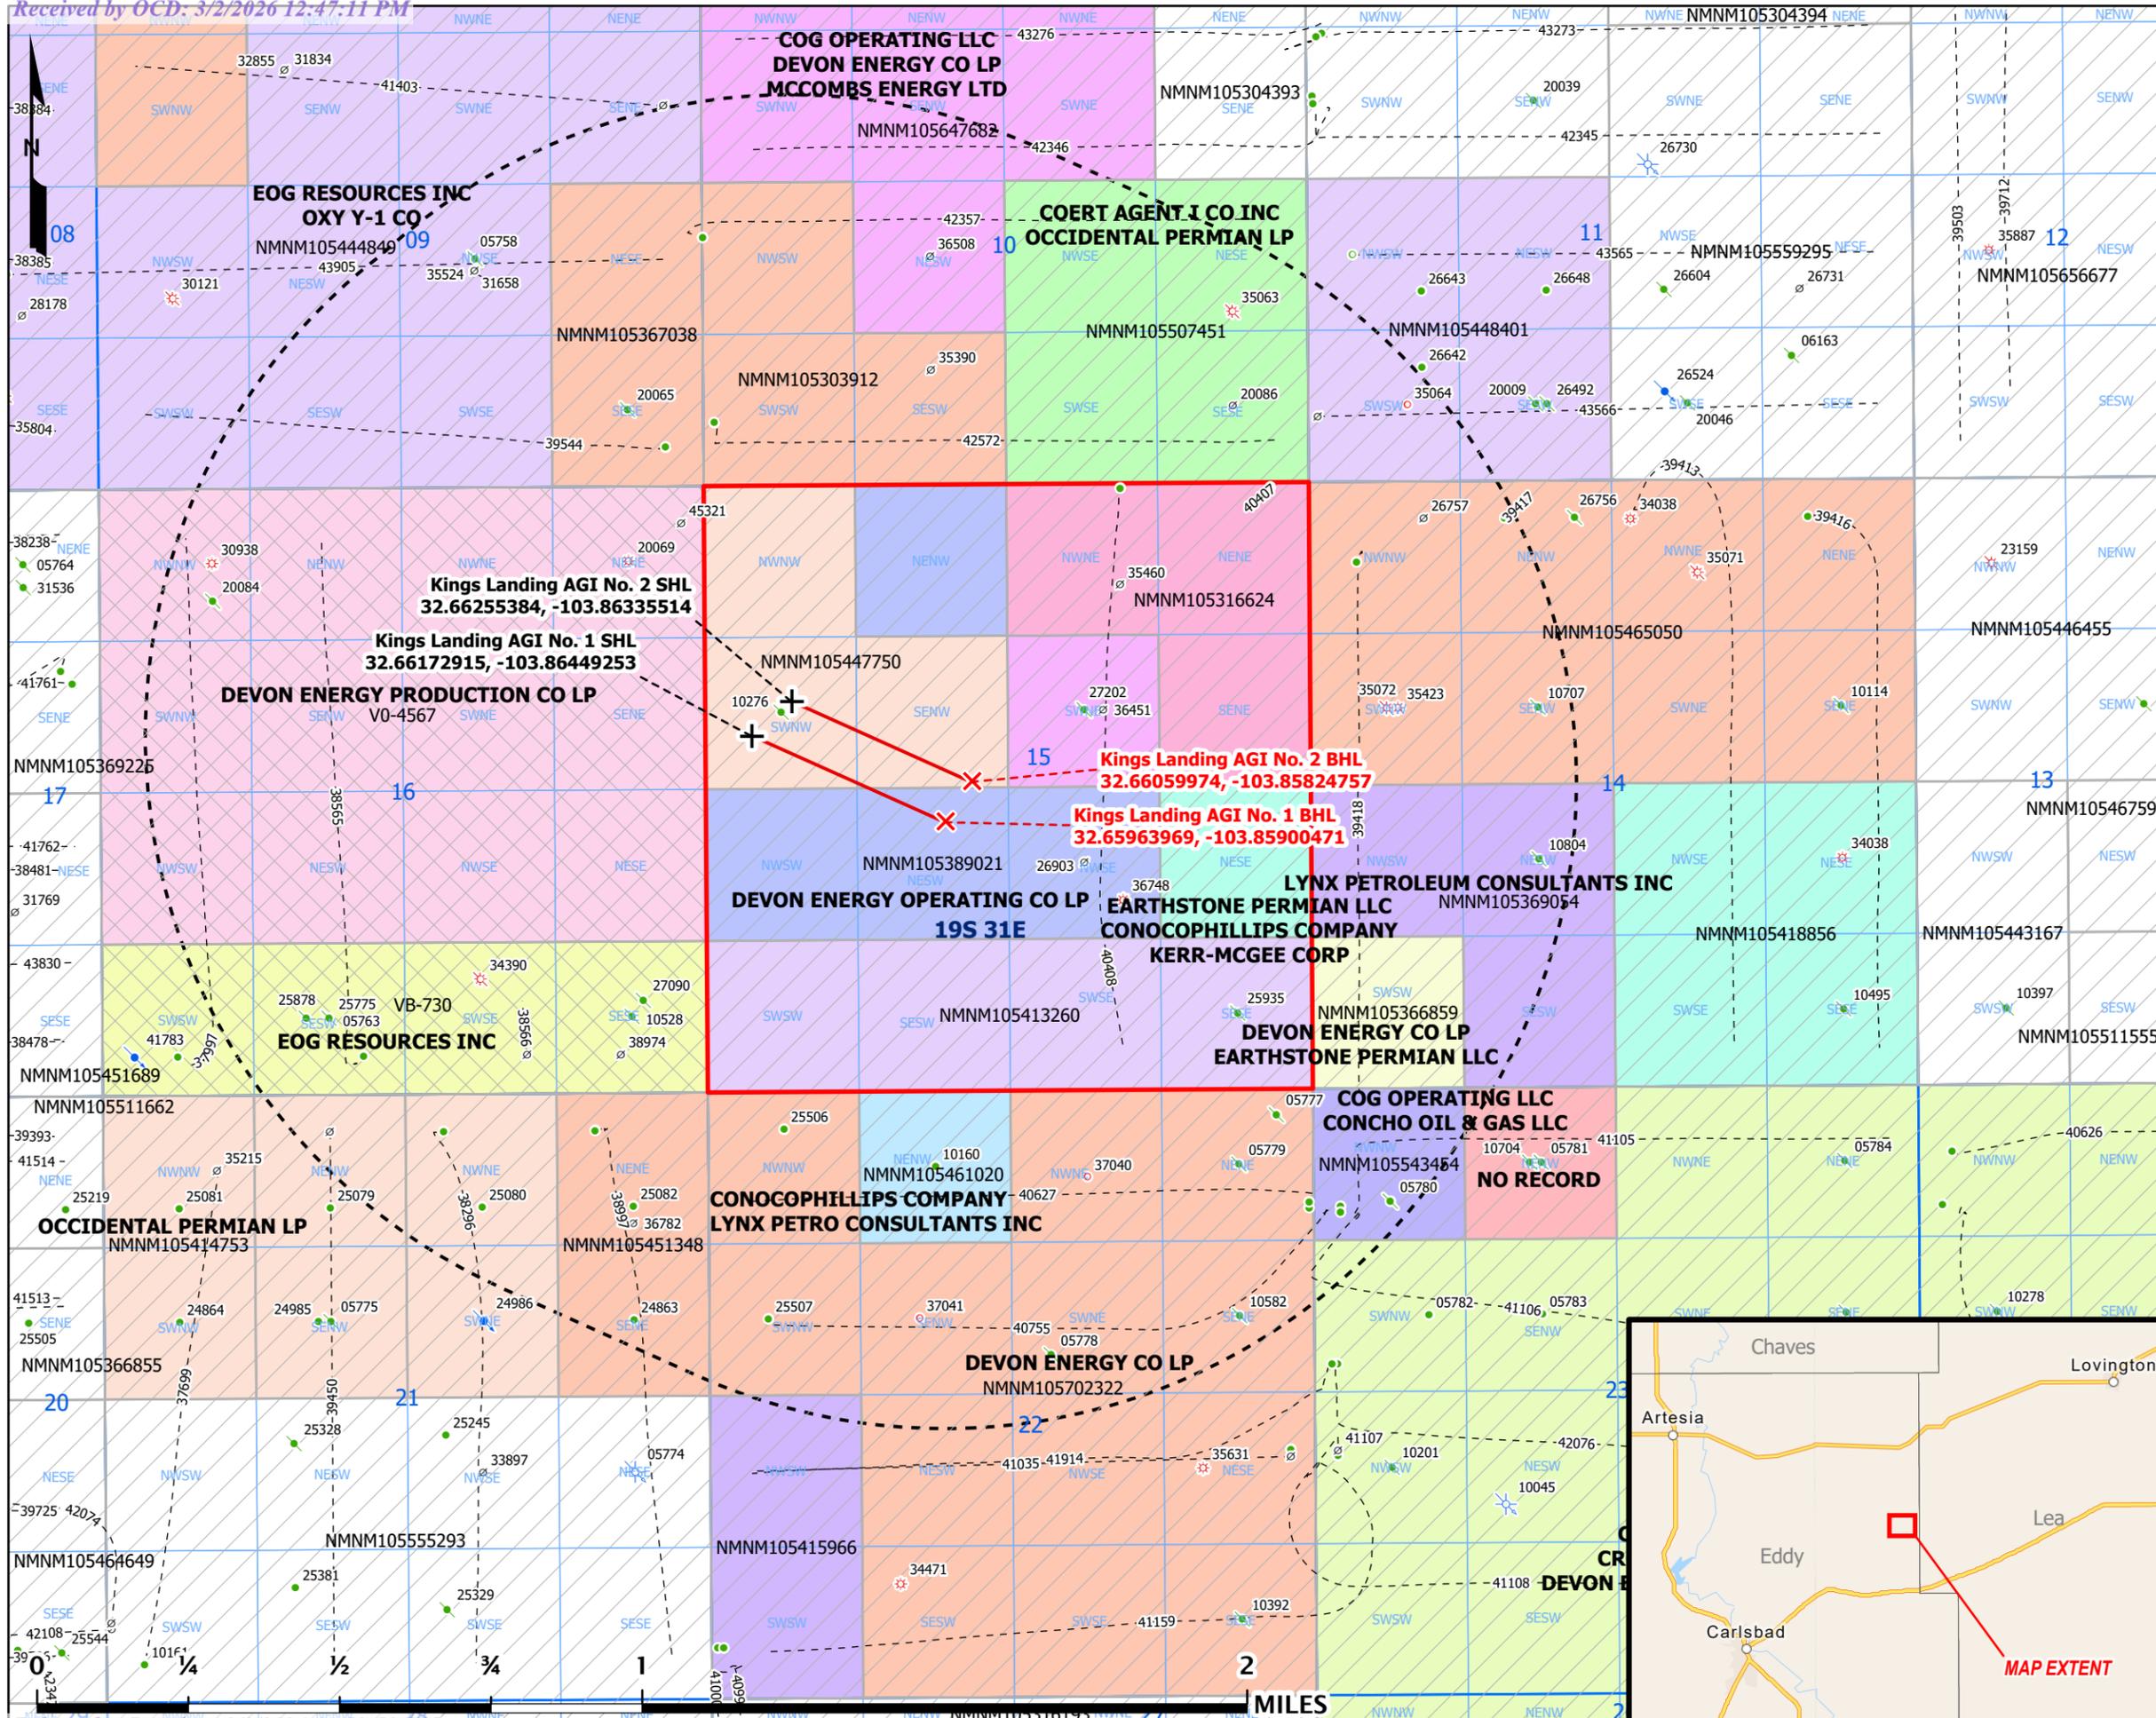


Kings Landing AGI No. 1 and No. 2  
1-Mile Offset Operators and Lessees List

S/T/R	QQ UNIT LETTER(S)	OPERATOR	MINERAL LESSEE	MINERAL OWNER	SURFACE OWNER	ADDRESS 1	ADDRESS 2
9/19S/31E	K,M,N,O,P	EOG RESOURCES INC	-	-	-	5509 CHAMPIONS DR	MIDLAND, TX 79706
	G,H	-	EOG RESOURCES INC	-	-	1111 BAGBY ST SKY LOBBY 2	HOUSTON, TX 77002
	-	-	OXY Y-1 CO	-	-	5 GREENWAY PLZ STE 110	HOUSTON, TX 77046
10/19S/31E	E,F,G,I,J,K,L,M,N,O,P	DEVON ENERGY PRODUCTION COMPANY, LP	-	-	-	333 WEST SHERIDAN AVE	OKLAHOMA CITY, OK 73102
11/19S/31E	L,M	APACHE CORPORATION	-	-	-	303 VETERANS AIRPARK LN	MIDLAND, TX 79705
		DEVON ENERGY PRODUCTION COMPANY, LP	-	-	-	333 WEST SHERIDAN AVE	OKLAHOMA CITY, OK 73102
		RAYBAW OPERATING, LLC	-	-	-	2626 COLE AVE	DALLAS, TX 75204
	N	APACHE CORPORATION	-	-	-	303 VETERANS AIRPARK LN	MIDLAND, TX 79705
		DEVON ENERGY PRODUCTION COMPANY, LP	-	-	-	333 WEST SHERIDAN AVE	OKLAHOMA CITY, OK 73102
14/19S/31E	C,D,E,F	DEVON ENERGY PRODUCTION COMPANY, LP	-	-	-	333 WEST SHERIDAN AVE	OKLAHOMA CITY, OK 73102
	K,L,M,N	DEVON ENERGY PRODUCTION COMPANY, LP	-	-	-	333 WEST SHERIDAN AVE	OKLAHOMA CITY, OK 73102
		ARMSTRONG ENERGY CORP	-	-	-	PO BOX 1973	ROSWELL, NM 88202
15/19S/31E	A,B,G,H,I,J,O,P	DEVON ENERGY PRODUCTION COMPANY, LP	-	-	-	333 WEST SHERIDAN AVE	OKLAHOMA CITY, OK 73102
	C,K,L	-	DEVON ENERGY OPERATING CO LP	-	-	333 WEST SHERIDAN AVE	OKLAHOMA CITY, OK 73102
	D,E,F	-	OCCIDENTAL PERMIAN LP	-	-	5 GREENWAY PLZ STE 110	HOUSTON, TX 77046
	M,N	-	EOG RESOURCES INC	-	-	1111 BAGBY ST SKY LOBBY 2	HOUSTON, TX 77002
	-	-	OXY Y-1 CO	-	-	5 GREENWAY PLZ STE 110	HOUSTON, TX 77046
16/19S/31E	A,B,C,D,E,F,G,H,I,J,K,L,N,O,P	EOG RESOURCES INC	-	-	-	5509 CHAMPIONS DR	MIDLAND, TX 79706
	M	EOG RESOURCES INC	-	-	-	5509 CHAMPIONS DR	MIDLAND, TX 79706
	-	DEVON ENERGY PRODUCTION COMPANY, LP	-	-	-	333 WEST SHERIDAN AVE	OKLAHOMA CITY, OK 73102
21/19S/31E	A,B,G,H	ACACIA OPERATING COMPANY, LLC	-	-	-	505 N BIG SPRING ST SUITE 303	MIDLAND, TX 79701
	-	COTERRA ENERGY OPERATING CO.	-	-	-	6001 DEAUVILLE BLVD SUITE 300 N	MIDLAND, TX 79706
	C	ACACIA OPERATING COMPANY, LLC	-	-	-	505 N BIG SPRING ST SUITE 303	MIDLAND, TX 79701
22/19S/31E	A,B,F,G,H,J,K,L	DEVON ENERGY PRODUCTION COMPANY, LP	-	-	-	333 WEST SHERIDAN AVE	OKLAHOMA CITY, OK 73102
	C,D,E	DEVON ENERGY PRODUCTION COMPANY, LP	-	-	-	333 WEST SHERIDAN AVE	OKLAHOMA CITY, OK 73102
	-	ACACIA OPERATING COMPANY, LLC	-	-	-	505 N BIG SPRING ST SUITE 303	MIDLAND, TX 79701
23/19S/31E	C,D	DEVON ENERGY PRODUCTION COMPANY, LP	-	-	-	333 WEST SHERIDAN AVE	OKLAHOMA CITY, OK 73102
	E	DEVON ENERGY PRODUCTION COMPANY, LP	-	-	-	333 WEST SHERIDAN AVE	OKLAHOMA CITY, OK 73102
		ACACIA OPERATING COMPANY, LLC	-	-	-	505 N BIG SPRING ST SUITE 303	MIDLAND, TX 79701
Surface Location	-	-	-	-	BUREAU OF LAND MANAGEMENT	620 E GREENE ST	CARLSBAD, NM 88220

## Appendix F – Well Construction Details

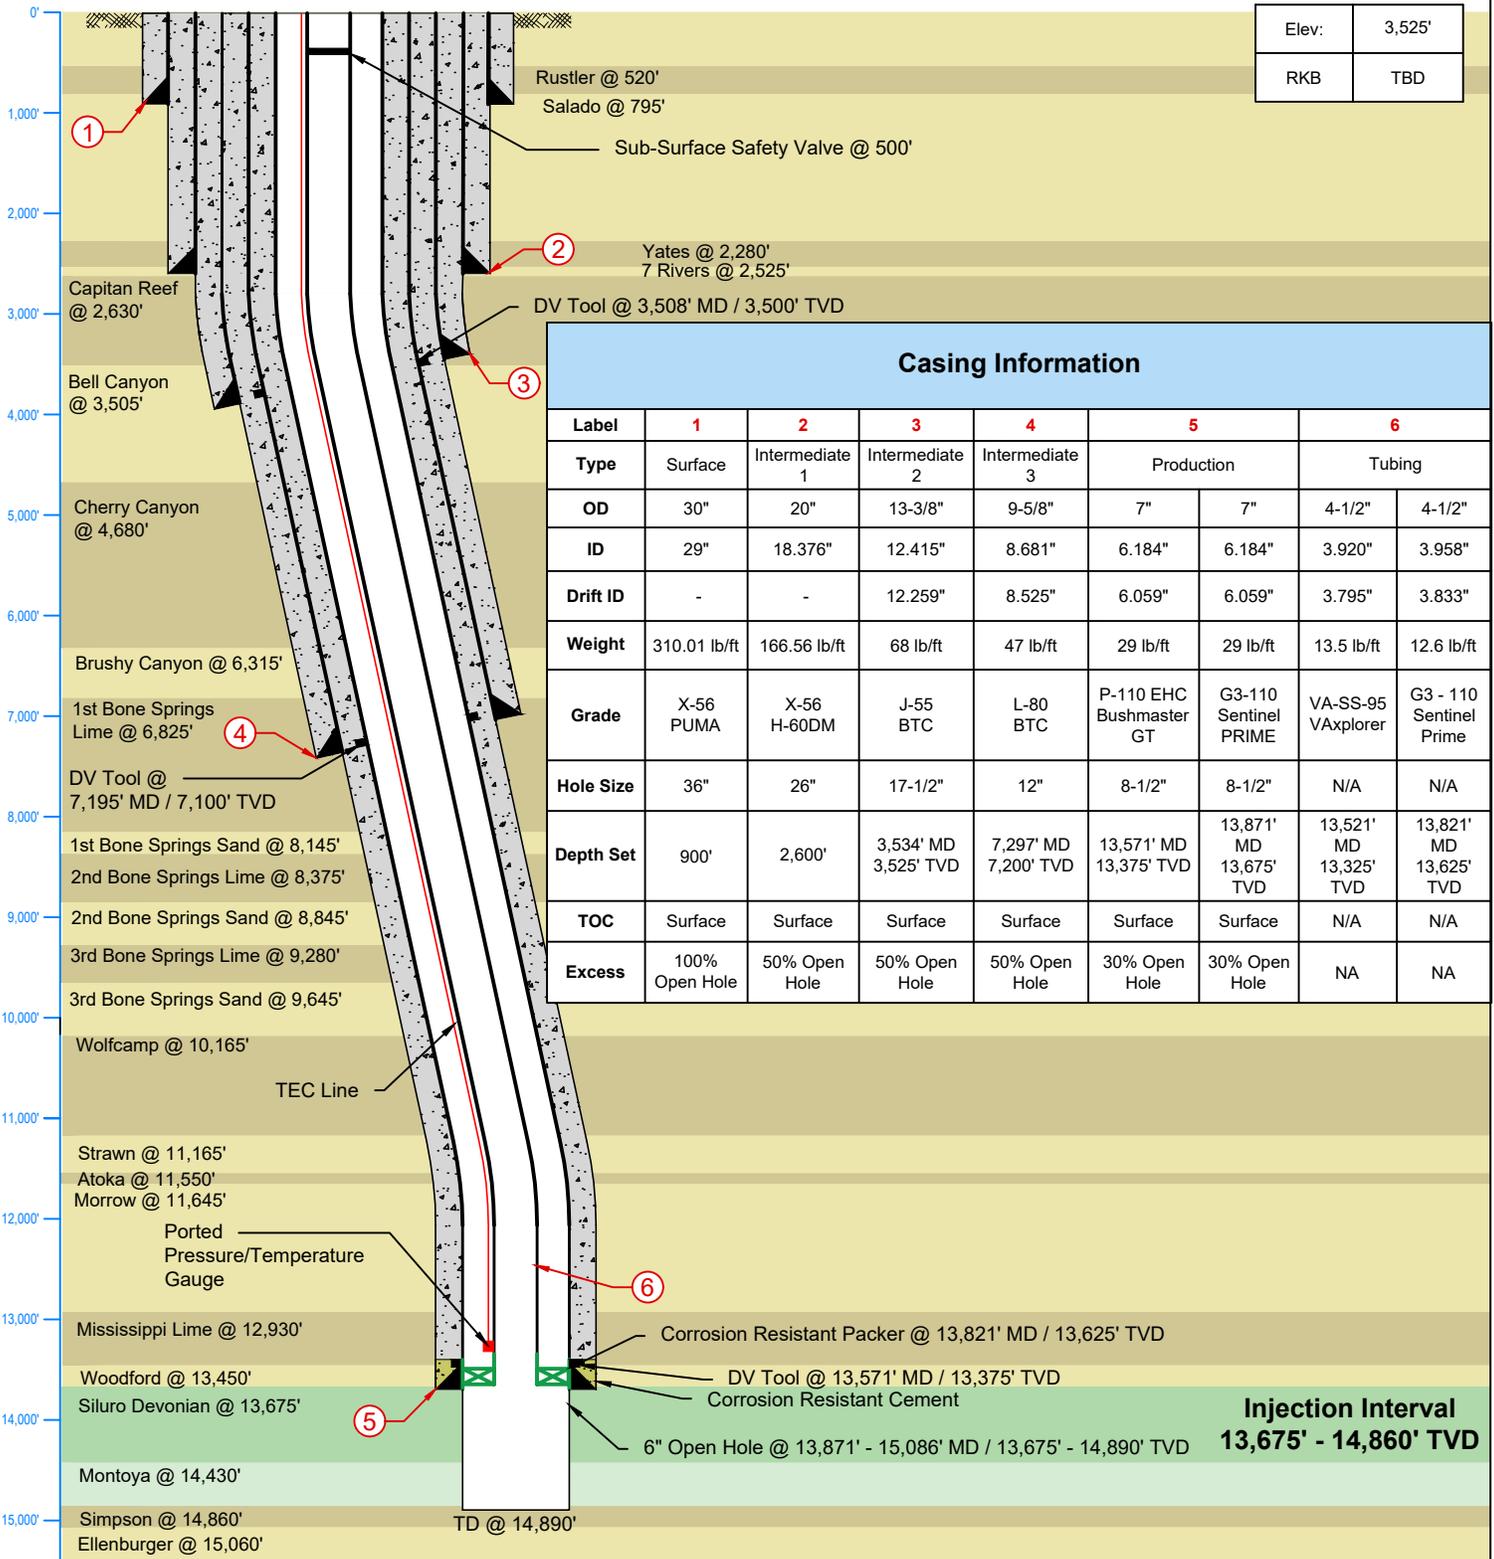

	Frontier Field Services, LLC		<b>Kings Landing AGI No. 1</b>	
	Country: USA		State/Province: New Mexico	
	Location: 32.66172915, -103.86449253 (NAD83)		County/Parish: Eddy	
	API No: TBD		District:	
Texas License F-9147	Survey:	Field:	Well Type/Status: AGI Disposal	
12912 Hill Country Blvd. Ste F-200 Austin, Texas 78738 Tel: 512.732.9812 Fax: 512.732.9816	Project No: LS229	Date: 1/19/2026	Date: 1/19/2026	
	Drawn: CJL	Reviewed: WHG	Approved:	
	Rev No: 1	Notes:		

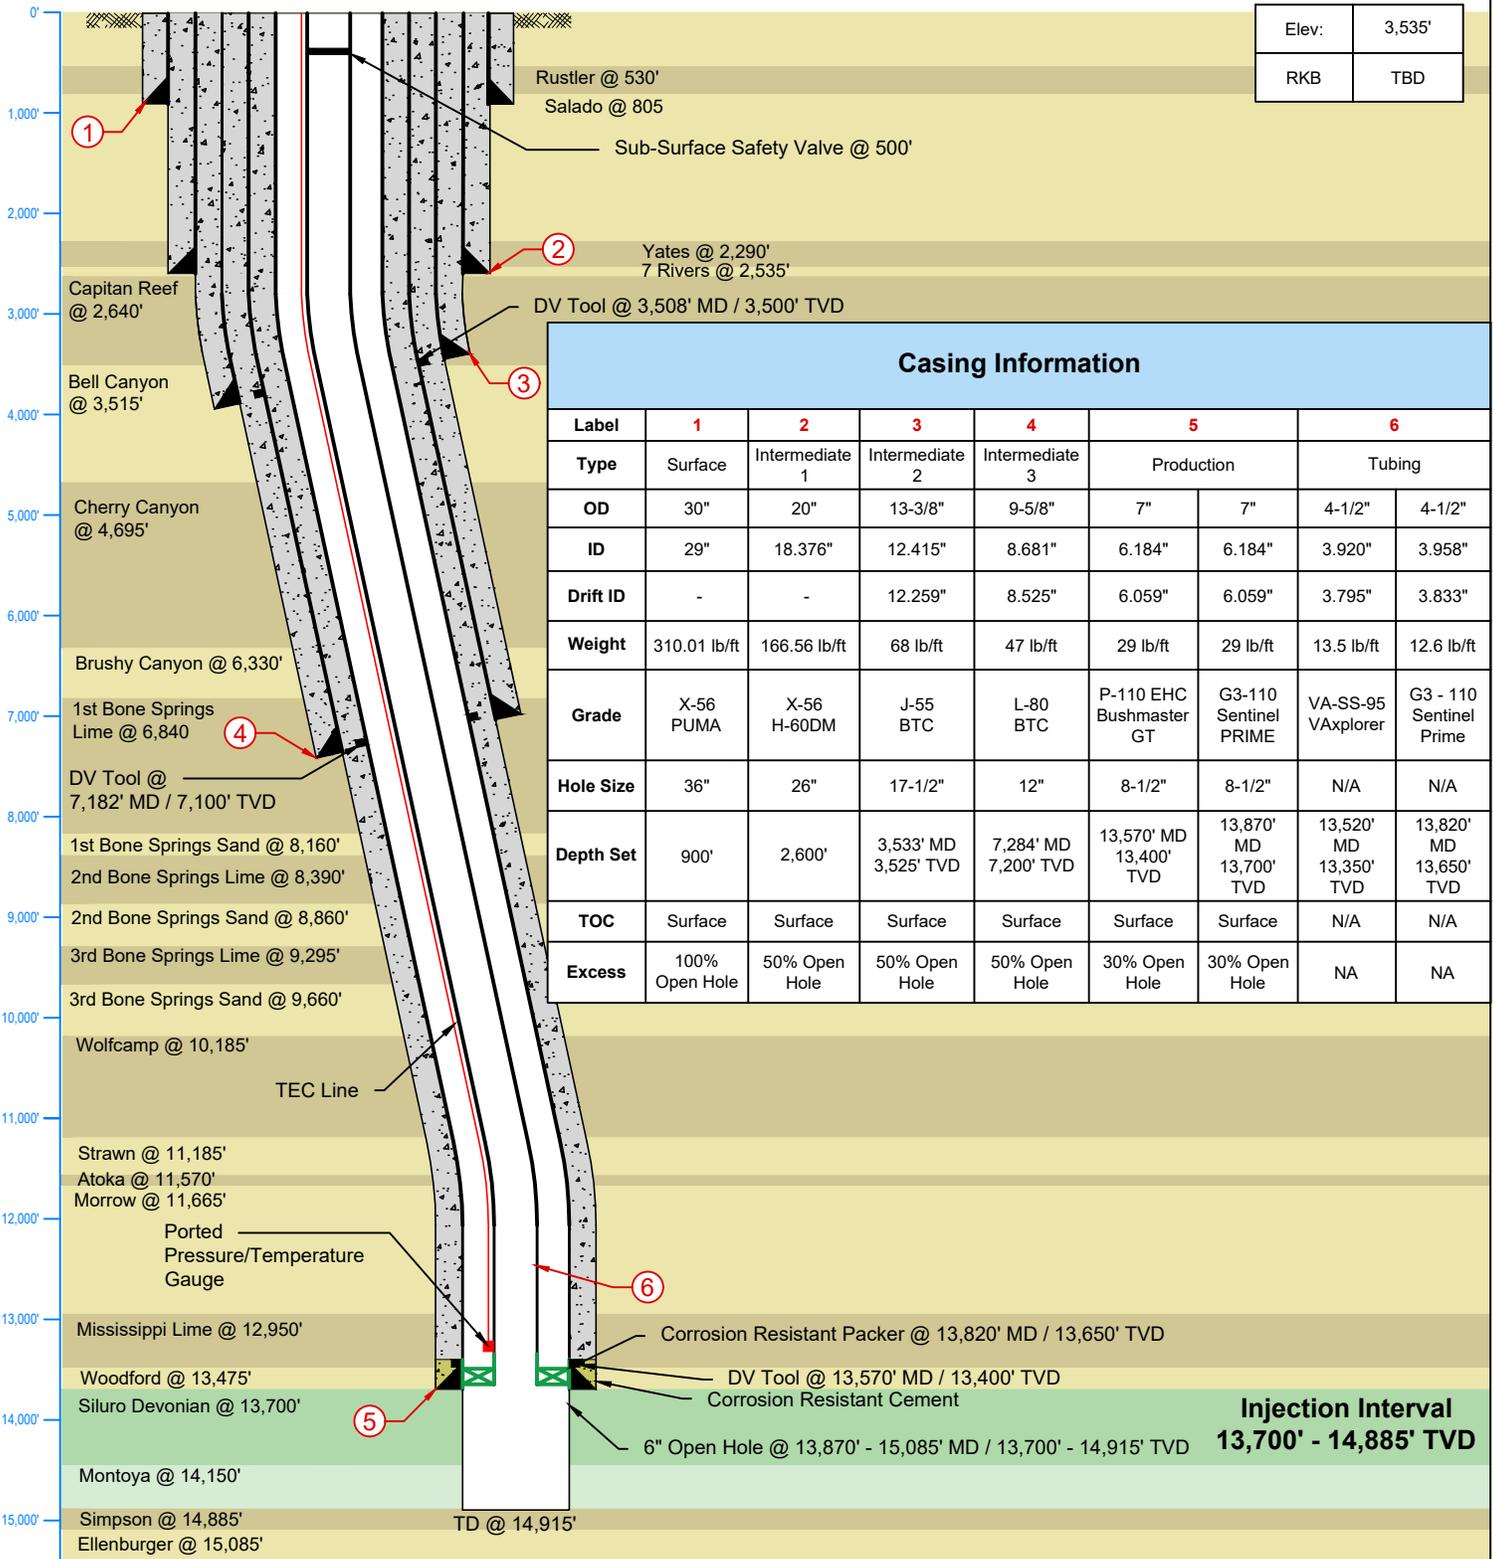

	Frontier Field Services, LLC		<b>Kings Landing AGI No. 2</b>	
	Country: USA		State/Province: New Mexico	
	Location: 32.66255384, -103.86335514 (NAD83)		County/Parish: Eddy	
	API No: TBD		District:	
Texas License F-9147	Survey:	Field:	Well Type/Status: AGI Disposal	
12912 Hill Country Blvd. Ste F-200 Austin, Texas 78738 Tel: 512.732.9812 Fax: 512.732.9816	Project No: LS229	Date: 1/19/2026	Date: 1/19/2026	
	Drawn: CJL	Reviewed: WHG	Approved:	
	Rev No: 1	Notes:		



**LONQUIST & CO., LLC**  
EDDY COUNTY, NM EAST (NAD83)  
KINGS LANDING  
KINGS LANDING AGI #1

Wellbore #1

Plan: PLAN 2

**Standard Planning Report**

21 January, 2026

**LONQUIST & CO. LLC**

PETROLEUM  
ENGINEERS

ENERGY  
ADVISORS

HOUSTON | CALGARY  
AUSTIN | WICHITA | DENVER



Planning Report



<b>Database:</b>	HPD Well Planning	<b>Local Co-ordinate Reference:</b>	Well KINGS LANDING AGI #1
<b>Company:</b>	LONQUIST & CO., LLC	<b>TVD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Project:</b>	EDDY COUNTY, NM EAST (NAD83)	<b>MD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Site:</b>	KINGS LANDING	<b>North Reference:</b>	Grid
<b>Well:</b>	KINGS LANDING AGI #1	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	PLAN 2		

<b>Project</b>	EDDY COUNTY, NM EAST (NAD83)		
<b>Map System:</b>	US State Plane 1983	<b>System Datum:</b>	Mean Sea Level
<b>Geo Datum:</b>	North American Datum 1983		
<b>Map Zone:</b>	New Mexico Eastern Zone		

<b>Site</b>	KINGS LANDING				
<b>Site Position:</b>		<b>Northing:</b>	605,088.25 usft	<b>Latitude:</b>	32.6625539
<b>From:</b>	Lat/Long	<b>Easting:</b>	685,968.45 usft	<b>Longitude:</b>	-103.8633551
<b>Position Uncertainty:</b>	0.00 usft	<b>Slot Radius:</b>	13.200 in		

<b>Well</b>	KINGS LANDING AGI #1					
<b>Well Position</b>	<b>+N/-S</b>	0.00 usft	<b>Northing:</b>	604,786.67 usft	<b>Latitude:</b>	32.6617292
	<b>+E/-W</b>	0.00 usft	<b>Easting:</b>	685,619.76 usft	<b>Longitude:</b>	-103.8644925
<b>Position Uncertainty</b>		0.00 usft	<b>Wellhead Elevation:</b>	usft	<b>Ground Level:</b>	3,535.00 usft
<b>Grid Convergence:</b>		0.25 °				

<b>Wellbore</b>	Wellbore #1				
<b>Magnetics</b>	<b>Model Name</b>	<b>Sample Date</b>	<b>Declination (°)</b>	<b>Dip Angle (°)</b>	<b>Field Strength (nT)</b>
	IGRF2020	1/19/2026	6.18	60.10	47,243.12506676

<b>Design</b>	PLAN 2			
<b>Audit Notes:</b>				
<b>Version:</b>	<b>Phase:</b>	PLAN	<b>Tie On Depth:</b>	0.00
<b>Vertical Section:</b>	<b>Depth From (TVD) (usft)</b>	<b>+N/-S (usft)</b>	<b>+E/-W (usft)</b>	<b>Direction (°)</b>
	0.00	0.00	0.00	113.98

<b>Plan Survey Tool Program</b>	<b>Date</b>	1/21/2026		
<b>Depth From (usft)</b>	<b>Depth To (usft)</b>	<b>Survey (Wellbore)</b>	<b>Tool Name</b>	<b>Remarks</b>
1	0.00	15,111.34	PLAN 2 (Wellbore #1)	MWD OWSG MWD - Standard

<b>Plan Sections</b>										
<b>Measured Depth (usft)</b>	<b>Inclination (°)</b>	<b>Azimuth (°)</b>	<b>Vertical Depth (usft)</b>	<b>+N/-S (usft)</b>	<b>+E/-W (usft)</b>	<b>Dogleg Rate (°/100ft)</b>	<b>Build Rate (°/100ft)</b>	<b>Turn Rate (°/100ft)</b>	<b>TFO (°)</b>	<b>Target</b>
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2,750.00	0.00	0.00	2,750.00	0.00	0.00	0.00	0.00	0.00	0.00	
3,372.73	12.45	113.98	3,367.84	-27.40	61.60	2.00	2.00	0.00	113.98	
11,231.04	12.45	113.98	11,041.22	-716.14	1,610.11	0.00	0.00	0.00	0.00	
12,061.34	0.00	0.00	11,865.00	-752.67	1,692.24	1.50	-1.50	0.00	180.00	KINGS LANDING A
15,111.34	0.00	0.00	14,915.00	-752.67	1,692.24	0.00	0.00	0.00	0.00	KINGS LANDING A



Planning Report



<b>Database:</b>	HPD Well Planning	<b>Local Co-ordinate Reference:</b>	Well KINGS LANDING AGI #1
<b>Company:</b>	LONQUIST & CO., LLC	<b>TVD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Project:</b>	EDDY COUNTY, NM EAST (NAD83)	<b>MD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Site:</b>	KINGS LANDING	<b>North Reference:</b>	Grid
<b>Well:</b>	KINGS LANDING AGI #1	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	PLAN 2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
520.00	0.00	0.00	520.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Rustler</b>									
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
795.00	0.00	0.00	795.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Salado</b>									
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,280.00	0.00	0.00	2,280.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Yates</b>									
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,525.00	0.00	0.00	2,525.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Seven Rivers</b>									
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00
2,630.00	0.00	0.00	2,630.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Capitan Reef</b>									
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00
2,750.00	0.00	0.00	2,750.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	1.00	113.98	2,800.00	-0.18	0.40	0.44	2.00	2.00	0.00
2,900.00	3.00	113.98	2,899.93	-1.60	3.59	3.93	2.00	2.00	0.00
3,000.00	5.00	113.98	2,999.68	-4.43	9.96	10.90	2.00	2.00	0.00
3,100.00	7.00	113.98	3,099.13	-8.68	19.51	21.35	2.00	2.00	0.00
3,200.00	9.00	113.98	3,198.15	-14.33	32.23	35.27	2.00	2.00	0.00
3,300.00	11.00	113.98	3,296.63	-21.39	48.09	52.63	2.00	2.00	0.00
3,372.73	12.45	113.98	3,367.84	-27.40	61.60	67.42	2.00	2.00	0.00
3,400.00	12.45	113.98	3,394.47	-29.79	66.97	73.30	0.00	0.00	0.00
3,500.00	12.45	113.98	3,492.11	-38.55	86.68	94.86	0.00	0.00	0.00
3,513.20	12.45	113.98	3,505.00	-39.71	89.28	97.71	0.00	0.00	0.00
<b>Bell Canyon</b>									
3,600.00	12.45	113.98	3,589.76	-47.32	106.38	116.43	0.00	0.00	0.00
3,700.00	12.45	113.98	3,687.41	-56.08	126.09	138.00	0.00	0.00	0.00
3,800.00	12.45	113.98	3,785.05	-64.85	145.79	159.56	0.00	0.00	0.00



Planning Report



<b>Database:</b>	HPD Well Planning	<b>Local Co-ordinate Reference:</b>	Well KINGS LANDING AGI #1
<b>Company:</b>	LONQUIST & CO., LLC	<b>TVD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Project:</b>	EDDY COUNTY, NM EAST (NAD83)	<b>MD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Site:</b>	KINGS LANDING	<b>North Reference:</b>	Grid
<b>Well:</b>	KINGS LANDING AGI #1	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	PLAN 2		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
3,900.00	12.45	113.98	3,882.70	-73.61	165.50	181.13	0.00	0.00	0.00	
4,000.00	12.45	113.98	3,980.35	-82.37	185.20	202.70	0.00	0.00	0.00	
4,100.00	12.45	113.98	4,077.99	-91.14	204.91	224.26	0.00	0.00	0.00	
4,200.00	12.45	113.98	4,175.64	-99.90	224.62	245.83	0.00	0.00	0.00	
4,300.00	12.45	113.98	4,273.29	-108.67	244.32	267.40	0.00	0.00	0.00	
4,400.00	12.45	113.98	4,370.93	-117.43	264.03	288.96	0.00	0.00	0.00	
4,500.00	12.45	113.98	4,468.58	-126.20	283.73	310.53	0.00	0.00	0.00	
4,600.00	12.45	113.98	4,566.23	-134.96	303.44	332.10	0.00	0.00	0.00	
4,700.00	12.45	113.98	4,663.87	-143.73	323.14	353.66	0.00	0.00	0.00	
4,716.52	12.45	113.98	4,680.00	-145.17	326.40	357.23	0.00	0.00	0.00	
<b>Cherry Canyon</b>										
4,800.00	12.45	113.98	4,761.52	-152.49	342.85	375.23	0.00	0.00	0.00	
4,900.00	12.45	113.98	4,859.17	-161.26	362.55	396.80	0.00	0.00	0.00	
5,000.00	12.45	113.98	4,956.81	-170.02	382.26	418.36	0.00	0.00	0.00	
5,100.00	12.45	113.98	5,054.46	-178.78	401.96	439.93	0.00	0.00	0.00	
5,200.00	12.45	113.98	5,152.11	-187.55	421.67	461.50	0.00	0.00	0.00	
5,300.00	12.45	113.98	5,249.75	-196.31	441.37	483.06	0.00	0.00	0.00	
5,400.00	12.45	113.98	5,347.40	-205.08	461.08	504.63	0.00	0.00	0.00	
5,500.00	12.45	113.98	5,445.05	-213.84	480.79	526.20	0.00	0.00	0.00	
5,600.00	12.45	113.98	5,542.69	-222.61	500.49	547.76	0.00	0.00	0.00	
5,700.00	12.45	113.98	5,640.34	-231.37	520.20	569.33	0.00	0.00	0.00	
5,800.00	12.45	113.98	5,737.99	-240.14	539.90	590.90	0.00	0.00	0.00	
5,900.00	12.45	113.98	5,835.63	-248.90	559.61	612.46	0.00	0.00	0.00	
6,000.00	12.45	113.98	5,933.28	-257.66	579.31	634.03	0.00	0.00	0.00	
6,100.00	12.45	113.98	6,030.93	-266.43	599.02	655.60	0.00	0.00	0.00	
6,200.00	12.45	113.98	6,128.57	-275.19	618.72	677.16	0.00	0.00	0.00	
6,300.00	12.45	113.98	6,226.22	-283.96	638.43	698.73	0.00	0.00	0.00	
6,390.92	12.45	113.98	6,315.00	-291.93	656.34	718.34	0.00	0.00	0.00	
<b>Brushy Canyon</b>										
6,400.00	12.45	113.98	6,323.87	-292.72	658.13	720.30	0.00	0.00	0.00	
6,500.00	12.45	113.98	6,421.51	-301.49	677.84	741.86	0.00	0.00	0.00	
6,600.00	12.45	113.98	6,519.16	-310.25	697.54	763.43	0.00	0.00	0.00	
6,700.00	12.45	113.98	6,616.81	-319.02	717.25	785.00	0.00	0.00	0.00	
6,800.00	12.45	113.98	6,714.45	-327.78	736.96	806.56	0.00	0.00	0.00	
6,900.00	12.45	113.98	6,812.10	-336.55	756.66	828.13	0.00	0.00	0.00	
6,913.21	12.45	113.98	6,825.00	-337.70	759.26	830.98	0.00	0.00	0.00	
<b>1st Bone Springs (lime)</b>										
7,000.00	12.45	113.98	6,909.75	-345.31	776.37	849.70	0.00	0.00	0.00	
7,100.00	12.45	113.98	7,007.39	-354.07	796.07	871.26	0.00	0.00	0.00	
7,200.00	12.45	113.98	7,105.04	-362.84	815.78	892.83	0.00	0.00	0.00	
7,300.00	12.45	113.98	7,202.69	-371.60	835.48	914.40	0.00	0.00	0.00	
7,400.00	12.45	113.98	7,300.33	-380.37	855.19	935.96	0.00	0.00	0.00	
7,500.00	12.45	113.98	7,397.98	-389.13	874.89	957.53	0.00	0.00	0.00	
7,600.00	12.45	113.98	7,495.63	-397.90	894.60	979.10	0.00	0.00	0.00	
7,700.00	12.45	113.98	7,593.27	-406.66	914.30	1,000.66	0.00	0.00	0.00	
7,800.00	12.45	113.98	7,690.92	-415.43	934.01	1,022.23	0.00	0.00	0.00	
7,900.00	12.45	113.98	7,788.57	-424.19	953.71	1,043.80	0.00	0.00	0.00	
8,000.00	12.45	113.98	7,886.21	-432.96	973.42	1,065.36	0.00	0.00	0.00	
8,100.00	12.45	113.98	7,983.86	-441.72	993.13	1,086.93	0.00	0.00	0.00	
8,200.00	12.45	113.98	8,081.51	-450.48	1,012.83	1,108.50	0.00	0.00	0.00	
8,265.02	12.45	113.98	8,145.00	-456.18	1,025.64	1,122.52	0.00	0.00	0.00	
<b>1st Bone Springs (sand)</b>										
8,300.00	12.45	113.98	8,179.15	-459.25	1,032.54	1,130.06	0.00	0.00	0.00	



Planning Report



<b>Database:</b>	HPD Well Planning	<b>Local Co-ordinate Reference:</b>	Well KINGS LANDING AGI #1
<b>Company:</b>	LONQUIST & CO., LLC	<b>TVD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Project:</b>	EDDY COUNTY, NM EAST (NAD83)	<b>MD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Site:</b>	KINGS LANDING	<b>North Reference:</b>	Grid
<b>Well:</b>	KINGS LANDING AGI #1	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	PLAN 2		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
8,400.00	12.45	113.98	8,276.80	-468.01	1,052.24	1,151.63	0.00	0.00	0.00	
8,500.00	12.45	113.98	8,374.45	-476.78	1,071.95	1,173.20	0.00	0.00	0.00	
8,500.57	12.45	113.98	8,375.00	-476.83	1,072.06	1,173.32	0.00	0.00	0.00	
<b>2nd Bone Springs (lime)</b>										
8,600.00	12.45	113.98	8,472.10	-485.54	1,091.65	1,194.76	0.00	0.00	0.00	
8,700.00	12.45	113.98	8,569.74	-494.31	1,111.36	1,216.33	0.00	0.00	0.00	
8,800.00	12.45	113.98	8,667.39	-503.07	1,131.06	1,237.90	0.00	0.00	0.00	
8,900.00	12.45	113.98	8,765.04	-511.84	1,150.77	1,259.46	0.00	0.00	0.00	
8,981.89	12.45	113.98	8,845.00	-519.01	1,166.91	1,277.12	0.00	0.00	0.00	
<b>2nd Bone Springs (sand)</b>										
9,000.00	12.45	113.98	8,862.68	-520.60	1,170.47	1,281.03	0.00	0.00	0.00	
9,100.00	12.45	113.98	8,960.33	-529.36	1,190.18	1,302.60	0.00	0.00	0.00	
9,200.00	12.45	113.98	9,057.98	-538.13	1,209.88	1,324.16	0.00	0.00	0.00	
9,300.00	12.45	113.98	9,155.62	-546.89	1,229.59	1,345.73	0.00	0.00	0.00	
9,400.00	12.45	113.98	9,253.27	-555.66	1,249.30	1,367.30	0.00	0.00	0.00	
9,427.38	12.45	113.98	9,280.00	-558.06	1,254.69	1,373.20	0.00	0.00	0.00	
<b>3rd Bone Springs (lime)</b>										
9,500.00	12.45	113.98	9,350.92	-564.42	1,269.00	1,388.86	0.00	0.00	0.00	
9,600.00	12.45	113.98	9,448.56	-573.19	1,288.71	1,410.43	0.00	0.00	0.00	
9,700.00	12.45	113.98	9,546.21	-581.95	1,308.41	1,431.99	0.00	0.00	0.00	
9,800.00	12.45	113.98	9,643.86	-590.72	1,328.12	1,453.56	0.00	0.00	0.00	
9,801.17	12.45	113.98	9,645.00	-590.82	1,328.35	1,453.81	0.00	0.00	0.00	
<b>3rd Bone Springs (sand)</b>										
9,900.00	12.45	113.98	9,741.50	-599.48	1,347.82	1,475.13	0.00	0.00	0.00	
10,000.00	12.45	113.98	9,839.15	-608.25	1,367.53	1,496.69	0.00	0.00	0.00	
10,100.00	12.45	113.98	9,936.80	-617.01	1,387.23	1,518.26	0.00	0.00	0.00	
10,200.00	12.45	113.98	10,034.44	-625.77	1,406.94	1,539.83	0.00	0.00	0.00	
10,300.00	12.45	113.98	10,132.09	-634.54	1,426.64	1,561.39	0.00	0.00	0.00	
10,333.70	12.45	113.98	10,165.00	-637.49	1,433.29	1,568.66	0.00	0.00	0.00	
<b>Wolfcamp</b>										
10,400.00	12.45	113.98	10,229.74	-643.30	1,446.35	1,582.96	0.00	0.00	0.00	
10,500.00	12.45	113.98	10,327.38	-652.07	1,466.05	1,604.53	0.00	0.00	0.00	
10,600.00	12.45	113.98	10,425.03	-660.83	1,485.76	1,626.09	0.00	0.00	0.00	
10,700.00	12.45	113.98	10,522.68	-669.60	1,505.47	1,647.66	0.00	0.00	0.00	
10,800.00	12.45	113.98	10,620.32	-678.36	1,525.17	1,669.23	0.00	0.00	0.00	
10,900.00	12.45	113.98	10,717.97	-687.13	1,544.88	1,690.79	0.00	0.00	0.00	
11,000.00	12.45	113.98	10,815.62	-695.89	1,564.58	1,712.36	0.00	0.00	0.00	
11,100.00	12.45	113.98	10,913.26	-704.66	1,584.29	1,733.93	0.00	0.00	0.00	
11,200.00	12.45	113.98	11,010.91	-713.42	1,603.99	1,755.49	0.00	0.00	0.00	
11,231.04	12.45	113.98	11,041.22	-716.14	1,610.11	1,762.19	0.00	0.00	0.00	
11,300.00	11.42	113.98	11,108.69	-721.94	1,623.14	1,776.45	1.50	-1.50	0.00	
11,357.37	10.56	113.98	11,165.00	-726.38	1,633.13	1,787.39	1.50	-1.50	0.00	
<b>Strawn</b>										
11,400.00	9.92	113.98	11,206.96	-729.46	1,640.06	1,794.97	1.50	-1.50	0.00	
11,500.00	8.42	113.98	11,305.67	-735.94	1,654.62	1,810.90	1.50	-1.50	0.00	
11,600.00	6.92	113.98	11,404.78	-741.36	1,666.81	1,824.25	1.50	-1.50	0.00	
11,700.00	5.42	113.98	11,504.19	-745.73	1,676.64	1,835.00	1.50	-1.50	0.00	
11,745.99	4.73	113.98	11,550.00	-747.38	1,680.35	1,839.07	1.50	-1.50	0.00	
<b>Atoka</b>										
11,800.00	3.92	113.98	11,603.86	-749.04	1,684.07	1,843.14	1.50	-1.50	0.00	
11,841.22	3.30	113.98	11,645.00	-750.09	1,686.45	1,845.74	1.50	-1.50	0.00	
<b>Morrow</b>										
11,900.00	2.42	113.98	11,703.70	-751.29	1,689.13	1,848.67	1.50	-1.50	0.00	



Planning Report



<b>Database:</b>	HPD Well Planning	<b>Local Co-ordinate Reference:</b>	Well KINGS LANDING AGI #1
<b>Company:</b>	LONQUIST & CO., LLC	<b>TVD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Project:</b>	EDDY COUNTY, NM EAST (NAD83)	<b>MD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Site:</b>	KINGS LANDING	<b>North Reference:</b>	Grid
<b>Well:</b>	KINGS LANDING AGI #1	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	PLAN 2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
12,000.00	0.92	113.98	11,803.66	-752.47	1,691.79	1,851.58	1.50	-1.50	0.00
12,061.34	0.00	0.00	11,865.00	-752.67	1,692.24	1,852.08	1.50	-1.50	0.00
12,100.00	0.00	0.00	11,903.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
12,200.00	0.00	0.00	12,003.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
12,300.00	0.00	0.00	12,103.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
12,400.00	0.00	0.00	12,203.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
12,500.00	0.00	0.00	12,303.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
12,600.00	0.00	0.00	12,403.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
12,700.00	0.00	0.00	12,503.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
12,800.00	0.00	0.00	12,603.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
12,900.00	0.00	0.00	12,703.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
13,000.00	0.00	0.00	12,803.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
13,100.00	0.00	0.00	12,903.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
13,126.34	0.00	0.00	12,930.00	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
<b>Mississippi limestone</b>									
13,200.00	0.00	0.00	13,003.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
13,300.00	0.00	0.00	13,103.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
13,400.00	0.00	0.00	13,203.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
13,500.00	0.00	0.00	13,303.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
13,600.00	0.00	0.00	13,403.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
13,646.34	0.00	0.00	13,450.00	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
<b>Woodford Shale</b>									
13,700.00	0.00	0.00	13,503.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
13,800.00	0.00	0.00	13,603.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
13,871.34	0.00	0.00	13,675.00	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
<b>Siluro-Devonian</b>									
13,900.00	0.00	0.00	13,703.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
14,000.00	0.00	0.00	13,803.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
14,100.00	0.00	0.00	13,903.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
14,200.00	0.00	0.00	14,003.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
14,300.00	0.00	0.00	14,103.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
14,400.00	0.00	0.00	14,203.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
14,500.00	0.00	0.00	14,303.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
14,600.00	0.00	0.00	14,403.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
14,626.34	0.00	0.00	14,430.00	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
<b>Montoya</b>									
14,700.00	0.00	0.00	14,503.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
14,800.00	0.00	0.00	14,603.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
14,900.00	0.00	0.00	14,703.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
15,000.00	0.00	0.00	14,803.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
15,056.34	0.00	0.00	14,860.00	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
<b>Simpson</b>									
15,100.00	0.00	0.00	14,903.66	-752.67	1,692.24	1,852.08	0.00	0.00	0.00
15,111.34	0.00	0.00	14,915.00	-752.67	1,692.24	1,852.07	0.00	0.00	0.00



Planning Report



<b>Database:</b>	HPD Well Planning	<b>Local Co-ordinate Reference:</b>	Well KINGS LANDING AGI #1
<b>Company:</b>	LONQUIST & CO., LLC	<b>TVD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Project:</b>	EDDY COUNTY, NM EAST (NAD83)	<b>MD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Site:</b>	KINGS LANDING	<b>North Reference:</b>	Grid
<b>Well:</b>	KINGS LANDING AGI #1	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	PLAN 2		

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
KINGS LANDING AGI - hit/miss target - Shape - plan hits target center - Point	0.00	0.00	11,865.00	-752.67	1,692.24	604,034.00	687,312.00	32.6596397	-103.8590047
KINGS LANDING AGI - plan hits target center - Point	0.00	0.00	14,915.00	-752.67	1,692.24	604,034.00	687,312.00	32.6596397	-103.8590047

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
520.00	520.00	Rustler				
795.00	795.00	Salado				
2,280.00	2,280.00	Yates				
2,525.00	2,525.00	Seven Rivers				
2,630.00	2,630.00	Capitan Reef				
3,513.20	3,505.00	Bell Canyon				
4,716.52	4,680.00	Cherry Canyon				
6,390.92	6,315.00	Brushy Canyon				
6,913.21	6,825.00	1st Bone Springs (lime)				
8,265.02	8,145.00	1st Bone Springs (sand)				
8,500.57	8,375.00	2nd Bone Springs (lime)				
8,981.89	8,845.00	2nd Bone Springs (sand)				
9,427.38	9,280.00	3rd Bone Springs (lime)				
9,801.17	9,645.00	3rd Bone Springs (sand)				
10,333.70	10,165.00	Wolfcamp				
11,357.37	11,165.00	Strawn				
11,745.99	11,550.00	Atoka				
11,841.22	11,645.00	Morrow				
13,126.34	12,930.00	Mississippi limestone				
13,646.34	13,450.00	Woodford Shale				
13,871.34	13,675.00	Siluro-Devonian				
14,626.34	14,430.00	Montoya		0.00		
15,056.34	14,860.00	Simpson		0.00		



**LONQUIST & CO., LLC**  
EDDY COUNTY, NM EAST (NAD83)  
KINGS LANDING  
KINGS LANDING AGI #1

**Wellbore #1**  
**PLAN 2**

# Anticollision Report

21 January, 2026

**LONQUIST & CO. LLC**

PETROLEUM  
ENGINEERS

ENERGY  
ADVISORS

HOUSTON | CALGARY  
AUSTIN | WICHITA | DENVER



### Anticollision Report



<b>Company:</b>	LONQUIST & CO., LLC	<b>Local Co-ordinate Reference:</b>	Well KINGS LANDING AGI #1
<b>Project:</b>	EDDY COUNTY, NM EAST (NAD83)	<b>TVD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Reference Site:</b>	KINGS LANDING	<b>MD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Site Error:</b>	0.00 usft	<b>North Reference:</b>	Grid
<b>Reference Well:</b>	KINGS LANDING AGI #1	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Well Error:</b>	0.00 usft	<b>Output errors are at</b>	2.00 sigma
<b>Reference Wellbore</b>	Wellbore #1	<b>Database:</b>	HPD Well Planning
<b>Reference Design:</b>	PLAN 2	<b>Offset TVD Reference:</b>	Reference Datum

<b>Reference</b>	PLAN 2		
<b>Filter type:</b>	NO GLOBAL FILTER: Using user defined selection & filtering criteria		
<b>Interpolation Method:</b>	MD Interval 100.00usft	<b>Error Model:</b>	ISCWSA
<b>Depth Range:</b>	Unlimited	<b>Scan Method:</b>	Closest Approach 3D
<b>Results Limited by:</b>	Maximum centre distance of 1,711.13usft	<b>Error Surface:</b>	Pedal Curve
<b>Warning Levels Evaluated at:</b>	2.00 Sigma	<b>Casing Method:</b>	Not applied

<b>Survey Tool Program</b>	<b>Date</b>	1/21/2026		
<b>From (usft)</b>	<b>To (usft)</b>	<b>Survey (Wellbore)</b>	<b>Tool Name</b>	<b>Description</b>
0.00	15,111.34	PLAN 2 (Wellbore #1)	MWD	OWSG MWD - Standard

Site Name	Reference Measured Depth (usft)	Offset Measured Depth (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Separation Factor	Warning
Offset Well - Wellbore - Design						
KINGS LANDING						
KINGS LANDING AGI #2 - Wellbore #1 - PLAN 3	11,300.00	11,259.91	419.78	354.52	6.432	CC
KINGS LANDING AGI #2 - Wellbore #1 - PLAN 3	15,111.34	15,084.95	419.87	349.97	6.006	ES, SF

Offset Design: KINGS LANDING - KINGS LANDING AGI #2 - Wellbore #1 - PLAN 3													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Measured Reference Depth (usft)	Vertical Depth (usft)	Offset Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Semi Major Axis Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre		Distance Between Centres (usft)		Minimum Separation (usft)	Separation Factor	Warning	
							+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)				
0.00	0.00	0.00	0.00	0.00	0.00	49.14	301.58	348.69	461.01					
100.00	100.00	100.00	100.00	1.21	1.21	49.14	301.58	348.69	461.01	458.59	2.42	190.461		
200.00	200.00	200.00	200.00	1.72	1.72	49.14	301.58	348.69	461.01	457.58	3.43	134.372		
300.00	300.00	300.00	300.00	2.11	2.11	49.14	301.58	348.69	461.01	456.80	4.21	109.467		
400.00	400.00	400.00	400.00	2.44	2.44	49.14	301.58	348.69	461.01	456.14	4.87	94.588		
500.00	500.00	500.00	500.00	2.73	2.73	49.14	301.58	348.69	461.01	455.55	5.46	84.413		
600.00	600.00	600.00	600.00	3.00	3.00	49.14	301.58	348.69	461.01	455.02	6.00	76.887		
700.00	700.00	700.00	700.00	3.25	3.25	49.14	301.58	348.69	461.01	454.52	6.49	71.026		
800.00	800.00	800.00	800.00	3.48	3.48	49.14	301.58	348.69	461.01	454.06	6.95	66.292		
900.00	900.00	900.00	900.00	3.70	3.70	49.14	301.58	348.69	461.01	453.62	7.39	62.364		
1,000.00	1,000.00	1,000.00	1,000.00	3.90	3.90	49.14	301.58	348.69	461.01	453.21	7.81	59.034		
1,100.00	1,100.00	1,100.00	1,100.00	4.10	4.10	49.14	301.58	348.69	461.01	452.81	8.21	56.165		
1,200.00	1,200.00	1,200.00	1,200.00	4.30	4.30	49.14	301.58	348.69	461.01	452.42	8.59	53.657		
1,300.00	1,300.00	1,300.00	1,300.00	4.48	4.48	49.14	301.58	348.69	461.01	452.05	8.96	51.441		
1,400.00	1,400.00	1,400.00	1,400.00	4.66	4.66	49.14	301.58	348.69	461.01	451.69	9.32	49.463		
1,500.00	1,500.00	1,500.00	1,500.00	4.83	4.83	49.14	301.58	348.69	461.01	451.35	9.67	47.684		
1,600.00	1,600.00	1,600.00	1,600.00	5.00	5.00	49.14	301.58	348.69	461.01	451.01	10.01	46.071		
1,700.00	1,700.00	1,700.00	1,700.00	5.17	5.17	49.14	301.58	348.69	461.01	450.68	10.34	44.601		
1,800.00	1,800.00	1,800.00	1,800.00	5.33	5.33	49.14	301.58	348.69	461.01	450.36	10.66	43.253		
1,900.00	1,900.00	1,900.00	1,900.00	5.49	5.49	49.14	301.58	348.69	461.01	450.04	10.97	42.011		
2,000.00	2,000.00	2,000.00	2,000.00	5.64	5.64	49.14	301.58	348.69	461.01	449.73	11.28	40.861		
2,100.00	2,100.00	2,100.00	2,100.00	5.79	5.79	49.14	301.58	348.69	461.01	449.43	11.59	39.793		
2,200.00	2,200.00	2,200.00	2,200.00	5.94	5.94	49.14	301.58	348.69	461.01	449.13	11.88	38.798		
2,300.00	2,300.00	2,300.00	2,300.00	6.09	6.09	49.14	301.58	348.69	461.01	448.84	12.17	37.867		
2,400.00	2,400.00	2,400.00	2,400.00	6.23	6.23	49.14	301.58	348.69	461.01	448.55	12.46	36.993		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



### Anticollision Report



<b>Company:</b>	LONQUIST & CO., LLC	<b>Local Co-ordinate Reference:</b>	Well KINGS LANDING AGI #1
<b>Project:</b>	EDDY COUNTY, NM EAST (NAD83)	<b>TVD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Reference Site:</b>	KINGS LANDING	<b>MD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Site Error:</b>	0.00 usft	<b>North Reference:</b>	Grid
<b>Reference Well:</b>	KINGS LANDING AGI #1	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Well Error:</b>	0.00 usft	<b>Output errors are at</b>	2.00 sigma
<b>Reference Wellbore</b>	Wellbore #1	<b>Database:</b>	HPD Well Planning
<b>Reference Design:</b>	PLAN 2	<b>Offset TVD Reference:</b>	Reference Datum

Offset Design: KINGS LANDING - KINGS LANDING AGI #2 - Wellbore #1 - PLAN 3													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N-S (usft)	+E-W (usft)	Distance Between Centres (usft)	Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
2,500.00	2,500.00	2,500.00	2,500.00	6.37	6.37	49.14	301.58	348.69	461.01	448.27	12.75	36.171		
2,600.00	2,600.00	2,600.00	2,600.00	6.51	6.51	49.14	301.58	348.69	461.01	447.99	13.02	35.396		
2,700.00	2,700.00	2,700.00	2,700.00	6.65	6.65	49.14	301.58	348.69	461.01	447.71	13.30	34.664		
2,800.00	2,800.00	2,796.81	2,796.81	6.72	6.71	49.14	301.42	349.04	461.00	447.58	13.42	34.342		
2,900.00	2,899.93	2,890.43	2,890.37	6.90	6.88	49.09	300.18	351.83	460.90	447.26	13.64	33.789		
3,000.00	2,999.68	2,984.06	2,983.80	7.09	7.06	48.99	297.68	357.41	460.70	446.84	13.86	33.233		
3,100.00	3,099.13	3,077.71	3,077.00	7.30	7.25	48.85	293.94	365.78	460.40	446.31	14.10	32.658		
3,200.00	3,198.15	3,171.38	3,169.86	7.54	7.47	48.66	288.96	376.93	460.01	445.66	14.35	32.054		
3,300.00	3,296.63	3,265.08	3,262.31	7.79	7.70	48.42	282.74	390.85	459.51	444.88	14.63	31.408		
3,400.00	3,394.47	3,360.88	3,356.30	7.98	7.89	48.17	275.18	407.76	458.91	444.05	14.86	30.887		
3,500.00	3,492.11	3,460.87	3,454.26	8.22	8.11	48.00	267.01	426.04	458.22	443.02	15.20	30.154		
3,600.00	3,589.76	3,560.86	3,552.22	8.48	8.35	47.83	258.84	444.32	457.54	441.97	15.57	29.380		
3,700.00	3,687.41	3,660.84	3,650.19	8.75	8.62	47.65	250.67	462.61	456.86	440.88	15.98	28.594		
3,800.00	3,785.05	3,760.83	3,748.15	9.05	8.90	47.47	242.49	480.89	456.19	439.78	16.41	27.804		
3,900.00	3,882.70	3,860.82	3,846.11	9.35	9.20	47.30	234.32	499.17	455.52	438.66	16.86	27.017		
4,000.00	3,980.35	3,960.81	3,944.07	9.67	9.51	47.12	226.15	517.46	454.86	437.52	17.33	26.240		
4,100.00	4,077.99	4,060.79	4,042.03	10.01	9.83	46.94	217.98	535.74	454.20	436.37	17.83	25.477		
4,200.00	4,175.64	4,160.78	4,139.99	10.35	10.17	46.77	209.81	554.02	453.54	435.20	18.34	24.731		
4,300.00	4,273.29	4,260.77	4,237.96	10.71	10.52	46.59	201.64	572.31	452.89	434.03	18.87	24.005		
4,400.00	4,370.93	4,360.76	4,335.92	11.07	10.87	46.41	193.46	590.59	452.25	432.84	19.41	23.302		
4,500.00	4,468.58	4,460.75	4,433.88	11.45	11.24	46.23	185.29	608.87	451.61	431.64	19.96	22.622		
4,600.00	4,566.23	4,560.73	4,531.84	11.83	11.61	46.05	177.12	627.16	450.97	430.44	20.53	21.967		
4,700.00	4,663.87	4,660.72	4,629.80	12.22	11.99	45.87	168.95	645.44	450.34	429.23	21.11	21.335		
4,800.00	4,761.52	4,760.71	4,727.76	12.61	12.37	45.69	160.78	663.72	449.71	428.01	21.70	20.728		
4,900.00	4,859.17	4,860.70	4,825.72	13.01	12.76	45.51	152.61	682.01	449.09	426.79	22.29	20.146		
5,000.00	4,956.81	4,960.68	4,923.69	13.42	13.16	45.32	144.43	700.29	448.47	425.57	22.90	19.586		
5,100.00	5,054.46	5,060.67	5,021.65	13.83	13.56	45.14	136.26	718.57	447.85	424.35	23.51	19.050		
5,200.00	5,152.11	5,160.66	5,119.61	14.24	13.97	44.96	128.09	736.86	447.25	423.12	24.13	18.536		
5,300.00	5,249.75	5,260.65	5,217.57	14.66	14.38	44.78	119.92	755.14	446.64	421.89	24.75	18.043		
5,400.00	5,347.40	5,360.63	5,315.53	15.08	14.79	44.59	111.75	773.43	446.04	420.66	25.38	17.571		
5,500.00	5,445.05	5,460.62	5,413.49	15.51	15.21	44.41	103.58	791.71	445.45	419.43	26.02	17.119		
5,600.00	5,542.69	5,560.61	5,511.46	15.94	15.63	44.22	95.40	809.99	444.86	418.20	26.66	16.685		
5,700.00	5,640.34	5,660.60	5,609.42	16.37	16.05	44.04	87.23	828.28	444.27	416.97	27.31	16.270		
5,800.00	5,737.99	5,760.58	5,707.38	16.80	16.48	43.85	79.06	846.56	443.69	415.74	27.96	15.872		
5,900.00	5,835.63	5,860.57	5,805.34	17.24	16.90	43.67	70.89	864.84	443.12	414.51	28.61	15.490		
6,000.00	5,933.28	5,960.56	5,903.30	17.68	17.33	43.48	62.72	883.13	442.55	413.28	29.26	15.123		
6,100.00	6,030.93	6,060.55	6,001.26	18.12	17.77	43.29	54.55	901.41	441.98	412.06	29.92	14.772		
6,200.00	6,128.57	6,160.54	6,099.23	18.56	18.20	43.10	46.37	919.69	441.42	410.84	30.58	14.434		
6,300.00	6,226.22	6,260.52	6,197.19	19.01	18.64	42.92	38.20	937.98	440.86	409.62	31.24	14.110		
6,400.00	6,323.87	6,360.51	6,295.15	19.45	19.08	42.73	30.03	956.26	440.31	408.40	31.91	13.798		
6,500.00	6,421.51	6,460.50	6,393.11	19.90	19.52	42.54	21.86	974.54	439.77	407.19	32.58	13.499		
6,600.00	6,519.16	6,560.49	6,491.07	20.35	19.96	42.35	13.69	992.83	439.22	405.98	33.25	13.211		
6,700.00	6,616.81	6,660.47	6,589.03	20.80	20.40	42.16	5.52	1,011.11	438.69	404.77	33.92	12.934		
6,800.00	6,714.45	6,760.46	6,686.99	21.25	20.84	41.97	-2.66	1,029.39	438.16	403.57	34.59	12.667		
6,900.00	6,812.10	6,860.45	6,784.96	21.71	21.29	41.78	-10.83	1,047.68	437.63	402.37	35.26	12.410		
7,000.00	6,909.75	6,960.44	6,882.92	22.16	21.74	41.59	-19.00	1,065.96	437.11	401.17	35.94	12.163		
7,100.00	7,007.39	7,060.42	6,980.88	22.62	22.18	41.40	-27.17	1,084.24	436.59	399.98	36.61	11.924		
7,200.00	7,105.04	7,160.41	7,078.84	23.07	22.63	41.20	-35.34	1,102.53	436.08	398.79	37.29	11.694		
7,300.00	7,202.69	7,260.40	7,176.80	23.53	23.08	41.01	-43.51	1,120.81	435.58	397.61	37.97	11.472		
7,400.00	7,300.33	7,360.39	7,274.76	23.99	23.53	40.82	-51.68	1,139.10	435.07	396.43	38.65	11.258		
7,500.00	7,397.98	7,460.37	7,372.73	24.45	23.98	40.63	-59.86	1,157.38	434.58	395.25	39.33	11.051		
7,600.00	7,495.63	7,560.36	7,470.69	24.91	24.44	40.43	-68.03	1,175.66	434.09	394.08	40.01	10.851		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



<b>Company:</b>	LONQUIST & CO., LLC	<b>Local Co-ordinate Reference:</b>	Well KINGS LANDING AGI #1
<b>Project:</b>	EDDY COUNTY, NM EAST (NAD83)	<b>TVD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Reference Site:</b>	KINGS LANDING	<b>MD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Site Error:</b>	0.00 usft	<b>North Reference:</b>	Grid
<b>Reference Well:</b>	KINGS LANDING AGI #1	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Well Error:</b>	0.00 usft	<b>Output errors are at</b>	2.00 sigma
<b>Reference Wellbore</b>	Wellbore #1	<b>Database:</b>	HPD Well Planning
<b>Reference Design:</b>	PLAN 2	<b>Offset TVD Reference:</b>	Reference Datum

Offset Design: KINGS LANDING - KINGS LANDING AGI #2 - Wellbore #1 - PLAN 3													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Offset Measured Depth (usft)	Offset Vertical Depth (usft)	Semi Major Axis Reference (usft)	Semi Major Axis Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N-S (usft)	Offset Wellbore Centre +E-W (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
7,700.00	7,593.27	7,660.35	7,568.65	25.37	24.89	40.24	-76.20	1,193.95	433.60	392.92	40.69	10.657		
7,800.00	7,690.92	7,760.34	7,666.61	25.83	25.34	40.04	-84.37	1,212.23	433.12	391.75	41.37	10.470		
7,900.00	7,788.57	7,860.33	7,764.57	26.30	25.80	39.85	-92.54	1,230.51	432.65	390.60	42.05	10.289		
8,000.00	7,886.21	7,960.31	7,862.53	26.76	26.25	39.65	-100.71	1,248.80	432.18	389.45	42.73	10.114		
8,100.00	7,983.86	8,060.30	7,960.49	27.23	26.71	39.46	-108.89	1,267.08	431.71	388.30	43.41	9.945		
8,200.00	8,081.51	8,160.29	8,058.46	27.69	27.17	39.26	-117.06	1,285.36	431.25	387.16	44.09	9.780		
8,300.00	8,179.15	8,260.28	8,156.42	28.16	27.62	39.06	-125.23	1,303.65	430.80	386.02	44.78	9.621		
8,400.00	8,276.80	8,360.26	8,254.38	28.62	28.08	38.87	-133.40	1,321.93	430.35	384.89	45.46	9.467		
8,500.00	8,374.45	8,460.25	8,352.34	29.09	28.54	38.67	-141.57	1,340.21	429.90	383.76	46.14	9.317		
8,600.00	8,472.10	8,560.24	8,450.30	29.56	29.00	38.47	-149.74	1,358.50	429.47	382.64	46.83	9.172		
8,700.00	8,569.74	8,660.23	8,548.26	30.02	29.46	38.27	-157.92	1,376.78	429.03	381.52	47.51	9.031		
8,800.00	8,667.39	8,760.21	8,646.23	30.49	29.92	38.08	-166.09	1,395.06	428.60	380.41	48.19	8.894		
8,900.00	8,765.04	8,860.20	8,744.19	30.96	30.38	37.88	-174.26	1,413.35	428.18	379.31	48.87	8.761		
9,000.00	8,862.68	8,960.19	8,842.15	31.43	30.84	37.68	-182.43	1,431.63	427.77	378.21	49.56	8.632		
9,100.00	8,960.33	9,060.18	8,940.11	31.90	31.30	37.48	-190.60	1,449.91	427.35	377.11	50.24	8.506		
9,200.00	9,057.98	9,160.16	9,038.07	32.37	31.76	37.28	-198.77	1,468.20	426.95	376.02	50.93	8.384		
9,300.00	9,155.62	9,260.15	9,136.03	32.84	32.22	37.08	-206.95	1,486.48	426.55	374.94	51.61	8.265		
9,400.00	9,253.27	9,360.14	9,233.99	33.31	32.69	36.88	-215.12	1,504.76	426.15	373.86	52.29	8.149		
9,500.00	9,350.92	9,460.13	9,331.96	33.78	33.15	36.68	-223.29	1,523.05	425.76	372.78	52.98	8.037		
9,600.00	9,448.56	9,560.12	9,429.92	34.25	33.61	36.47	-231.46	1,541.33	425.38	371.72	53.66	7.927		
9,700.00	9,546.21	9,660.10	9,527.88	34.72	34.08	36.27	-239.63	1,559.62	425.00	370.65	54.34	7.821		
9,800.00	9,643.86	9,760.09	9,625.84	35.19	34.54	36.07	-247.80	1,577.90	424.62	369.60	55.03	7.717		
9,900.00	9,741.50	9,860.08	9,723.80	35.67	35.00	35.87	-255.98	1,596.18	424.25	368.55	55.71	7.616		
10,000.00	9,839.15	9,960.07	9,821.76	36.14	35.47	35.66	-264.15	1,614.47	423.89	367.50	56.39	7.517		
10,100.00	9,936.80	10,060.05	9,919.73	36.61	35.93	35.46	-272.32	1,632.75	423.53	366.46	57.08	7.421		
10,200.00	10,034.44	10,160.04	10,017.69	37.09	36.40	35.26	-280.49	1,651.03	423.18	365.42	57.76	7.327		
10,300.00	10,132.09	10,260.03	10,115.65	37.56	36.86	35.05	-288.66	1,669.32	422.84	364.39	58.44	7.235		
10,400.00	10,229.74	10,360.02	10,213.61	38.03	37.33	34.85	-296.83	1,687.60	422.50	363.37	59.13	7.146		
10,500.00	10,327.38	10,460.00	10,311.57	38.51	37.79	34.65	-305.01	1,705.88	422.16	362.35	59.81	7.058		
10,600.00	10,425.03	10,559.99	10,409.53	38.98	38.26	34.44	-313.18	1,724.17	421.83	361.34	60.49	6.973		
10,700.00	10,522.68	10,659.98	10,507.50	39.46	38.73	34.24	-321.35	1,742.45	421.51	360.33	61.18	6.890		
10,800.00	10,620.32	10,759.97	10,605.46	39.93	39.19	34.03	-329.52	1,760.73	421.19	359.33	61.86	6.809		
10,900.00	10,717.97	10,859.95	10,703.42	40.41	39.66	33.82	-337.69	1,779.02	420.88	358.33	62.54	6.729		
11,000.00	10,815.62	10,959.94	10,801.38	40.88	40.13	33.62	-345.86	1,797.30	420.57	357.34	63.23	6.652		
11,100.00	10,913.26	11,059.93	10,899.34	41.36	40.60	33.41	-354.04	1,815.58	420.27	356.36	63.91	6.576		
11,200.00	11,010.91	11,159.92	10,997.30	41.84	41.06	33.21	-362.21	1,833.87	419.97	355.38	64.59	6.502		
11,299.65	11,108.40	11,259.56	11,094.93	42.30	41.52	33.12	-370.35	1,852.09	419.83	354.56	65.27	6.433		
11,300.00	11,108.69	11,259.91	11,095.27	42.30	41.53	33.08	-370.38	1,852.15	419.78	354.52	65.26	6.432	CC	
11,400.00	11,206.96	11,361.61	11,195.15	42.77	41.99	33.17	-378.20	1,869.65	419.80	353.89	65.91	6.369		
11,500.00	11,305.67	11,463.41	11,295.60	43.21	42.45	33.25	-384.94	1,884.72	419.82	353.33	66.49	6.314		
11,600.00	11,404.78	11,565.22	11,396.45	43.65	42.89	33.31	-390.58	1,897.35	419.84	352.85	66.99	6.268		
11,700.00	11,504.19	11,667.03	11,497.65	44.06	43.31	33.37	-395.13	1,907.52	419.85	352.45	67.40	6.229		
11,800.00	11,603.86	11,768.84	11,599.11	44.44	43.70	33.41	-398.57	1,915.23	419.86	352.13	67.73	6.199		
11,900.00	11,703.70	11,870.66	11,700.77	44.79	44.06	33.43	-400.91	1,920.46	419.87	351.88	67.99	6.176		
12,000.00	11,803.66	11,972.48	11,802.54	45.08	44.35	33.45	-402.14	1,923.22	419.87	351.71	68.16	6.160		
12,100.00	11,903.66	12,073.60	11,903.66	45.17	44.47	33.45	-402.35	1,923.69	419.87	351.66	68.21	6.155		
12,200.00	12,003.66	12,173.60	12,003.66	45.18	44.47	33.45	-402.35	1,923.69	419.87	351.61	68.26	6.151		
12,300.00	12,103.66	12,273.60	12,103.66	45.20	44.48	33.45	-402.35	1,923.69	419.87	351.56	68.31	6.146		
12,400.00	12,203.66	12,373.60	12,203.66	45.21	44.48	33.45	-402.35	1,923.69	419.87	351.51	68.37	6.142		
12,500.00	12,303.66	12,473.60	12,303.66	45.23	44.49	33.45	-402.35	1,923.69	419.87	351.45	68.42	6.137		
12,600.00	12,403.66	12,573.60	12,403.66	45.24	44.49	33.45	-402.35	1,923.69	419.87	351.40	68.47	6.132		
12,700.00	12,503.66	12,673.60	12,503.66	45.26	44.50	33.45	-402.35	1,923.69	419.87	351.35	68.52	6.127		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



<b>Company:</b>	LONQUIST & CO., LLC	<b>Local Co-ordinate Reference:</b>	Well KINGS LANDING AGI #1
<b>Project:</b>	EDDY COUNTY, NM EAST (NAD83)	<b>TVD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Reference Site:</b>	KINGS LANDING	<b>MD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Site Error:</b>	0.00 usft	<b>North Reference:</b>	Grid
<b>Reference Well:</b>	KINGS LANDING AGI #1	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Well Error:</b>	0.00 usft	<b>Output errors are at</b>	2.00 sigma
<b>Reference Wellbore</b>	Wellbore #1	<b>Database:</b>	HPD Well Planning
<b>Reference Design:</b>	PLAN 2	<b>Offset TVD Reference:</b>	Reference Datum

Offset Design: KINGS LANDING - KINGS LANDING AGI #2 - Wellbore #1 - PLAN 3													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Reference	Measured Vertical	Offset	Vertical	Semi Major Axis		Azimuth from North (°)	Offset Wellbore Centre		Rule Assigned: Distance		Minimum Separation (usft)	Separation Factor	Warning	
Depth (usft)	Depth (usft)	Measured Depth (usft)	Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)				
12,800.00	12,603.66	12,773.60	12,603.66	45.27	44.51	33.45	-402.35	1,923.69	419.87	351.30	68.58	6.123		
12,900.00	12,703.66	12,873.60	12,703.66	45.29	44.51	33.45	-402.35	1,923.69	419.87	351.24	68.63	6.118		
13,000.00	12,803.66	12,973.60	12,803.66	45.31	44.52	33.45	-402.35	1,923.69	419.87	351.19	68.68	6.113		
13,100.00	12,903.66	13,073.60	12,903.66	45.32	44.53	33.45	-402.35	1,923.69	419.87	351.13	68.74	6.108		
13,200.00	13,003.66	13,173.60	13,003.66	45.34	44.54	33.45	-402.35	1,923.69	419.87	351.08	68.79	6.103		
13,300.00	13,103.66	13,273.60	13,103.66	45.35	44.54	33.45	-402.35	1,923.69	419.87	351.02	68.85	6.098		
13,400.00	13,203.66	13,373.60	13,203.66	45.37	44.55	33.45	-402.35	1,923.69	419.87	350.97	68.90	6.094		
13,500.00	13,303.66	13,473.60	13,303.66	45.39	44.56	33.45	-402.35	1,923.69	419.87	350.91	68.96	6.089		
13,600.00	13,403.66	13,573.60	13,403.66	45.41	44.57	33.45	-402.35	1,923.69	419.87	350.86	69.02	6.084		
13,700.00	13,503.66	13,673.60	13,503.66	45.42	44.58	33.45	-402.35	1,923.69	419.87	350.80	69.07	6.079		
13,800.00	13,603.66	13,773.60	13,603.66	45.44	44.58	33.45	-402.35	1,923.69	419.87	350.74	69.13	6.074		
13,900.00	13,703.66	13,873.60	13,703.66	45.46	44.59	33.45	-402.35	1,923.69	419.87	350.69	69.19	6.069		
14,000.00	13,803.66	13,973.60	13,803.66	45.48	44.60	33.45	-402.35	1,923.69	419.88	350.63	69.25	6.064		
14,100.00	13,903.66	14,073.60	13,903.66	45.49	44.61	33.45	-402.35	1,923.69	419.88	350.57	69.30	6.058		
14,200.00	14,003.66	14,173.60	14,003.66	45.51	44.62	33.45	-402.35	1,923.69	419.88	350.51	69.36	6.053		
14,300.00	14,103.66	14,273.60	14,103.66	45.53	44.63	33.45	-402.35	1,923.69	419.88	350.45	69.42	6.048		
14,400.00	14,203.66	14,373.60	14,203.66	45.55	44.64	33.45	-402.35	1,923.69	419.88	350.40	69.48	6.043		
14,500.00	14,303.66	14,473.60	14,303.66	45.56	44.65	33.45	-402.35	1,923.69	419.88	350.34	69.54	6.038		
14,600.00	14,403.66	14,573.60	14,403.66	45.58	44.66	33.45	-402.35	1,923.69	419.88	350.28	69.60	6.033		
14,700.00	14,503.66	14,673.60	14,503.66	45.60	44.67	33.45	-402.35	1,923.69	419.88	350.22	69.66	6.028		
14,800.00	14,603.66	14,773.60	14,603.66	45.62	44.68	33.45	-402.35	1,923.69	419.88	350.16	69.72	6.022		
14,900.00	14,703.66	14,873.60	14,703.66	45.64	44.69	33.45	-402.35	1,923.69	419.88	350.10	69.78	6.017		
15,000.00	14,803.66	14,973.60	14,803.66	45.66	44.70	33.45	-402.34	1,923.69	419.88	350.04	69.84	6.012		
15,100.00	14,903.66	15,073.62	14,903.68	45.68	44.71	33.45	-402.35	1,923.69	419.87	349.97	69.90	6.007		
15,111.34	14,915.00	15,084.95	14,915.00	45.68	44.71	33.45	-402.35	1,923.69	419.87	349.97	69.90	6.006	ES, SF	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation




### Anticollision Report



<b>Company:</b>	LONQUIST & CO., LLC	<b>Local Co-ordinate Reference:</b>	Well KINGS LANDING AGI #1
<b>Project:</b>	EDDY COUNTY, NM EAST (NAD83)	<b>TVD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Reference Site:</b>	KINGS LANDING	<b>MD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Site Error:</b>	0.00 usft	<b>North Reference:</b>	Grid
<b>Reference Well:</b>	KINGS LANDING AGI #1	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Well Error:</b>	0.00 usft	<b>Output errors are at</b>	2.00 sigma
<b>Reference Wellbore</b>	Wellbore #1	<b>Database:</b>	HPD Well Planning
<b>Reference Design:</b>	PLAN 2	<b>Offset TVD Reference:</b>	Reference Datum

Reference Depths are relative to KB @ 3535.00usft (NO RIG)      Coordinates are relative to: KINGS LANDING AGI #1  
 Offset Depths are relative to Offset Datum      Coordinate System is US State Plane 1983, New Mexico Eastern Zone  
 Central Meridian is -104.333333      Grid Convergence at Surface is: 0.25°

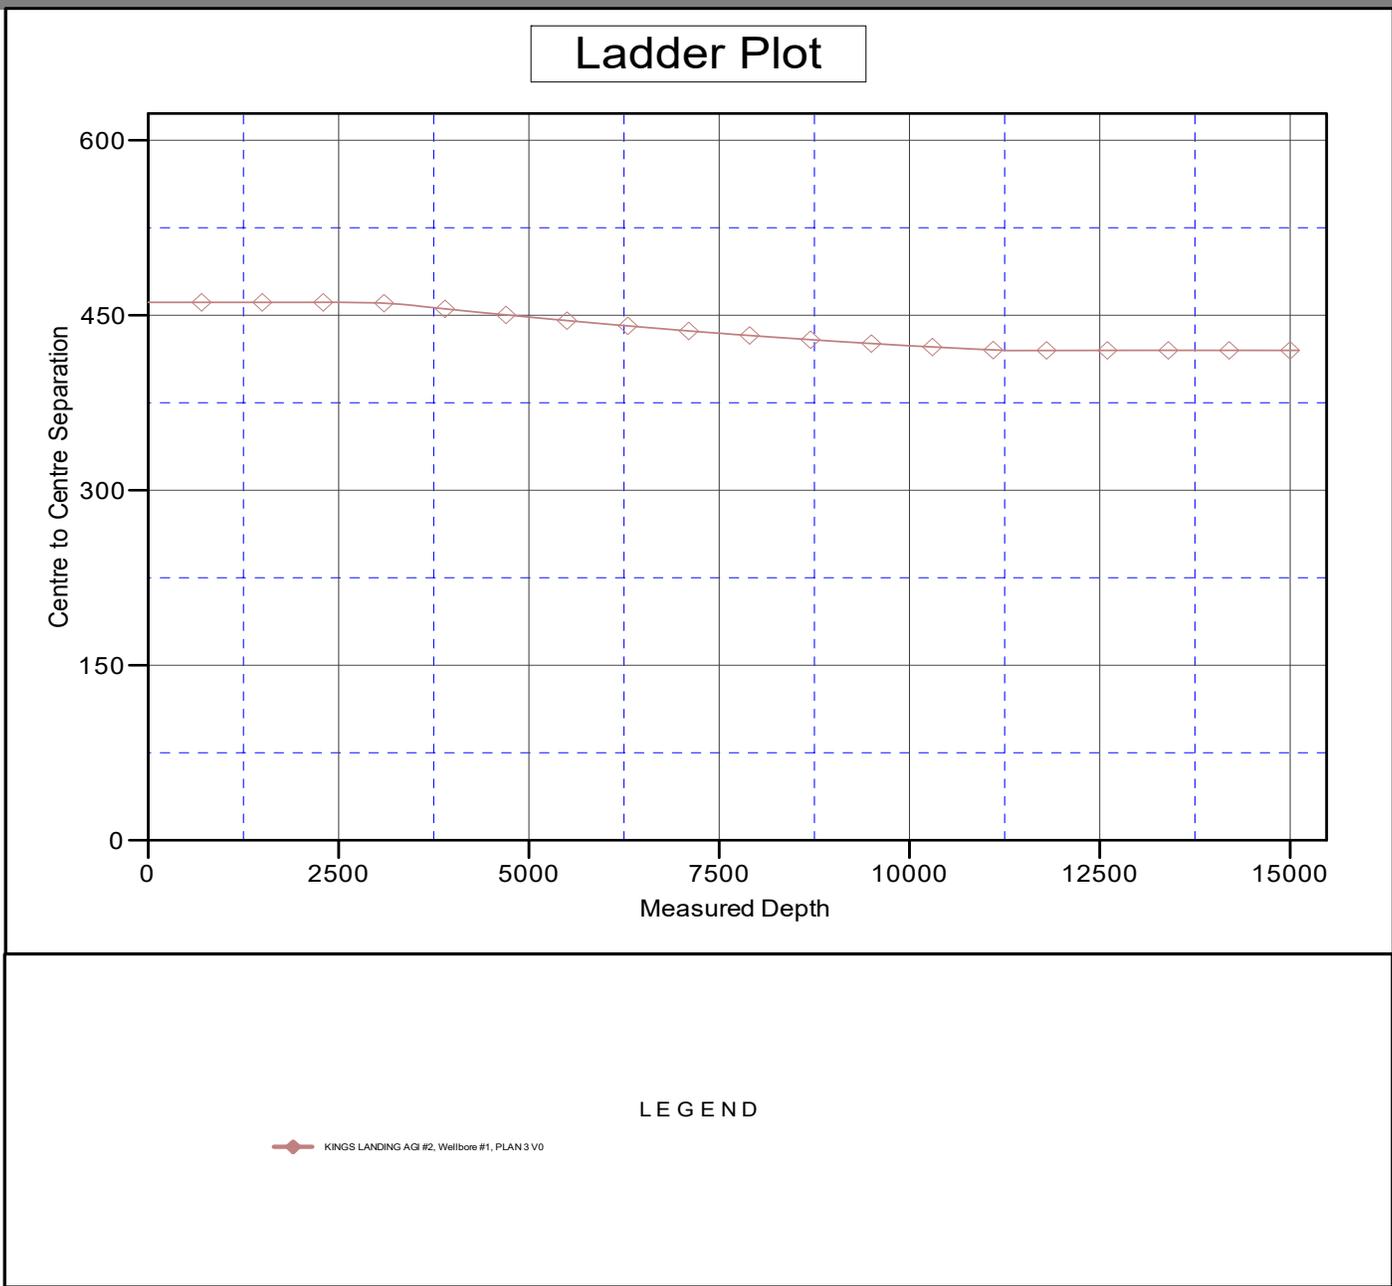




### Anticollision Report



<b>Company:</b>	LONQUIST & CO., LLC	<b>Local Co-ordinate Reference:</b>	Well KINGS LANDING AGI #1
<b>Project:</b>	EDDY COUNTY, NM EAST (NAD83)	<b>TVD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Reference Site:</b>	KINGS LANDING	<b>MD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Site Error:</b>	0.00 usft	<b>North Reference:</b>	Grid
<b>Reference Well:</b>	KINGS LANDING AGI #1	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Well Error:</b>	0.00 usft	<b>Output errors are at</b>	2.00 sigma
<b>Reference Wellbore</b>	Wellbore #1	<b>Database:</b>	HPD Well Planning
<b>Reference Design:</b>	PLAN 2	<b>Offset TVD Reference:</b>	Reference Datum

Reference Depths are relative to KB @ 3535.00usft (NO RIG)      Coordinates are relative to: KINGS LANDING AGI #1  
 Offset Depths are relative to Offset Datum      Coordinate System is US State Plane 1983, New Mexico Eastern Zone  
 Central Meridian is -104.3333333      Grid Convergence at Surface is: 0.25°

## Separation Factor Plot

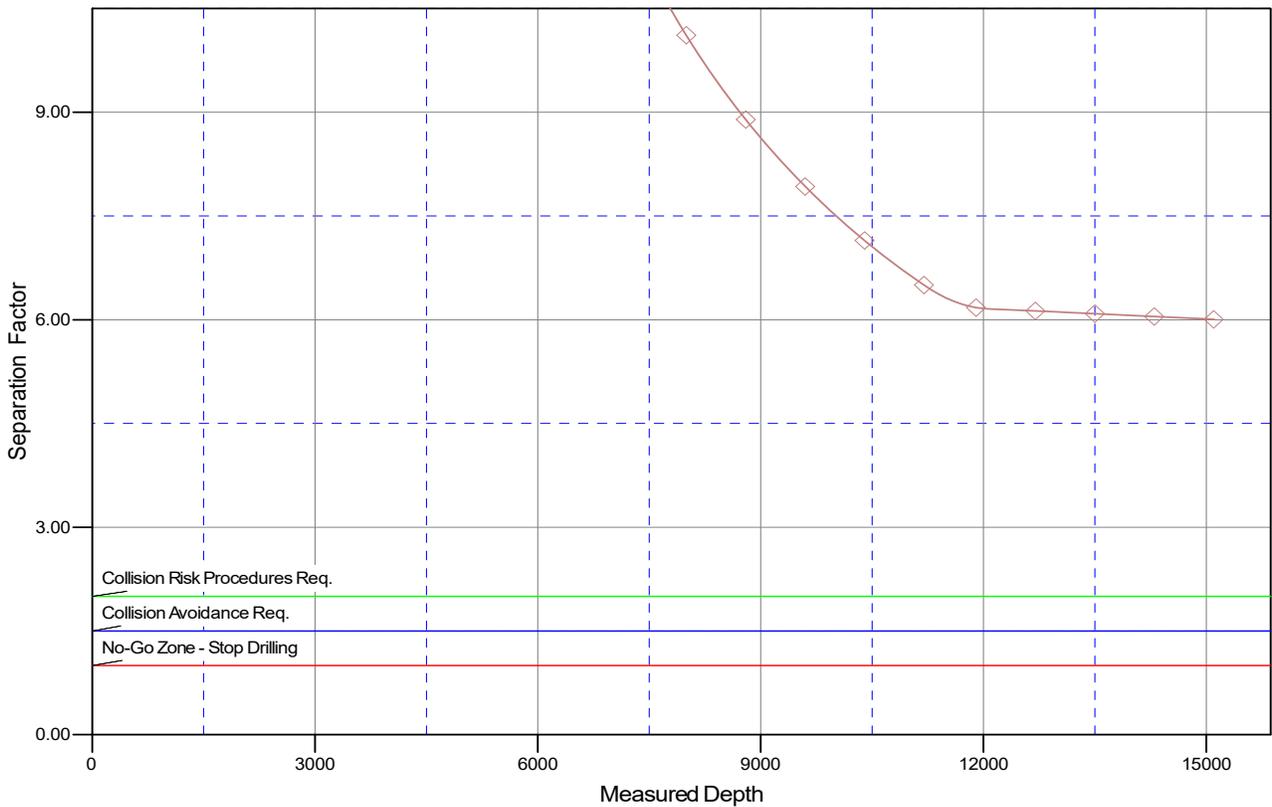

### LEGEND

◆ KINGS LANDING AGI #2, Wellbore #1, PLAN 3 V0



**HIGH PERFORMANCE  
DIRECTIONAL**

Project: EDDY COUNTY, NM EAST (NAD83)  
 Site: KINGS LANDING  
 Well: KINGS LANDING AGI #1  
 Wellbore: Wellbore #1  
 Design: PLAN 2

Geodetic System: US State Plane 1983  
 Datum: North American Datum 1983  
 Ellipsoid: GRS 1980  
 Zone: New Mexico Eastern Zone  
**RKB ELEVATION: KB @ 3535.00usft (NO RIG)**

**LONQUIST & CO. LLC**

PETROLEUM  
ENGINEERS

ENERGY  
ADVISORS

HOUSTON | CALGARY  
AUSTIN | WICHITA | DENVER



WELL DETAILS: KINGS LANDING AGI #1					
+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
0.00	0.00	604786.67	685619.76	32.6617292	-103.8644925

**DESIGN TARGET DETAILS**


Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
KINGS LANDING AGI #1 VP	11865.00	-752.67	1692.24	604034.00	687312.00	32.6596397	-103.8590047
KINGS LANDING AGI #1 BHL	14915.00	-752.67	1692.24	604034.00	687312.00	32.6596397	-103.8590047

**SECTION DETAILS**

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	Vsect
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2750.00	0.00	0.00	2750.00	0.00	0.00	0.00	0.00	0.00
3372.73	113.98	12.45	3367.84	-27.40	61.60	2.00	113.98	67.42
11231.04	113.98	12.45	11041.22	-716.14	1610.11	0.00	0.00	1762.19
12061.34	0.00	0.00	11865.00	-752.67	1692.24	1.50	180.00	1852.08
15111.34	0.00	0.00	14915.00	-752.67	1692.24	0.00	0.00	1852.07

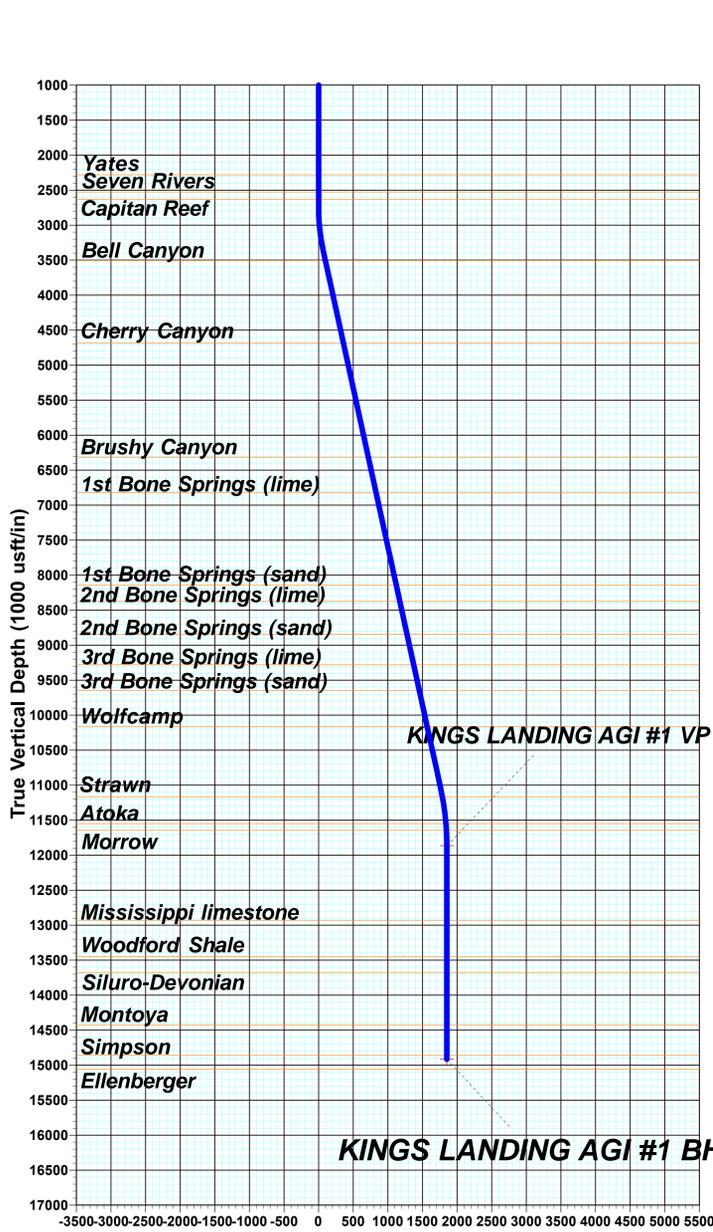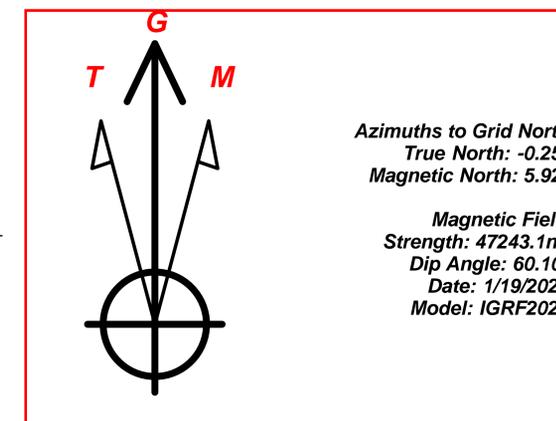

**Vertical Section at 113.98° (1000 usft/in)**

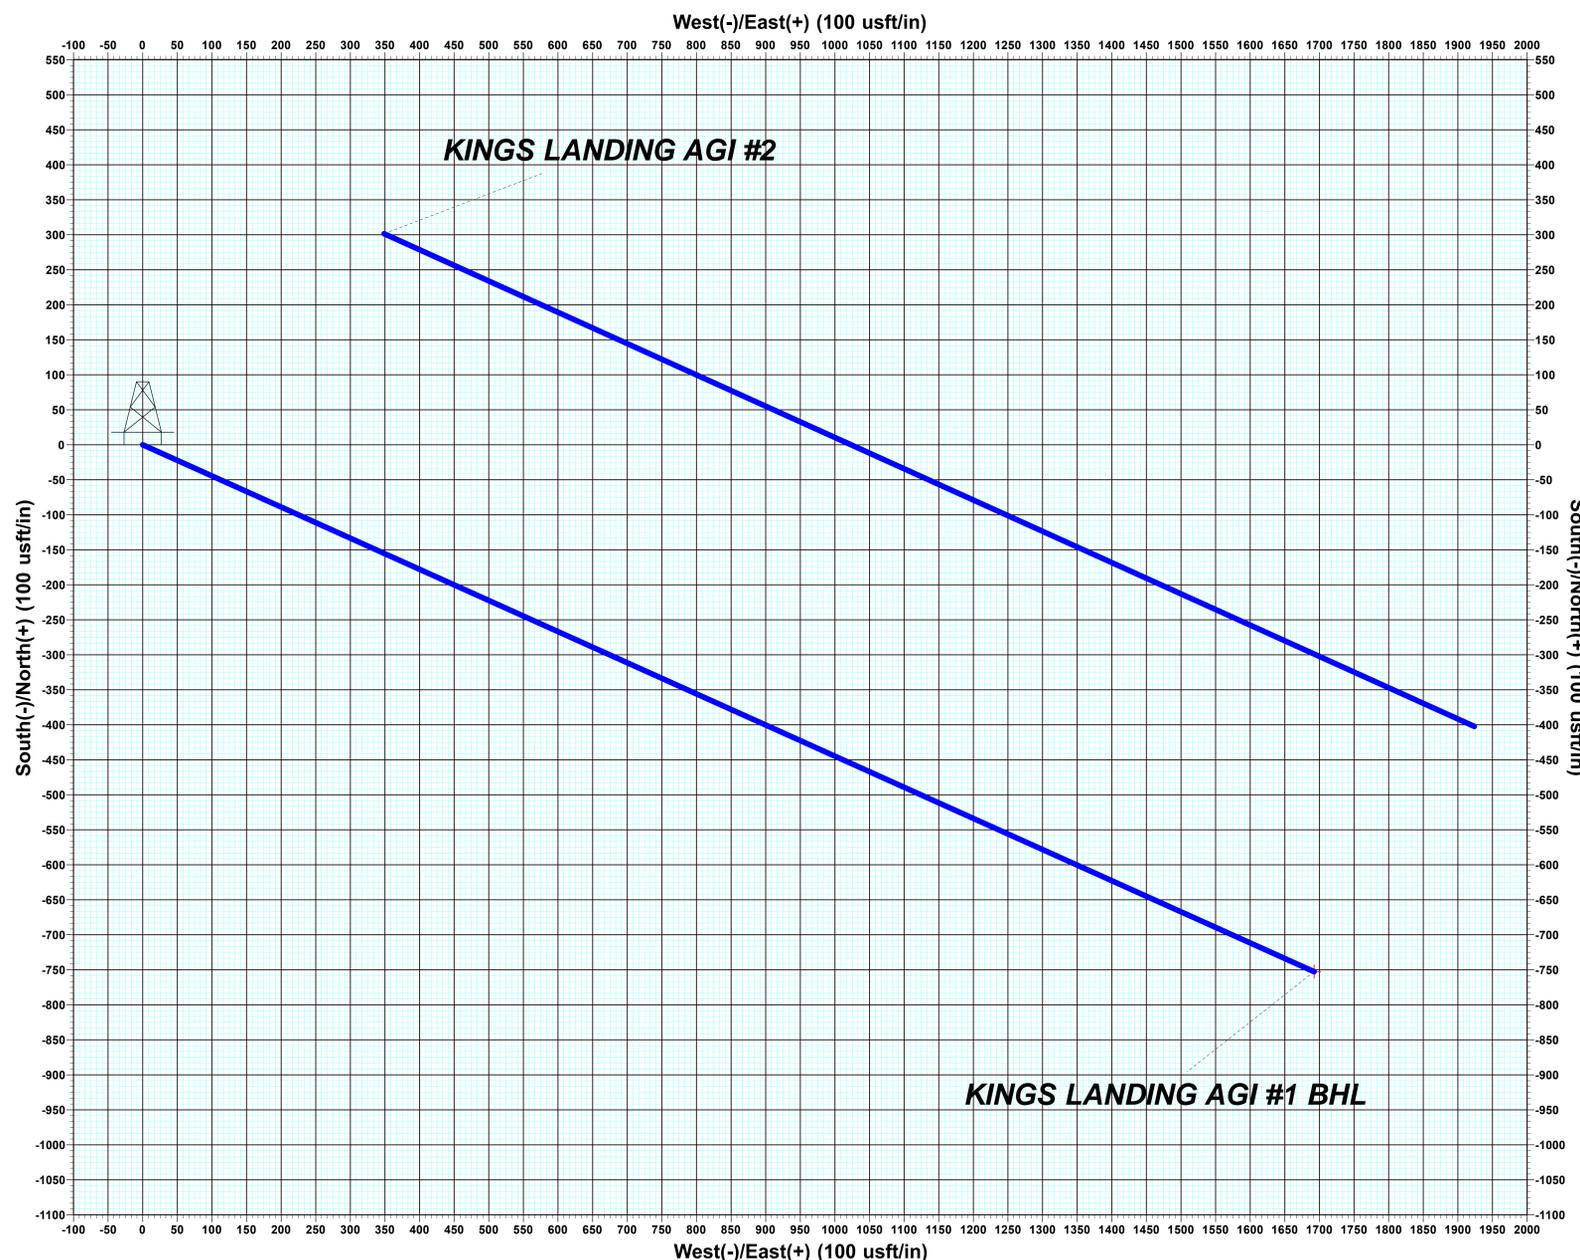

MAGNETIC CORRECTION DATA:
MAGNETIC NORTH IS 5.92° EAST OF GRID NORTH (MAGNETIC CONVERGENCE) TO CONVERT A MAGNETIC DIRECTION TO A GRID DIRECTION, ADD 5.92° TO CONVERT A TRUE DIRECTION TO A GRID DIRECTION, SUBTRACT 0.25°
MAGNETIC DECLINATION: 6.18° GRID_CONVERGENCE: 0.25° WEST

\*\*\*Note: this electronic file is provided for information purposes only. HP Directional LLC, it's employees, and agents make no guarantee or warranty, expressed or implied, as to the accuracy of this electronic file. The data included here and may be subject to error, while corruption, change, alteration, or update without any notice to the user. HP Directional LLC, it's employees, and it's agents assume no responsibility, expressed or implied, for any damages incurred directly or indirectly by the use of this electronic file. The users agree to the above, expressed or implied, and agrees to verify the data enclosed to ascertain its accuracy for their intended use. If these conditions are unacceptable, user shall discard this data.\*\*\*

**36"x36"**



**LONQUIST & CO., LLC**  
EDDY COUNTY, NM EAST (NAD83)  
KINGS LANDING  
KINGS LANDING AGI #2

Wellbore #1

Plan: PLAN 2

**Standard Planning Report**

12 January, 2026





### Planning Report



<b>Database:</b>	HPD Well Planning	<b>Local Co-ordinate Reference:</b>	Well KINGS LANDING AGI #2
<b>Company:</b>	LONQUIST & CO., LLC	<b>TVD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Project:</b>	EDDY COUNTY, NM EAST (NAD83)	<b>MD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Site:</b>	KINGS LANDING	<b>North Reference:</b>	Grid
<b>Well:</b>	KINGS LANDING AGI #2	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	PLAN 2		

<b>Project</b>	EDDY COUNTY, NM EAST (NAD83)		
<b>Map System:</b>	US State Plane 1983	<b>System Datum:</b>	Mean Sea Level
<b>Geo Datum:</b>	North American Datum 1983		
<b>Map Zone:</b>	New Mexico Eastern Zone		

<b>Site</b>	KINGS LANDING				
<b>Site Position:</b>		<b>Northing:</b>	605,088.25 usft	<b>Latitude:</b>	32.6625539
<b>From:</b>	Lat/Long	<b>Easting:</b>	685,968.45 usft	<b>Longitude:</b>	-103.8633551
<b>Position Uncertainty:</b>	0.00 usft	<b>Slot Radius:</b>	13.200 in		

<b>Well</b>	KINGS LANDING AGI #2					
<b>Well Position</b>	<b>+N/-S</b>	0.00 usft	<b>Northing:</b>	605,088.25 usft	<b>Latitude:</b>	32.6625539
	<b>+E/-W</b>	0.00 usft	<b>Easting:</b>	685,968.45 usft	<b>Longitude:</b>	-103.8633551
<b>Position Uncertainty</b>		0.00 usft	<b>Wellhead Elevation:</b>	usft	<b>Ground Level:</b>	3,535.00 usft
<b>Grid Convergence:</b>		0.25 °				

<b>Wellbore</b>	Wellbore #1				
<b>Magnetics</b>	<b>Model Name</b>	<b>Sample Date</b>	<b>Declination (°)</b>	<b>Dip Angle (°)</b>	<b>Field Strength (nT)</b>
	IGRF2020	4/1/2026	6.15	60.09	47,223.19214486


<b>Design</b>	PLAN 2			
<b>Audit Notes:</b>				
<b>Version:</b>	<b>Phase:</b>	PLAN	<b>Tie On Depth:</b>	0.00
<b>Vertical Section:</b>	<b>Depth From (TVD) (usft)</b>	<b>+N/-S (usft)</b>	<b>+E/-W (usft)</b>	<b>Direction (°)</b>
	0.00	0.00	0.00	114.08

<b>Plan Survey Tool Program</b>	<b>Date</b>	1/12/2026		
<b>Depth From (usft)</b>	<b>Depth To (usft)</b>	<b>Survey (Wellbore)</b>	<b>Tool Name</b>	<b>Remarks</b>
1	0.00	15,112.71	PLAN 2 (Wellbore #1)	MWD OWSG MWD - Standard

<b>Plan Sections</b>										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2,750.00	0.00	0.00	2,750.00	0.00	0.00	0.00	0.00	0.00	0.00	
3,374.98	12.50	114.08	3,370.03	-27.70	61.99	2.00	2.00	0.00	114.08	
11,229.40	12.50	114.08	11,038.29	-721.29	1,614.01	0.00	0.00	0.00	0.00	
12,062.71	0.00	0.00	11,865.00	-758.23	1,696.67	1.50	-1.50	-13.69	-180.00	KINGS LANDING A
15,112.71	0.00	0.00	14,915.00	-758.23	1,696.67	0.00	0.00	0.00	0.00	KINGS LANDING A



Planning Report



<b>Database:</b>	HPD Well Planning	<b>Local Co-ordinate Reference:</b>	Well KINGS LANDING AGI #2
<b>Company:</b>	LONQUIST & CO., LLC	<b>TVD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Project:</b>	EDDY COUNTY, NM EAST (NAD83)	<b>MD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Site:</b>	KINGS LANDING	<b>North Reference:</b>	Grid
<b>Well:</b>	KINGS LANDING AGI #2	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	PLAN 2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
530.00	0.00	0.00	530.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Rustler</b>									
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
805.00	0.00	0.00	805.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Salado</b>									
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,290.00	0.00	0.00	2,290.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Yates</b>									
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,535.00	0.00	0.00	2,535.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Seven Rivers</b>									
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00
2,640.00	0.00	0.00	2,640.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Capitan Reef</b>									
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00
2,750.00	0.00	0.00	2,750.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	1.00	114.08	2,800.00	-0.18	0.40	0.44	2.00	2.00	0.00
2,900.00	3.00	114.08	2,899.93	-1.60	3.58	3.93	2.00	2.00	0.00
3,000.00	5.00	114.08	2,999.68	-4.45	9.95	10.90	2.00	2.00	0.00
3,100.00	7.00	114.08	3,099.13	-8.71	19.50	21.35	2.00	2.00	0.00
3,200.00	9.00	114.08	3,198.15	-14.39	32.20	35.27	2.00	2.00	0.00
3,300.00	11.00	114.08	3,296.63	-21.48	48.05	52.63	2.00	2.00	0.00
3,374.98	12.50	114.08	3,370.03	-27.70	61.99	67.90	2.00	2.00	0.00
3,400.00	12.50	114.08	3,394.46	-29.91	66.94	73.32	0.00	0.00	0.00
3,500.00	12.50	114.08	3,492.09	-38.74	86.70	94.96	0.00	0.00	0.00
3,523.47	12.50	114.08	3,515.00	-40.82	91.33	100.04	0.00	0.00	0.00
<b>Bell Canyon</b>									
3,600.00	12.50	114.08	3,589.72	-47.58	106.46	116.60	0.00	0.00	0.00
3,700.00	12.50	114.08	3,687.35	-56.41	126.22	138.25	0.00	0.00	0.00
3,800.00	12.50	114.08	3,784.98	-65.24	145.98	159.89	0.00	0.00	0.00



Planning Report



<b>Database:</b>	HPD Well Planning	<b>Local Co-ordinate Reference:</b>	Well KINGS LANDING AGI #2
<b>Company:</b>	LONQUIST & CO., LLC	<b>TVD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Project:</b>	EDDY COUNTY, NM EAST (NAD83)	<b>MD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Site:</b>	KINGS LANDING	<b>North Reference:</b>	Grid
<b>Well:</b>	KINGS LANDING AGI #2	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	PLAN 2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
3,900.00	12.50	114.08	3,882.61	-74.07	165.74	181.53	0.00	0.00	0.00
4,000.00	12.50	114.08	3,980.24	-82.90	185.50	203.18	0.00	0.00	0.00
4,100.00	12.50	114.08	4,077.87	-91.73	205.26	224.82	0.00	0.00	0.00
4,200.00	12.50	114.08	4,175.50	-100.56	225.02	246.46	0.00	0.00	0.00
4,300.00	12.50	114.08	4,273.13	-109.39	244.78	268.11	0.00	0.00	0.00
4,400.00	12.50	114.08	4,370.76	-118.22	264.54	289.75	0.00	0.00	0.00
4,500.00	12.50	114.08	4,468.39	-127.05	284.30	311.39	0.00	0.00	0.00
4,600.00	12.50	114.08	4,566.02	-135.88	304.06	333.04	0.00	0.00	0.00
4,700.00	12.50	114.08	4,663.65	-144.71	323.82	354.68	0.00	0.00	0.00
4,732.11	12.50	114.08	4,695.00	-147.55	330.16	361.63	0.00	0.00	0.00
<b>Cherry Canyon</b>									
4,800.00	12.50	114.08	4,761.28	-153.54	343.57	376.32	0.00	0.00	0.00
4,900.00	12.50	114.08	4,858.91	-162.37	363.33	397.97	0.00	0.00	0.00
5,000.00	12.50	114.08	4,956.54	-171.20	383.09	419.61	0.00	0.00	0.00
5,100.00	12.50	114.08	5,054.17	-180.03	402.85	441.25	0.00	0.00	0.00
5,200.00	12.50	114.08	5,151.80	-188.86	422.61	462.90	0.00	0.00	0.00
5,300.00	12.50	114.08	5,249.43	-197.69	442.37	484.54	0.00	0.00	0.00
5,400.00	12.50	114.08	5,347.06	-206.52	462.13	506.18	0.00	0.00	0.00
5,500.00	12.50	114.08	5,444.69	-215.36	481.89	527.83	0.00	0.00	0.00
5,600.00	12.50	114.08	5,542.32	-224.19	501.65	549.47	0.00	0.00	0.00
5,700.00	12.50	114.08	5,639.95	-233.02	521.41	571.11	0.00	0.00	0.00
5,800.00	12.50	114.08	5,737.58	-241.85	541.17	592.75	0.00	0.00	0.00
5,900.00	12.50	114.08	5,835.21	-250.68	560.93	614.40	0.00	0.00	0.00
6,000.00	12.50	114.08	5,932.84	-259.51	580.69	636.04	0.00	0.00	0.00
6,100.00	12.50	114.08	6,030.47	-268.34	600.45	657.68	0.00	0.00	0.00
6,200.00	12.50	114.08	6,128.09	-277.17	620.21	679.33	0.00	0.00	0.00
6,300.00	12.50	114.08	6,225.72	-286.00	639.97	700.97	0.00	0.00	0.00
6,400.00	12.50	114.08	6,323.35	-294.83	659.73	722.61	0.00	0.00	0.00
6,406.81	12.50	114.08	6,330.00	-295.43	661.08	724.09	0.00	0.00	0.00
<b>Brushy Canyon</b>									
6,500.00	12.50	114.08	6,420.98	-303.66	679.49	744.26	0.00	0.00	0.00
6,600.00	12.50	114.08	6,518.61	-312.49	699.25	765.90	0.00	0.00	0.00
6,700.00	12.50	114.08	6,616.24	-321.32	719.01	787.54	0.00	0.00	0.00
6,800.00	12.50	114.08	6,713.87	-330.15	738.77	809.19	0.00	0.00	0.00
6,900.00	12.50	114.08	6,811.50	-338.98	758.53	830.83	0.00	0.00	0.00
6,929.19	12.50	114.08	6,840.00	-341.56	764.30	837.15	0.00	0.00	0.00
<b>1st Bone Springs (Lime)</b>									
7,000.00	12.50	114.08	6,909.13	-347.81	778.29	852.47	0.00	0.00	0.00
7,100.00	12.50	114.08	7,006.76	-356.64	798.05	874.12	0.00	0.00	0.00
7,200.00	12.50	114.08	7,104.39	-365.47	817.81	895.76	0.00	0.00	0.00
7,300.00	12.50	114.08	7,202.02	-374.30	837.57	917.40	0.00	0.00	0.00
7,400.00	12.50	114.08	7,299.65	-383.14	857.33	939.05	0.00	0.00	0.00
7,500.00	12.50	114.08	7,397.28	-391.97	877.09	960.69	0.00	0.00	0.00
7,600.00	12.50	114.08	7,494.91	-400.80	896.85	982.33	0.00	0.00	0.00
7,700.00	12.50	114.08	7,592.54	-409.63	916.61	1,003.98	0.00	0.00	0.00
7,800.00	12.50	114.08	7,690.17	-418.46	936.37	1,025.62	0.00	0.00	0.00
7,900.00	12.50	114.08	7,787.80	-427.29	956.13	1,047.26	0.00	0.00	0.00
8,000.00	12.50	114.08	7,885.43	-436.12	975.89	1,068.90	0.00	0.00	0.00
8,100.00	12.50	114.08	7,983.06	-444.95	995.65	1,090.55	0.00	0.00	0.00
8,200.00	12.50	114.08	8,080.69	-453.78	1,015.41	1,112.19	0.00	0.00	0.00
8,281.24	12.50	114.08	8,160.00	-460.95	1,031.46	1,129.77	0.00	0.00	0.00
<b>1st Bone Springs (Sand)</b>									
8,300.00	12.50	114.08	8,178.32	-462.61	1,035.17	1,133.83	0.00	0.00	0.00



Planning Report



<b>Database:</b>	HPD Well Planning	<b>Local Co-ordinate Reference:</b>	Well KINGS LANDING AGI #2
<b>Company:</b>	LONQUIST & CO., LLC	<b>TVD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Project:</b>	EDDY COUNTY, NM EAST (NAD83)	<b>MD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Site:</b>	KINGS LANDING	<b>North Reference:</b>	Grid
<b>Well:</b>	KINGS LANDING AGI #2	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	PLAN 2		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
8,400.00	12.50	114.08	8,275.95	-471.44	1,054.93	1,155.48	0.00	0.00	0.00	
8,500.00	12.50	114.08	8,373.58	-480.27	1,074.69	1,177.12	0.00	0.00	0.00	
8,516.82	12.50	114.08	8,390.00	-481.76	1,078.01	1,180.76	0.00	0.00	0.00	
<b>2nd Bone Springs (Lime)</b>										
8,600.00	12.50	114.08	8,471.21	-489.10	1,094.45	1,198.76	0.00	0.00	0.00	
8,700.00	12.50	114.08	8,568.84	-497.93	1,114.21	1,220.41	0.00	0.00	0.00	
8,800.00	12.50	114.08	8,666.47	-506.76	1,133.97	1,242.05	0.00	0.00	0.00	
8,900.00	12.50	114.08	8,764.10	-515.59	1,153.73	1,263.69	0.00	0.00	0.00	
8,998.23	12.50	114.08	8,860.00	-524.27	1,173.14	1,284.95	0.00	0.00	0.00	
<b>2nd Bone Springs (Sand)</b>										
9,000.00	12.50	114.08	8,861.73	-524.42	1,173.49	1,285.34	0.00	0.00	0.00	
9,100.00	12.50	114.08	8,959.36	-533.25	1,193.25	1,306.98	0.00	0.00	0.00	
9,200.00	12.50	114.08	9,056.99	-542.08	1,213.01	1,328.62	0.00	0.00	0.00	
9,300.00	12.50	114.08	9,154.62	-550.92	1,232.77	1,350.27	0.00	0.00	0.00	
9,400.00	12.50	114.08	9,252.25	-559.75	1,252.53	1,371.91	0.00	0.00	0.00	
9,443.79	12.50	114.08	9,295.00	-563.61	1,261.18	1,381.39	0.00	0.00	0.00	
<b>3rd Bone Springs (Lime)</b>										
9,500.00	12.50	114.08	9,349.88	-568.58	1,272.29	1,393.55	0.00	0.00	0.00	
9,600.00	12.50	114.08	9,447.51	-577.41	1,292.05	1,415.20	0.00	0.00	0.00	
9,700.00	12.50	114.08	9,545.14	-586.24	1,311.81	1,436.84	0.00	0.00	0.00	
9,800.00	12.50	114.08	9,642.77	-595.07	1,331.57	1,458.48	0.00	0.00	0.00	
9,817.65	12.50	114.08	9,660.00	-596.63	1,335.05	1,462.30	0.00	0.00	0.00	
<b>3rd Bone Springs (Sand)</b>										
9,900.00	12.50	114.08	9,740.40	-603.90	1,351.32	1,480.13	0.00	0.00	0.00	
10,000.00	12.50	114.08	9,838.03	-612.73	1,371.08	1,501.77	0.00	0.00	0.00	
10,100.00	12.50	114.08	9,935.66	-621.56	1,390.84	1,523.41	0.00	0.00	0.00	
10,200.00	12.50	114.08	10,033.29	-630.39	1,410.60	1,545.06	0.00	0.00	0.00	
10,300.00	12.50	114.08	10,130.92	-639.22	1,430.36	1,566.70	0.00	0.00	0.00	
10,355.40	12.50	114.08	10,185.00	-644.11	1,441.31	1,578.69	0.00	0.00	0.00	
<b>Wolfcamp</b>										
10,400.00	12.50	114.08	10,228.55	-648.05	1,450.12	1,588.34	0.00	0.00	0.00	
10,500.00	12.50	114.08	10,326.18	-656.88	1,469.88	1,609.98	0.00	0.00	0.00	
10,600.00	12.50	114.08	10,423.80	-665.71	1,489.64	1,631.63	0.00	0.00	0.00	
10,700.00	12.50	114.08	10,521.43	-674.54	1,509.40	1,653.27	0.00	0.00	0.00	
10,800.00	12.50	114.08	10,619.06	-683.37	1,529.16	1,674.91	0.00	0.00	0.00	
10,900.00	12.50	114.08	10,716.69	-692.20	1,548.92	1,696.56	0.00	0.00	0.00	
11,000.00	12.50	114.08	10,814.32	-701.03	1,568.68	1,718.20	0.00	0.00	0.00	
11,100.00	12.50	114.08	10,911.95	-709.86	1,588.44	1,739.84	0.00	0.00	0.00	
11,200.00	12.50	114.08	11,009.58	-718.70	1,608.20	1,761.49	0.00	0.00	0.00	
11,229.40	12.50	114.08	11,038.29	-721.29	1,614.01	1,767.85	0.00	0.00	0.00	
11,300.00	11.44	114.08	11,107.35	-727.27	1,627.38	1,782.49	1.50	-1.50	0.00	
11,379.06	10.25	114.08	11,185.00	-733.34	1,640.96	1,797.37	1.50	-1.50	0.00	
<b>Strawn</b>										
11,400.00	9.94	114.08	11,205.61	-734.83	1,644.32	1,801.04	1.50	-1.50	0.00	
11,500.00	8.44	114.08	11,304.33	-741.35	1,658.90	1,817.01	1.50	-1.50	0.00	
11,600.00	6.94	114.08	11,403.42	-746.81	1,671.11	1,830.40	1.50	-1.50	0.00	
11,700.00	5.44	114.08	11,502.84	-751.21	1,680.96	1,841.18	1.50	-1.50	0.00	
11,767.41	4.43	114.08	11,570.00	-753.58	1,686.25	1,846.98	1.50	-1.50	0.00	
<b>Atoka</b>										
11,800.00	3.94	114.08	11,602.50	-754.55	1,688.43	1,849.36	1.50	-1.50	0.00	
11,862.62	3.00	114.08	11,665.00	-756.09	1,691.89	1,853.15	1.50	-1.50	0.00	
<b>Morrow</b>										
11,900.00	2.44	114.08	11,702.34	-756.82	1,693.51	1,854.92	1.50	-1.50	0.00	



Planning Report



<b>Database:</b>	HPD Well Planning	<b>Local Co-ordinate Reference:</b>	Well KINGS LANDING AGI #2
<b>Company:</b>	LONQUIST & CO., LLC	<b>TVD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Project:</b>	EDDY COUNTY, NM EAST (NAD83)	<b>MD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Site:</b>	KINGS LANDING	<b>North Reference:</b>	Grid
<b>Well:</b>	KINGS LANDING AGI #2	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	PLAN 2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
12,000.00	0.94	114.07	11,802.30	-758.02	1,696.20	1,857.87	1.50	-1.50	0.00
12,062.71	0.00	0.00	11,865.00	-758.23	1,696.67	1,858.39	1.50	-1.50	-181.91
12,100.00	0.00	0.00	11,902.29	-758.23	1,696.67	1,858.39	0.00	0.00	0.00
12,200.00	0.00	0.00	12,002.29	-758.23	1,696.67	1,858.39	0.00	0.00	0.00
12,300.00	0.00	0.00	12,102.29	-758.23	1,696.67	1,858.39	0.00	0.00	0.00
12,400.00	0.00	0.00	12,202.29	-758.23	1,696.67	1,858.39	0.00	0.00	0.00
12,500.00	0.00	0.00	12,302.29	-758.23	1,696.67	1,858.39	0.00	0.00	0.00
12,600.00	0.00	0.00	12,402.29	-758.23	1,696.67	1,858.39	0.00	0.00	0.00
12,700.00	0.00	0.00	12,502.29	-758.23	1,696.67	1,858.39	0.00	0.00	0.00
12,800.00	0.00	0.00	12,602.29	-758.23	1,696.67	1,858.39	0.00	0.00	0.00
12,900.00	0.00	0.00	12,702.29	-758.23	1,696.67	1,858.39	0.00	0.00	0.00
13,000.00	0.00	0.00	12,802.29	-758.23	1,696.67	1,858.39	0.00	0.00	0.00
13,100.00	0.00	0.00	12,902.29	-758.23	1,696.67	1,858.39	0.00	0.00	0.00
13,147.71	0.00	0.00	12,950.00	-758.23	1,696.67	1,858.39	0.00	0.00	0.00
<b>Mississippi Lime</b>									
13,200.00	0.00	0.00	13,002.29	-758.23	1,696.67	1,858.39	0.00	0.00	0.00
13,300.00	0.00	0.00	13,102.29	-758.23	1,696.67	1,858.39	0.00	0.00	0.00
13,400.00	0.00	0.00	13,202.29	-758.23	1,696.67	1,858.39	0.00	0.00	0.00
13,500.00	0.00	0.00	13,302.29	-758.23	1,696.67	1,858.39	0.00	0.00	0.00
13,600.00	0.00	0.00	13,402.29	-758.23	1,696.67	1,858.39	0.00	0.00	0.00
13,672.71	0.00	0.00	13,475.00	-758.23	1,696.67	1,858.39	0.00	0.00	0.00
<b>Woodford Shale</b>									
13,700.00	0.00	0.00	13,502.29	-758.23	1,696.67	1,858.39	0.00	0.00	0.00
13,800.00	0.00	0.00	13,602.29	-758.23	1,696.67	1,858.39	0.00	0.00	0.00
13,897.71	0.00	0.00	13,700.00	-758.23	1,696.67	1,858.39	0.00	0.00	0.00
<b>Siluro-Devonian</b>									
13,900.00	0.00	0.00	13,702.29	-758.23	1,696.67	1,858.39	0.00	0.00	0.00
14,000.00	0.00	0.00	13,802.29	-758.23	1,696.67	1,858.39	0.00	0.00	0.00
14,100.00	0.00	0.00	13,902.29	-758.23	1,696.67	1,858.39	0.00	0.00	0.00
14,200.00	0.00	0.00	14,002.29	-758.23	1,696.67	1,858.39	0.00	0.00	0.00
14,300.00	0.00	0.00	14,102.29	-758.23	1,696.67	1,858.39	0.00	0.00	0.00
14,400.00	0.00	0.00	14,202.29	-758.23	1,696.67	1,858.39	0.00	0.00	0.00
14,500.00	0.00	0.00	14,302.29	-758.23	1,696.67	1,858.38	0.00	0.00	0.00
14,600.00	0.00	0.00	14,402.29	-758.22	1,696.67	1,858.38	0.00	0.00	0.00
14,652.71	0.00	0.00	14,455.00	-758.22	1,696.67	1,858.38	0.00	0.00	0.00
<b>Montoya</b>									
14,700.00	0.00	0.00	14,502.29	-758.22	1,696.67	1,858.38	0.00	0.00	0.00
14,800.00	0.00	0.00	14,602.29	-758.22	1,696.67	1,858.38	0.00	0.00	0.00
14,900.00	0.00	0.00	14,702.29	-758.22	1,696.67	1,858.38	0.00	0.00	0.00
15,000.00	0.00	0.00	14,802.29	-758.22	1,696.67	1,858.38	0.00	0.00	0.00
15,082.71	0.00	0.00	14,885.00	-758.22	1,696.67	1,858.38	0.00	0.00	0.00
<b>Simpson</b>									
15,100.00	0.00	0.00	14,902.29	-758.22	1,696.67	1,858.38	0.00	0.00	0.00
15,112.71	0.00	0.00	14,915.00	-758.23	1,696.67	1,858.39	0.00	0.00	0.00



Planning Report



<b>Database:</b>	HPD Well Planning	<b>Local Co-ordinate Reference:</b>	Well KINGS LANDING AGI #2
<b>Company:</b>	LONQUIST & CO., LLC	<b>TVD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Project:</b>	EDDY COUNTY, NM EAST (NAD83)	<b>MD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Site:</b>	KINGS LANDING	<b>North Reference:</b>	Grid
<b>Well:</b>	KINGS LANDING AGI #2	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	PLAN 2		

Design Targets										
Target Name	- hit/miss target	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
KINGS LANDING AGI	- plan hits target center	0.00	0.01	11,865.00	-758.23	1,696.67	604,330.02	687,665.12	32.6604490	-103.8578530
	- Point									
KINGS LANDING AGI	- plan hits target center	0.00	0.00	14,915.00	-758.23	1,696.67	604,330.03	687,665.12	32.6604490	-103.8578530
	- Point									

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
530.00	530.00	Rustler				
805.00	805.00	Salado				
2,290.00	2,290.00	Yates				
2,535.00	2,535.00	Seven Rivers				
2,640.00	2,640.00	Capitan Reef				
3,523.47	3,515.00	Bell Canyon				
4,732.11	4,695.00	Cherry Canyon				
6,406.81	6,330.00	Brushy Canyon				
6,929.19	6,840.00	1st Bone Springs (Lime)				
8,281.24	8,160.00	1st Bone Springs (Sand)				
8,516.82	8,390.00	2nd Bone Springs (Lime)				
8,998.23	8,860.00	2nd Bone Springs (Sand)				
9,443.79	9,295.00	3rd Bone Springs (Lime)				
9,817.65	9,660.00	3rd Bone Springs (Sand)				
10,355.40	10,185.00	Wolfcamp				
11,379.06	11,185.00	Strawn				
11,767.41	11,570.00	Atoka				
11,862.62	11,665.00	Morrow				
13,147.71	12,950.00	Mississippi Lime				
13,672.71	13,475.00	Woodford Shale				
13,897.71	13,700.00	Siluro-Devonian				
14,652.71	14,455.00	Montoya				
15,082.71	14,885.00	Simpson				



**LONQUIST & CO., LLC**  
EDDY COUNTY, NM EAST (NAD83)  
KINGS LANDING  
KINGS LANDING AGI #2

**Wellbore #1**  
**PLAN 3**

# Anticollision Report

21 January, 2026

**LONQUIST & CO. LLC**

PETROLEUM  
ENGINEERS

ENERGY  
ADVISORS

HOUSTON | CALGARY  
AUSTIN | WICHITA | DENVER



### Anticollision Report



<b>Company:</b>	LONQUIST & CO., LLC	<b>Local Co-ordinate Reference:</b>	Well KINGS LANDING AGI #2
<b>Project:</b>	EDDY COUNTY, NM EAST (NAD83)	<b>TVD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Reference Site:</b>	KINGS LANDING	<b>MD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Site Error:</b>	0.00 usft	<b>North Reference:</b>	Grid
<b>Reference Well:</b>	KINGS LANDING AGI #2	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Well Error:</b>	0.00 usft	<b>Output errors are at</b>	2.00 sigma
<b>Reference Wellbore</b>	Wellbore #1	<b>Database:</b>	HPD Well Planning
<b>Reference Design:</b>	PLAN 3	<b>Offset TVD Reference:</b>	Reference Datum

<b>Reference</b>	PLAN 3		
<b>Filter type:</b>	GLOBAL FILTER APPLIED: All wellpaths within 200'+ 100/1000 of refere		
<b>Interpolation Method:</b>	MD Interval 100.00usft	<b>Error Model:</b>	ISCWSA
<b>Depth Range:</b>	Unlimited	<b>Scan Method:</b>	Closest Approach 3D
<b>Results Limited by:</b>	Maximum centre distance of 1,708.49usft	<b>Error Surface:</b>	Pedal Curve
<b>Warning Levels Evaluated at:</b>	2.00 Sigma	<b>Casing Method:</b>	Not applied

<b>Survey Tool Program</b>	Date	1/21/2026		
<b>From (usft)</b>	<b>To (usft)</b>	<b>Survey (Wellbore)</b>	<b>Tool Name</b>	<b>Description</b>
0.00	15,084.95	PLAN 3 (Wellbore #1)	MWD	OWSG MWD - Standard

Site Name	Reference Measured Depth (usft)	Offset Measured Depth (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Separation Factor	Warning
Offset Well - Wellbore - Design						
KINGS LANDING						
KINGS LANDING AGI #1 - Wellbore #1 - PLAN 2	11,292.26	11,331.78	419.74	354.28	6.412	CC
KINGS LANDING AGI #1 - Wellbore #1 - PLAN 2	15,084.95	15,111.34	419.87	349.97	6.006	ES, SF

Offset Design: KINGS LANDING - KINGS LANDING AGI #1 - Wellbore #1 - PLAN 2													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Measured Reference Depth (usft)	Vertical Reference Depth (usft)	Offset Measured Depth (usft)	Vertical Offset Depth (usft)	Semi Major Axis Reference (usft)	Semi Major Axis Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre		Distance Between Centres (usft)		Minimum Separation (usft)	Separation Factor	Warning	
							+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)				
0.00	0.00	0.00	0.00	0.00	0.00	-130.86	-301.58	-348.69	461.01					
100.00	100.00	100.00	100.00	1.21	1.21	-130.86	-301.58	-348.69	461.01	458.59	2.42	190.461		
200.00	200.00	200.00	200.00	1.72	1.72	-130.86	-301.58	-348.69	461.01	457.58	3.43	134.372		
300.00	300.00	300.00	300.00	2.11	2.11	-130.86	-301.58	-348.69	461.01	456.80	4.21	109.467		
400.00	400.00	400.00	400.00	2.44	2.44	-130.86	-301.58	-348.69	461.01	456.14	4.87	94.588		
500.00	500.00	500.00	500.00	2.73	2.73	-130.86	-301.58	-348.69	461.01	455.55	5.46	84.413		
600.00	600.00	600.00	600.00	3.00	3.00	-130.86	-301.58	-348.69	461.01	455.02	6.00	76.887		
700.00	700.00	700.00	700.00	3.25	3.25	-130.86	-301.58	-348.69	461.01	454.52	6.49	71.026		
800.00	800.00	800.00	800.00	3.48	3.48	-130.86	-301.58	-348.69	461.01	454.06	6.95	66.292		
900.00	900.00	900.00	900.00	3.70	3.70	-130.86	-301.58	-348.69	461.01	453.62	7.39	62.364		
1,000.00	1,000.00	1,000.00	1,000.00	3.90	3.90	-130.86	-301.58	-348.69	461.01	453.21	7.81	59.034		
1,100.00	1,100.00	1,100.00	1,100.00	4.10	4.10	-130.86	-301.58	-348.69	461.01	452.81	8.21	56.165		
1,200.00	1,200.00	1,200.00	1,200.00	4.30	4.30	-130.86	-301.58	-348.69	461.01	452.42	8.59	53.657		
1,300.00	1,300.00	1,300.00	1,300.00	4.48	4.48	-130.86	-301.58	-348.69	461.01	452.05	8.96	51.441		
1,400.00	1,400.00	1,400.00	1,400.00	4.66	4.66	-130.86	-301.58	-348.69	461.01	451.69	9.32	49.463		
1,500.00	1,500.00	1,500.00	1,500.00	4.83	4.83	-130.86	-301.58	-348.69	461.01	451.35	9.67	47.684		
1,600.00	1,600.00	1,600.00	1,600.00	5.00	5.00	-130.86	-301.58	-348.69	461.01	451.01	10.01	46.071		
1,700.00	1,700.00	1,700.00	1,700.00	5.17	5.17	-130.86	-301.58	-348.69	461.01	450.68	10.34	44.601		
1,800.00	1,800.00	1,800.00	1,800.00	5.33	5.33	-130.86	-301.58	-348.69	461.01	450.36	10.66	43.253		
1,900.00	1,900.00	1,900.00	1,900.00	5.49	5.49	-130.86	-301.58	-348.69	461.01	450.04	10.97	42.011		
2,000.00	2,000.00	2,000.00	2,000.00	5.64	5.64	-130.86	-301.58	-348.69	461.01	449.73	11.28	40.861		
2,100.00	2,100.00	2,100.00	2,100.00	5.79	5.79	-130.86	-301.58	-348.69	461.01	449.43	11.59	39.793		
2,200.00	2,200.00	2,200.00	2,200.00	5.94	5.94	-130.86	-301.58	-348.69	461.01	449.13	11.88	38.798		
2,300.00	2,300.00	2,300.00	2,300.00	6.09	6.09	-130.86	-301.58	-348.69	461.01	448.84	12.17	37.867		
2,400.00	2,400.00	2,400.00	2,400.00	6.23	6.23	-130.86	-301.58	-348.69	461.01	448.55	12.46	36.993		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



### Anticollision Report



<b>Company:</b>	LONQUIST & CO., LLC	<b>Local Co-ordinate Reference:</b>	Well KINGS LANDING AGI #2
<b>Project:</b>	EDDY COUNTY, NM EAST (NAD83)	<b>TVD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Reference Site:</b>	KINGS LANDING	<b>MD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Site Error:</b>	0.00 usft	<b>North Reference:</b>	Grid
<b>Reference Well:</b>	KINGS LANDING AGI #2	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Well Error:</b>	0.00 usft	<b>Output errors are at</b>	2.00 sigma
<b>Reference Wellbore</b>	Wellbore #1	<b>Database:</b>	HPD Well Planning
<b>Reference Design:</b>	PLAN 3	<b>Offset TVD Reference:</b>	Reference Datum

Offset Design: KINGS LANDING - KINGS LANDING AGI #1 - Wellbore #1 - PLAN 2													Offset Site Error:	0.00 usft		
Survey Program: 0-MWD													Rule Assigned:		Offset Well Error:	0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N-S (usft)	+E-W (usft)	Between Centres (usft)	Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning			
2,500.00	2,500.00	2,500.00	2,500.00	6.37	6.37	-130.86	-301.58	-348.69	461.01	448.27	12.75	36.171				
2,600.00	2,600.00	2,600.00	2,600.00	6.51	6.51	-130.86	-301.58	-348.69	461.01	447.99	13.02	35.396				
2,700.00	2,700.00	2,700.00	2,700.00	6.65	6.65	-130.86	-301.58	-348.69	461.01	447.71	13.30	34.664				
2,800.00	2,800.00	2,803.67	2,803.67	6.72	6.72	-130.86	-301.78	-348.23	461.00	447.57	13.43	34.326				
2,900.00	2,899.93	2,911.01	2,910.93	6.90	6.92	-130.92	-303.42	-344.56	460.89	447.22	13.66	33.734				
3,000.00	2,999.68	3,018.34	3,017.94	7.09	7.13	-131.04	-306.68	-337.21	460.66	446.75	13.90	33.135				
3,100.00	3,099.13	3,125.63	3,124.56	7.30	7.36	-131.22	-311.57	-326.22	460.31	446.16	14.16	32.516				
3,200.00	3,198.15	3,232.89	3,230.61	7.54	7.62	-131.46	-318.08	-311.59	459.86	445.43	14.43	31.860				
3,300.00	3,296.63	3,340.10	3,335.93	7.79	7.87	-131.75	-326.19	-293.36	459.30	444.57	14.73	31.191				
3,400.00	3,394.63	3,442.27	3,435.74	7.97	8.09	-131.97	-335.07	-273.39	458.63	443.65	14.98	30.617				
3,500.00	3,492.60	3,542.26	3,533.38	8.20	8.33	-132.15	-343.84	-253.68	457.94	442.60	15.34	29.850				
3,600.00	3,590.57	3,642.25	3,631.01	8.45	8.59	-132.32	-352.60	-233.98	457.26	441.53	15.73	29.069				
3,700.00	3,688.55	3,742.23	3,728.65	8.73	8.88	-132.50	-361.36	-214.28	456.59	440.44	16.15	28.280				
3,800.00	3,786.52	3,842.22	3,826.28	9.01	9.18	-132.67	-370.13	-194.58	455.92	439.33	16.59	27.489				
3,900.00	3,884.50	3,942.21	3,923.92	9.32	9.49	-132.85	-378.89	-174.87	455.25	438.20	17.05	26.705				
4,000.00	3,982.47	4,042.20	4,021.55	9.63	9.81	-133.02	-387.65	-155.17	454.59	437.06	17.53	25.932				
4,100.00	4,080.44	4,142.19	4,119.18	9.96	10.15	-133.20	-396.42	-135.47	453.93	435.90	18.03	25.175				
4,200.00	4,178.42	4,242.17	4,216.82	10.30	10.50	-133.38	-405.18	-115.76	453.28	434.73	18.55	24.437				
4,300.00	4,276.39	4,342.16	4,314.45	10.65	10.86	-133.56	-413.94	-96.06	452.63	433.55	19.08	23.720				
4,400.00	4,374.36	4,442.15	4,412.09	11.01	11.23	-133.74	-422.71	-76.36	451.99	432.36	19.63	23.026				
4,500.00	4,472.34	4,542.14	4,509.72	11.38	11.61	-133.92	-431.47	-56.65	451.35	431.16	20.19	22.355				
4,600.00	4,570.31	4,642.12	4,607.36	11.75	11.99	-134.09	-440.23	-36.95	450.71	429.95	20.76	21.709				
4,700.00	4,668.29	4,742.11	4,704.99	12.14	12.38	-134.28	-449.00	-17.25	450.08	428.74	21.34	21.087				
4,800.00	4,766.26	4,842.10	4,802.63	12.52	12.78	-134.46	-457.76	2.45	449.46	427.52	21.94	20.490				
4,900.00	4,864.23	4,942.09	4,900.26	12.92	13.18	-134.64	-466.52	22.16	448.83	426.30	22.54	19.917				
5,000.00	4,962.21	5,042.07	4,997.90	13.32	13.59	-134.82	-475.29	41.86	448.22	425.07	23.14	19.367				
5,100.00	5,060.18	5,142.06	5,095.53	13.72	14.00	-135.00	-484.05	61.56	447.61	423.85	23.76	18.839				
5,200.00	5,158.15	5,242.05	5,193.17	14.13	14.42	-135.18	-492.81	81.27	447.00	422.62	24.38	18.334				
5,300.00	5,256.13	5,342.04	5,290.80	14.54	14.84	-135.37	-501.58	100.97	446.40	421.39	25.01	17.850				
5,400.00	5,354.10	5,442.02	5,388.44	14.95	15.26	-135.55	-510.34	120.67	445.80	420.16	25.64	17.385				
5,500.00	5,452.07	5,542.01	5,486.07	15.37	15.69	-135.73	-519.10	140.37	445.21	418.93	26.28	16.941				
5,600.00	5,550.05	5,642.00	5,583.70	15.79	16.12	-135.92	-527.87	160.08	444.62	417.70	26.92	16.515				
5,700.00	5,648.02	5,741.99	5,681.34	16.22	16.55	-136.10	-536.63	179.78	444.04	416.47	27.57	16.106				
5,800.00	5,746.00	5,841.97	5,778.97	16.64	16.98	-136.29	-545.39	199.48	443.46	415.24	28.22	15.715				
5,900.00	5,843.97	5,941.96	5,876.61	17.07	17.42	-136.47	-554.16	219.19	442.88	414.01	28.87	15.339				
6,000.00	5,941.94	6,041.95	5,974.24	17.50	17.86	-136.66	-562.92	238.89	442.31	412.79	29.53	14.979				
6,100.00	6,039.92	6,141.94	6,071.88	17.94	18.30	-136.85	-571.68	258.59	441.75	411.56	30.19	14.633				
6,200.00	6,137.89	6,241.93	6,169.51	18.37	18.75	-137.03	-580.45	278.30	441.19	410.34	30.85	14.301				
6,300.00	6,235.86	6,341.91	6,267.15	18.81	19.19	-137.22	-589.21	298.00	440.64	409.12	31.52	13.982				
6,400.00	6,333.84	6,441.90	6,364.78	19.25	19.64	-137.41	-597.97	317.70	440.09	407.91	32.18	13.675				
6,500.00	6,431.81	6,541.89	6,462.42	19.69	20.09	-137.60	-606.74	337.40	439.54	406.69	32.85	13.380				
6,600.00	6,529.78	6,641.88	6,560.05	20.13	20.54	-137.79	-615.50	357.11	439.01	405.49	33.52	13.097				
6,700.00	6,627.76	6,741.86	6,657.69	20.58	20.99	-137.98	-624.26	376.81	438.47	404.28	34.19	12.824				
6,800.00	6,725.73	6,841.85	6,755.32	21.02	21.44	-138.17	-633.03	396.51	437.94	403.08	34.86	12.561				
6,900.00	6,823.71	6,941.84	6,852.96	21.47	21.90	-138.36	-641.79	416.22	437.42	401.88	35.54	12.308				
7,000.00	6,921.68	7,041.83	6,950.59	21.91	22.35	-138.55	-650.56	435.92	436.90	400.68	36.21	12.065				
7,100.00	7,019.65	7,141.81	7,048.22	22.36	22.81	-138.74	-659.32	455.62	436.38	399.49	36.89	11.829				
7,200.00	7,117.63	7,241.80	7,145.86	22.81	23.27	-138.93	-668.08	475.33	435.88	398.31	37.57	11.603				
7,300.00	7,215.60	7,341.79	7,243.49	23.26	23.72	-139.12	-676.85	495.03	435.37	397.13	38.24	11.384				
7,400.00	7,313.57	7,441.78	7,341.13	23.71	24.18	-139.32	-685.61	514.73	434.87	395.95	38.92	11.172				
7,500.00	7,411.55	7,541.76	7,438.76	24.16	24.64	-139.51	-694.37	534.43	434.38	394.78	39.60	10.968				
7,600.00	7,509.52	7,641.75	7,536.40	24.62	25.10	-139.70	-703.14	554.14	433.89	393.61	40.28	10.771				

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



### Anticollision Report



<b>Company:</b>	LONQUIST & CO., LLC	<b>Local Co-ordinate Reference:</b>	Well KINGS LANDING AGI #2
<b>Project:</b>	EDDY COUNTY, NM EAST (NAD83)	<b>TVD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Reference Site:</b>	KINGS LANDING	<b>MD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Site Error:</b>	0.00 usft	<b>North Reference:</b>	Grid
<b>Reference Well:</b>	KINGS LANDING AGI #2	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Well Error:</b>	0.00 usft	<b>Output errors are at</b>	2.00 sigma
<b>Reference Wellbore</b>	Wellbore #1	<b>Database:</b>	HPD Well Planning
<b>Reference Design:</b>	PLAN 3	<b>Offset TVD Reference:</b>	Reference Datum

Offset Design: KINGS LANDING - KINGS LANDING AGI #1 - Wellbore #1 - PLAN 2													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Offset Measured Depth (usft)	Offset Vertical Depth (usft)	Semi Major Axis Reference (usft)	Semi Major Axis Offset (usft)	Azimuth from North (°)	Offset Wellbore Centre +N-S (usft)	Offset Wellbore Centre +E-W (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
7,700.00	7,607.50	7,741.74	7,634.03	25.07	25.57	-139.90	-711.90	573.84	433.41	392.44	40.96	10.580		
7,800.00	7,705.47	7,841.73	7,731.67	25.52	26.03	-140.09	-720.66	593.54	432.93	391.28	41.64	10.396		
7,900.00	7,803.44	7,941.72	7,829.30	25.98	26.49	-140.28	-729.43	613.25	432.45	390.13	42.33	10.217		
8,000.00	7,901.42	8,041.70	7,926.94	26.43	26.95	-140.48	-738.19	632.95	431.99	388.98	43.01	10.044		
8,100.00	7,999.39	8,141.69	8,024.57	26.89	27.42	-140.68	-746.95	652.65	431.52	387.83	43.69	9.877		
8,200.00	8,097.36	8,241.68	8,122.21	27.35	27.88	-140.87	-755.72	672.35	431.07	386.69	44.37	9.715		
8,300.00	8,195.34	8,341.67	8,219.84	27.81	28.35	-141.07	-764.48	692.06	430.61	385.56	45.06	9.558		
8,400.00	8,293.31	8,441.65	8,317.47	28.26	28.82	-141.26	-773.24	711.76	430.17	384.43	45.74	9.405		
8,500.00	8,391.28	8,541.64	8,415.11	28.72	29.28	-141.46	-782.01	731.46	429.73	383.30	46.42	9.257		
8,600.00	8,489.26	8,641.63	8,512.74	29.18	29.75	-141.66	-790.77	751.17	429.29	382.19	47.10	9.114		
8,700.00	8,587.23	8,741.62	8,610.38	29.64	30.22	-141.86	-799.53	770.87	428.86	381.07	47.79	8.974		
8,800.00	8,685.21	8,841.60	8,708.01	30.10	30.69	-142.05	-808.30	790.57	428.43	379.96	48.47	8.839		
8,900.00	8,783.18	8,941.59	8,805.65	30.56	31.15	-142.25	-817.06	810.28	428.01	378.86	49.15	8.708		
9,000.00	8,881.15	9,041.58	8,903.28	31.02	31.62	-142.45	-825.82	829.98	427.60	377.76	49.84	8.580		
9,100.00	8,979.13	9,141.57	9,000.92	31.48	32.09	-142.65	-834.59	849.68	427.19	376.67	50.52	8.456		
9,200.00	9,077.10	9,241.55	9,098.55	31.95	32.56	-142.85	-843.35	869.38	426.78	375.58	51.20	8.335		
9,300.00	9,175.07	9,341.54	9,196.19	32.41	33.03	-143.05	-852.11	889.09	426.38	374.50	51.89	8.218		
9,400.00	9,273.05	9,441.53	9,293.82	32.87	33.50	-143.25	-860.88	908.79	425.99	373.42	52.57	8.103		
9,500.00	9,371.02	9,541.52	9,391.46	33.33	33.98	-143.45	-869.64	928.49	425.60	372.35	53.25	7.992		
9,600.00	9,469.00	9,641.51	9,489.09	33.80	34.45	-143.65	-878.40	948.20	425.22	371.28	53.94	7.884		
9,700.00	9,566.97	9,741.49	9,586.73	34.26	34.92	-143.85	-887.17	967.90	424.84	370.22	54.62	7.778		
9,800.00	9,664.94	9,841.48	9,684.36	34.72	35.39	-144.06	-895.93	987.60	424.47	369.17	55.30	7.675		
9,900.00	9,762.92	9,941.47	9,781.99	35.19	35.86	-144.26	-904.69	1,007.30	424.11	368.12	55.99	7.575		
10,000.00	9,860.89	10,041.46	9,879.63	35.65	36.34	-144.46	-913.46	1,027.01	423.75	367.07	56.67	7.477		
10,100.00	9,958.86	10,141.44	9,977.26	36.12	36.81	-144.66	-922.22	1,046.71	423.39	366.04	57.35	7.382		
10,200.00	10,056.84	10,241.43	10,074.90	36.58	37.28	-144.87	-930.98	1,066.41	423.04	365.00	58.04	7.289		
10,300.00	10,154.81	10,341.42	10,172.53	37.05	37.76	-145.07	-939.75	1,086.12	422.70	363.98	58.72	7.198		
10,400.00	10,252.78	10,441.41	10,270.17	37.51	38.23	-145.27	-948.51	1,105.82	422.36	362.95	59.40	7.110		
10,500.00	10,350.76	10,541.39	10,367.80	37.98	38.70	-145.48	-957.28	1,125.52	422.03	361.94	60.09	7.023		
10,600.00	10,448.73	10,641.38	10,465.44	38.45	39.18	-145.68	-966.04	1,145.23	421.70	360.93	60.77	6.939		
10,700.00	10,546.71	10,741.37	10,563.07	38.91	39.65	-145.89	-974.80	1,164.93	421.38	359.92	61.45	6.857		
10,800.00	10,644.68	10,841.36	10,660.71	39.38	40.13	-146.09	-983.57	1,184.63	421.06	358.92	62.14	6.776		
10,900.00	10,742.65	10,941.34	10,758.34	39.85	40.60	-146.30	-992.33	1,204.33	420.75	357.93	62.82	6.698		
11,000.00	10,840.63	11,041.33	10,855.98	40.31	41.08	-146.50	-1,001.09	1,224.04	420.45	356.94	63.51	6.621		
11,100.00	10,938.60	11,141.32	10,953.61	40.78	41.56	-146.71	-1,009.86	1,243.74	420.15	355.96	64.19	6.545		
11,200.00	11,036.57	11,241.31	11,051.07	41.25	42.03	-146.91	-1,018.60	1,263.40	419.86	354.99	64.87	6.473		
11,292.26	11,127.04	11,331.78	11,139.86	41.67	42.45	-146.93	-1,026.02	1,280.08	419.74	354.28	65.47	6.412 CC		
11,300.00	11,134.58	11,339.38	11,147.33	41.71	42.48	-146.88	-1,026.60	1,281.40	419.79	354.27	65.52	6.407		
11,400.00	11,232.97	11,437.63	11,244.06	42.17	42.93	-146.80	-1,033.60	1,297.13	419.81	353.67	66.14	6.347		
11,500.00	11,331.80	11,535.87	11,341.19	42.61	43.37	-146.73	-1,039.58	1,310.58	419.83	353.15	66.68	6.296		
11,600.00	11,430.99	11,634.11	11,438.66	43.04	43.79	-146.67	-1,044.55	1,321.74	419.84	352.71	67.14	6.254		
11,700.00	11,530.48	11,732.34	11,536.40	43.44	44.18	-146.62	-1,048.49	1,330.61	419.85	352.34	67.52	6.219		
11,800.00	11,630.20	11,830.57	11,634.37	43.82	44.55	-146.58	-1,051.42	1,337.18	419.86	352.04	67.82	6.191		
11,900.00	11,730.08	11,928.80	11,732.48	44.16	44.87	-146.56	-1,053.31	1,341.45	419.87	351.83	68.04	6.171		
12,000.00	11,830.05	12,027.02	11,830.67	44.43	45.12	-146.55	-1,054.19	1,343.41	419.87	351.69	68.18	6.158		
12,100.00	11,930.05	12,126.40	11,930.05	44.47	45.17	-146.55	-1,054.25	1,343.55	419.87	351.65	68.22	6.154		
12,200.00	12,030.05	12,226.40	12,030.05	44.47	45.18	-146.55	-1,054.25	1,343.55	419.87	351.60	68.28	6.150		
12,300.00	12,130.05	12,326.40	12,130.05	44.48	45.20	-146.55	-1,054.25	1,343.55	419.87	351.55	68.33	6.145		
12,400.00	12,230.05	12,426.40	12,230.05	44.48	45.21	-146.55	-1,054.25	1,343.55	419.87	351.49	68.38	6.140		
12,500.00	12,330.05	12,526.40	12,330.05	44.49	45.23	-146.55	-1,054.25	1,343.55	419.87	351.44	68.43	6.136		
12,600.00	12,430.05	12,626.40	12,430.05	44.50	45.25	-146.55	-1,054.25	1,343.55	419.87	351.39	68.48	6.131		
12,700.00	12,530.05	12,726.40	12,530.05	44.50	45.26	-146.55	-1,054.25	1,343.55	419.87	351.34	68.54	6.126		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



<b>Company:</b>	LONQUIST & CO., LLC	<b>Local Co-ordinate Reference:</b>	Well KINGS LANDING AGI #2
<b>Project:</b>	EDDY COUNTY, NM EAST (NAD83)	<b>TVD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Reference Site:</b>	KINGS LANDING	<b>MD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Site Error:</b>	0.00 usft	<b>North Reference:</b>	Grid
<b>Reference Well:</b>	KINGS LANDING AGI #2	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Well Error:</b>	0.00 usft	<b>Output errors are at</b>	2.00 sigma
<b>Reference Wellbore</b>	Wellbore #1	<b>Database:</b>	HPD Well Planning
<b>Reference Design:</b>	PLAN 3	<b>Offset TVD Reference:</b>	Reference Datum

Offset Design: KINGS LANDING - KINGS LANDING AGI #1 - Wellbore #1 - PLAN 2													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Reference	Measured Vertical	Offset	Vertical	Semi Major Axis		Azimuth from North (°)	Offset Wellbore Centre		Rule Assigned: Distance		Minimum Separation (usft)	Separation Factor	Warning	
Depth (usft)	Depth (usft)	Measured Depth (usft)	Depth (usft)	Reference (usft)	Offset (usft)		+N-S (usft)	+E-W (usft)	Between Centres (usft)	Between Ellipses (usft)				
12,800.00	12,630.05	12,826.40	12,630.05	44.51	45.28	-146.55	-1,054.25	1,343.55	419.87	351.28	68.59	6.121		
12,900.00	12,730.05	12,926.40	12,730.05	44.52	45.29	-146.55	-1,054.25	1,343.55	419.87	351.23	68.64	6.117		
13,000.00	12,830.05	13,026.40	12,830.05	44.52	45.31	-146.55	-1,054.25	1,343.55	419.87	351.17	68.70	6.112		
13,100.00	12,930.05	13,126.40	12,930.05	44.53	45.33	-146.55	-1,054.25	1,343.55	419.87	351.12	68.75	6.107		
13,200.00	13,030.05	13,226.40	13,030.05	44.54	45.34	-146.55	-1,054.25	1,343.55	419.87	351.07	68.81	6.102		
13,300.00	13,130.05	13,326.40	13,130.05	44.55	45.36	-146.55	-1,054.25	1,343.55	419.87	351.01	68.86	6.097		
13,400.00	13,230.05	13,426.40	13,230.05	44.55	45.38	-146.55	-1,054.25	1,343.55	419.87	350.95	68.92	6.092		
13,500.00	13,330.05	13,526.40	13,330.05	44.56	45.39	-146.55	-1,054.25	1,343.55	419.87	350.90	68.98	6.087		
13,600.00	13,430.05	13,626.40	13,430.05	44.57	45.41	-146.55	-1,054.25	1,343.55	419.87	350.84	69.03	6.082		
13,700.00	13,530.05	13,726.40	13,530.05	44.58	45.43	-146.55	-1,054.25	1,343.55	419.87	350.79	69.09	6.077		
13,800.00	13,630.05	13,826.40	13,630.05	44.59	45.44	-146.55	-1,054.25	1,343.55	419.87	350.73	69.15	6.072		
13,900.00	13,730.05	13,926.40	13,730.05	44.59	45.46	-146.55	-1,054.25	1,343.55	419.87	350.67	69.20	6.067		
14,000.00	13,830.05	14,026.40	13,830.05	44.60	45.48	-146.55	-1,054.25	1,343.55	419.88	350.61	69.26	6.062		
14,100.00	13,930.05	14,126.40	13,930.05	44.61	45.50	-146.55	-1,054.25	1,343.55	419.88	350.56	69.32	6.057		
14,200.00	14,030.05	14,226.40	14,030.05	44.62	45.52	-146.55	-1,054.25	1,343.55	419.88	350.50	69.38	6.052		
14,300.00	14,130.05	14,326.40	14,130.05	44.63	45.53	-146.55	-1,054.25	1,343.55	419.88	350.44	69.44	6.047		
14,400.00	14,230.05	14,426.40	14,230.05	44.64	45.55	-146.55	-1,054.25	1,343.55	419.88	350.38	69.50	6.042		
14,500.00	14,330.05	14,526.40	14,330.05	44.65	45.57	-146.55	-1,054.25	1,343.55	419.88	350.32	69.55	6.037		
14,600.00	14,430.05	14,626.40	14,430.05	44.66	45.59	-146.55	-1,054.25	1,343.55	419.88	350.26	69.61	6.031		
14,700.00	14,530.05	14,726.40	14,530.05	44.67	45.61	-146.55	-1,054.25	1,343.55	419.88	350.20	69.68	6.026		
14,800.00	14,630.05	14,826.40	14,630.05	44.68	45.63	-146.55	-1,054.25	1,343.55	419.88	350.14	69.74	6.021		
14,900.00	14,730.05	14,926.40	14,730.05	44.69	45.64	-146.55	-1,054.25	1,343.55	419.88	350.08	69.80	6.016		
15,000.00	14,830.05	15,026.40	14,830.05	44.70	45.66	-146.55	-1,054.25	1,343.55	419.88	350.02	69.86	6.010		
15,084.58	14,914.63	15,111.02	14,914.68	44.71	45.68	-146.55	-1,054.25	1,343.55	419.88	349.97	69.90	6.006		
15,084.95	14,915.00	15,111.34	14,915.00	44.71	45.68	-146.55	-1,054.25	1,343.55	419.87	349.97	69.90	6.006	ES, SF	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation




### Anticollision Report



<b>Company:</b>	LONQUIST & CO., LLC	<b>Local Co-ordinate Reference:</b>	Well KINGS LANDING AGI #2
<b>Project:</b>	EDDY COUNTY, NM EAST (NAD83)	<b>TVD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Reference Site:</b>	KINGS LANDING	<b>MD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Site Error:</b>	0.00 usft	<b>North Reference:</b>	Grid
<b>Reference Well:</b>	KINGS LANDING AGI #2	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Well Error:</b>	0.00 usft	<b>Output errors are at</b>	2.00 sigma
<b>Reference Wellbore</b>	Wellbore #1	<b>Database:</b>	HPD Well Planning
<b>Reference Design:</b>	PLAN 3	<b>Offset TVD Reference:</b>	Reference Datum

Reference Depths are relative to KB @ 3535.00usft (NO RIG)      Coordinates are relative to: KINGS LANDING AGI #2  
 Offset Depths are relative to Offset Datum      Coordinate System is US State Plane 1983, New Mexico Eastern Zone  
 Central Meridian is -104.3333333      Grid Convergence at Surface is: 0.25°

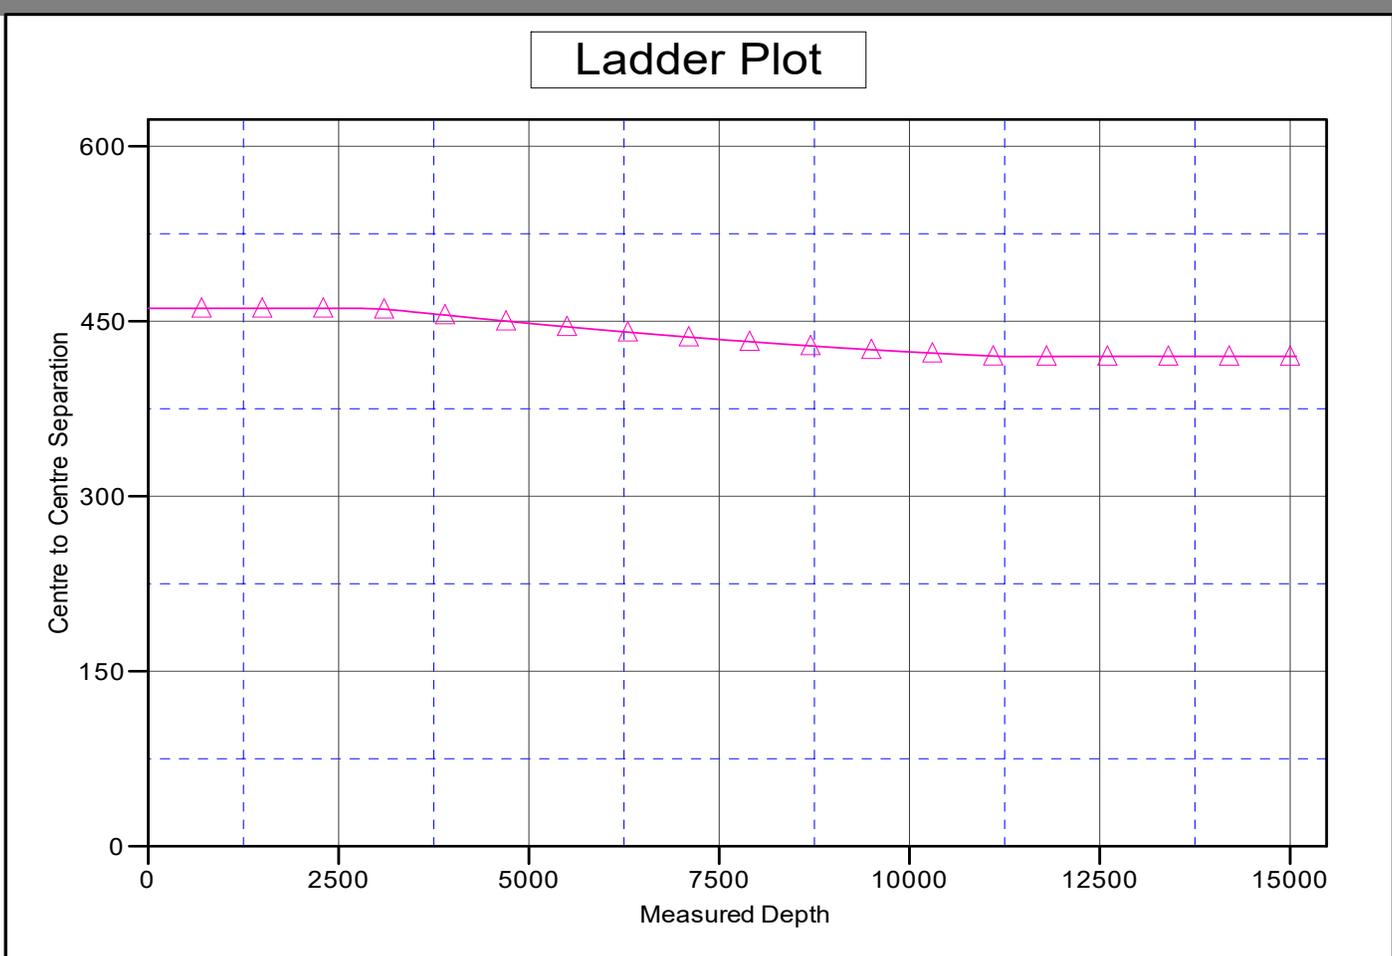

LEGEND

KINGS LANDING AGI #1, Wellbore #1, PLAN 2 VO



### Anticollision Report




<b>Company:</b>	LONQUIST & CO., LLC	<b>Local Co-ordinate Reference:</b>	Well KINGS LANDING AGI #2
<b>Project:</b>	EDDY COUNTY, NM EAST (NAD83)	<b>TVD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Reference Site:</b>	KINGS LANDING	<b>MD Reference:</b>	KB @ 3535.00usft (NO RIG)
<b>Site Error:</b>	0.00 usft	<b>North Reference:</b>	Grid
<b>Reference Well:</b>	KINGS LANDING AGI #2	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Well Error:</b>	0.00 usft	<b>Output errors are at</b>	2.00 sigma
<b>Reference Wellbore</b>	Wellbore #1	<b>Database:</b>	HPD Well Planning
<b>Reference Design:</b>	PLAN 3	<b>Offset TVD Reference:</b>	Reference Datum

Reference Depths are relative to KB @ 3535.00usft (NO RIG)  
 Offset Depths are relative to Offset Datum  
 Central Meridian is -104.3333333

Coordinates are relative to: KINGS LANDING AGI #2  
 Coordinate System is US State Plane 1983, New Mexico Eastern Zone  
 Grid Convergence at Surface is: 0.25°

## Separation Factor Plot

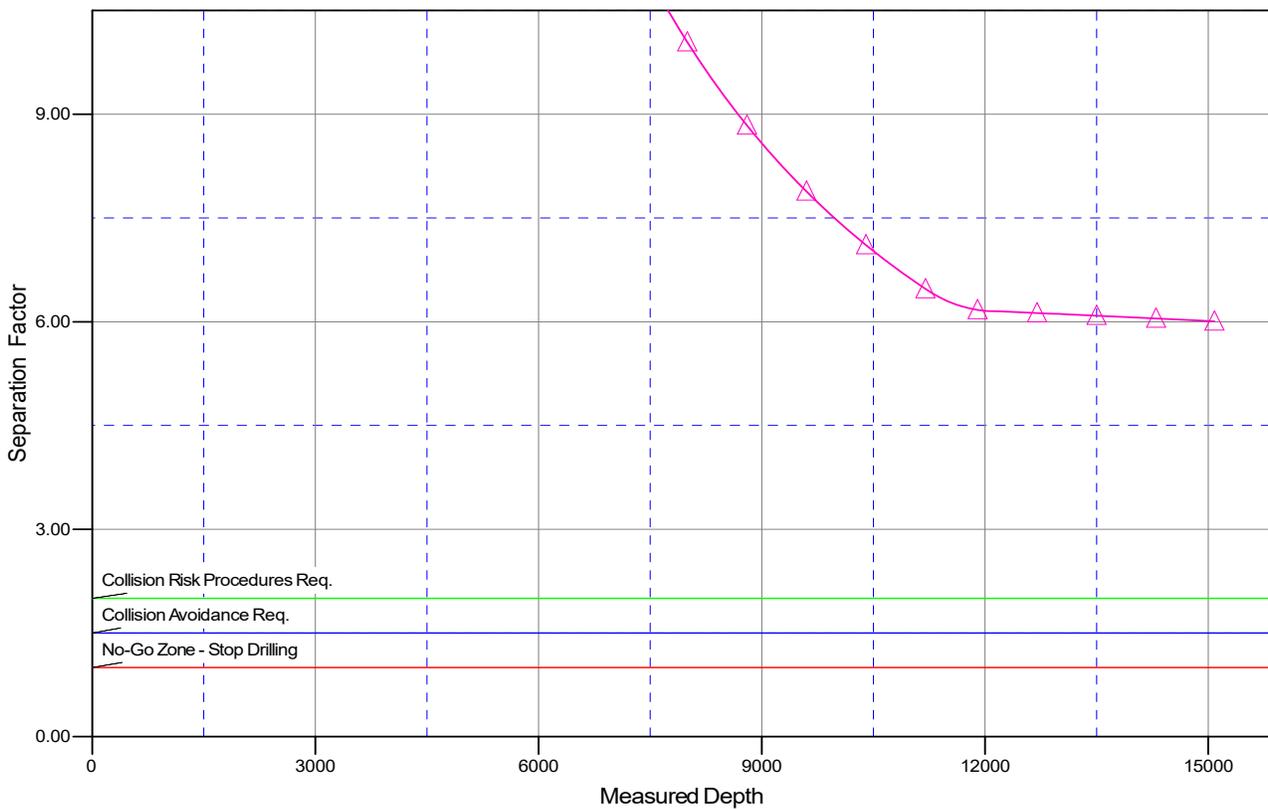

### LEGEND

KINGS LANDING AGI #1, Wellbore #1, PLAN 2 V0



**HIGH PERFORMANCE  
DIRECTIONAL**

Project: **EDDY COUNTY, NM EAST (NAD83)**  
Site: **KINGS LANDING**  
Well: **KINGS LANDING AGI #2**  
Wellbore: **Wellbore #1**  
Design: **PLAN 2**

Geodetic System: **US State Plane 1983**  
Datum: **North American Datum 1983**  
Ellipsoid: **GRS 1980**  
Zone: **New Mexico Eastern Zone**  
**RKB ELEVATION: KB @ 3535.00usft (NO RIG)**

**LONQUIST & CO. LLC**

**PETROLEUM  
ENGINEERS**

**ENERGY  
ADVISORS**

HOUSTON | CALGARY  
AUSTIN | WICHITA | DENVER



WELL DETAILS: KINGS LANDING AGI #2					
+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
0.00	0.00	605088.25	685968.45	32.6625538	-103.8633551

**DESIGN TARGET DETAILS**


Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
KINGS LANDING AGI #2 - VP	11865.00	-758.23	1696.67	604330.02	687665.12	32.6604490	-103.8578530
KINGS LANDING AGI #2 - BHL	14915.00	-758.23	1696.67	604330.02	687665.12	32.6604490	-103.8578530

**SECTION DETAILS**

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2750.00	0.00	0.00	2750.00	0.00	0.00	0.00	0.00	0.00
3374.98	12.50	114.08	3370.03	-27.70	61.99	2.00	114.08	67.90
11229.40	12.50	114.08	11038.29	-721.29	1614.01	0.00	0.00	1767.85
12062.71	0.00	0.00	11865.00	-758.23	1696.67	1.50	-180.00	1858.39
15112.71	0.00	0.00	14915.00	-758.23	1696.67	0.00	0.00	1858.39

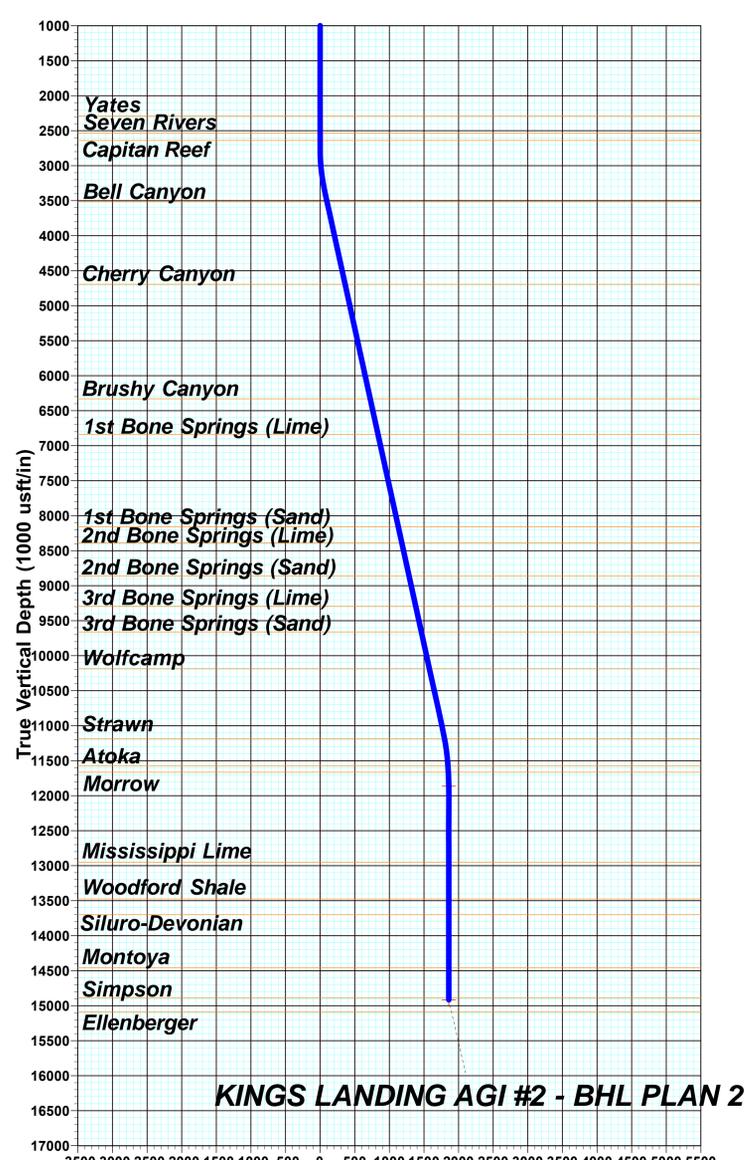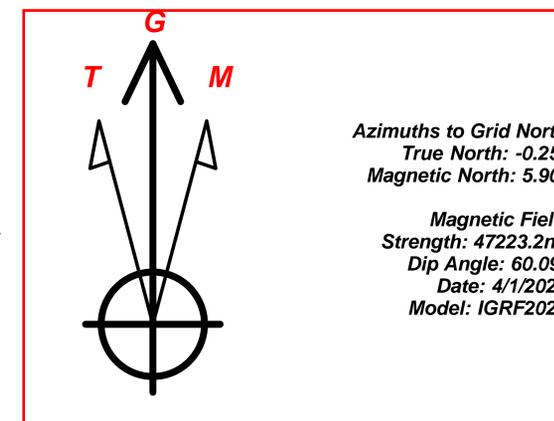

**Vertical Section at 114.08° (1000 usft/in)**

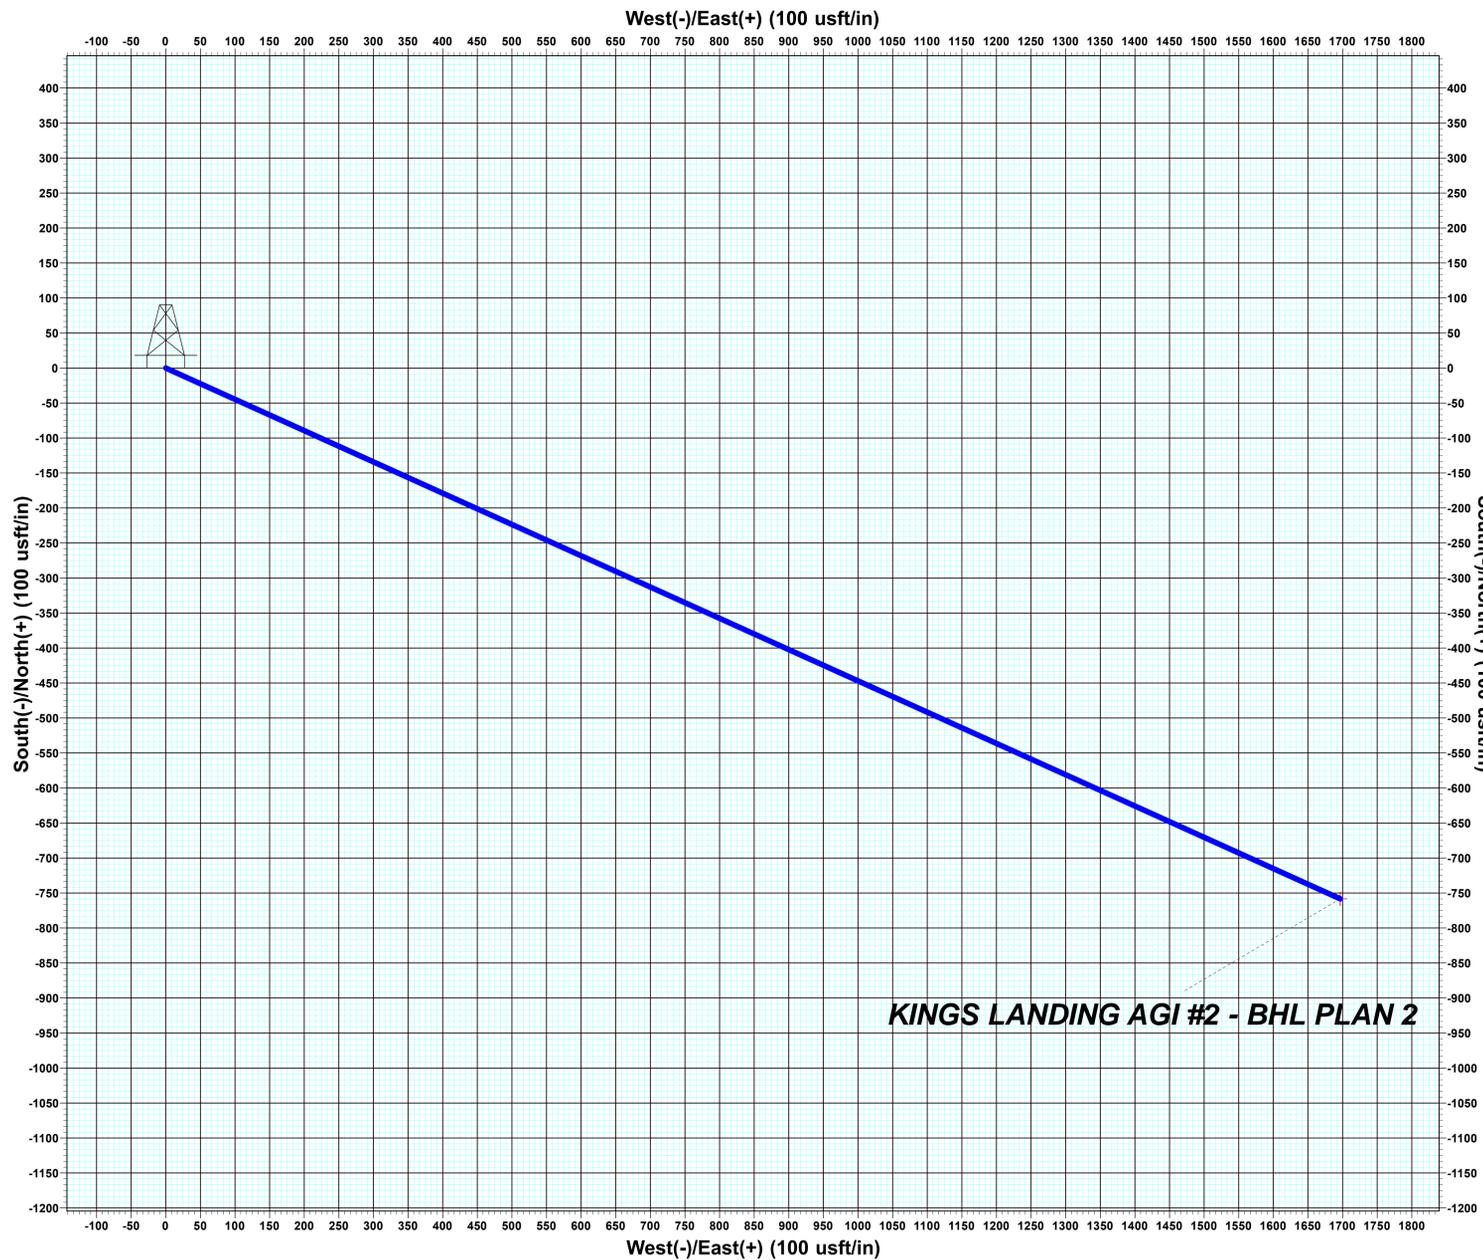

**KINGS LANDING AGI #2 - BHL PLAN 2**

**MAGNETIC CORRECTION DATA:**

MAGNETIC NORTH IS 5.90° EAST OF GRID NORTH (MAGNETIC CONVERGENCE)  
TO CONVERT A MAGNETIC DIRECTION TO A GRID DIRECTION, ADD 5.90°  
TO CONVERT A TRUE DIRECTION TO A GRID DIRECTION, SUBTRACT 0.25°

MAGNETIC DECLINATION: 6.15°  
GRID\_CONVERGENCE: 0.25° WEST

\*\*\*Note: this electronic file is provided for information purposes only. HP Directional LLC, it's employees, and agents make no guarantee or warranty, expressed or implied, as to the accuracy of this electronic file. The data included here and may be subject to error, while corruption, change, alteration, or update without any notice to the user. HP Directional LLC, it's employees, and it's agents assume no responsibility, expressed or implied, for any damages incurred either directly or indirectly by the use of this electronic file. The users agree to the above specified terms of this electronic file and agrees to verify the data enclosed to ascertain its accuracy for their intended use. If these conditions are unacceptable, user shall discard this data.\*\*\*

**36"x36"**