U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Sundry Print Report

09/15/2026

Well Name: POKER LAKE CVX JV BS

Well Location: T25S / R30E / SEC 3 / SWSE / 32.152952 / -103.8670793

County or Parish/State: EDDY / NM

Well Number: 16H

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMLC061616A

Unit or CA Name:

Unit or CA Number:

US Well Number: 3001540581

Operator: XTO PERMIAN OPERATING LLC

Notice of Intent

Sundry ID: 2930941

Type of Submission: Notice of Intent

Type of Action: Plug and Abandonment

Date Sundry Submitted: 09/02/2026

Time Sundry Submitted: 02:18

Date proposed operation will begin: 10/02/2026

Procedure Description: XTO Permian Operating, LLC. respectfully requests to Plug and Abandon the above mentioned well. Please see attached procedure, current and proposed wellbore diagrams for your approval.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

POKER_LAKE_UNIT_CVX_JV_BS_16H_P_A_Package_20260902081812.pdf

CONFIDENTIAL

Well Name: POKER LAKE CVX JV BS

Well Location: T25S / R30E / SEC 3 / SWSE / 32.152952 / -103.8670793

County or Parish/State: EDDY / NM

Well Number: 16H

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMLC061616A

Unit or CA Name:

Unit or CA Number:

US Well Number: 3001540581

Operator: XTO PERMIAN OPERATING LLC

Conditions of Approval

Specialist Review

Combined_COA_Inlcude_LPC_Habitat_and_Non_LPC_Habitat__General_Plug___Abandonment_and_Reclaimation__20260915081527.pdf

Revised_Diagram_20260915081527.pdf

Revised_Procedure_20260915081527.pdf

3_25_30_Sundry_ID_2930941_Poker_Lake_CVX_JV_BS_16H_Eddy_NMLC061616A_XTO_Permian_Operating_LLC_1_22i_2_23_2023_LV_20260915081527.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: KRISTEN HOUSTON

Signed on: SEP 02, 2026 08:18 AM

Name: XTO PERMIAN OPERATING LLC

Title: Regulatory Analyst

Street Address: 3617 NORTH BIG SPRING STREET

City: MIDLAND **State:** TX

Phone: (432) 620-6700

Email address: KRISTEN.HOUSTON@EXXONMOBIL.COM

Field

Representative Name:

Street Address:

City: **State:** **Zip:**

Phone:

Email address:

BLM Point of Contact

BLM POC Name: LONG VO

BLM POC Title: Petroleum Engineer

BLM POC Phone: 5759885402

BLM POC Email Address: LVO@BLM.GOV

Disposition: Approved

Disposition Date: 09/15/2026

Signature: Long Vo

Released to Imaging: 10/13/2026 1:00:15 PM

PLUG AND ABANDON WELLBORE
POKER LAKE UNIT CVX JV BS 16H
EDDY COUNTY, NEW MEXICO
Class II

AFE#: ~~PA.2025.18169~~

MASIP	MAOP	MAWP	Surface Csg Yield
1,000 psi	4,500 psi	4,500 psi	1,730 PSI

SUMMARY: Plug and abandon wellbore according to BLM regulations.

Steps 1-7 shall be completed with Prep Rig

1) MIRU plugging company. Set open top steel pit for plugging.
2) ND WH and NU 3K manual BOP. Function test BOP.
3) Unset the TAC at 8,331'. POOH tbg.
4) MIRU WLU, RIH GR to 8,601'; RIH set CIBP at 8,561' (KOP), pressure test to 500 PSI for 30 minutes.
5) Run CBL from 8,561' to surface. (estimated TOC at Surface). Send CBL results to engineering.
6) Dump bail 35' **Class H** cement from 8,561' to 8,526'. WOC and tag to verify.
7) ND BOP and NU Wellhead, RDMO.

Steps 8 and forward will be completed with P&A rig within 90 days from RDMO.

8) MIRU plugging unit company. Set open Steel Pit for plugging
9) ND WH and NU 3K manual BOP. Function test BOP.
10) Spot 26 SKS **Class H** cement from 8,469' to 8,259'.
(T/1st Bone Spring lime, T/Avalon lower).
11) Spot 25 SKS **Class H** cement from 7,817' to 7,613'. (T/Bone Spring lm).
12) Spot 25 SKS **Class H** cement from 6,127' to 5,923'. (T/Brushy Canyon).
13) Spot 25 SKS Class C cement from 4,978' to 4,724'. WOC and tag to verify. (T/Cherry Canyon).
14) Spot 33 SKS Class C cement from 3,989' to 3,655'. WOC and tag to verify. (T/Delaware, Intermediate Casing shoe, T/Base of Salt).
15) Spot 123 SKS Class C cement from 1,246' to Surface. WOC and tag to verify. (T/Salado, Surface casing shoe, T/Rustler, Conductor casing shoe).
16) ND BOP and cut off wellhead 5' below surface, if needed top off wellhead with cement. RDMO PU, transport trucks, and pump truck.
17) Set P&A marker.
18) Pull fluid from steel tank and haul to disposal. Release steel tank.


ExxonMobil

Schematic - Current Directional

Well Name: Poker Lake CVX JV BS 016H

API/UWI	SAP Cost Center ID	Permit Number	State/Province	County
3001540581	1140131001		NEW MEXICO	EDDY

Surface Legal Location	Spud Date	Original KB Elevation (ft)	Ground Elevation (ft)	KB-Ground Distance (ft)	Casing Flange Elevation (ft)
T25S-R30E-S03	9/26/2012 06:00	3,339.00	3,317.00	22.00	

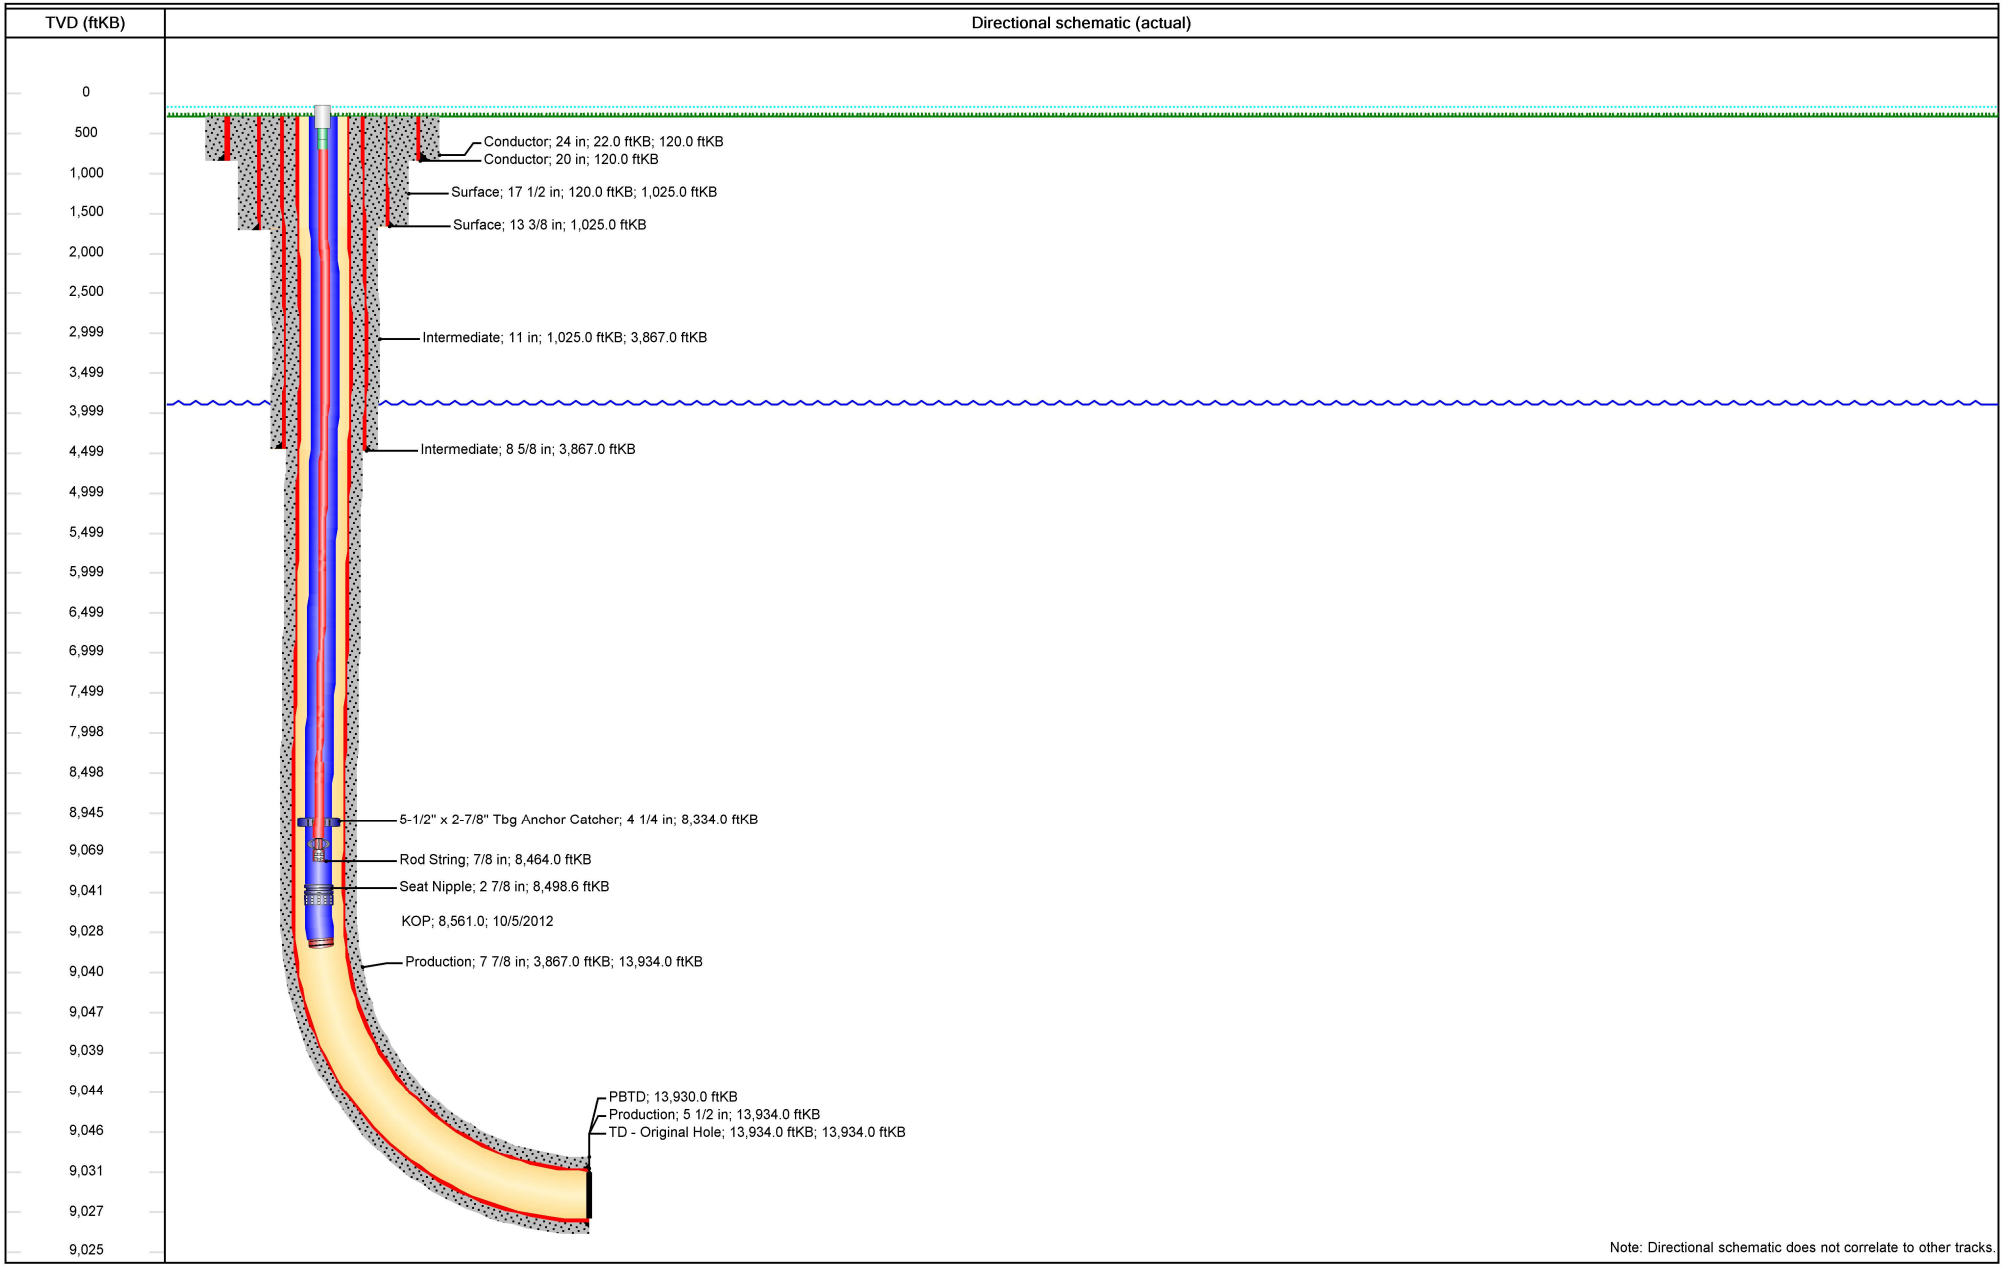

Report Printed: 8/27/2026

POKER LAKE UNIT CVX JV BS 16H - Proposed WBD

120′ Conductor Casing shoe

933′ T/ Rustler

1025′ Surface Casing Shoe

1196′ T/ Salado

3705′ T/ Base of Salt

3867′ Intermediate Casing Shoe

3939′ T/Delaware

4851′ T/Cheery Canyon


6025′ T/ Brushy Canyon

7715′ T/Bone Spring Lm

8309′ T/Avalon Lower

8418′ T/1st Bone Spring Lime

8561′ KOP

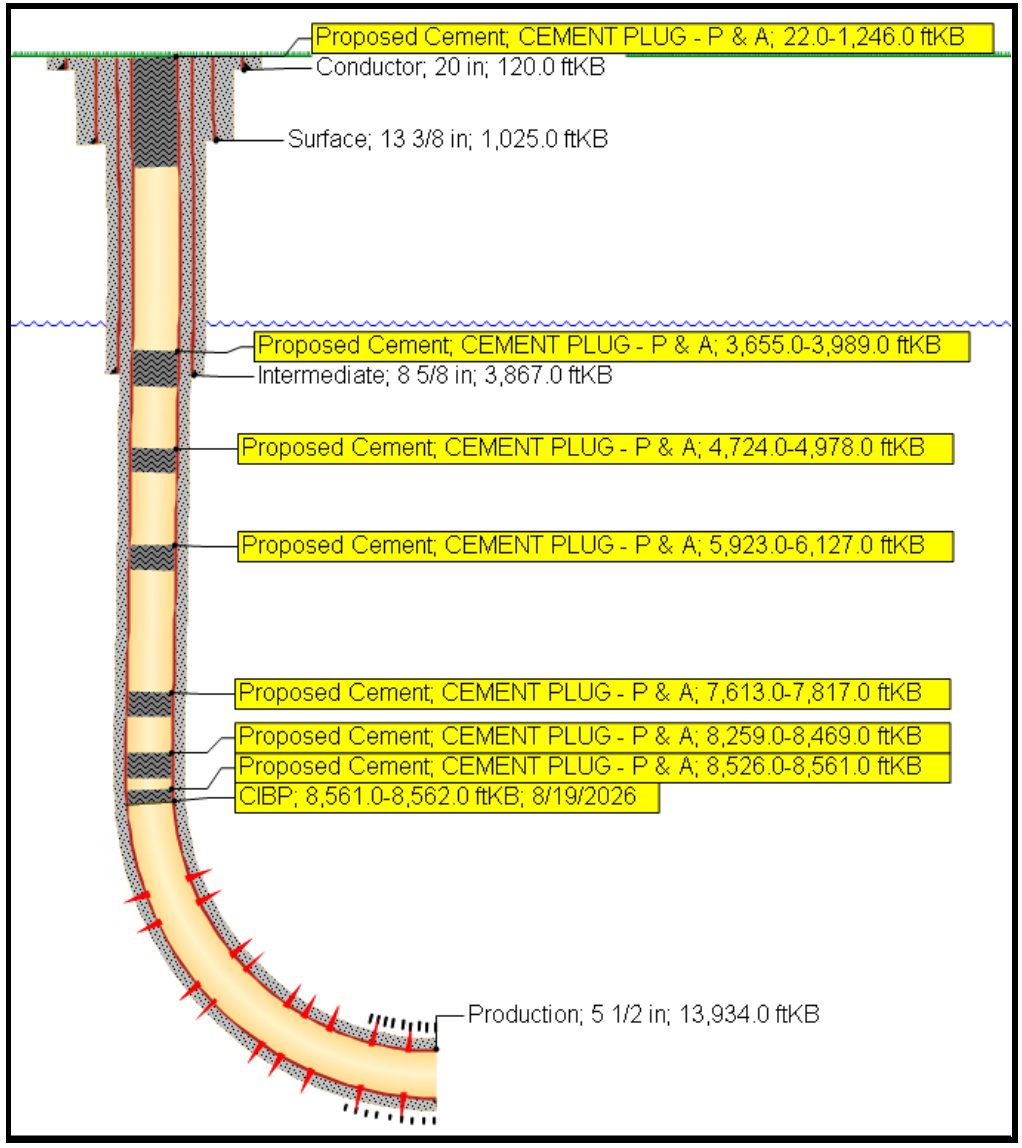

Spot 123 SKS Class C cement from 1,246′ to Surface. WOC and Tag.

Spot 33 SKS Class C cement from 3,989′ to 3,655′. WOC and Tag.

Spot 25 SKS Class C cement from 4,978′ to 4,724′. WOC and Tag.

Spot 25 SKS **Class H** cement from 6,127′ to 5,923′.

Spot 25 SKS **Class H** cement from 7,817′ to 7,613′.

Spot 26 SKS **Class H** cement from 8,469′ to 8,259′.

Dump bail 35′ **Class H** cement from 8,561′ to 8,526′. WOC and Tag.

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 624540

CONDITIONS

Operator: XTO PERMIAN OPERATING LLC. 3617 North Big Spring Street MIDLAND, TX 79705	OGRID: 373075
	Action Number: 624540
	Action Type: [C-103F] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
gcordero	Notify the OCD inspection supervisor via email 24 hours prior to beginning Plug & Abandon (P&A) operations.	10/13/2026
gcordero	Run RCBL with zero psi, keep hole loaded with fluid, log 8561' to Surface.	10/13/2026
gcordero	Submit Cement Bond Logs (CBL) prior to submittal of C-103P.	10/13/2026