

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK

DRILL DEEPEN

b. TYPE OF WELL

OIL WELL Gas Well OTHER SINGLE ZONE MULTIPLE ZONE

2. NAME OF OPERATOR

Mack Energy Corporation 13837

3. ADDRESS AND TELEPHONE NO.

P.O. Box 960, Artesia, NM 88211-0960 (505) 748-1288

4. LOCATION OF WELL (Indicate location clearly and in accordance with any state requirement.)*

At surface
At proposed prod. zone
SUBJECT TO LIKE APPROVAL BY STATE 1550 FSL & 1500 FEL UNORTHODOX LOCATION

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*

8 miles west of Loco Hills Post office

15. DISTANCE FROM PROPOSED* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drlg. unit line, if any)

180

16. NO. OF ACRES IN LEASE

80

17. NO OF ACRES IN LEASE TO THIS WELL

40

18. DISTANCE FROM PROPOSED LOCATION* TO NEAREST WELL, DRILLING, COMPLETED OR APPLIED FOR, ON THIS LEASE, FT.

660

19. PROPOSED DEPTH

5500

20. ROTARY OR CABLE TOOLS

Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.)

3630

ROOSEVELL CONTROLLED WATER BASIN

22. APPROX. DATE WORK WILL START*

11/30/99

23.

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
17 1/2	K-55, 13 3/8	48	325	Circ
12 1/4	K-55, 8 5/8	24	950	Circ
7 7/8	J-55, 5 1/2	15.5	5500	Suff to Circ

Mack Energy proposes to drill to a depth sufficient to test the Paddock Formation for oil gas. If productive, 5 1/2" casing will be cemented. If non-productive, plugging and abandoning in a manor consistent with federal regulation. Specific programs as per Onshore Oil and Gas Order #1 are outlined in the following attachments:

- 1. Surveys
Exhibit #1- Well Location Plat
Exhibit #2- Vicinity Map
Exhibit #3- Location Verification Map
- 2. Drilling Program
- 3. Surface Use & Operating Plan
Exhibit #4- One Mile Radius Map
Exhibit #5- Production Facilities Layout
Exhibit #6- Location Layout
- 4. Certification
- 5. Hydrogen Sulfide Drilling Operation Plan
Exhibit #7- H2S Warning Sign
Exhibit #8- H2S Safety Equipment
- 6. Blowout Preventers
Exhibit #9- BOPE Schematic
Exhibit #10- Blowout Preventer Requirements
Exhibit #11- Choke Manifold
- 7. Responsibility Statement

APPROVAL SUBJECT TO
GENERAL REQUIREMENTS AND
SPECIAL STIPULATIONS
ATTACHED

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED Math J. Brewer TITLE Geological Engineer DATE 9/28/99

(This space for Federal or State office use)

PERMIT NO. _____ APPROVAL DATE _____

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

CONDITIONS OF APPROVAL, IF ANY:

Acting

(ORIG. SGD.) ARMANDO A. LOPEZ

Assistant Field Office Manager,
Lands and Minerals

APPROVED BY _____ TITLE _____ DATE NOV 10 1999

*See Instructions On Reverse Side

APPROVED FOR 1 YEAR

DISTRICT I
P.O. Box 1980, Hobbs, NM 88241-1980

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-102
Revised February 10, 1994
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

DISTRICT II
P.O. Drawer DD, Artesia, NM 88211-0719

OIL CONSERVATION DIVISION
P.O. Box 2088
Santa Fe, New Mexico 87504-2088

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV
P.O. BOX 2088, SANTA FE, N.M. 87504-2088

AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number	Pool Code 96210	Pool Name Empire Yeso
Property Code	Property Name NAVAHO FEDERAL	Well Number 2
OGRID No. 013837	Operator Name MACK ENERGY CORPORATION	Elevation 3630

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
J	30	17 S	29 E		1550	SOUTH	1500	EAST	EDDY

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres 40		Joint or Infill	Consolidation Code	Order No.					

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION


	<p>OPERATOR CERTIFICATION</p> <p><i>I hereby certify the the information contained herein is true and complete to the best of my knowledge and belief.</i></p> <p><i>Matt J. Brewer</i> Signature</p> <p>Matt J. Brewer Printed Name</p> <p>Geological Engineer Title</p> <p>9/22/99 Date</p>
	<p>SURVEYOR CERTIFICATION</p> <p><i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</i></p> <p>SEPTEMBER 10, 1999</p> <p>Date Surveyed DMCC</p> <p>Signature <i>Ronald E. Edson</i> Professional Surveyor</p> <p style="text-align: center;"> </p> <p>State No. RONALD E. EDSON 3239 GARY EDSON 12641 DONALD 12185</p>

Attachment to Exhibit #9
NOTES REGARDING THE BLOWOUT PREVENTERS
Navaho Federal #2
Eddy County, New Mexico


1. Drilling nipple to be so constructed that it can be removed without use of a welder through rotary table opening, with minimum I.D. equal to preventer bore.
2. Wear ring to be properly installed in head.
3. Blow out preventer and all fittings must be in good condition, 2000 psi WP minimum.
4. All fittings to be flanged.
5. Safety valve must be available on rig floor at all times with proper connections, valve to be full 2000 psi WP minimum.
6. All choke and fill lines to be securely anchored especially ends of choke lines.
7. Equipment through which bit must pass shall be at least as large as the diameter of the casing being drilled through.
8. Kelly cock on Kelly.
9. Extension wrenches and hands wheels to be properly installed.
10. Blow out preventer control to be located as close to driller's position as feasible.
11. Blow out preventer closing equipment to include minimum 40-gallon accumulator, two independent sources of pump power on each closing unit installation all API specifications.

Mack Energy Corporation

Exhibit #9 BOPE Schematic

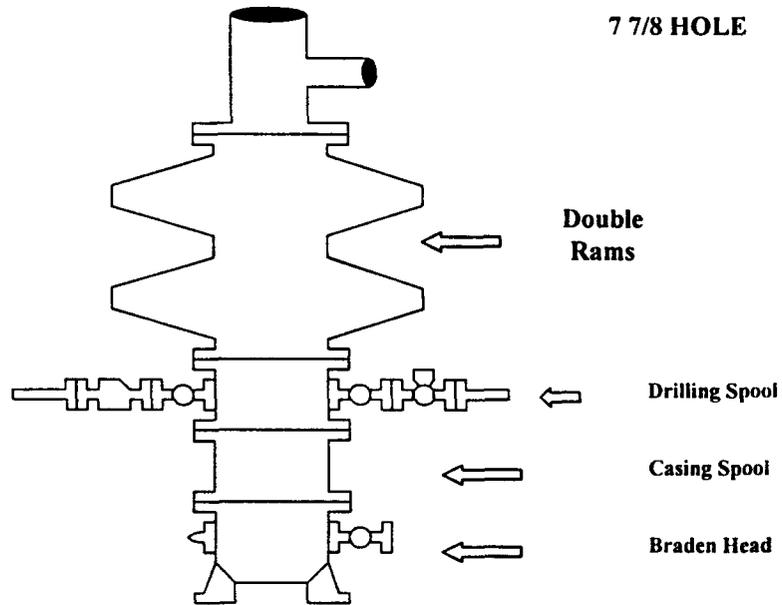

**Choke Manifold Requirement (2000 psi WP)
No Annular Required**

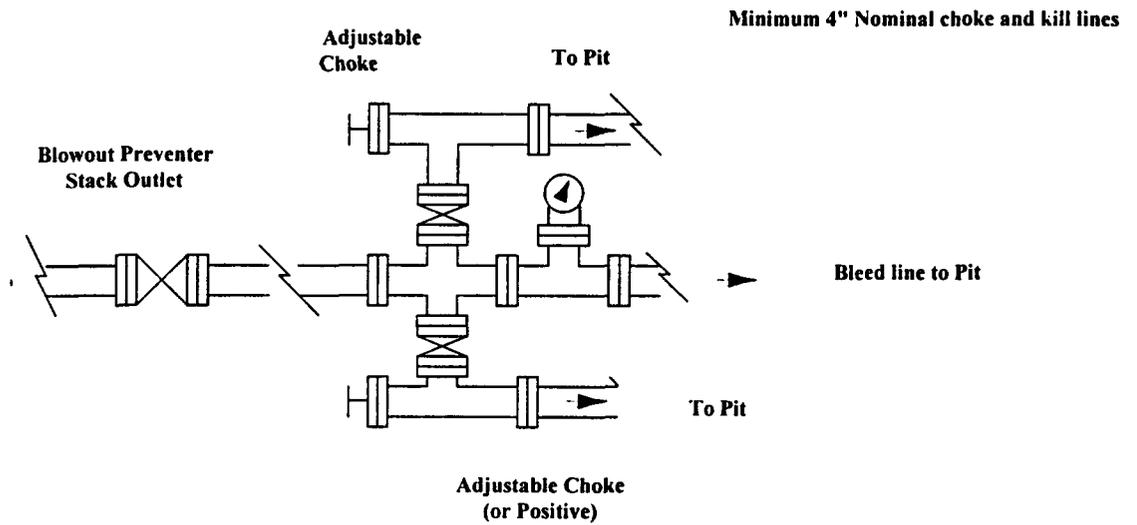


Mack Energy Corporation
Minimum Blowout Preventer Requirements
 2000 psi Working Pressure
 2 MWP
 EXHIBIT #10

Stack Requirements

NO.	Items	Min. I.D.	Min. Nominal
1	Flowline		2"
2	Fill up line		2"
3	Drilling nipple		
4	Annular preventer		
5	Two single or one dual hydraulically operated rams		
6a	Drilling spool with 2" min. kill line and 3" min choke line outlets		2" Choke
6b	2" min. kill line and 3" min. choke line outlets in ram. (Alternate to 6a above)		
7	Valve Gate Plug	3 1/8	
8	Gate valve-power operated	3 1/8	
9	Line to choke manifold		3"
10	Valve Gate Plug	2 1/16	
11	Check valve	2 1/16	
12	Casing head		
13	Valve Gate Plug	1 13/16	
14	Pressure gauge with needle valve		
15	Kill line to rig mud pump manifold		2"

OPTIONAL

16	Flanged Valve	1 13/16	
----	---------------	---------	--

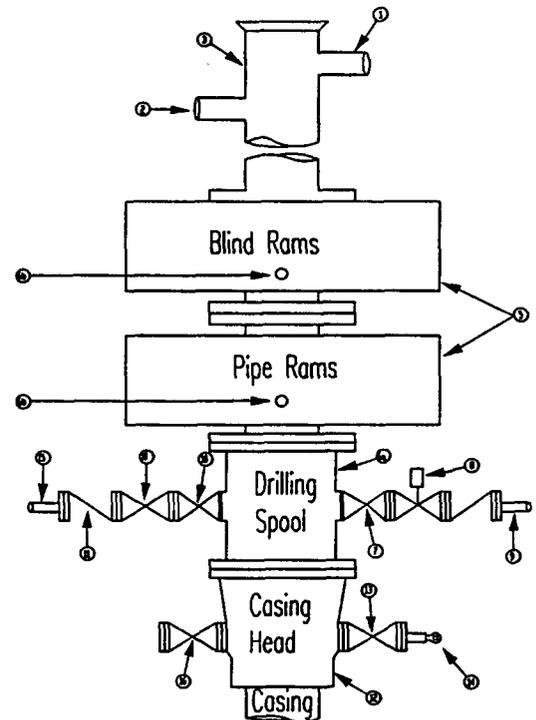

CONTRACTOR'S OPTION TO FURNISH:

- All equipment and connections above bradenhead or casinghead. Working pressure of preventers to be 2000 psi minimum.
- Automatic accumulator (80 gallon, minimum) capable of closing BOP in 30 seconds or less and, holding them closed against full rated working pressure.
- BOP controls, to be located near drillers' position.
- Kelly equipped with Kelly cock.
- Inside blowout preventer or its equivalent on derrick floor at all times with proper threads to fit pipe being used.
- Kelly saver-sub equipped with rubber casing protector at all times.
- Plug type blowout preventer tester.
- Extra set pipe rams to fit drill pipe in use on location at all times.
- Type RX ring gaskets in place of Type R.

MEC TO FURNISH:

- Bradenhead or casing head and side valves.
- Wear bushing. If required.

GENERAL NOTES:


- Deviations from this drawing may be made only with the express permission of MEC's Drilling Manager.
- All connections, valves, fittings, piping, etc., subject to well or pump pressure must be flanged (suitable clamp connections acceptable) and have minimum working pressure equal to rated working pressure of preventers up through choke valves must be full opening and suitable for high pressure mud service.
- Controls to be of standard design and each marked, showing opening and closing position
- Chokes will be positioned so as not to hamper or delay changing of choke beans. Replaceable parts for adjustable choke, or bean

- sizes, retainers, and choke wrenches to be conveniently located for immediate use.
- All valves to be equipped with hand-wheels or handles ready for immediate use.
- Choke lines must be suitably anchored.
- Handwheels and extensions to be connected and ready for use.
- Valves adjacent to drilling spool to be kept open. Use outside valves except for emergency.
- All seamless steel control piping (2000 psi working pressure) to have flexible joints to avoid stress. Hoses will be permitted.
- Casinghead connections shall not be used except in case of emergency.
- Do not use kill line for routine fill up operations.

Mack Energy Corporation

Exhibit #11

MINIMUM CHOKE MANIFOLD
3,000, 5,000, and 10,000 PSI Working Pressure
2 M will be used or greater
3 MWP - 5 MWP - 10 MWP

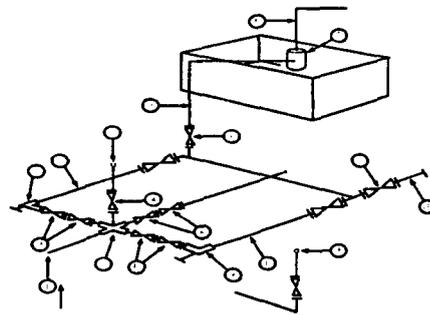

Mud Pit

Reserve Pit

* Location of separator optional

Below Substructure

Minimum requirements

No.		3,000 MWP			5,000 MWP			10,000 MWP		
		I.D.	NOMINAL	Rating	I.D.	Nominal	Rating	I.D.	Nominal	Rating
1	Line from drilling Spool		3"	3,000		3"	5,000		3"	10,000
2	Cross 3" x 3" x 3" x 2"			3,000			5,000			
2	Cross 3" x 3" x 3" x 2"									10,000
3	Valve Gate Plug	3 1/8		3,000	3 1/8		5,000	3 1/8		10,000
4	Valve Gate Plug	1 13/16		3,000	1 13/16		5,000	1 13/16		10,000
4a	Valves (1)	2 1/16		3,000	2 1/16		5,000	2 1/16		10,000
5	Pressure Gauge			3,000			5,000			10,000
6	Valve Gate Plug	3 1/8		3,000	3 1/8		5,000	3 1/8		10,000
7	Adjustable Choke (3)	2"		3,000	2"		5,000	2"		10,000
8	Adjustable Choke	1"		3,000	1"		5,000	2"		10,000
9	Line		3"	3,000		3"	5,000		3"	10,000
10	Line		2"	3,000		2"	5,000		2"	10,000
11	Valve Gate Plug	3 1/8		3,000	3 1/8		5,000	3 1/8		10,000
12	Line		3"	1,000		3"	1,000		3"	2,000
13	Line		3"	1,000		3"	1,000		3"	2,000
14	Remote reading compound Standpipe pressure gauge			3,000			5,000			10,000
15	Gas Separator		2' x 5'			2' x 5'			2' x 5'	
16	Line		4"	1,000		4"	1,000		4"	2,000
17	Valve Gate Plug	3 1/8		3,000	3 1/8		5,000	3 1/8		10,000

- (1) Only one required in Class 3M
- (2) Gate valves only shall be used for Class 10 M
- (3) Remote operated hydraulic choke required on 5,000 psi and 10,000 psi for drilling.

EQUIPMENT SPECIFICATIONS AND INSTALLATION INSTRUCTION

1. All connections in choke manifold shall be welded, studded, flanged or Cameron clamp of comparable rating.
2. All flanges shall be API 6B or 6BX and ring gaskets shall be API RX or BX. Use only BX for 10 MWP.
3. All lines shall be securely anchored.
4. Chokes shall be equipped with tungsten carbide seats and needles, and replacements shall be available.
5. Choke manifold pressure and standpipe pressure gauges shall be available at the choke manifold to assist in regulating chokes. As an alternate with automatic chokes, a choke manifold pressure gauge shall be located on the rig floor in conjunction with the standpipe pressure gauge.
6. Line from drilling spool to choke manifold should be as straight as possible. Lines downstream from chokes shall make turns by large bends or 90 degree bends using bull plugged tees.

CMD :
OG5SECT

ONGARD
INQUIRE LAND BY SECTION

01/28/00 13:49:19
OGOMES -TPQE
PAGE NO: 2

Sec : 30 Twp : 17S Rng : 29E Section Type : NORMAL

3 28.17 CS E04201 0000 CONOCO INC U U 09/11/60 A A A	K 40.00 CS OG0181 0001 HARVEY E YATES CO U U 09/18/66 A A A A	J 40.00 CS OPEN U U R A A A	I 40.00 CS OPEN U U R A A A A
4 28.40 CS B07596 0000 CONOCO INC U U 05/10/48 A A	N 40.00 CS B07596 0000 CONOCO INC U U 05/10/48 A A A A	O 40.00 CS OPEN U R A A A	P 40.00 CS OPEN U R A A

PF01 HELP PF02 PF03 EXIT PF04 GoTo PF05 PF06
PF07 BKWD PF08 FWD PF09 PRINT PF10 SDIV PF11 PF12

CMD : ONGARD 01/28/00 13:50:31
OG6C101 C101-APPLICATION FOR PERMIT TO DRILL OGOMES -TPQE

OGRID Idn : 13837 API Well No: 30 15 30839 APD Status(A/C/P): A
Opr Name, Addr: MACK ENERGY CORP Aprvl/Cncl Date : 11-10-1999
PO BOX 960
ARTESIA,NM 88211-0960

Prop Idn: 25079 NAVAHO FEDERAL Well No: 2

	U/L	Sec	Township	Range	Lot	Idn	North/South	East/West
Surface Locn	: J	30	17S	29E			FTG 1550 F S	FTG 1500 F E
OCD U/L	: J		API County	: 15				

Work typ(N/E/D/P/A) : N Well typ(O/G/M/I/S/W/C): O Cable/Rotary (C/R) : F
Lease typ(F/S/P/N/J/U/I): F Ground Level Elevation : 3630

State Lease No: Multiple Comp (Y/N) : N
Prpsd Depth : 5500 Prpsd Frmtn : YESO

E0009: Enter data to modify record

PF01 HELP PF02 PF03 EXIT PF04 GoTo PF05 PF06 CONFIRM
PF07 PF08 PF09 PRINT PF10 C102 PF11 HISTORY PF12

County Eddy

Pool East Empire - Yeso

TOWNSHIP 17 South

Range 29 East


NMPM

	6	5	4	3	2	1
	7	8	9	10	11	12
	18	17	16	15	14	13
*	19	20	21	22	23	24
	30	29	28	27	26	25
	31	32	33	34	35	36

Ext. ^{SW}/₄ Sec. 19, ^{NW}/₄ Sec. 20 (R-11005, 7-21-98) Ext. ^{NE}/₄ Sec. 30 (R-11097, 12-10-98)
Ext. ^{SW}/₄ Sec. 30 (R-11203, 6-14-99)

County Eddy Pool East Empire - Yeso

TOWNSHIP 17 South Range 29 East NMPM

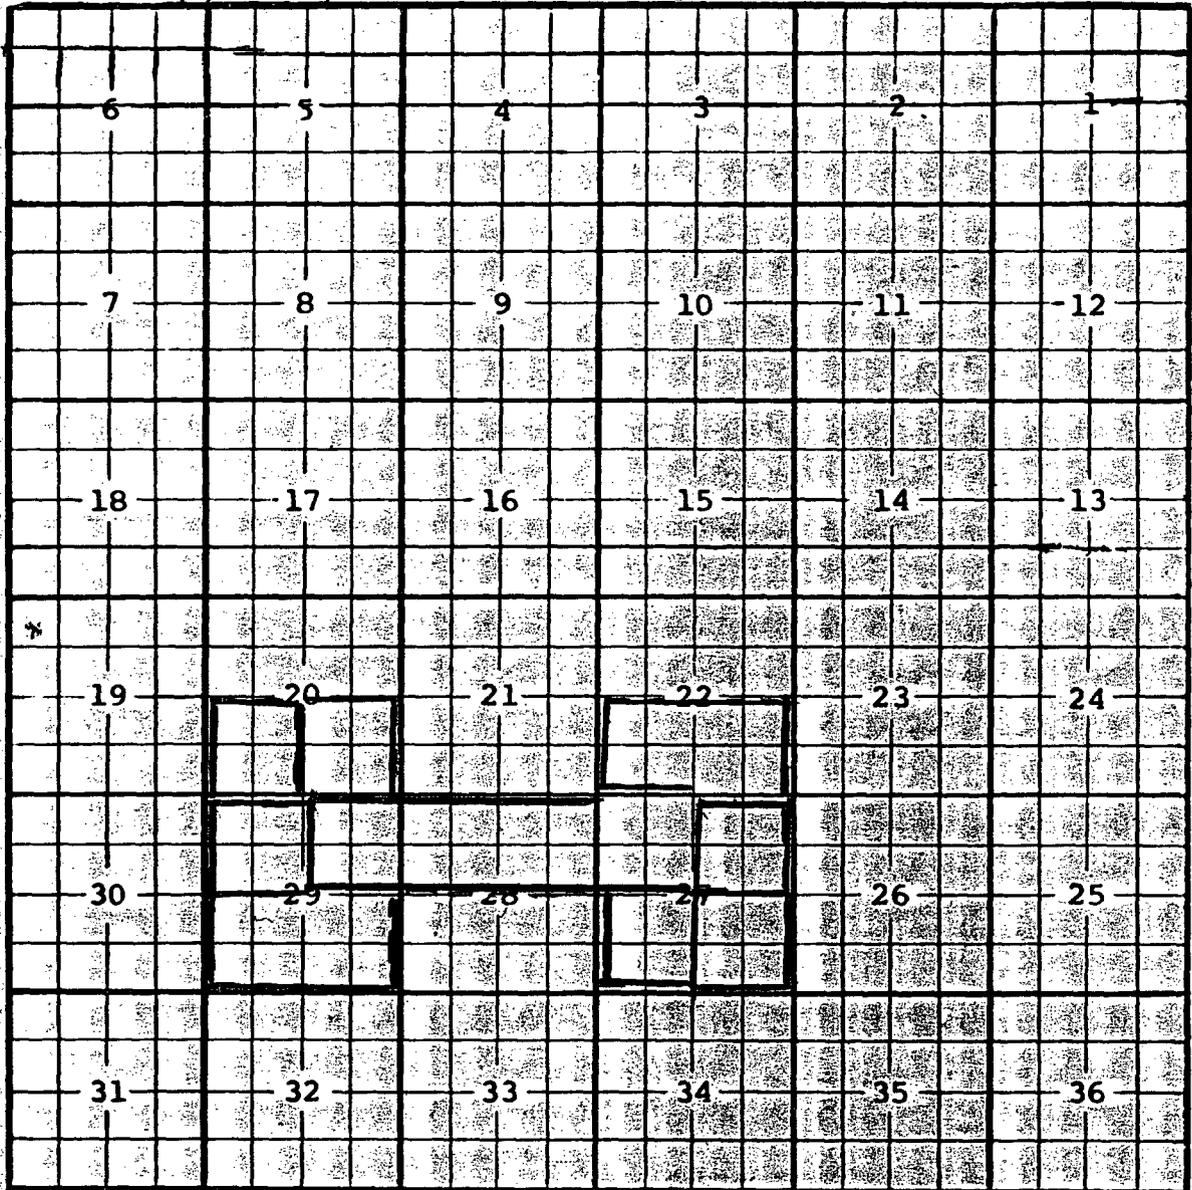

Description: $\text{NE} \frac{1}{4}$ Sec. 27 (R-10724, 1-8-97) Ext: $\frac{1}{2}$ Sec. 22 (R-10951, 2-4-98)
Ext: $\text{NW} \frac{1}{4}$ Sec. 27, $\text{N} \frac{1}{2}$ Sec. 28, $\text{NE} \frac{1}{4}$ Sec. 29 (R-11005, 7-24-98)
Ext: $\frac{1}{2}$ Sec. 29 (R-11067, 8-20-98) Ext: $\frac{SE}{4}$ Sec. 27 (R-11697, 12-10-98)
Ext: $\text{NW} \frac{1}{4}$ Sec. 29 (R-11160, 4-7-99) Ext: $\frac{SW}{4}$ Sec. 20 (R-11244, 9-15-99)
Ext: $\frac{SW}{4}$ Sec. 27 (R-11256, 10-14-99) Ext: $\frac{SE}{4}$ Sec. 20 (R-11277, 11-15-99)