


Application

Part *IV*

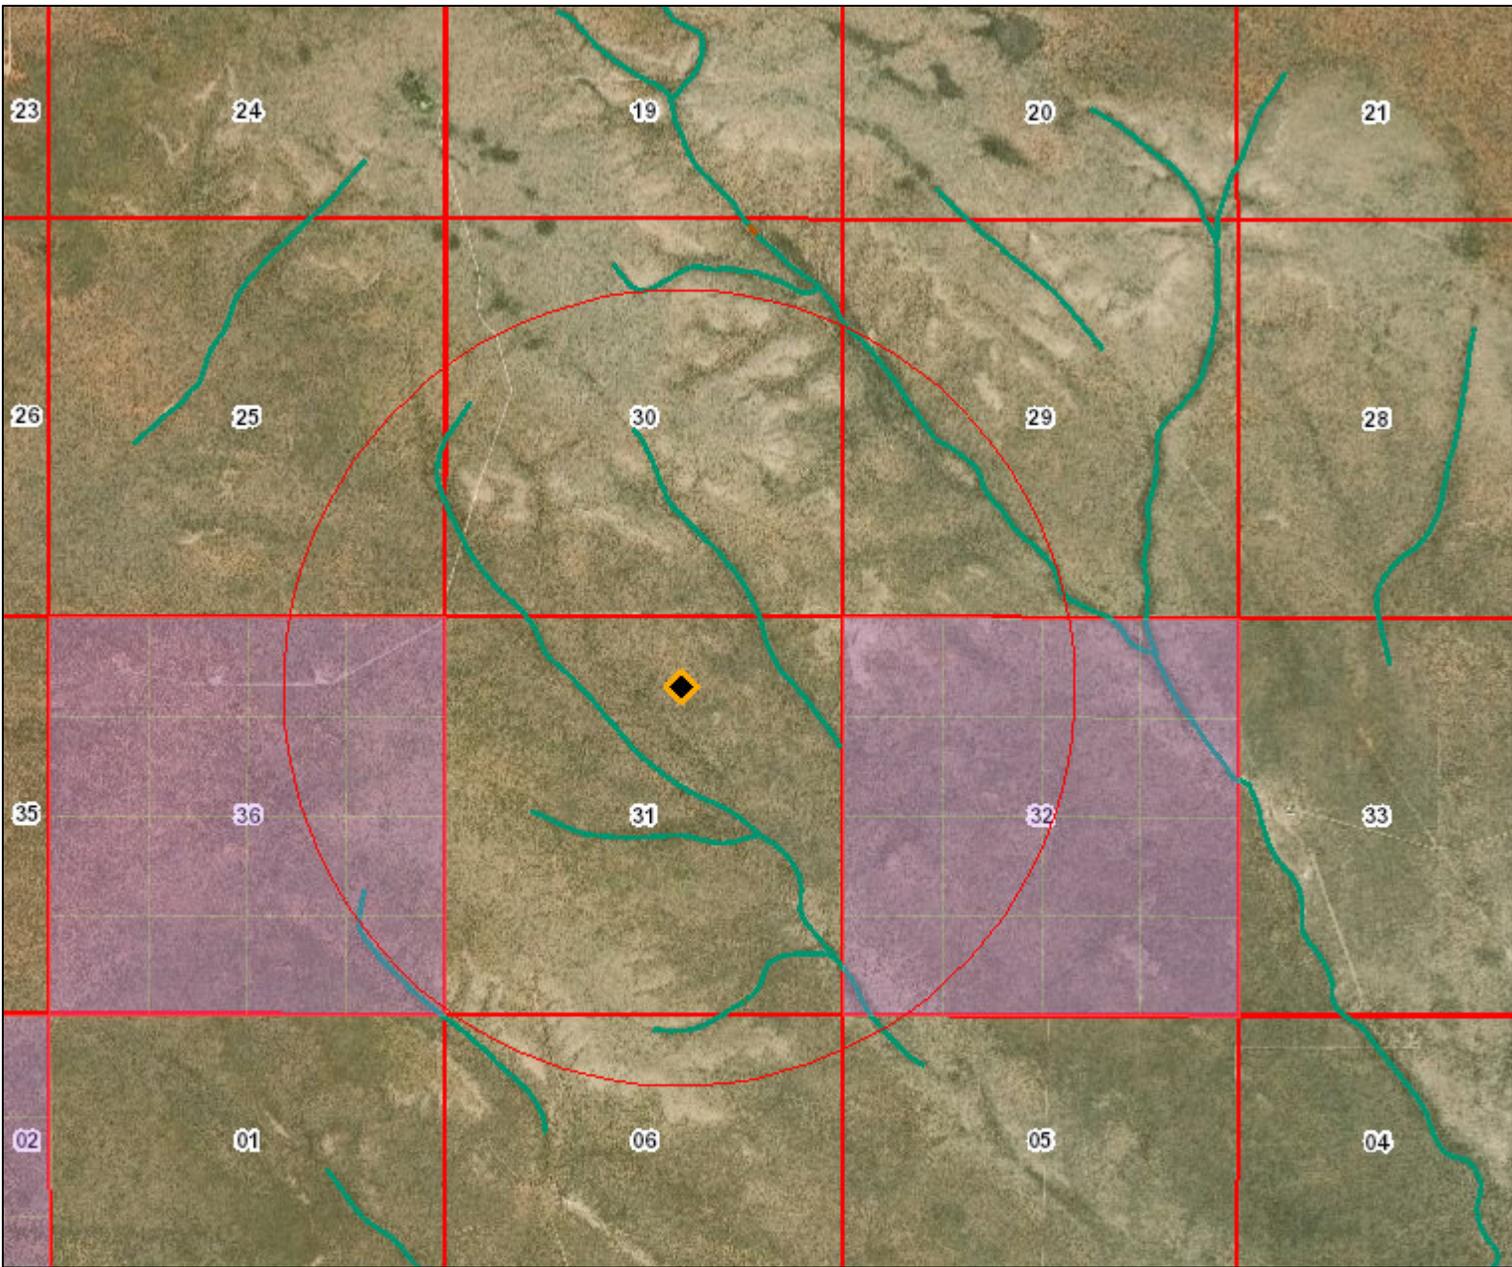

Coordinates
UTM - NAD 83 (m) - Zone 13
 Easting 660032.478
 Northing 3561507.986
State Plane - NAD 83 (f) - Zone E
 Easting 860256.880
 Northing 430279.486
Degrees Minutes Seconds
 Latitude 32 : 10 : 43.396353
 Longitude -103 : 18 : 9.181381
 Location pulled from New Map Point

Spatial Information
 OSE Administrative Area: District 2
 County: Lea
 Groundwater Basin: Capitan
 Sub-Basin: Landreth-Monumnet Draws
 Abstract Area: Capitan
 Land Grant: Not in Land Grant
 Restrictions:
NA
PLSS Description
 NESWNWNE Qtr of Sec 31 of 024S 036E
 Derived from CADNSDI - Qtr Sec. locations are calculated and are only approximations

File Number:
Owner:
Purpose:
Author:

NEW MEXICO OFFICE
 OF THE
 STATE ENGINEER

1:36,112
 mi
 0 0.125 0.25 0.5

N

7/8/2019

Image Information
 Source: DigitalGlobe
 Date: 1/30/2016
 Resolution (m): 0.5
 Accuracy (m): 10.16

- User Defined Point
- 1 Miles Buffer
- OSE District Boundary
- State Land

Revisions to this map have been made by the New Mexico Office of the State Engineer (OSE) to verify that these maps are accurate to other maps. The user of this map is to be aware that: however, a degree of error is inherent in all maps, and these maps may contain omissions and errors in scale, resolution, modification, positional accuracy, development methodology in preparation of source data, and other circumstances. These maps are distributed "as is" without warranty of any kind.



New Mexico Office of the State Engineer
Active & Inactive Points of Diversion
(with Ownership Information)

No PODs found.

POD Search:

POD Number: CP 00523

UTMNAD83 Radius Search (in meters):

Easting (X): 660032.478

Northing (Y): 3561507.986

Radius: 1609.3

BC&D Operating, Inc

P.O. Box 302 Hobbs, NM 88241
(405) 837-8147

June 6, 2019

Surface Owner / Offset Operators

Re: Notification of Application for Authorization to Inject into the West Jal Deep SWD #7 Well.

Ladies and Gentlemen:

BC&D Operating, Inc is seeking administrative approval to utilize the West Jal Deep SWD #7 (new drill) as a Salt Water Disposal well. As required by the New Mexico Oil Conservation Division Rules, we are notifying you of the following proposed salt water disposal well. This letter is a notice only. No action is required unless you have questions or objections.

<u>Well:</u>	West Jal Deep SWD #7
<u>Proposed Disposal Zone:</u>	Devonian Formation (14,844' – 17,400')
<u>Location:</u>	640' FNL & 1,980 FEL, Sec. 31, T24S, R36E, Lea Co., NM
<u>Applicants Name:</u>	BC&D Operating, Inc
<u>Applicants Address:</u>	P.O. Box 302, Hobbs, NM 88241

This application for water disposal well will be filed with the New Mexico Oil Conservation Division. If they determine the application complies with the applicable regulations, then it will be approved. The New Mexico Conservation Division address is 1220 South St. Francis Dr., Santa Fe NM 87505 and their phone number is (505) 476-3460.

Please call Richard Hill with BC&D Operating, Inc if you have any questions at (405) 837-8147

Sincerely,

Richard Hill

BC&D Operating, Inc

P.O. Box 302 Hobbs, NM 88241

(405) 837-8147

Intrepid Potash
1001 17th St Suite 1050
Denver, Co 80202

Ameredev II, LLC
5707 Southwest Pkwy
Bldg. 1 Ste. 275
Austin, Tx 78735

Franklin Mountain Energy
2401 E. 2nd Ave. Suite 300
Denver, CO 80206

Lilis Energy
1800 Bering Drive
Houston, Tx 77057

Morrow Family Trust
30393 Oak Grove Rd
Paola, Kansas 88220

U.S – BLM
620 E. Green St.
Carlsbad, NM 88220

NM State Land Office
310 Old Santa Fe Trail
Santa Fe, NM 87501

Jal Public Library Fund
P.O. Box 178
Jal NM 88252-0178

New Mexico Oil Conservation Division
1220 S. St. Francis Dr.
Santa Fe, NM 87505

BC&D Operating, Inc

P.O. Box 302 Hobbs, NM 88241
(405) 837-8147

New Mexico Oil Conservation Division – Hobbs Field Office
1625 N. French Drive
Hobbs, NM 88240

7019 0700 0000 2469 1536

U.S. Postal Service™
CERTIFIED MAIL® RECEIPT
 Domestic Mail Only

For delivery information, visit our website at www.usps.com

AUSTIN, TX 78735


Certified Mail Fee \$3.50

Extra Services & Fees (check box, add fee):
 Return Receipt (hardcopy) \$2.80
 Return Receipt (electronic) \$0.00
 Certified Mail Restricted Delivery \$0.00
 Adult Signature Required \$0.00
 Adult Signature Restricted Delivery \$0.00

Postage \$0.55
Total Postage and Fees \$6.85

Sent To
Ameredeu II LLC
 Street and Apt. No., or PO Box No.
5707 SW RKwy Bld 1 suite 225
 City, State, ZIP+4®
Austin, TX 78735

PS Form 3800, April 2015 PSN 7530-02-000-9047 See Reverse for Instructions



06/07/2019
 WOST JAL
 Deep SWD #7

7019 0700 0000 2469 1512

U.S. Postal Service™
CERTIFIED MAIL® RECEIPT
 Domestic Mail Only

For delivery information, visit our website at www.usps.com

DENVER, CO 80206

Certified Mail Fee \$3.50

Extra Services & Fees (check box, add fee):
 Return Receipt (hardcopy) \$2.80
 Return Receipt (electronic) \$0.00
 Certified Mail Restricted Delivery \$0.00
 Adult Signature Required \$0.00
 Adult Signature Restricted Delivery \$0.00

Postage \$0.55
Total Postage and Fees \$6.85

Sent To
Franklin Mountain Energy
 Street and Apt. No., or PO Box No.
2401 E 2nd Ave suite 300
 City, State, ZIP+4®
Denver, Co 80206

PS Form 3800, April 2015 PSN 7530-02-000-9047 See Reverse for Instructions



06/07/2019
 WOST JAL
 Deep SWD #7

7019 0700 0000 2469 1390

U.S. Postal Service™
CERTIFIED MAIL® RECEIPT
 Domestic Mail Only

For delivery information, visit our website at www.usps.com

DENVER, CO 80202

Certified Mail Fee \$3.50

Extra Services & Fees (check box, add fee):
 Return Receipt (hardcopy) \$2.80
 Return Receipt (electronic) \$0.00
 Certified Mail Restricted Delivery \$0.00
 Adult Signature Required \$0.00
 Adult Signature Restricted Delivery \$0.00

Postage \$0.55
Total Postage and Fees \$6.85

Sent To
Entrepid Potash
 Street and Apt. No., or PO Box No.
1001 17th ST Suite 105D
 City, State, ZIP+4®
Denver, Co 80202

PS Form 3800, April 2015 PSN 7530-02-000-9047 See Reverse for Instructions



06/07/2019
 WOST JAL
 Deep SWD #7

7019 0700 0000 2469 1529

U.S. Postal Service™
CERTIFIED MAIL® RECEIPT
 Domestic Mail Only

For delivery information, visit our website at www.usps.com

PADLA, KS 66071

Certified Mail Fee \$3.50

Extra Services & Fees (check box, add fee):
 Return Receipt (hardcopy) \$2.80
 Return Receipt (electronic) \$0.00
 Certified Mail Restricted Delivery \$0.00
 Adult Signature Required \$0.00
 Adult Signature Restricted Delivery \$0.00

Postage \$0.55
Total Postage and Fees \$6.85

Sent To
Morrow Family Trust
 Street and Apt. No., or PO Box No.
30393 Oak Grove Rd
 City, State, ZIP+4®
Padla, Kansas 66071

PS Form 3800, April 2015 PSN 7530-02-000-9047 See Reverse for Instructions



06/07/2019
 WOST JAL
 Deep SWD #7

7019 0700 0000 2469 1406

U.S. Postal Service™
CERTIFIED MAIL® RECEIPT
 Domestic Mail Only

For delivery information, visit our website at www.usps.com

JAL, NM 88252


Certified Mail Fee \$3.50

Extra Services & Fees (check box, add fee):
 Return Receipt (hardcopy) \$2.80
 Return Receipt (electronic) \$0.00
 Certified Mail Restricted Delivery \$0.00
 Adult Signature Required \$0.00
 Adult Signature Restricted Delivery \$0.00

Postage \$0.55
Total Postage and Fees \$6.85

Sent To
Jal Public Library Fund
 Street and Apt. No., or PO Box No.
P.O. Box 178
 City, State, ZIP+4®
Jal, NM 88252-0178

PS Form 3800, April 2015 PSN 7530-02-000-9047 See Reverse for Instructions



06/07/2019
 WOST JAL
 Deep SWD #7

7019 0700 0000 2469 1543

U.S. Postal Service™
CERTIFIED MAIL® RECEIPT
 Domestic Mail Only

For delivery information, visit our website at www.usps.com

HOUSTON, TX 77057


Certified Mail Fee \$3.50

Extra Services & Fees (check box, add fee):
 Return Receipt (hardcopy) \$2.80
 Return Receipt (electronic) \$0.00
 Certified Mail Restricted Delivery \$0.00
 Adult Signature Required \$0.00
 Adult Signature Restricted Delivery \$0.00

Postage \$0.55
Total Postage and Fees \$6.85

Sent To
Lilis Energy
 Street and Apt. No., or PO Box No.
1800 Bernis Drive
 City, State, ZIP+4®
Houston, TX 77057

PS Form 3800, April 2015 PSN 7530-02-000-9047 See Reverse for Instructions



06/07/2019
 WOST JAL
 Deep SWD #7

7019 0700 0000 2469 1550

U.S. Postal Service™ CERTIFIED MAIL® RECEIPT Domestic Mail Only

For delivery information, visit our website at www.usps.com®.
CARLSBAD, NM 88220

Certified Mail Fee	\$3.50
Extra Services & Fees (check box, add fee)	\$2.80
<input type="checkbox"/> Return Receipt (hardcopy)	\$0.00
<input type="checkbox"/> Return Receipt (electronic)	\$0.00
<input type="checkbox"/> Certified Mail Restricted Delivery	\$0.00
<input type="checkbox"/> Adult Signature Required	\$0.00
<input type="checkbox"/> Adult Signature Restricted Delivery	\$0.00
Postage	\$0.55
Total Postage and Fees	\$6.85



06/07/2019

Sent To
US BLM
Street and Apt. No., or PO Box No.
620 E Green ST
City, State, ZIP+4®
CARLSBAD, NM 88220
PS Form 3800, April 2015 PSN 7530-02-000-9047 See Reverse for Instructions

*West JF
Deep SWD
#7*

7019 0700 0000 2469 1383

U.S. Postal Service™ CERTIFIED MAIL® RECEIPT Domestic Mail Only

For delivery information, visit our website at www.usps.com®.
SANTA FE, NM 87501

Certified Mail Fee	\$3.50
Extra Services & Fees (check box, add fee)	\$2.80
<input type="checkbox"/> Return Receipt (hardcopy)	\$0.00
<input type="checkbox"/> Return Receipt (electronic)	\$0.00
<input type="checkbox"/> Certified Mail Restricted Delivery	\$0.00
<input type="checkbox"/> Adult Signature Required	\$0.00
<input type="checkbox"/> Adult Signature Restricted Delivery	\$0.00
Postage	\$0.55
Total Postage and Fees	\$6.85



06/07/2019

Sent To
NM STATE LAND OFFICE
Street and Apt. No., or PO Box No.
310 OLD SANTA FE TRAIL
City, State, ZIP+4®
SANTA FE, NM 87501
PS Form 3800, April 2015 PSN 7530-02-000-9047 See Reverse for Instructions

*West JF
Deep SWD
#7*

7019 0700 0000 2469 1574

U.S. Postal Service™ CERTIFIED MAIL® RECEIPT Domestic Mail Only

For delivery information, visit our website at www.usps.com®.
SANTA FE, NM 87505

Certified Mail Fee	\$3.50
Extra Services & Fees (check box, add fee)	\$2.80
<input type="checkbox"/> Return Receipt (hardcopy)	\$0.00
<input type="checkbox"/> Return Receipt (electronic)	\$0.00
<input type="checkbox"/> Certified Mail Restricted Delivery	\$0.00
<input type="checkbox"/> Adult Signature Required	\$0.00
<input type="checkbox"/> Adult Signature Restricted Delivery	\$0.00
Postage	\$0.55
Total Postage and Fees	\$6.85



06/07/2019

Sent To
OCD
Street and Apt. No., or PO Box No.
1220 South St. Francis Dr.
City, State, ZIP+4®
SANTA FE, NM 87505
PS Form 3800, April 2015 PSN 7530-02-000-9047 See Reverse for Instructions


*West JF
Deep SWD
#7*

7019 0700 0000 2469 1567

U.S. Postal Service™ CERTIFIED MAIL® RECEIPT Domestic Mail Only

For delivery information, visit our website at www.usps.com®.
HOBBS, NM 88240

Certified Mail Fee	\$3.50
Extra Services & Fees (check box, add fee)	\$2.80
<input type="checkbox"/> Return Receipt (hardcopy)	\$0.00
<input type="checkbox"/> Return Receipt (electronic)	\$0.00
<input type="checkbox"/> Certified Mail Restricted Delivery	\$0.00
<input type="checkbox"/> Adult Signature Required	\$0.00
<input type="checkbox"/> Adult Signature Restricted Delivery	\$0.00
Postage	\$0.55
Total Postage and Fees	\$6.85



06/07/2019

Sent To
OCD-District 2
Street and Apt. No., or PO Box No.
1625 N. French Dr
City, State, ZIP+4®
Hobbs NM 88240
PS Form 3800, April 2015 PSN 7530-02-000-9047 See Reverse for Instructions

*West JF
Deep SWD
#7*

BC&D Operating

P.O. Box 302 Hobbs, NM 88241

(405) 837-8147

June 6, 2019

BC&D Operating, INC, P.O. BOX 302 Hobbs, NM 88241, has filed a form C-108 (Application for Authorization to inject) with the Oil Conservation Division seeking administrative approval to utilize the West Jal Deep SWD #7 as a Commercial Salt Water Disposal well.

The West Jal Deep SWD #7 is located at 640' FNL & 1,980 FEL, Sec. 31, T24S, R36E, Lea County New Mexico. The well will dispose of water produced from oil and gas wells into the Devonian-Silurian Formations from 14,844' – 17,400' at a maximum rate of 40,000 barrel of water per day with a maximum pressure of 2,968 psi.

Interested parties must file objections or requests for hearing with the Oil Conservation Division, 1220 South St. Francis Dr., Santa Fe, New Mexico 87505, within 15 days.

Additional information can be obtained by contacting BC&D Operating, Inc at (405) 837-8147.

Affidavit of Publication

STATE OF NEW MEXICO
COUNTY OF LEA

I, Daniel Russell, Publisher of the Hobbs News-Sun, a newspaper published at Hobbs, New Mexico, solemnly swear that the clipping attached hereto was published in the regular and entire issue of said newspaper, and not a supplement thereof for a period of 1 issue(s).

Beginning with the issue dated
June 08, 2019
and ending with the issue dated
June 08, 2019.




Publisher

Sworn and subscribed to before me this
8th day of June 2019.



Business Manager

My commission expires
January 29, 2023

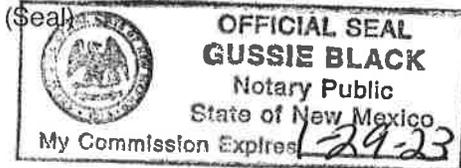

This newspaper is duly qualified to publish legal notices or advertisements within the meaning of Section 3, Chapter 167, Laws of 1937 and payment of fees for said

**LEGAL NOTICE
JUNE 8, 2019**

BC&D Operating, INC, P.O. BOX 302 Hobbs, NM 88241, has filed a form C-108 (Application for Authorization to inject) with the Oil Conservation Division seeking administrative approval to utilize the West Jal Deep SWD #7 as a Commercial Salt Water Disposal well.

The West Jal Deep SWD #7 is located at 640' FNL & 1,980 FEL, Sec. 31, T24S, R36E, Lea County New Mexico. The well will dispose of water produced from oil and gas wells into the Devonian-Silurian Formations from 14,844' - 17,400' at a maximum rate of 40,000 barrel of water per day with a maximum pressure of 2,968 psi.

Interested parties must file objections or requests for hearing with the Oil Conservation Division, 1220 South St. Francis Dr., Santa Fe, New Mexico 87505, within 15 days.

Additional information can be obtained by contacting BC&D Operating, Inc at (405) 837-8147. #34262

67115835

00229366

RICHARD HILL
BC&D OPERATING
PO BOX 302
HOBBS , NM 88241

API	Well Name	Well Number	Operator Company Name	County	Target Formation	(TD) md	TVD	Well Status	Spud Date	Drill Type	Section	Township	Range
30025442220000	BLUE BAY WCA STATE COM	001H	FRANKLIN MOUNTAIN ENERGY LLC	LEA (NM)	WOLFCAMP	19266		PERMITTED		H	1	25S	35E
30025440340000	CHAMBERS BAY WCA STATE COM	001H	FRANKLIN MOUNTAIN ENERGY LLC	LEA (NM)	WOLFCAMP	19310		PERMITTED		H	1	25S	35E
30025439220000	PROXY WCA STATE COM	001H	FRANKLIN MOUNTAIN ENERGY LLC	LEA (NM)	WOLFCAMP	16762	12577	ACTIVE	#####	H	36	24S	35E
30025261270000	ASHLEY ST	1	PRE-ONGARD WELL OPERATOR	LEA (NM)	(N/A)			P & A		V	36	24S	35E
30025261230000	BULL BEAR	1	PRE-ONGARD WELL OPERATOR	LEA (NM)	(N/A)			CANCELLED		V	25	24S	35E
30025260160000	CRAZY HOR	1	PRE-ONGARD WELL OPERATOR	LEA (NM)	(N/A)	3875	3875	P & A		V	36	24S	35E
30025259630000	AMOCO STATE	1	O H BERRY	LEA (NM)	YATES-SEVEN RIVER	3775	3775	P & A	8/11/1978	V	36	24S	35E

BC&D Operating

Well: West Jal Deep SWD #7

Casing Assumptions

Section	Hole Size	Csg Size	Drift	From (MD)	To (MD)	From (TVD)	To (TVD)	Tapered String	Weight (lbs)	Grade	Conn.	Collapse	Burst	Body Tension	Joint Tension	Dry/Buoyant	Mud Weight (ppg)
Surface	26.000	20	18.937	0	1250	0	1250	No	94	J-55	BTC	520	2110	1480	1402	Dry	8.4
Intermediate #1	17.500	13.375	12.359	0	5200	0	5200	No	61	HCL-80	BTC	2060	4500	1399	1399	Dry	9.7
Intermediate #2	12.250	9.625	8.679	0	11864	0	11864	No	40	HCL-80	BTC	3870	5750	916	947	Dry	9.8
Intermediate #3	8.500	7	6	11,565	15550	11565	15550	No	32	P110HC	SpCL BTC	11890	12450	1025	1053	Dry	12.5

Safety Factors

Section	Csg Size	Weight (lbs)	Grade	Collapse	Burst	Body Tension	Joint Tension
Surface	20	94	J-55	1.919	3.864	12.596	11.932
Intermediate #1	13.375	61	HCL-80	1.393	1.716	4.410	4.410
Intermediate #2	9.625	40	HCL-80	1.126	1.674	1.930	1.996
Intermediate #3	7	32	P110HC	1.778	1.862	2.060	2.116

Clearance

Hole Size	Conn.	Tube OD	Drift	Conn. OD	Tube Clearance	Conn. Clearance
26.000	BTC	20.000	18.937	21.000	3.000	2.500
17.500	BTC	13.375	12.359	14.375	2.063	1.563
12.250	BTC	9.625	8.679	10.625	1.313	0.813
8.500	SpCL BTC	7.000	6.000	7.375	0.750	0.563

Criteria

Collapse	1.125
Burst	1.125
Body Tension	2
Joint Tension	2

Engineering Notes:

Please see the the special clearance BTC conn. being used with the 7" casing. It has an coupling OD of 7.375" and will yield a 0.563" clearance inside of open hole. All collapse values assume vacated pipe with a gas gradiat .22 psi/ft.

BC&D Operating

Well: West Jal Deep SWD #7

Circulating Medium Table

Section	Hole Size	Top Depth	Bottom Depth	Mud Type	Min Mud Weight (ppg)	Max Mud Weight (ppg)	Gel Strength (lbs/100 sqft)	PH	Viscosity	Salinity (ppm)	Filtration	Additional Characteristics
Surface	26.000	0	1250.00	Fresh Water	8.4	8.4	-	9	28-36	-	N/C	
Intermediate #1	17.500	1250	5400.00	Cut Brine	8.4	9.7	-	9	28-36	-	N/C	Loss Circulation Control
Intermediate #2	12.250	5200	11564.00	Cut Brine	9.6	9.8	-	10-10.5	28-36	-	N/C	Los Circulation Control
Intermediate #3	8.500	11864	15250.00	Oil Base Water	12	12.5	-	-	60	-	N/C	30/70 %
Production	6.000	15550	17400.00	Cut Brine	9	9	-	9	28-36	-	-	

BC&D Operating

West Jal Deep SWD #7

Drilling plan

Surface Hole

- Drill 26" hole to 1,250' and R&C 20" 94# J-55 BTC casing. A lead and a tail slurry will be pumped with top of cement at surface (150% excess on lead and 50% excess on tail). Directional surveys will be take taken for directional control. The mud will be a freshwater system with a weight of 8.4 ppg. A 5M BOPE system will be installed and tested before drilling out the 20" casing shoe. Casing shoe depth will be 25' into the rustler and determined by mud logger.

Intermediate 1

- Drill 17-1/2" hole to 5,200' and R&C 13-3/8" 61# HCL-10 BTC casing. A lead and a tail slurry will be pumped with top of cement at surface (150% excess on lead and 100% excess on tail). Directional surveys will be take taken for directional control. The mud will be a cut brine system with w weight of 8.4 – 8.9 ppg using loss circulation control. Any broken connection will be tested for well control. Casing shoe depth will be 100' past the base of the Capitan Reef and determined by mud logger. Full suite of logs consisting on GR/CNL/CDN will be ran to identify Capitan Reef. A cement bond log will be ran after casing is cemented in place. All information gathered on the Capitan Reef will be shared with NMOCD for future study and analysis.

Intermediate 2

- Drill 12-1/4" hole to 11,864' and R&C 9-5/8" 40# HCL-80 BTC casing. A Two stage cement job will be performed with the DV tool at 5,500'. A lead and a tail cement will be pumped on both stages. Stage 2 cement will be circulated to surface (150% excess on lead and 100% excess on tail). Directional surveys will be take taken for directional control. The mud will be a cut brine system with a weight of 9.6 – 10 ppg using loss circulation control. A 10M BOPE system will be installed and tested before drilling out the shoe. Casing set depth well be identified with mud logger and Gamma. The casing will be set 150' into the Strawn. Cement bond log will be ran after casing is cemented in place.

Intermediate 3

- Drill 8-1/2" hole to 15,550' and R&C 7" 32# HCP-110 BTC drilling liner. One slurry of cement will be pumped with the top of cement covering the liner top (50% excess). Directional surveys will be take taken for directional control. The mud will be a 70/30 oil base mud system with a weight of 12 – 12.5 ppg. Any broken connections will be tested for well control. Casing set depth will be

BC&D Operating

identified with mud logger ang Gamma. The casing shoe will be 50' past the base of the Woodford shale. Cement bond log will be ran after casing is cemented in place.

Open Hole

- Drill 6" hole to 17,400' and will be left open hole for the injection interval. Directional surveys will be taken for directional control. The mud will be a cut brine system with a weight of 9 – 9.8 ppg using loss circulation control. TD will be defined by mud logger 100' into the Montoya. Full suite of logs will be ran. The Montoya will be plugged back with the cement top no less than a 100' above its top.

BC&D Operating

West Jal Deep SWD #7

Well Control Plan

BOP Equipment

- A BOP consisting of 3 rams with 2 pipe rams, 1 blind ram and one annular preventer. The BOP will be utilized below surface casing to TD. Also present will be an accumulator that meets the requirements of Onshore Order #2 for the pressure rating on the BOP stack. A rotating head will also be installed as needed. BOP will be inspected and operated as recommended in Onshore Order #2. A Kelly cock and sub equipped with a full opening valve sized to fit the drill pipe and collars will be available on the rig floor in the open position.

Testing Procedure 10M System

- Pressure tests will be conducted before drilling out from under all casing strings. BOP will be inspected and operated as required by Onshore Order #2. Kelly cock sub equipped with a full opening valve sized to fit the drill pipe and collars will be available on the rig floor in the open position. A third-party company will test the BOP's. After setting the surface casing, and before drilling the surface casing shoe, a minimum of 5M BOPE system will be installed. It will be tested to 250 psi low and 5000 psi high. Annular will be tested to 250 psi low and 3500 psi high. After setting intermediate 1 casing, a minimum 5M BOPE system will be installed and tested to 250 psi low and 5000 psi high. Annular will be tested to 250 psi low and 3500 psi high. After setting Intermediate #2, a 10M system will be installed and tested to 250 psi low and 8500 psi high with the annular being tested to 250 psi low and 3500 psi high. The 13-3/8" 10M flange on the wellhead will also be tested to 10,000 psi at this time.

Variance Request

- BC&D Operating requests a variance to have the option of running a speed head for the setting of intermediate 1 and 2 strings. If running speed head with landing mandrel for the 13-3/8" and 9-5/8" casing, then a minimum 5M BOPE system will be installed after surface casing is set. BOP test pressures will be 250 psi low and 5000 psi high. Annular will be tested to 250 psi low and 3500 psi high before drilling below the surface shoe. After 9-5/8" casing is set in the speed head the BOP will then be lifted to install another casing head section for the production casing. BC&D Operating will nipple up the casing head and BOP and a minimum 10M BOPE system will be installed. Pressure tests will be made to 250 psi low and 8500 psi high. BC&D Operating requests a variance to have a 5M Annular on top of a 10M BOP and will be tested to 250 psi low and 3500 psi high. A diagram of the speed head and BOP is attached. BC&D Operating requests

BC&D Operating

a variance to drill this well using a co-flex line between the BOP and Choke manifold. Certification for the proposed co-flex hose is attached. The hose is not required by the manufacturer to be anchored. If the specific hose is not available, then one of equal or higher rating will be used.

A. Component and Preventer Compatibility Table

The table below, which cover the drilling and casing of the 10M MASP portion of the well, outlines the tubulars and the compatible preventers in use. This table, combined with the mud program, documents and that two barriers to flow can be maintained at all times, independent of the rating of the annular preventer.

8-1/2" Production hole section, 10M requirement

	OD	Preventer	RWP
Drill Pipe	5"	Fixer lower 5" Upper 4.5 - 7" VBR	10M
HWDP	5"	Fixed Lower 5" Upper 4.5 - 7" VBR	10M
Jars	5"	Fixed Lower 5" Upper 4.5 - 7" VBR	10M
Drill Collars and MWD tools	6.25" - 6.75"	Upper 4.5 - 7" VBR	10M
Mud Motor	6.75"	Upper 4.5 - 7" VBR	10M
Production Casing	7"	Upper 4.5 - 7" VBR	10M
All	0 - 13-5/8"	Annular	5M
Open hole	-	Blind Rams	10M

6" Production hole section, 10M requirement.

Component	OD	Preventer	RWP
Drill Pipe	4"	Upper 3.5" - 5.5" VBR Lower 3.5 - 5.5" VBR	10M
HWDP	4"	Upper 3.5" - 5.5" VBR Lower 3.5 - 5.5" VBR	10M
Jars	4"	Upper 3.5" - 5.5" VBR Lower 3.5 - 5.5" VBR	10M
Drill Collars and MWD tools	4" - 5"	Upper 4.5 - 5.5" VBR	10M
Mud Motor	4.75" - 5"	Upper 4.5 - 5.5" VBR	10M
Production Casing	NA	Upper 4.5 - 5.5" VBR	10M
All	1" - 13-5/8"	Annular	5M
Open hole	-	Blind Rams	10M

VBR = Variable Bore Ram. Compatible range listed in chart.

HWDP = Heavy Weight Drill Pipe

MWD = Measurement While Drilling

BC&D Operating

B. Well Control Procedures

Well control procedures are specific to the rig equipment and the operation at the time the kick occurs. Below are the minimal high-level tasks prescribed to assure a proper shut-in while drilling, tripping, running casing, pipe out of the hole (open hole), the pressure at which control is swapped from the annular to another compatible ram is variable, but the operator will document in the submission of their well control plan what their operating pressure limit is for the 5M annular preventer. The operator may choose an operating pressure less than or equal to RWP, but in no case will it exceed the Rated Working Pressure (RWP) of the annular preventer.

General Procedure While Drilling

- Sound alarm (alert crew).
- Space out drill string.
- Shut down pumps (stop pumps and rotary).
- Shut-in well (uppermost applicable BOP, typically annular preventer first. The hydraulic Control Remote (HCR) valve and choke will already be in the closed position).

- Confirm shut-in.
- Notify tool pusher/onsite supervisor.
- Read and record the following:
 - SIDPP and SICP
 - Pit gain
 - Time
- Regroup and identify forward plan.
- If pressure has built or is anticipated during the kill to reach the RWP of the annular preventer, confirm spacing and swap to the upper pipe ram.

General Procedure While Tripping

- Sound alarm (alert crew).
- Stab full opening safety valve and close.
- Space out drill string.
- Shut-in (uppermost applicable BOP, typically annular preventer first. The HCR and choke will already be in the closed position).
- Confirm shut-in.
- Notify tool pusher/onsite supervisor.
- Read and record the following.
 - SIDPP and SICP
 - Pit gain
 - Time

BC&D Operating

- Regroup and identify forward plan.
- If pressure has built or is anticipated during the kill to reach the RWP of the annular preventer, confirm spacing and swap to the upper pipe ram.

General Procedure While Running Casing

- Sound alarm (alert crew).
- Stab crossover and full opening safety valve and close.
- Space out string.
- Shut-in (uppermost applicable BOP, typically annular preventer first. The HCR and choke will already be in the closed position).
- Confirm shut-in.
- Notify tool pusher/onsite supervisor.
- Read and record the following.
 - SIDPP and SICP
 - Pit Gain
 - Time
 - Regroup and identify forward plan.
 - If pressure has built or is anticipated during the kill to reach the RWP of the annular preventer, confirm spacing and swap to compatible pipe ram.

General Procedure with No Pipe in Hole (Open Hole)

- Sound alarm (alert crew).
- Shut-in with blind rams or BSR. (The HCR and choke will already be in the closed position).
- Confirm shut-in
- Notify tool pusher/company representative.
- Read and record the following.
 - SICP
 - Pit gain
 - Time
- Regroup and identify forward plan.

General Procedures While Pulling BHA thru Stack

- PRIOR to pulling last joint of drill pipe thru the stack.
 - Perform flow check, if flowing:
 - Sound alarm (alert crew).
 - Stab full opening safety valve and close.
 - Space out drill string with tool joint just beneath the upper pipe ram.

BC&D Operating

- Shut-in using upper pipe ram. (The HCR and choke will already be in the closed position.)
- Confirm shut-in.
- Notify tool pusher/onsite supervisor.
- Read and record the following.
 - SIDPP and SICP
 - Pit gain
 - Time
 - Regroup and identify forward plan.
- With BHA in the stack and compatible ram preventer and pipe combo immediately available.
 - Sound alarm (alert crew).
 - Stab crossover and full opening safety valve and close.
 - Space out drill string with upset just beneath the compatible pipe ram.
 - Shut-in using compatible pipe ram. (The HCR and choke will already be in the closed position.)
 - Confirm shut-in.
 - Notify tool pusher/onsite supervisor.
- With BHA in the stack and NO compatible ram preventer and pipe combo immediately available.
 - Sound alarm (alert crew).
 - If possible to pick up high enough, pull string clear of the stack and follow “Open Hole” scenario.
 - If impossible to pick up high enough to pull the string clear of the stack.
 - Stab crossover, make up one joint/stand of drill pipe, and full opening safety valve and close.
 - Space out drill string with tool joint just beneath the upper pipe ram.
 - Shut-in using upper pipe ram. (The HCR and choke will already be in the closed position).
 - Confirm shut-in.
 - Notify tool pusher/company representative.
 - Read and record the following:
 - SIDPP and SICP
 - Pit gain
 - Time
 - Regroup and identify forward plan.

BC&D Operating

Hydrogen Sulfide Drilling Operations Plan

1. Hydrogen Sulfide Training

All personnel, whether regularly assigned, contracted, or employed on a unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this will:

- The hazards and characteristics of hydrogen sulfide (H₂S).
- The proper use and maintenance of personal protective equipment and life support systems.
- The proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
- The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

- The effects of H₂S on metal components. If high tensile tubulars are to be used, personnel will be trained in their special maintenance requirements.
- Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
- The contents and requirements of the H₂S Drilling Operations Plan and the Public Protection Plan.

There will be an initial training session just prior to encountering a known or probable H₂S zone (within 3 days or 500') and weekly H₂S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H₂S Drilling Operations Plan and the Public Protection Plan. This plan shall be available at the well site. All personnel will be required to carry documentation that they have received the proper training.

2. H₂S Safety Equipment and systems

Note: All H₂S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500' above, or three days prior to penetrating the first zone containing or reasonably expected to contain H₂S. If H₂S greater than 100 ppm is encountered in the gas stream, we will shut in the install H₂S equipment.

- Well Control Equipment:
 - Flare Line.
 - Choke manifold with remotely operated choke.
 - Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit.
 -

BC&D Operating

- Auxiliary equipment to include: annular preventer, mud-gas, separator, rotating head.
- Protective equipment for essential personnel:
 - Mark II Surviveair 30 minute units located in the dog house and at briefing areas.
- H2S detection and monitoring equipment:
 - 2 portable H2S monitors positioned on location for best coverage and response. These units have warning lights and audible sirens when H2S levels of 20 ppm are reached.
- Visual warning systems:
 - Caution/Danger signs shall be posted on roads providing direct access to location. Signs will be painted a high visibility yellow with black lettering of sufficient size to be readable at a reasonable distance from the immediate location. Bilingual signs will be used, when appropriate.
- Mud program:
 - The mud program has been designed to minimize the volume of H2S circulated to the surface.

BC&D Operating, INC has conducted a review to determine if an H2S contingency plan is required for the above referenced well. We were able to conclude that any potential hazardous volume would be minimal.

BC&D Operating

Contact Information

In at this time the supervising person determines the release of H2S cannot be contained to the site location and the general public is in harm's way he will take the necessary steps to protect the workers and the public.

Key Personnel	Title	Office	Mobile
Donnie Hill	Owner/President		575-390-7626
Richard Hill	Drilling	405-837-8147	405-837-8147

Lea County	Contact
Ambulance	911
Nor Lea General Hospital (Hobbs)	575-397-0560
State Police (Hobbs)	575-392-5580
City Police (Hobbs)	575-397-9625
Sheriff's Office (Lovington)	575-396-3611
Fire Marshall (Lovington)	575-391-2983
Volunteer Fire Dept. (Jal)	575-395-2221
Emergency Management (Lovington)	575-391-2983
New Mexico Oil Conservation Division (Hobbs)	575-393-6161
BLM (Hobbs)	575-393-3612
Hobbs Animal Clinic	575-392-5563
Dal Paso Animal Hospital (Hobbs)	575-397-2286
Mountain States Equine (Hobbs)	575-392-7488
Carlsbad	
BLM	575-234-5972
Santa Fe	
New Mexico Emergency Response Commission	505-476-9600
New Mexico Emergency Response Commission (24 hrs)	505-827-9126
New Mexico State Emergency Operations Center	505-476-9635
National	
National Emergency Response Center (Washington, D.C.)	800-424-8802
Medical	
Flight for Life - 4000 24th Lubbock, Tx	806-743-9911
Aerocare - R3, Box 49F; Lubbock, Tx	806-747-8923
Med Flight Air Amb - 2301 Yale Blvd SD, D3; Albuquerque, NM	505-842-4433
SB Air Med Service - 2505 Clark Carr Loop SE; Albuquerque, NM	505-842-4949
Other	
Boots & Coots IWC	800-256-9688
Cudd Pressure Control	432-699-0139
NM Dept. of Transportation (Roswell)	575-637-7200

McMillan, Michael, EMNRD

From: McMillan, Michael, EMNRD <Michael.McMillan@state.nm.us>
Sent: Monday, July 22, 2019 8:11 AM
To: Richard Hill
Cc: Goetze, Phillip, EMNRD; Lowe, Leonard, EMNRD; Jones, William V, EMNRD; Murphy, Kathleen A, EMNRD
Subject: West Jal Deep SWD Well No. 7

Richard:

The OCD received your administrative SWD application for the West Jal Deep SWD Well No. 7 on July 19, 2019. You must go through the fee portal before your application can be logged into the administrative process.

You will be expected to pay the fees required for an administrative SWD, and also provide a pdf of the administrative application.

To help the OCD, when you submit the application, scan the green cards in black and white (11byte of the black and white vs. 2MB file color file).

Thank You

Mike

Michael McMillan
1220 South St. Francis
Santa Fe, New Mexico
505-476-3448
Michael.mcmillan@state.nm.us

McMillan, Michael, EMNRD

From: hill.richie@gmail.com
Sent: Thursday, July 25, 2019 9:25 AM
To: McMillan, Michael, EMNRD; Goetze, Phillip, EMNRD; Lowe, Leonard, EMNRD; Jones, William V, EMNRD; Murphy, Kathleen A, EMNRD
Cc: Richard Hill
Subject: [EXT] FW: OCD Receipt of Fee Application Payment
Attachments: OCDReceiptOfFeePayment.pdf; C-108_WJD7.pdf; West Jal Deep SWD Well No. 7

Good Morning,

I wanted to bring it your attention that the payment portal is not linked or has a corrupt link. In the Fee application page when "upload document" is selected, it will allow you to upload the document but does not send you to the payment portal only an error message. The end result has a PO number assigned to a application attachment with a pending payment and no options are given on how to make payment. I selected the "mail or hand deliver option" and the payment portal is available... I went through the process of making payment with my Visa and it worked; but there is no option to attach the application at this point. I spoke with Daniel Sanchez about the issue and informed him we had the same result on other computers and user names. I apologize in advance for any in confusion into this matter but, I do think the new system will work great and streamline the process once all the bugs are worked out.

I attached the receipt for payment as well as the application for the West Jal Deep SWD #7 for reference when looking into this matter. A hard copy of the application was received last week; attached is a conformation email that was sent to me a few days ago.

Thank You

Richard Hill
(405) 837-8147

From: OCDOnline@state.nm.us <OCDOnline@state.nm.us>
Sent: Thursday, July 25, 2019 9:20 AM
To: hill.richie@gmail.com
Subject: OCD Receipt of Fee Application Payment

Thank you for your fee application payment! Your receipt is attached.

PO Number: NWTIV-190725-C-1080
Payment Date: 7/25/2019
Payment Amount: \$500.00
Payment Type: Credit Card

Application Type: Application for a fluid injection well permit.

Fee Amount: \$500.00

Application Status: Pending Document Delivery

OGRID: 25670

First Name: Richard

Last Name: Hill

Email: hill.richie@gmail.com

IMPORTANT: If you are mailing or delivering your application, you must print and include your receipt of payment as the first page on your application. All mailed and delivered applications must be sent to the following address: 1220 S. St. Francis Dr., Santa Fe, NM 87505. For inquiries, reference the PO Number listed above.

Oil Conservation Division * 1220 South St. Francis Drive * Santa Fe, New Mexico 87505

(505) 476-3441 * ocd.fees@state.nm.us *

<https://clicktime.symantec.com/3GVATDhY1KumcHsxp2D1pft7Vc?u=www.emnrd.state.nm.us%2FOCD>

This is an automated email please do not reply.