

3R - 427

RP WORKPLAN

01/06/2009

3R427

RECEIVED

2009 JAN 6 PM 1 13

**Environmental Work Plan for Monitoring
Well Installation, Groundwater Sampling
and Preliminary Exposure Pathway
Assessment (PEPA)**

**El Paso 1A
San Juan Basin, Blanco, New Mexico**

Prepared for:

ConocoPhillips Company

*Risk Management and Remediation
420 South Keeler Avenue
Bartlesville, OK 74004
(918) 661-0935 office*

Prepared by:

Tetra Tech

*6121 Indian School Road NE, Suite 200
Albuquerque, NM 87110
(505) 237-8440*

January 2009

TABLE OF CONTENTS

1.0 PURPOSE AND NEED2

2.0 SITE HISTORY3

 2.1 Site Activities3

3.0 SCOPE OF WORK4

 3.1 Pre Field Work Preparation4

 3.2 Site Investigation4

 3.2.1 Soil Boring Advancement and Soil Sample Collection.....4

 3.2.2 Groundwater Monitoring Well Construction5

 3.2.3 Investigation Derived Waste.....6

 3.2.4 Groundwater Monitoring.....6

 3.3 Reporting.....6

 3.4 PEPA7

4.0 QUALITY ASSURANCE AND QUALITY CONTROL8

5.0 REFERENCES9

LIST OF FIGURES

Figure 1 – Site Location Map

Figure 2 – Proposed Groundwater Monitoring Well Locations

Figure 3 – Typical Monitoring Well Completion Diagram

APPENDICES

Appendix A – Historical Analytical Tables

Appendix B – Groundwater Monitoring Well Installation Log for MW-1

Appendix C – Soil Boring and Monitoring Well Completion Log Forms, MW-2 through MW-4

Appendix D – Groundwater Sampling Forms

Appendix E – Site Contacts

1.0 PURPOSE AND NEED

This document presents the scope of work to be performed at the El Paso 1A petroleum hydrocarbon release site (Site) associated with ConocoPhillips Company exploration and production operations in the San Juan Basin area of New Mexico. The surface owner of the Site is the Bureau of Land Management (BLM).

This work is being conducted in response to a request by the New Mexico Oil Conservation Division (OCD) for Site characterization and enhanced laboratory analyses. This request was communicated to Tetra Tech Incorporated (Tetra Tech) during an April 2008 meeting conducted in Santa Fe, New Mexico with Glen Von Gonten, OCD Environmental Bureau Hydrologist. The OCD is located at 1220 South St. Francis Drive, Santa Fe, NM 87505.

This document does not describe the preparation of risk analyses or the implementation of remedial activities that could potentially occur simultaneously with monitoring efforts at the sites in the future. Specific plans covering those potential activities will be prepared separately.

2.0 SITE HISTORY

Chronologies of activities previously performed at the Site are presented below. The proposed scope of work for the Site is presented following the chronology section.

2.1 Site Activities

The following table summarizes activities that have occurred at the Site regarding the response to the 2007 release discovery.

DATE	ACTIVITY
February 2007	Hydrocarbon-impacted soils discovered during trench work being conducted for a new flowline. Original source of contamination is unknown.
February 2007	Contaminated soil excavated from the Site. Soil samples collected and analyzed for benzene, toluene, ethylbenzene and total xylenes (BTEX) were below NMOCD regulations.
September 21, 2007	Ground water monitoring well installed to a depth of ten (10) feet below ground surface (bgs) by Envirotech Inc. of Farmington, NM (Envirotech). A soil sample obtained from the well boring was analyzed for benzene, BTEX and total petroleum hydrocarbons (TPH). Results were below NMOCD regulations of 10 parts per million (ppm), 50 ppm, and 100 ppm, respectively.
September 21, 2007	A ground water sample was collected from the temporary monitoring well and analyzed for BTEX; results were below the State of New Mexico drinking water standard for this constituent.
September 27, 2007	Depth to groundwater measured at seven (7) feet bgs.
September 2007	Envirotech report recommends plugging and abandonment of the temporary ground water monitoring well and a No Further Action determination for the Site (Envirotech, 2007).

3.0 SCOPE OF WORK

The Scope of Work for Site activities is described below. Work conducted at the Site will consist of field preparation prior to the start of work (Section 3.1); a Site investigation (Section 3.2) consisting of soil boring advancement and soil sample collection (Section 3.2.1); soil boring completion to groundwater monitoring wells (Section 3.2.2); proper handling and disposal of investigation-derived waste (Section 3.2.3); and groundwater monitoring (Section 3.2.4). Reporting is discussed in Section 3.3, the preliminary exposure pathway assessment (PEPA) prepared by Tetra Tech for ConocoPhillips internal use is described in Section 3.4, and quality assurance/quality control (QA/QC) is discussed in Section 4.0. References can be found in Section 5.0. Figure 1 is a Site location map, Figure 2 displays the Site layout and proposed locations of groundwater monitoring wells to be installed, and Figure 3 is a typical groundwater monitoring well completion diagram. Appendices follow the Figures and include:

- Appendix A – Historical Analytical Tables;
- Appendix B – Groundwater Monitoring Well Installation Log for MW-1;
- Appendix C – Soil Boring and Monitoring Well Completion Log Forms, MW-2 through MW-4;
- Appendix D – Groundwater Sampling Forms; and
- Appendix E – Site Contacts

3.1 Pre Field Work Preparation

The proposed groundwater monitoring well location map (Figure 2) will be reviewed and approved by ConocoPhillips Risk Management and Remediation personnel. Once these well locations have been approved, New Mexico One-Call will be contacted to perform a utility locate within a 250 foot radius from the El Paso 1A wellhead. Additionally, monitoring well installation permits will be acquired by WDC Exploration and Wells of Peralta, NM (WDC), and a Health and Safety Plan (HASP) will be prepared by Tetra Tech prior to the start of field work.

3.2 Site Investigation

3.2.1 Soil Boring Advancement and Soil Sample Collection

The subject Site is scheduled to have three (3) soil borings completed into two-inch diameter groundwater monitoring wells in order to define the groundwater flow direction and to determine the extent, if any, of petroleum hydrocarbon-impacts to groundwater. Borings will be advanced until auger refusal is met or until a sufficient depth into groundwater is achieved. Depth to groundwater at the Site is expected to be found at a depth of seven (7) feet bgs (Envirotech, 2007).

Prior to the start of drilling operations, each boring location will be “day lighted” by Riley Industrial Services of Farmington, New Mexico, in order to insure that no underground utilities within the Site will be damaged by drilling equipment. “Day lighting” of each boring will be

performed using a vacuum truck and water pressure to advance a hole approximately ten (10) inches in diameter and five (5) feet deep. Soil samples will be collected from just below the “day lighted” hole to just above the water table with a split-spoon sampling device during the advancement of each boring, while the lithology of the borehole will be recorded to the total depth of the boring. Soil samples will be collected in one-foot intervals for field screening with a photo-ionization organic vapor detector (PID) using the heated headspace method. The interval containing the highest PID readings within each of the three (3) soil borings will be collected and submitted to a laboratory for the following analytical parameters:

- Volatile Organic Compounds (VOCs), EPA Method 8260B
- Semivolatile Organic Compounds (SVOCs), EPA Method 8270C
- Total petroleum hydrocarbons (TPH), EPA Method 418.1
- Total metals, EPA Methods 6010/6020/7470A/7471A
- General chemistry (as described in 40 CFR 136.3), including alkalinity, bromide, chloride, fluoride, orthophosphate, sulfate, nitrate/nitrite, pH, specific conductance, TDS, and hardness (various methods)

After the first regularly scheduled quarterly groundwater monitoring event covered under this work plan, an expanded baseline groundwater parameter list will be submitted for laboratory analysis. Compounds of concern (COCs) detected in groundwater at concentrations above the New Mexico Water Quality Control Commission (NMWQCC) Groundwater Quality Standards during the first quarterly groundwater monitoring event will be carried forward for analyses in subsequent quarterly groundwater monitoring events. If all COCs are below NMWQCC groundwater quality standards after eight (8) consecutive quarters of groundwater monitoring, ConocoPhillips will request a No Further Action status for this Site.

The baseline parameter list for groundwater includes analyses of the following parameters:

- VOCs, EPA Method 8260B
- SVOCs, EPA Method 8270C
- TPH, gasoline range organics (GRO), EPA Method 8015B
- TPH, diesel range organics (DRO), EPA Method 8015B
- Total metals, EPA Methods 6010/6020/7470A/7471A
- General chemistry (as described in 40 CFR 136.3), including alkalinity, bromide, chloride, fluoride, orthophosphate, sulfate, nitrate/nitrite, pH, specific conductance, TDS, and hardness (various methods)

3.2.2 Groundwater Monitoring Well Construction

WDC will be utilized at the drilling contractor at the Site, and drilling operations will be supervised by Tetra Tech personnel. Groundwater monitoring wells will be constructed using 2-inch diameter polyvinyl chloride casing and at least 15 feet of screen (approximately 10 feet of the screen to be installed below the water table). The installed groundwater monitoring wells will contain a filter pack to 2-feet above the top of the screen, with a sand collar above the filter pack. The annular seal will be placed on top of the sand collar, followed by cement grouting to the land surface. Each well will be completed with a locking, stick-up mounted well head set in

concrete (Figure 3). Traffic bollards will be installed around each groundwater monitoring well. Following construction, the ground water monitoring wells will be developed using a surge block and bailer or purge pump, and the wells will be incorporated into a quarterly groundwater monitoring program.

3.2.3 Investigation Derived Waste

All well development water will be containerized in on-Site wastewater disposal tanks. Soil cuttings will be placed on polyethylene sheeting and will be covered in the event of precipitation during field activities. Once each soil boring is complete, a representative sample of soil cuttings from each soil boring will be field screened using a PID and will be spread on-Site if the results are less than 100 ppm. In the event that soil cutting PID results are greater than 100 ppm, soil cuttings will be containerized and transported by Envirotech to the Envirotech Soil Remediation Facility (or other ConocoPhillips-approved waste disposal facility) located along Angel Peak Road, approximately 16 miles south of Bloomfield, NM.

3.2.4 Groundwater Monitoring

Quarterly groundwater sampling will be conducted in January, April, July and October 2009 at the Site. A dedicated, disposable bailer will be used to purge and sample each well. A groundwater sample will be collected once depth to groundwater, specific conductance, pH, dissolved oxygen, and temperature are determined to have stabilized (within a 10% margin). Records of each sampling event will be kept on Tetra Tech ground water sampling forms and in a bound field notebook dedicated to the Site. Groundwater samples will be containerized in bottles supplied by SPL Laboratories of Houston, Texas or other ConocoPhillips-approved laboratories. The groundwater samples will be placed on ice in a cooler under chain of custody documentation and submitted to SPL (or other ConocoPhillips-approved laboratory) for analysis. Groundwater samples will be shipped by overnight courier.

3.3 Reporting

Quarterly groundwater monitoring reports will be prepared for the Site. The first quarterly report will include a summary of the groundwater monitoring well installation and a brief narrative of the sampling events. In general, the quarterly reports will include the date(s) the events occurred, copies of field notes from each sampling event, copies of laboratory chain-of-custody documentation and results, laboratory quality assurance/quality control (QA/QC) documentation, tabulated groundwater elevations, soil results and groundwater concentration/elevation maps and cross sections, and a summary of key findings. Starting with the second quarterly report, the groundwater elevations and groundwater analytical results from the previous quarter(s) will be tabulated with the results from the current quarter.

An annual report will be prepared that summarizes the results of the most recent quarterly monitoring event and will include a compilation of the results of the previous monitoring events at the Site. One (1) hard copy of each quarterly monitoring report and of the annual monitoring report will be submitted to OCD.

In addition, a C-141 form (Release Notification and Corrective Action) will be completed and submitted to OCD for the Site.

3.4 PEPA

A preliminary exposure pathway assessment (PEPA) will be prepared for the Site using an internal ConocoPhillips Company checklist. In addition, an Environmental Data Resources (EDR) report will be generated for the Site and site reconnaissance and mapping will be conducted by Tetra Tech in the field. The PEPA document will be prepared for ConocoPhillips internal use only.

4.0 QUALITY ASSURANCE AND QUALITY CONTROL

A quality assurance evaluation will be conducted by the analytical laboratory on collected samples to check for accuracy, precision and reliability of each reported analyte concentration. Sample spiked-matrix batch samples will be analyzed to determine the accuracy of laboratory results. Quality assurance documentation will be provided on the laboratory report. In addition, at least one duplicate groundwater sample will be obtained during sampling activities and will be labeled with a false name and false time in order to remove any laboratory bias toward the sample. Results of the duplicate sample analysis will be reported with the groundwater results table contained in the quarterly report.

At least one field audit of investigation and sampling protocol will be conducted by the project manager during the period covered by this work plan. Variations from standard operating procedures will be documented and corrected, if necessary.

5.0 REFERENCES


Envirotech, Inc. (2007). *Monitor Well Installation and Groundwater Sampling Report at Burlington Resources, El Paso 1A*. Prepared for ConocoPhillips. Report Dated September 2007. 34 pp.

FIGURES



FIGURE 1.

Site Location Map
 ConocoPhillips
 El Paso 1A
 Bloomfield, NM

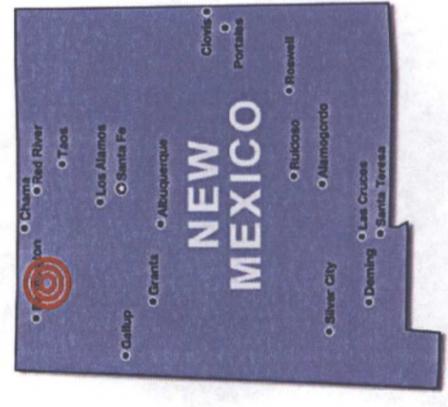

Directions from HW 64 to
 ConocoPhillips
 El Paso 1A site Location

Approximate ConocoPhillips
 El Paso 1A
 Site location



TETRA TECH, INC.


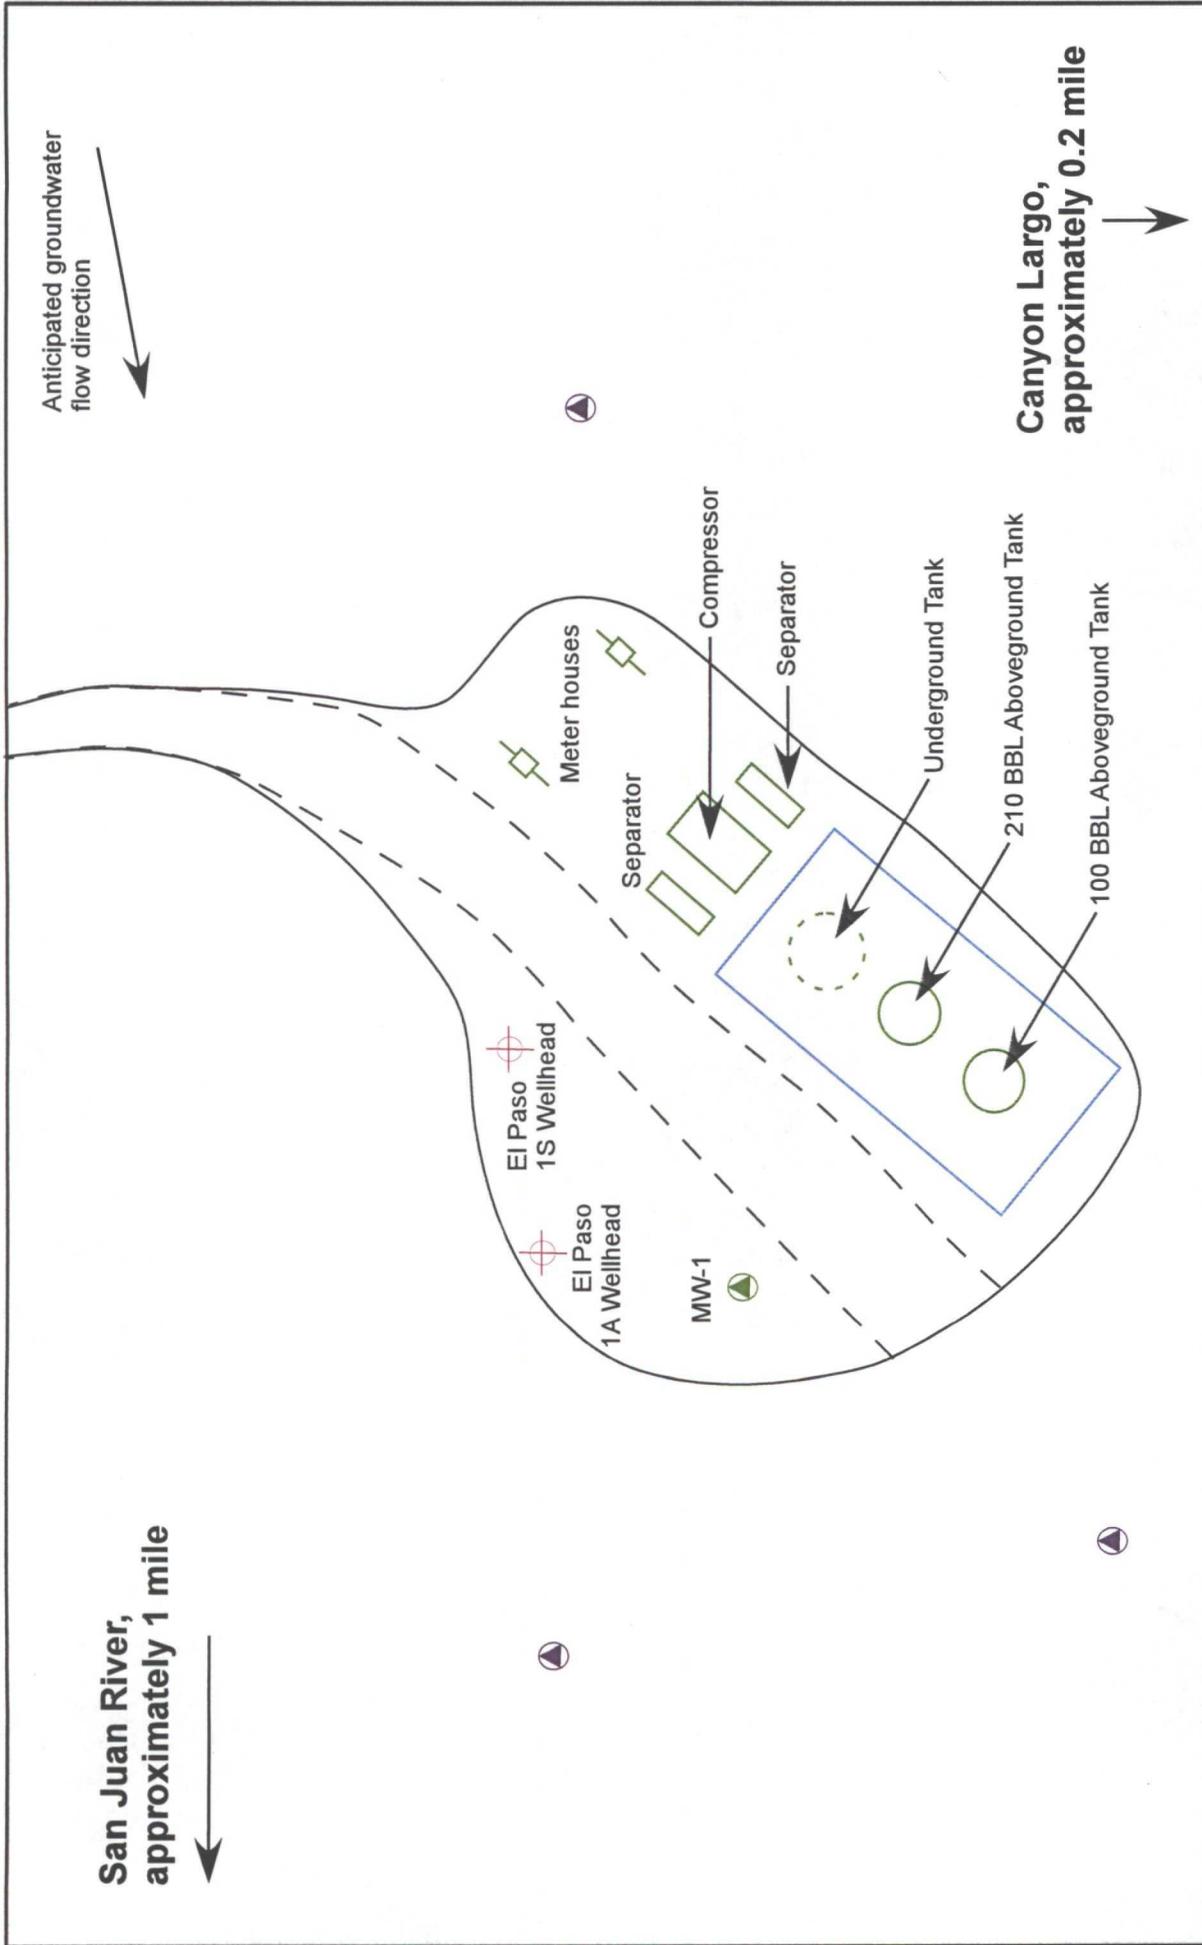


FIGURE 2:
 PROPOSED WELL LOCATIONS MAP
 CONOCOPHILLIPS
 EL PASO 1A
 Sec 29, Twp 29N, Rng 11W
 Blanco, New Mexico

C:\projects\WC-PROPOSAL.dwg SAVED:12/19/08 PRINTED:12/19/08 BY: TOM BOEHLER

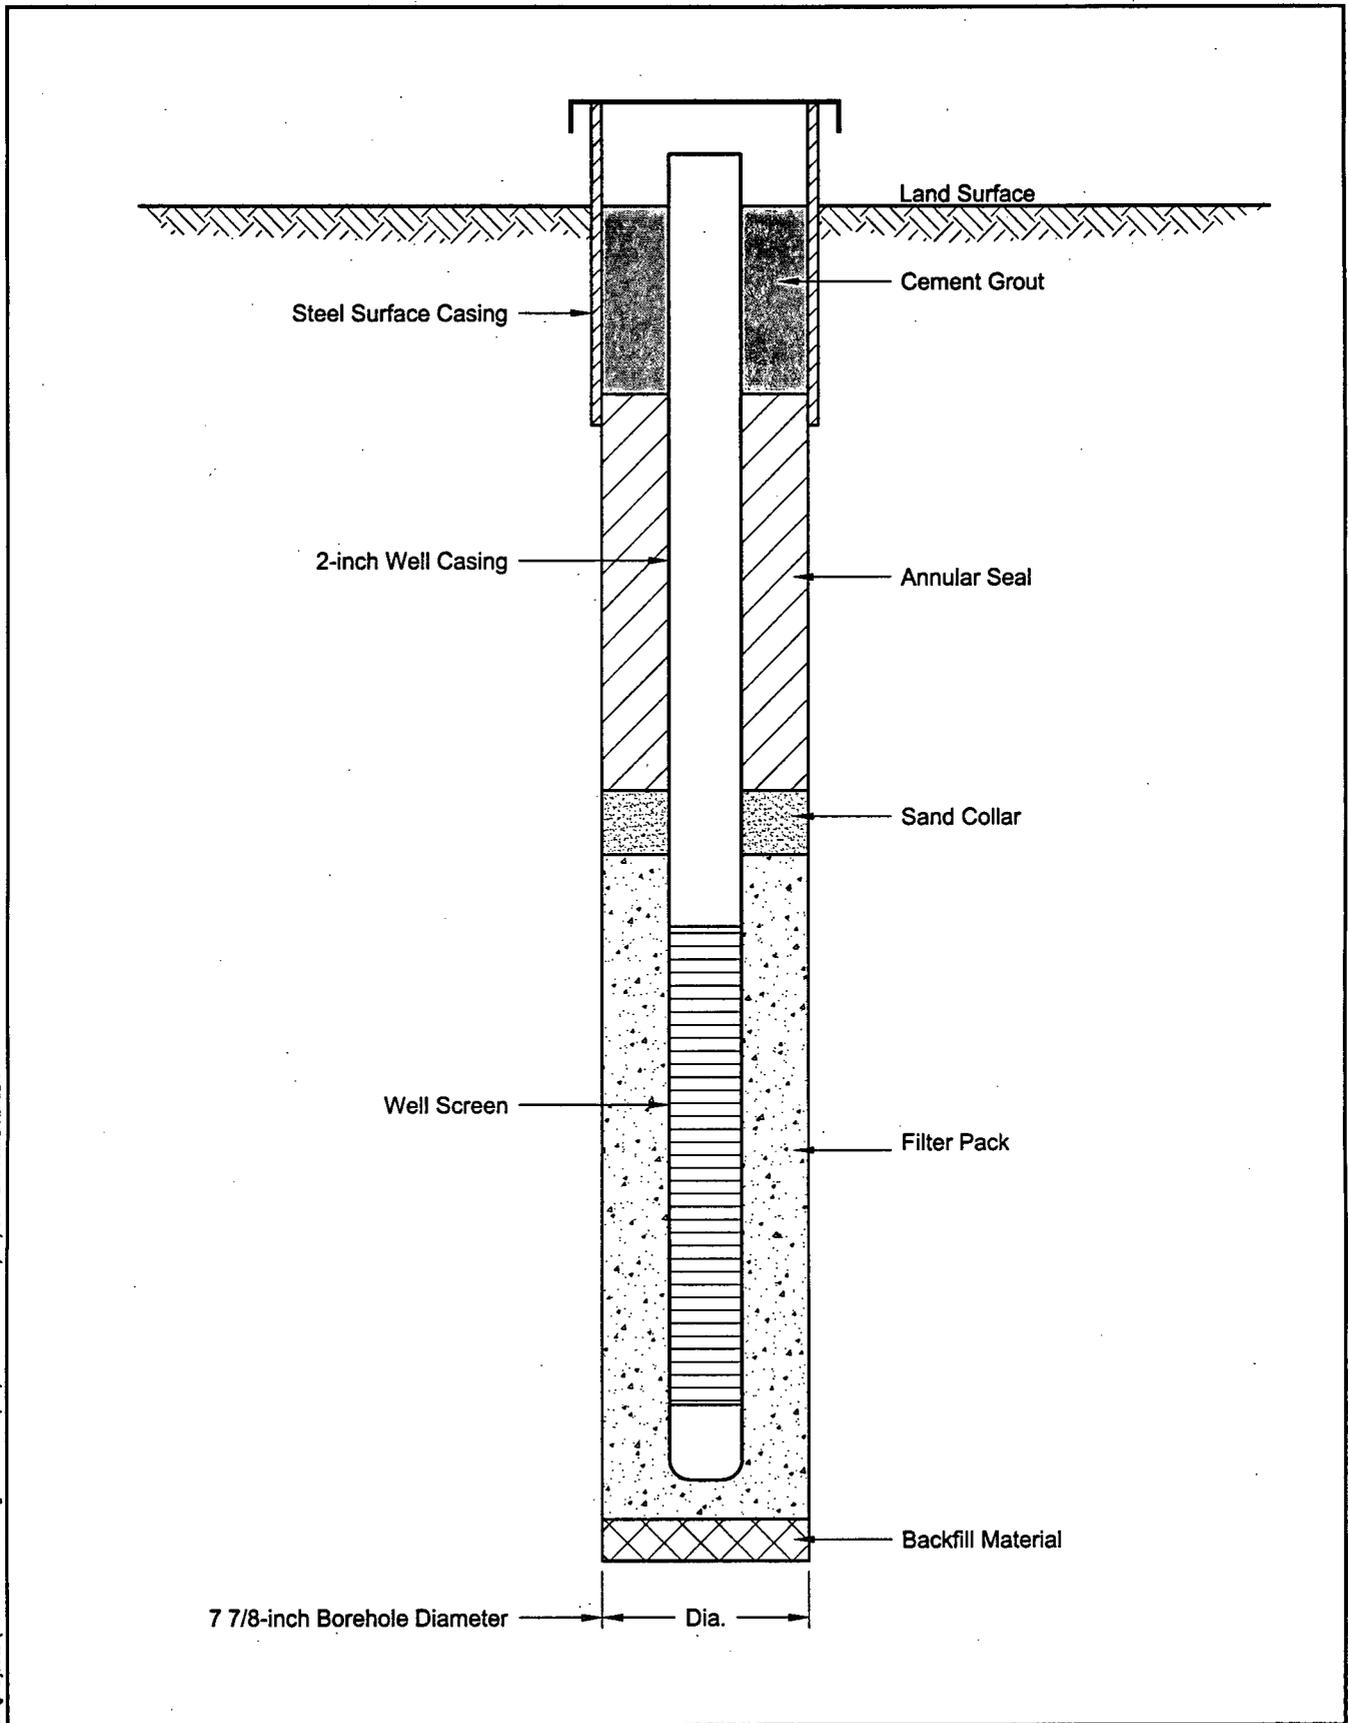

December 2008



Figure 3
Typical Monitoring Well Completion diagram

APPENDICES

APPENDIX A
Historical Analytical Tables

Table 1: Summary of Analytical Results

Soil Samples

Sample ID	Date	TPH (ppm)	Benzene (ppm)	Total BTEX (ppm)
NMOC D Regulations		100	10	50
SW corner @ 8'	2/27/2007	ND	ND	0.045
4-wall com @ 6'	2/27/2007	ND	ND	0.0022
10' BGS	9/21/2007	3.2	ND	0.069


Water Sample

Sample ID	Date	Benzene (ppb)	Toluene (ppb)	Ethylbenzene (ppb)	Total Xylenes (ppb)
NMOC D Regulations		10	750	750	620
MW-1	9/21/2007	ND	15.2	6	47.8

APPENDIX B
Groundwater Monitoring Well Installation Log for
MW-1

ABOVE GRADE WELL COMPLETION
DIAGRAM / LITHOLOGY LOG

MW 1
SB _____

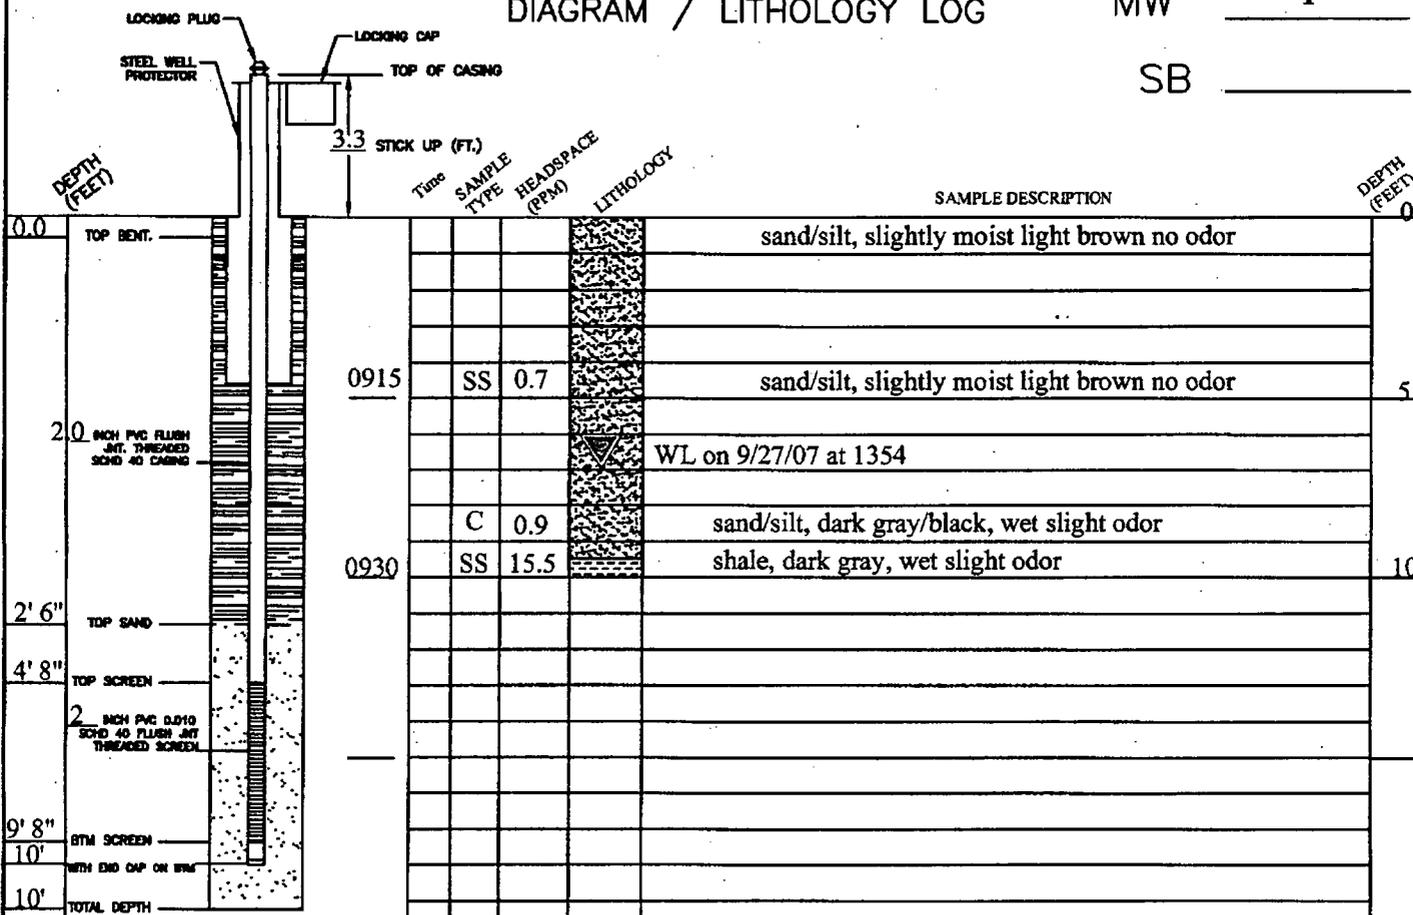

Well Materials Used:

- 4.5 Sks 10-12 Silica Sand
- 1/2 Sks Bentonite Chips
- ___ Sks Class "A" Cement
- ___ Sks Quickcrete
- 10 Ft Blank Casing
- 5 Ft Screen

Well Development:

- Bailed
- Pumped
- 15 Gallons of Water

Remarks:

DRILLER: Danny Padilla
HELPER: Robert Salazar
DRILLING COMPANY: Envirotech
DRILLING METHOD: HSA

BIT SIZE: 7 7/8"
TOTAL BORING DEPTH: 10
DATE STARTED: 9/21/07
SAMPLER TYPE: Split Spoon/Cuttings

LOCATION: El Paso #1A
ELEVATION: _____
DATE COMPLETED: 9/21/07
GEOLOGIST: Greg Crabtree

Burlington Resources
El Paso #1A
Sec 20 Twp 29N Rng 9W

ENVIROTECH INC.

MW-1

REVISIONS
BY _____ DATE _____
BY _____ DATE _____

JOB # 92115-250

ENVIRONMENTAL SCIENTISTS & ENGINEERS
5788 U.S. HIGHWAY 64
FARMINGTON, NEW MEXICO 87401
(505) 832-0815
AbvGridLog.org

DATE 9/27/07 DRAWN GWC PAGE 1
SCALE _____ APPROVED _____ OF 1

APPENDIX C
Soil Boring and Monitoring Well Completion Log
Forms, MW-2 through MW-4



PROJECT NAME _____ PROJECT NUMBER _____ LOCATION _____ BORING NUMBER _____ DATUM _____ ELEVATION _____ LOGGED BY: _____ DATE _____ REVIEWED BY: _____ DATE _____	DRILLER _____ DRILLING RIG _____ DRILLING METHOD _____ AUGER ID _____ AUGER O.D. _____
--	--

SAMPLING METHOD

DRILLING	
START	FINISH
TIME	TIME
DATE	DATE


WATER LEVEL				
TIME				
DATE				
CASING DEPTH				

SURFACE CONDITIONS

DEPTH IN FEET	RECOVERY	PID READING (PPM)	DESCRIPTION OF MATERIAL	SAMPLER NUMBER		DEPTH IN FEET		COMMENTS
				FROM	TO	FROM	TO	

PROJECT NAME _____
 CT NUMBER _____
 JN _____
 BORING NUMBER _____
 DATE _____ TIME OF CONSTRUCTION _____
 PREPARED BY: _____ DATE: _____
 REVIEWED BY: _____ DATE: _____

DRILLER _____ DRILLING RIG _____
 DRILLING METHOD _____ TO _____
 _____ TO _____
 _____ TO _____

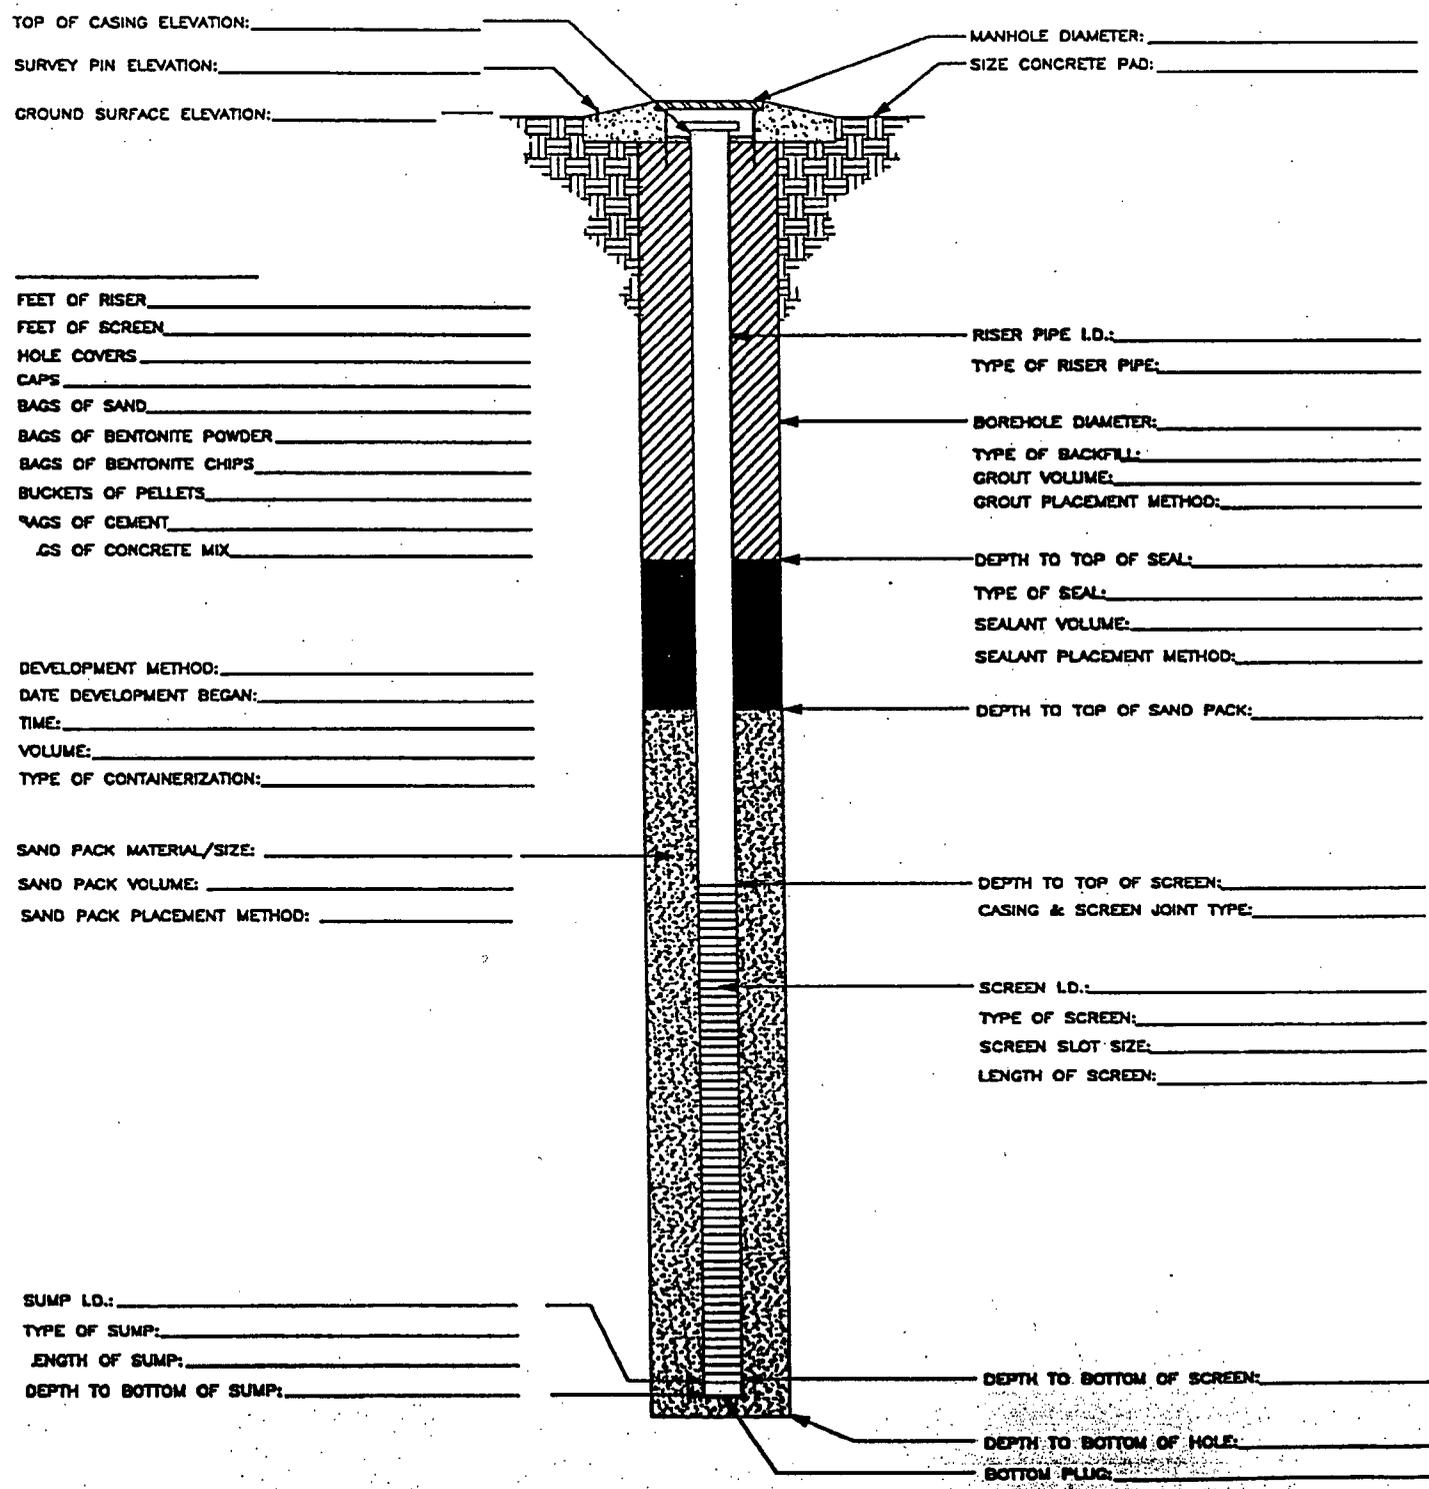

APPENDIX D
Groundwater Sampling Forms



WATER SAMPLING FIELD FORM

Project No. _____ of _____

Site Location _____

Site/Well No. MW- _____ Coded/ Replicate No. _____ Date _____

Weather _____ Time Sampling Began _____ Time Sampling Completed _____

EVACUATION DATA

Description of Measuring Pt (MP) _____

Height of MP Above/Below Land Surface _____ MP Elevation _____

Total Sounded Depth of Well Below MP _____ Water-Level Elevation _____

Held _____ Depth to Water Below MP _____ Diameter of Casing 2 inch / 4 inch

Wet _____ Water Column in Well _____ Gallons Pumped/Bailed Prior to Sampling _____

Gallons per Foot _____

Gallons in Well _____ Sampling Pump Intake (feet below land surface) _____

Purging Equipment _____

SAMPLING DATA/FIELD PARAMETERS

Time	Temperature	pH	Conductivity	TDS	DO	DO%	ORP	Other

Sampling Equipment Low Flow Pump / Disposable Bailer

<u>Constituents Sampled</u>	<u>Container Description</u>	<u>Preservative</u>

Remarks _____

Sampling Personnel _____

Well Casing Volumes				
Gal./ft.	1 ¼" = 0.077	2" = 0.16	3" = 0.37	4" = 0.65
	1 ½" = 0.10	2 ½" = 0.24	3" ½ = 0.50	6" = 1.46

APPENDIX E

Site Contacts

