

ABOVE THIS LINE FOR DIVISION USE ONLY

**NEW MEXICO OIL CONSERVATION DIVISION**  
 - Engineering Bureau -  
 1220 South St. Francis Drive, Santa Fe, NM 87505



**ADMINISTRATIVE APPLICATION CHECKLIST**

THIS CHECKLIST IS MANDATORY FOR ALL ADMINISTRATIVE APPLICATIONS FOR EXCEPTIONS TO DIVISION RULES AND REGULATIONS WHICH REQUIRE PROCESSING AT THE DIVISION LEVEL IN SANTA FE

**Application Acronyms:**

- [NSL-Non-Standard Location] [NSP-Non-Standard Proration Unit] [SD-Simultaneous Dedication]  
 [DHC-Downhole Commingling] [CTB-Lease Commingling] [PLC-Pool/Lease Commingling]  
 [PC-Pool Commingling] [OLS - Off-Lease Storage] [OLM-Off-Lease Measurement]  
 [WFX-Waterflood Expansion] [PMX-Pressure Maintenance Expansion]  
 [SWD-Salt Water Disposal] [IPI-Injection Pressure Increase]  
 [EOR-Qualified Enhanced Oil Recovery Certification] [PPR-Positive Production Response]

[1] **TYPE OF APPLICATION** - Check Those Which Apply for [A]

- [A] Location - Spacing Unit - Simultaneous Dedication  
 NSL  NSP  SD

Check One Only for [B] or [C]

- [B] Commingling - Storage - Measurement  
 DHC  CTB  PLC  PC  OLS  OLM

- [C] Injection - Disposal - Pressure Increase - Enhanced Oil Recovery  
 X WFX  PMX  SWD  IPI  EOR  PPR

[D] Other: Specify \_\_\_\_\_

(813)  
**APACHE CORP**  
 Northeast Drinkard  
 Unit 174  
 30-025-40846

[2] **NOTIFICATION REQUIRED TO:** - Check Those Which Apply, or Does Not Apply

- [A]  Working, Royalty or Overriding Royalty Interest Owners  
 [B] X Offset Operators, Leaseholders or Surface Owner  
 [C] X Application is One Which Requires Published Legal Notice  
 [D]  Notification and/or Concurrent Approval by BLM or SLO  
U.S. Bureau of Land Management - Commissioner of Public Lands, State Land Office  
 [E] X For all of the above, Proof of Notification or Publication is Attached, and/or,  
 [F]  Waivers are Attached

Case 9232  
 R-8541 as amended

[3] **SUBMIT ACCURATE AND COMPLETE INFORMATION REQUIRED TO PROCESS THE TYPE OF APPLICATION INDICATED ABOVE.**

[4] **CERTIFICATION:** I hereby certify that the information submitted with this application for administrative approval is **accurate** and **complete** to the best of my knowledge. I also understand that **no action** will be taken on this application until the required information and notifications are submitted to the Division.

Note: Statement must be completed by an individual with managerial and/or supervisory capacity.

Brian Wood  
 \_\_\_\_\_  
 Print or Type Name

*Brian Wood*  
 \_\_\_\_\_  
 Signature

Consultant  
 \_\_\_\_\_  
 Title

2-23-13  
 \_\_\_\_\_  
 Date

brian@permitswest.com  
 \_\_\_\_\_  
 e-mail Address

**APPLICATION FOR AUTHORIZATION TO INJECT**

I. PURPOSE: XXX Secondary Recovery \_\_\_\_\_ Pressure Maintenance \_\_\_\_\_ Disposal \_\_\_\_\_ Storage \_\_\_\_\_  
Application qualifies for administrative approval? \_\_\_\_\_ Yes \_\_\_\_\_ No

II. OPERATOR: APACHE CORPORATION

ADDRESS: 303 VETERANS AIRPARK LANE, SUITE 3000, MIDLAND, TX 79705

CONTACT PARTY: BRIAN WOOD (PERMITS WEST, INC.) PHONE: 505 466-8120

III. WELL DATA: Complete the data required on the reverse side of this form for each well proposed for injection.  
Additional sheets may be attached if necessary.

IV. Is this an expansion of an existing project? \_\_\_\_\_ Yes XXX No  
If yes, give the Division order number authorizing the project: R-8541

V. Attach a map that identifies all wells and leases within two miles of any proposed injection well with a one-half mile radius circle drawn around each proposed injection well. This circle identifies the well's area of review.

VI. Attach a tabulation of data on all wells of public record within the area of review which penetrate the proposed injection zone. Such data shall include a description of each well's type, construction, date drilled, location, depth, record of completion, and a schematic of any plugged well illustrating all plugging detail.

**NORTHEAST DRINKARD UNIT #174**  
**30-025-40846**

VII. Attach data on the proposed operation, including:

1. Proposed average and maximum daily rate and volume of fluids to be injected;
2. Whether the system is open or closed;
3. Proposed average and maximum injection pressure;
4. Sources and an appropriate analysis of injection fluid and compatibility with the receiving formation if other than reinjected produced water; and,
5. If injection is for disposal purposes into a zone not productive of oil or gas at or within one mile of the proposed well, attach a chemical analysis of the disposal zone formation water (may be measured or inferred from existing literature, studies, nearby wells, etc.).

\*VIII. Attach appropriate geologic data on the injection zone including appropriate lithologic detail, geologic name, thickness, and depth. Give the geologic name, and depth to bottom of all underground sources of drinking water (aquifers containing waters with total dissolved solids concentrations of 10,000 mg/l or less) overlying the proposed injection zone as well as any such sources known to be immediately underlying the injection interval.

IX. Describe the proposed stimulation program, if any.

\*X. Attach appropriate logging and test data on the well. (If well logs have been filed with the Division, they need not be resubmitted).

\*XI. Attach a chemical analysis of fresh water from two or more fresh water wells (if available and producing) within one mile of any injection or disposal well showing location of wells and dates samples were taken.

XII. Applicants for disposal wells must make an affirmative statement that they have examined available geologic and engineering data and find no evidence of open faults or any other hydrologic connection between the disposal zone and any underground sources of drinking water.

XIII. Applicants must complete the "Proof of Notice" section on the reverse side of this form.

XIV. Certification: I hereby certify that the information submitted with this application is true and correct to the best of my knowledge and belief.

NAME: BRIAN WOOD

TITLE: CONSULTANT

SIGNATURE: \_\_\_\_\_



DATE: FEBRUARY 22, 2013

E-MAIL ADDRESS: brian@permitswest.com

\* If the information required under Sections VI, VIII, X, and XI above has been previously submitted, it need not be resubmitted. Please show the date and circumstances of the earlier submittal: \_\_\_\_\_

### III. WELL DATA

A. The following well data must be submitted for each injection well covered by this application. The data must be both in tabular and schematic form and shall include:

- (1) Lease name; Well No.; Location by Section, Township and Range; and footage location within the section.
- (2) Each casing string used with its size, setting depth, sacks of cement used, hole size, top of cement, and how such top was determined.
- (3) A description of the tubing to be used including its size, lining material, and setting depth.
- (4) The name, model, and setting depth of the packer used or a description of any other seal system or assembly used.

Division District Offices have supplies of Well Data Sheets which may be used or which may be used as models for this purpose. Applicants for several identical wells may submit a "typical data sheet" rather than submitting the data for each well.

B. The following must be submitted for each injection well covered by this application. All items must be addressed for the initial well. Responses for additional wells need be shown only when different. Information shown on schematics need not be repeated.

- (1) The name of the injection formation and, if applicable, the field or pool name.
- (2) The injection interval and whether it is perforated or open-hole.
- (3) State if the well was drilled for injection or, if not, the original purpose of the well.
- (4) Give the depths of any other perforated intervals and detail on the sacks of cement or bridge plugs used to seal off such perforations.
- (5) Give the depth to and the name of the next higher and next lower oil or gas zone in the area of the well, if any.

### XIV. PROOF OF NOTICE

All applicants must furnish proof that a copy of the application has been furnished, by certified or registered mail, to the owner of the surface of the land on which the well is to be located and to each leasehold operator within one-half mile of the well location.

Where an application is subject to administrative approval, a proof of publication must be submitted. Such proof shall consist of a copy of the legal advertisement which was published in the county in which the well is located. The contents of such advertisement must include:

- (1) The name, address, phone number, and contact party for the applicant;
- (2) The intended purpose of the injection well; with the exact location of single wells or the Section, Township, and Range location of multiple wells;
- (3) The formation name and depth with expected maximum injection rates and pressures; and,
- (4) A notation that interested parties must file objections or requests for hearing with the Oil Conservation Division, 1220 South St. Francis Dr., Santa Fe, New Mexico 87505, within 15 days.

**NO ACTION WILL BE TAKEN ON THE APPLICATION UNTIL PROPER PROOF OF NOTICE HAS BEEN SUBMITTED.**

---

**NOTICE:** Surface owners or offset operators must file any objections or requests for hearing of administrative applications within 15 days from the date this application was mailed to them.

INJECTION WELL DATA SHEET


OPERATOR: APACHE CORPORATION

WELL NAME & NUMBER: NORTHEAST DRINKARD UNIT #174

WELL LOCATION: 3220' FNL & 2605' FWL      C (LOT 11)      3      21 S      37 E  
 FOOTAGE LOCATION      UNIT LETTER      SECTION      TOWNSHIP      RANGE

WELLBORE SCHEMATIC

"Proposed"

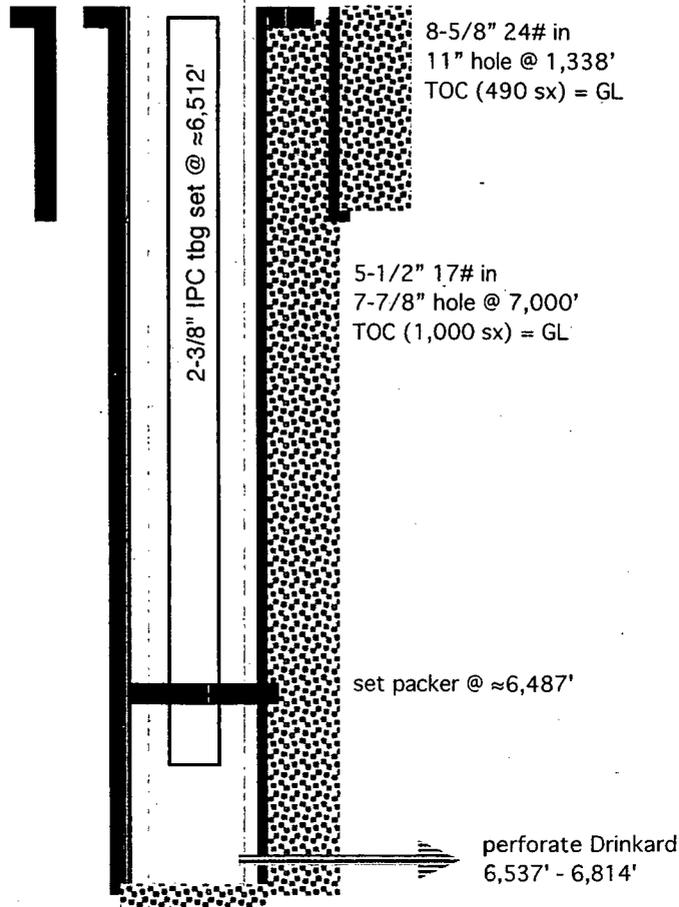

TD 7,000'  
(not to scale)

WELL CONSTRUCTION DATA

Surface Casing

Hole Size: 11"      Casing Size: 8-5/8"  
 Cemented with: 490 sx.      or \_\_\_\_\_ ft<sup>3</sup>  
 Top of Cement: SURFACE      Method Determined: VISUAL

Intermediate Casing

Hole Size: \_\_\_\_\_      Casing Size: \_\_\_\_\_  
 Cemented with: \_\_\_\_\_ sx.      or \_\_\_\_\_ ft<sup>3</sup>  
 Top of Cement: \_\_\_\_\_      Method Determined: \_\_\_\_\_

Production Casing

Hole Size: 7-7/8"      Casing Size: 5-1/2"  
 Cemented with: 1,000 sx.      or \_\_\_\_\_ ft<sup>3</sup>  
 Top of Cement: SURFACE      Method Determined: VISUAL  
 Total Depth: 7,000'

Injection Interval

6,537'      feet to      6,815'

13074 (Perforated or Open Hole; indicate which)  
 .....

**INJECTION WELL DATA SHEET**

Tubing Size: 2-3/8" J-55 4.7# Lining Material: INTERNAL PLASTIC COAT

Type of Packer: LOCK SET INJECTION

Packer Setting Depth: ≈6,487'

Other Type of Tubing/Casing Seal (if applicable): \_\_\_\_\_

Additional Data

1. Is this a new well drilled for injection? XXX Yes        No

If no, for what purpose was the well originally drilled? \_\_\_\_\_  
\_\_\_\_\_

2. Name of the Injection Formation: DRINKARD

3. Name of Field or Pool (if applicable): EUNICE; BLI-TU-DR, NORTH (POOL CODE 22900)

4. Has the well ever been perforated in any other zone(s)? List all such perforated intervals and give plugging detail, i.e. sacks of cement or plug(s) used. \_\_\_\_\_  
NO

5. Give the name and depths of any oil or gas zones underlying or overlying the proposed injection zone in this area: \_\_\_\_\_  
OVER: TUBB (6,124'), BLINEBRY (5,658'), GRAYBURG (3,767')  
\_\_\_\_\_  
UNDER: ABO (6,815'), HARE SIMPSON (8,000')  
\_\_\_\_\_

APACHE CORPORATION  
NORTHEAST DRINKARD UNIT 174  
3220 FNL & 2605 FWL SEC. 3, T. 21 S., R. 37 E.,  
LEA COUNTY, NEW MEXICO

PAGE 1

30-025-40846

I. Purpose is to drill a water injection well to increase oil recovery. The well will inject (6,537' - 6,814') into the Drinkard, which is part of the Eunice; Blinebry-Tubb-Drinkard, North Pool (aka, Eunice; BLI-TU-DR, North and pool code = 22900). The discovery well was the Gulf Vivian #1 in 1944. The well and zone are part of the Northeast Drinkard Unit (Unit Number 300160, Case Number 9231, Order Number R-8540) that was established in 1987 by Shell. The unit was subsequently operated by Altura, and now, by Apache. This is an active water flood.

*Stable UNIT*

II. Operator: Apache Corporation (OGRID #873)  
Operator phone number: (432) 818-1167  
Operator address: 303 Veterans Airpark Lane, Suite 3000  
Midland, TX 79705  
Contact for Application: Brian Wood (Permits West, Inc.)  
Phone: (505) 466-8120

III. A. (1) Lease: fee (Unit Tract 4, aka, Taylor-Glenn)  
Lease Size: 240 acres (see Exhibit A for C-102 and map)  
Closest Lease Line: 660'  
Lease Area: Lots 5, 6, 9, 10, & 11 of Section 3  
Lot 8 of Section 4  
T. 21 S., R. 37 E.

Unit Size: 4,938 acres  
Closest Unit Line: 3,220'  
Unit Area:

T. 21 S., R. 37 E.

Section 2: all

Section 3: all

Section 4: Lots 1, 8, 9, & 16

Section 10: all

Section 11: SW4

Section 14: NW4

Section 15: all

Section 22: all

Section 23: all

- A. (2) Surface casing (8-5/8" and 24#) will be set at 1,338' in an 11" hole. Cement will be circulated to the surface with 490 sacks.

Production casing (5-1/2" and 17#) will be set at 7,000' (TD) in a 7-7/8". Cement will be circulated to the surface with 1,000 sacks.

Mechanical integrity of the casing will be assured by hydraulically pressure testing to 500 psi for 30 minutes.

- A. (3) Tubing specifications are 2-3/8", J-55, 4.7#, and internally plastic coated. Setting depth will be  $\approx$ 6,512'. (Disposal interval will be 6,537' to 6,814'.)

- A. (4) A lock set injection packer will be set at  $\approx$ 6,487' ( $\approx$ 50' above the highest proposed perforation of 6,535').

- B. (1) Injection zone will be the grainstone and packstone member of the Drinkard limestone. The zone is part of the Eunice; Blinebry-Tubb-Drinkard, North Pool. Estimated fracture gradient is  $\approx$ 0.56 psi per foot.

- B. (2) Injection interval will be 6,537' to 6,814'. The well will be a cased hole. See attached well profile for more perforation information.

- B. (3) The well has not yet been drilled. It will be completed as a water injection well after approval.

- B. (4) The well will be perforated from 6,537' to 6,814' with 2 shots per foot. Shot diameter = 0.40".

- B. (5) The next higher oil or gas zone is the Tubb. Its estimated bottom is at  $\approx$ 6,536'. Injection will occur in the Drinkard. Drinkard top is at  $\approx$ 6,537'. Injection interval in the Drinkard will be 6,537' to 6,814'. The Tubb is unitized with the Blinebry and Drinkard. The Blinebry above the Tubb is productive in Section 3. The Blinebry is part of the Eunice; Blinebry-Tubb-Drinkard, North Pool (NMOCD pool code

number = 22900). Grayburg, above the Blinebry, is productive in Section 3. The Grayburg is part of the Penrose Skelly; Grayburg (NMOCD pool code number = 50350).

The next lower oil or gas zone is the Wantz; Abo (Pool Code = 62700). Its top is at 6,815'. There are six Abo producers in Section 3. Apache operates all six Abo producing wells. The Abo is not part of the Northeast Drinkard Unit. The Hare; Simpson is deeper than the Abo and is productive in Section 3.

*Case 9232 (Law ord. PG #8, 9) 11/9/87*

IV. This is not a horizontal or vertical expansion of an existing injection project. The case file for the unit approval (R-8540) includes a discussion of the Drinkard water flood. The water flood (R-8541) was approved at the same time in 1987.

There have been ten water flood expansions (WFX-583, WFX-674, WFX-722, WFX-740, WFX-752, WFX-759, WFX-774, WFX-784, WFX-881, WFX-882, WFX-889) since then. Closest unit boundary is 3,220' north. Thirteen injection wells are within a half-mile radius, all of which are in the unit. The injection wells are in all four cardinal directions (see Exhibit B).stopp

V. Exhibit B shows all 56 existing wells (3 P & A + 13 water injection wells + 40 producing oil wells) within a half-mile radius, regardless of depth. Exhibit C shows all 514 existing wells (374 oil or gas producing wells + 88 injection or disposal wells + 47 P & A wells + 5 water wells) within a two-mile radius.

Exhibit D shows all leases (only BLM and fee) within a half-mile radius. All leases within a half-mile are in the unit. Details on the leases within a half-mile are:

<u>Area (3-21s-37e)</u>	<u>Lessor</u>	<u>Lease Number</u>	<u>Operator</u>
Lots 1-4, 7, 8, 12, 15, & 16, N2SE, SESE	BLM	NMNM-002512	Apache
Lots 5, 6, 9, 10, & 11	fee	Taylor-Glenn	Apache
Lots 13 & 14, SWSE, NESW, & S2SW	fee	Livingston	Apache

Exhibit E shows all lessors (BLM, fee, and state) within a two-mile radius. Note that the ranges are offset from the normal pattern (T. 20 S., R. 38 E. is north of T. 21 S., R. 37 E.).

APACHE CORPORATION  
 NORTHEAST DRINKARD UNIT 174  
 3220 FNL & 2605 FWL SEC. 3, T. 21 S., R. 37 E.  
 LEA COUNTY, NEW MEXICO

30-025-40846

VI. There are sixty-two approved wells within a half-mile radius. Fifty-six of the wells have been drilled. The remaining six wells are approved, are in the Northeast Drinkard Unit, and will be operated by Apache, but have not yet been drilled. Those six wells will be Blinebry-Tubb-Drinkard wells. Forty-four of the 56 existing wells penetrated the Drinkard. The existing penetrators include 31 oil wells, 11 water injection wells, and 2 P & A wells. A table abstracting the well construction details and histories of the 44 existing and 6 proposed Drinkard penetrators is in Exhibit F. Diagrams illustrating the P & A penetrators are also in Appendix F. The sixty-two wells and their distances from the 174 are:

+ 42  
2  
44

OPERATOR	WELL	API # 30- 025-	LOCATION	ZONE	STATUS	TD	DISTANCE
Apache	Taylor Glenn 20	38687	C-3-21s-37e	Grayburg	oil	4530	302
Apache	NEDU 124	34424	K-3-21s-37e	Blinebry-Tubb-Drinkard	oil	6910	317
Apache	NEDU 229	34429	J-3-21s-37e	Blinebry-Tubb-Drinkard	oil	6910	512
Apache	NEDU 206	06522	K-3-21s-37e	Blinebry-Tubb-Drinkard	WIW	8590	627
Apache	NEDU 208	06385	J-3-21s-37e	Blinebry-Tubb-Drinkard	oil	6707	661
Apache	NEDU 163	39914	B-3-21s-37e	Blinebry-Tubb-Drinkard	oil	7025	833
Apache	NEDU 159	40497	C-3-21s-37e	Blinebry-Tubb-Drinkard	oil	7024	836
Apache	NEDU 175	40516	C-3-21s-37e	Blinebry-Tubb-Drinkard	oil	7050	844
Apache	NEDU 173	40554	B-3-21s-37e	Blinebry-Tubb-Drinkard	oil	7050	872
Apache	NEDU 263	40849	C-3-21s-37e	Blinebry-Tubb-Drinkard	planned oil	7000	995
Apache	NEDU 111	26670	G-3-21s-37e	Blinebry-Tubb-Drinkard	WIW	6875	1042
Apache	Taylor Glenn 5	06384	J-3-21s-37e	Wantz; Abo	oil	8361	1046
Apache	Taylor Glenn 15	35354	K-3-21s-37e	Grayburg	oil	4450	1058
Apache	NEDU 125	34425	J-3-21s-37e	Blinebry-Tubb-Drinkard	oil	6910	1234

APACHE CORPORATION  
 NORTHEAST DRINKARD UNIT 174  
 3220 FNL & 2605 FWL SEC. 3, T. 21 S., R. 37 E.,  
 LEA COUNTY, NEW MEXICO

30-025-40846

Apache	NEDU 176	40848	C-3-21s-37e	Blinebry-Tubb-Drinkard	planned oil	7050	1252
Apache	NEDU 172	40847	B-3-21s-37e	Blinebry-Tubb-Drinkard	planned oil	7050	1254
Apache	NEDU 228	34427	J-3-21s-37e	Blinebry-Tubb-Drinkard	oil	6920	1275
Apache	NEDU 108	24831	C-3-21s-37e	Blinebry-Tubb-Drinkard	P & A	6805	1394
Apache	NEDU 110	06495	G-3-21s-37e	Blinebry-Tubb-Drinkard	WIW	5976	1404
Apache	NEDU 232	34430	Lot 14-3-21s-37e	Blinebry-Tubb-Drinkard	oil	6890	1453
Apache	Hawk B 3 26	35734	G-3-21s-37e	Grayburg	oil	4476	1488
Apache	NEDU 128	34651	E-3-21s-37e	Blinebry-Tubb-Drinkard	oil	6930	1526
Apache	Livingston 24	38382	F-3-21s-37e	Grayburg	oil	4153	1575
Apache	NEDU 242	37875	G-3-21s-37e	Blinebry-Tubb-Drinkard	oil	6950	1584
Apache	Hawk B 3 33	39510	L-3-21s-37e	Grayburg	oil	4400	1669
Apache	NEDU 207	6519	N-3-21s-37e	Blinebry-Tubb-Drinkard	WIW	6885	1689
Apache	NEDU 157	40696	B-3-21s-37e	Blinebry-Tubb-Drinkard	oil	7036	1734
Apache	NEDU 107	20315	F-3-21s-37e	Blinebry-Tubb-Drinkard	WIW	6000	1755
Apache	NEDU 209	06508	O-3-21s-37e	Blinebry-Tubb-Drinkard	WIW	8114	1785
Apache	NEDU 153	40850	C-3-21s-37e	Blinebry-Tubb-Drinkard	planned WIW	7000	1786
Apache	NEDU 204	06506	L-3-21s-37e	Blinebry-Tubb-Drinkard	WIW	6800	1853
Apache	Taylor Glenn 13	35352	E-3-21s-37e	Grayburg	oil	4450	1861
Apache	Taylor Glenn 4	06383	A-3--21s-37e	Hare; Simpson	oil	8119	1889
Apache	NEDU 210	06502	G-3-21s-37e	Blinebry-Tubb-Drinkard	WIW	8302	1939
Continental	Hawk B 3 21	06511	L-3-21s-37e	Yates	P & A	2665	1951
Apache	NEDU 130	34617	F-3-21s-37e	Blinebry-Tubb-Drinkard	oil	6950	1970
Apache	NEDU 211	06381	I-3-21s-37e	Blinebry-Tubb-Drinkard	WIW	6780	1984

APACHE CORPORATION  
 NORTHEAST DRINKARD UNIT 174  
 3220 FNL & 2605 FWL SEC. 3, T. 21 S., R. 37 E.  
 LEA COUNTY, NEW MEXICO

30-025-40846

Apache	Taylor Glenn 14	35353	F-3-21s-37e	Grayburg	oil	4200	1999
Apache	Hawk B 3 30	39281	H-3-21s-37e	Grayburg	planned oil	4550	2021
Apache	NEDU 160	40498	D-3-21s-37e	Blinebry- Tubb-Drinkard	oil	7100	2064
Apache	NEDU 154	39439	B-3-21s-37e	Blinebry- Tubb-Drinkard	oil	7025	2077
Apache	NEDU 171	40553	I-3-21s-37e	Blinebry- Tubb-Drinkard	oil	7065	2091
Apache	NEDU 282	40499	E-3-21s-37e	Blinebry- Tubb-Drinkard	oil	7050	2102
Apache	NEDU 158	39440	A-3-21s-37e	Blinebry- Tubb-Drinkard	oil	7020	2157
Apache	NEDU 268	40779	K-3-21s-37e	Blinebry- Tubb-Drinkard	oil	7000	2167
Apache	Hawk B 3 25	35227	L-3-21s-37e	Grayburg	oil	4450	2178
Apache	NEDU 105	25008	E-3-21s-37e	Blinebry- Tubb-Drinkard	WIW	6870	2264
Apache	NEDU 240	35904	M-3-21s-37e	Blinebry- Tubb-Drinkard	WIW	6850	2280
Apache	NEDU 113	06496	H-3--21s-37e	Blinebry- Tubb-Drinkard	WIW	6830	2337
Apache	Taylor Glenn 3	06382	A-3--21s-37e	Wantz; Abo	oil	8224	2340
Apache	Livingston 18	36718	E-3-21s-37e	Grayburg	oil	4350	2357
Apache	NEDU 205	06521	M-3-21s-37e	Blinebry- Tubb-Drinkard	WIW	6730	2361
Apache	NEDU 212	06492	P-3-21s-37e	Blinebry- Tubb-Drinkard	oil	6782	2392
Apache	NEDU 131	34609	A-3-21s-37e	Blinebry- Tubb-Drinkard	oil	6990	2413
Apache	NEDU 227	34428	J-3-21s-37e	Blinebry- Tubb-Drinkard	oil	6890	2415
Apache	NEDU 267	40824	M-3-21s-37e	Blinebry- Tubb-Drinkard	oil	7010	2425
Apache	NEDU 233	34431	K-3-21s-37e	Blinebry- Tubb-Drinkard	oil	6870	2433
Apache	NEDU 177	40903	C-3-21s-37e	Blinebry- Tubb-Drinkard	planned oil	7200	2439
Apache	Livingston 14	28671	E-3-21s-37e	Wantz; Abo	oil	7745	2513
Apache	NEDU.129	34938	D-3-21s-37e	Blinebry- Tubb-Drinkard	oil	6980	2516

Apache	NEDU 226	34380	Q-3-21s-37e	Bliebry-Tubb-Drinkard	oil	6850	2585
Conoco	Hawk B 3 8	06500	P-3-21s-37e	Ellenburger	P & A	8191	2594
Apache	NEDU 106	06410	3-21s-37e	Bliebry-Tubb-Drinkard	WIW	6000	2645

- VII. 1. Average injection rate will be  $\approx$ 750 bwpd.  
 Maximum injection rate will be  $\approx$ 1,000 bwpd.
2. System will be closed. The well will be tied into the existing unit pipeline system. The system consists of a branched injection system with centrifugal injection pumps.
3. Average injection pressure will be  $\approx$ 1,000 psi. Maximum injection pressure will be 1,307 psi (0.2 psi/foot x 6,537' (highest perforation)).
4. Water source will be water pumped from existing  $\approx$ 4,000' deep San Andres water supply wells plus produced water from Bliebry, Tubb, and Drinkard zones. The source water and produced water are collected in separate skim tanks. The two water streams (source and produced) are commingled in a storage tank before being piped to the injection wells. Commingling began in the 1970s. A comparison of analyses from the discharge pump and San Andres follows. The complete analyses are in Exhibit G.

	<u>Injection Pump Discharge</u>	<u>San Andres 919-S</u>
Anion/Cation Ratio	1.0	N/A
Barium	0.1 mg/l	0.38 mg/l
Bicarbonate	671.0 mg/l	562.0 mg/l
Calcium	1,099.0 mg/l	608.0 mg/l
Carbon Dioxide	80.0 ppm	80.0 ppm
Chloride	10,086.0 mg/l	6,200.0 mg/l
Hydrogen Sulfide	90.0 ppm	408.0 ppm
Iron	0.3 mg/l	0.0 mg/l
Magnesium	439.0 mg/l	244.0 mg/l
Manganese	N/A	0.01 mg/l

pH	7.5	6.49
Potassium	115.0 mg/l	N/A
Sodium	5,799.5 mg/l	3,909.0 mg/l
Strontium	28.0 mg/l	19.0 mg/l
Sulfate	2,465.0 mg/l	1,750.0 mg/l
Total Dissolved Solids	20,702.9 mg/l	13,273.0 mg/l

5. The Drinkard currently produces in the unit. It is the goal of the project to increase production from the Drinkard. According to NMOCD records, at least 2,150 wells have been approved to target the Drinkard in New Mexico.

VIII. The Unit is on the north end of a north-northwest to south-southeast trending anticline. It is part of the Penrose Skelly trend and parallels the west edge of the Central Basin Platform. Dips are  $\approx 1^\circ$  to  $\approx 2^\circ$ . The Drinkard is 277' thick and consists of tan to dark gray limestone and dolomite. Core filling and replacement anhydrite are common in the limestone. Nodular anhydrite is common in the dolomite. The reservoir portion of the Drinkard consists of skeletal lime grindstone and lime packstone with some dolomitic packstone. Porosity is  $\approx 11\%$ . Permeability is  $\approx 2.45$  millidarcies.

There are currently 158 Drinkard injection wells in the state. Adjacent to the Northeast Drinkard Unit are three other Drinkard water floods (the Apache operated West Blinebry Drinkard and East Blinebry Drinkard Units and the Chevron operated Central Drinkard Unit). The Central Drinkard Unit has been under water flood since the 1960s.

Formation tops are:

Quaternary = 0'  
Rustler = 1,307'  
Yates = 2,645'  
Seven Rivers = 2,870'  
Queen = 3,440'  
Grayburg = 3,767'  
San Andres = 4,021'  
Glorieta = 5,252'  
Paddock = 5,320'

Blinebry = 5,658'  
Tubb = 6,124'  
Drinkard = 6,537'  
Abo = 6,815'  
Total Depth = 7,000'

One fresh water well is within a mile radius. This conclusion is based on a November 15, 2012 field inspection and a review of the State Engineer's records. The closest water well is 3,571' west in Section 4 (Exhibit H). That water well, equipped with an electric pump, is 90' deep and probably produces from the Ogallala aquifer. Depth to water is 75'. No existing underground drinking water sources are below the Drinkard within a mile radius.

There will be >6,000' of vertical separation and the Rustler salt between the bottom of the only likely underground water source (Ogallala) and the top of the Drinkard.

Produced water has been injected or disposed into five zones above the Drinkard within T. 21 S., R. 37 E. and T. 20 S., R. 38 E. The five zones, from top to bottom, are the Grayburg, San Andres, Glorieta, Blinebry, and Tubb.

IX. The well will be stimulated with acid to clean out scale or fill.

X. Spectral gamma ray, spectral density/compensated neutron, dual laterolog/MSFL, and sonic logs are planned.

XI. One fresh water well is within a mile. An analysis from that stock watering well is attached (Exhibit H).

XII. Apache is not aware of any geologic or engineering data that may indicate the Drinkard is in hydrologic connection with any underground sources of water. This was attested to during sworn testimony (page 65, line 14, Order R-8540) presented in 1987. Closest Quaternary fault is over 75 miles west (Exhibit I). At

APACHE CORPORATION  
NORTHEAST DRINKARD UNIT 174  
3220 FNL & 2605 FWL SEC. 3, T. 21 S., R. 37 E.  
LEA COUNTY, NEW MEXICO

PAGE 10

30-025-40846


least 256 injection or saltwater disposal wells have been drilled into the Drinkard in the New Mexico portion of the Permian Basin. Previously approved Drinkard water flood expansions in the unit include:

WFX-740 (October 13, 1998)  
WFX-752 (July 6, 1999)  
WFX-759 (May 8, 2000)  
WFX-774 (June 7, 2001)  
WFX-784 (October 29, 2002)  
WFX-881 (March 14, 2011)  
WFX-882 (March 16, 2011)  
WFX-896 (March 6, 2012)

XIII. Notice (this application) has been sent (Exhibit J) to the surface owner (Elizabeth Gervis Taylor, et al). Apache is the only Drinkard leasehold operator within a half-mile.

A legal ad (see Exhibit K) was published on February 5, 2013.

TOWNSHIP 21S, RANGE 37E, N.M.P.M.

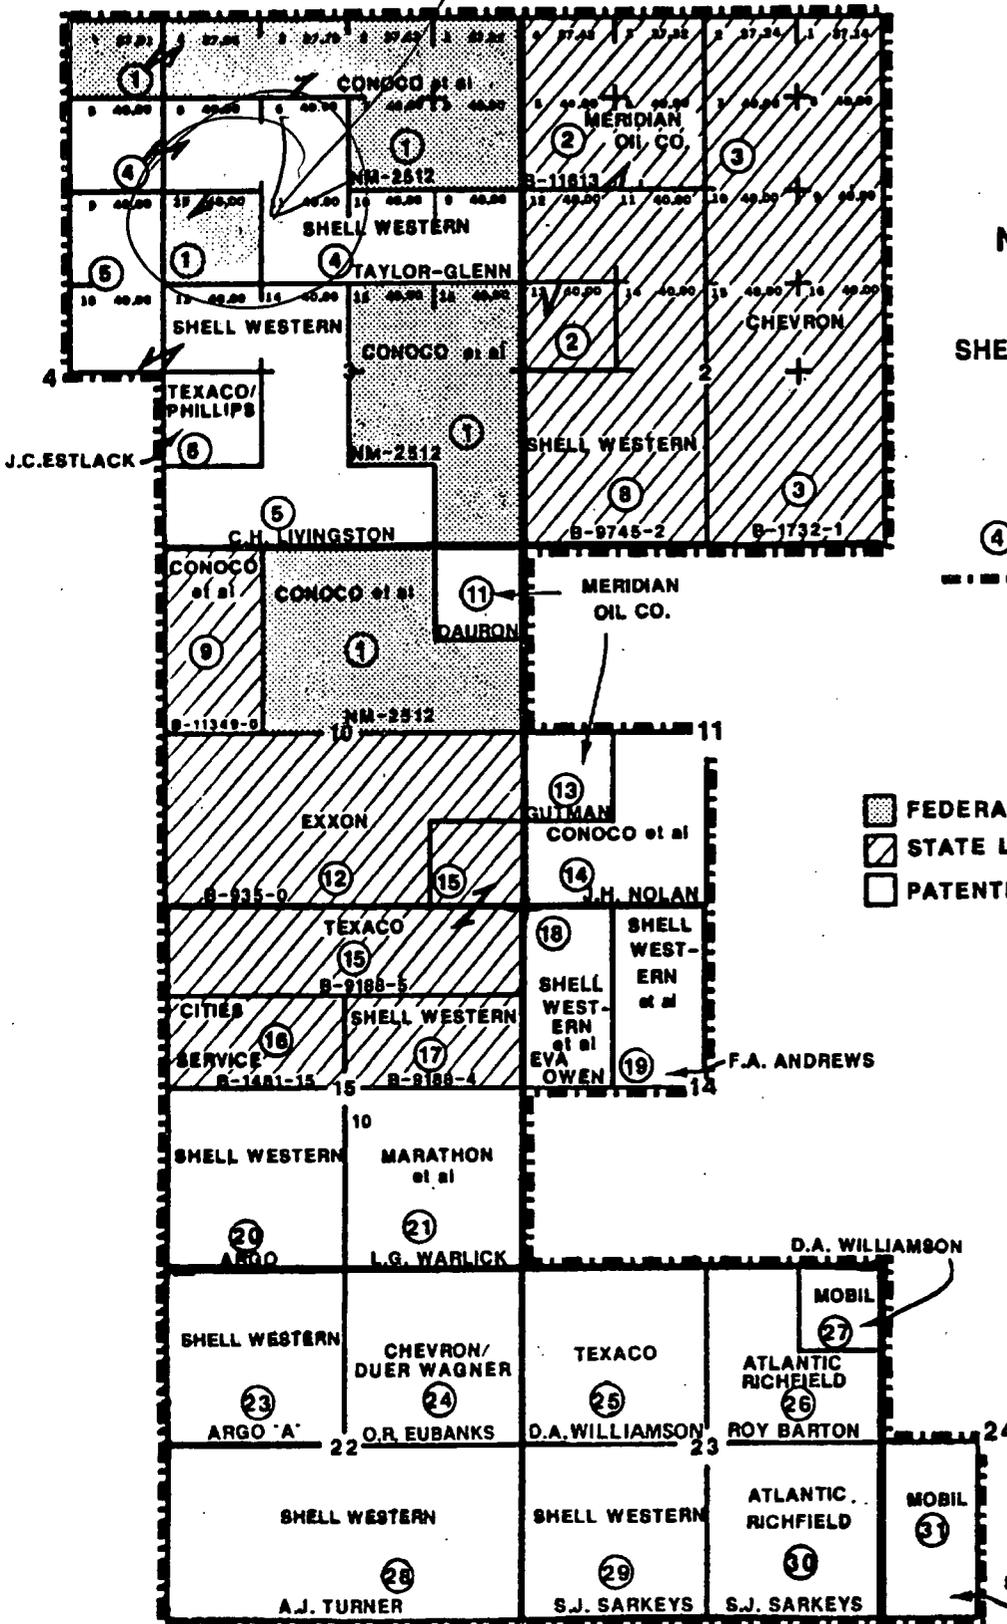

**EXHIBIT "A"**  
**NORTHEAST DRINKARD UNIT**  
**LEA COUNTY, NEW MEXICO**  
**SHELL WESTERN E & P INC., OPERATOR**

**LEGEND**

- ④ UNIT TRACT NUMBER
- - - UNIT BOUNDARY

	ACREAGE	PERCENTAGE
FEDERAL LANDS	708.67	14.12
STATE LANDS	1,669.12	33.26
PATENTED (FEE) LANDS	<u>2,640.00</u>	<u>52.62</u>
<b>TOTALS</b>	<b>5,017.79</b>	<b>100%</b>




NOTE: UNLESS OTHERWISE INDICATED, THE VARIOUS SECTIONS ON THIS MAP CONTAIN 640.00 ACRES.

Northeast Drinkard Unit  
 Exhibit Two  
 Cases 9230  
 9231  
 9232

TOWNSHIP 21S, RANGE 37E, N.M.P.M.

TOWNSHIP 21S, RANGE 37E, N.M.P.M.

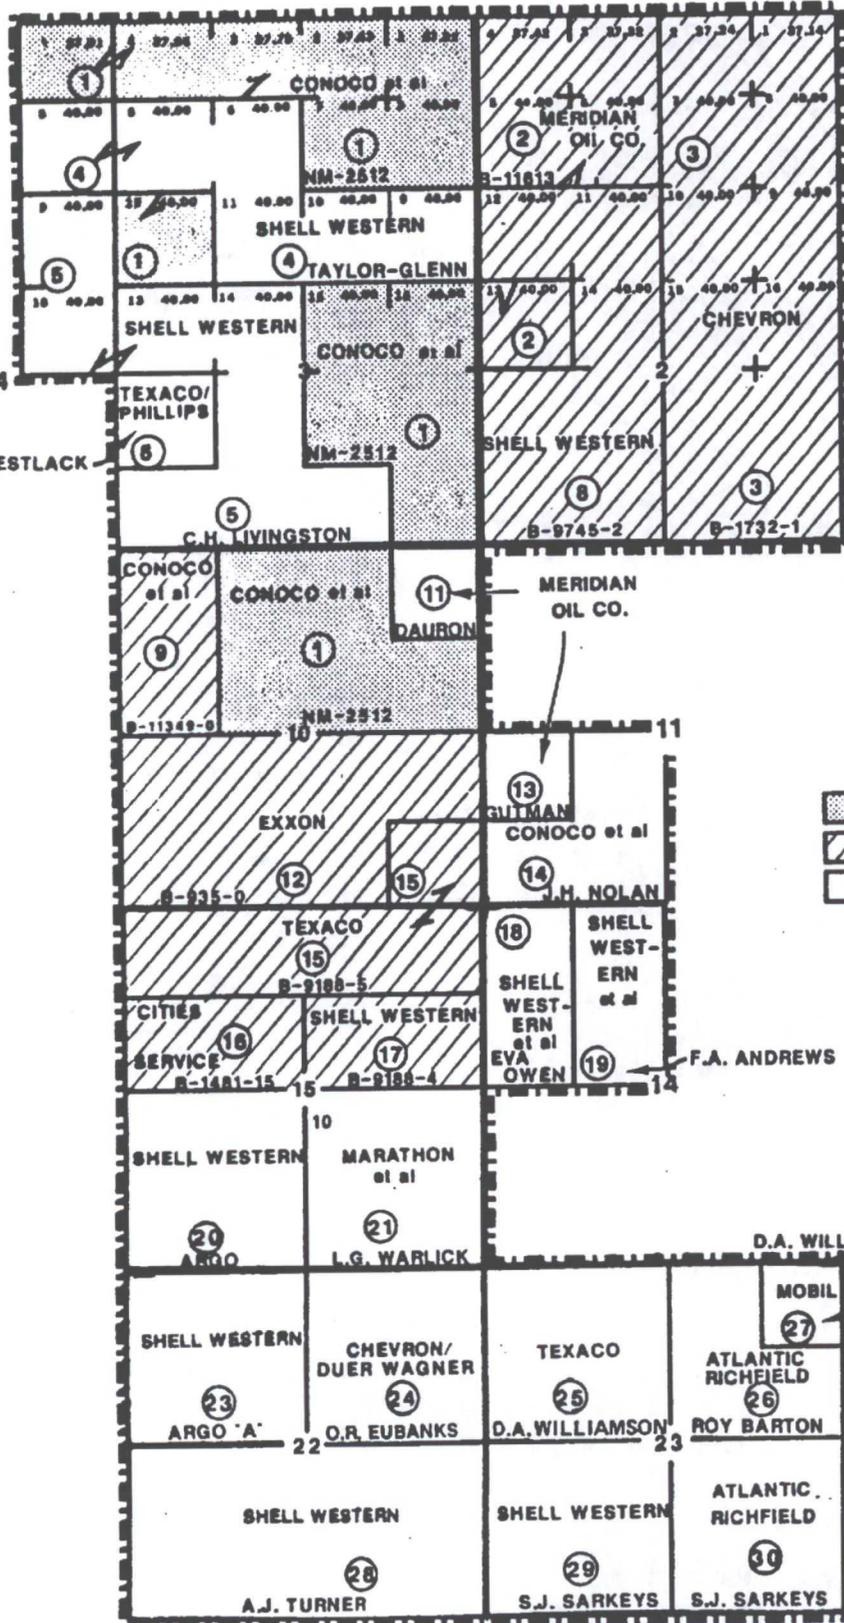

**EXHIBIT "A"**  
**NORTHEAST DRINKARD UNIT**  
**LEA COUNTY, NEW MEXICO**  
**SHELL WESTERN E & P INC., OPERATOR**

**LEGEND**

- ④ UNIT TRACT NUMBER
- UNIT BOUNDARY


	ACREAGE	PERCENTAGE
FEDERAL LANDS	708.67	14.12
STATE LANDS	1,669.12	33.26
PATENTED (FEE) LANDS	2,640.00	52.62
<b>TOTALS</b>	<b>5,017.79</b>	<b>100%</b>



NOTE: UNLESS OTHERWISE INDICATED, THE VARIOUS SECTIONS ON THIS MAP CONTAIN 640.00 ACRES.

Northeast Drinkard Unit  
 Exhibit Two  
 Cases 9230  
 9231  
 9232

TOWNSHIP 21S, RANGE 37E, N.M.P.M.

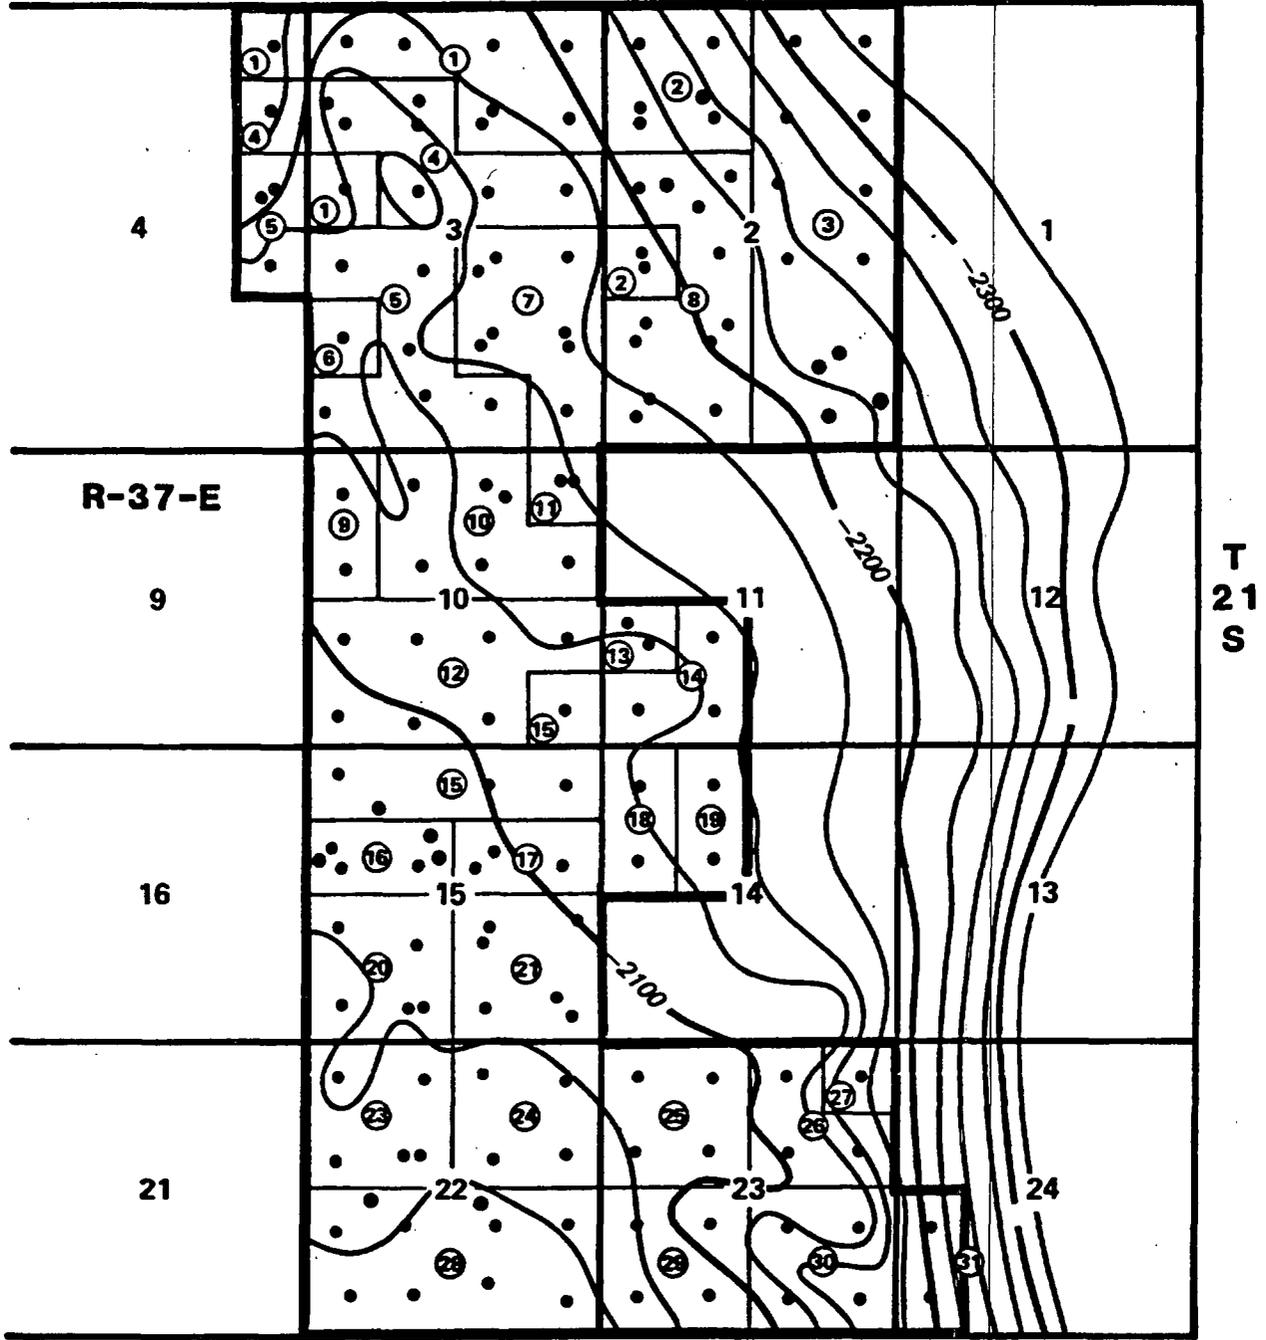

R-37-E


T  
21  
S

**LEGEND**

- PROPOSED UNITIZED WELLBORE
- Ⓢ TRACT NUMBER

**PROPOSED NORTHEAST DRINKARD UNIT**  
**LEA COUNTY, NEW MEXICO**  
**STRUCTURE ON TOP OF BLINEBRY**  
**CI=25'**  
**EXHIBIT 13**

Northeast Drinkard Unit  
 Exhibit Thirteen  
 Cases 9230  
       9231  
       9232

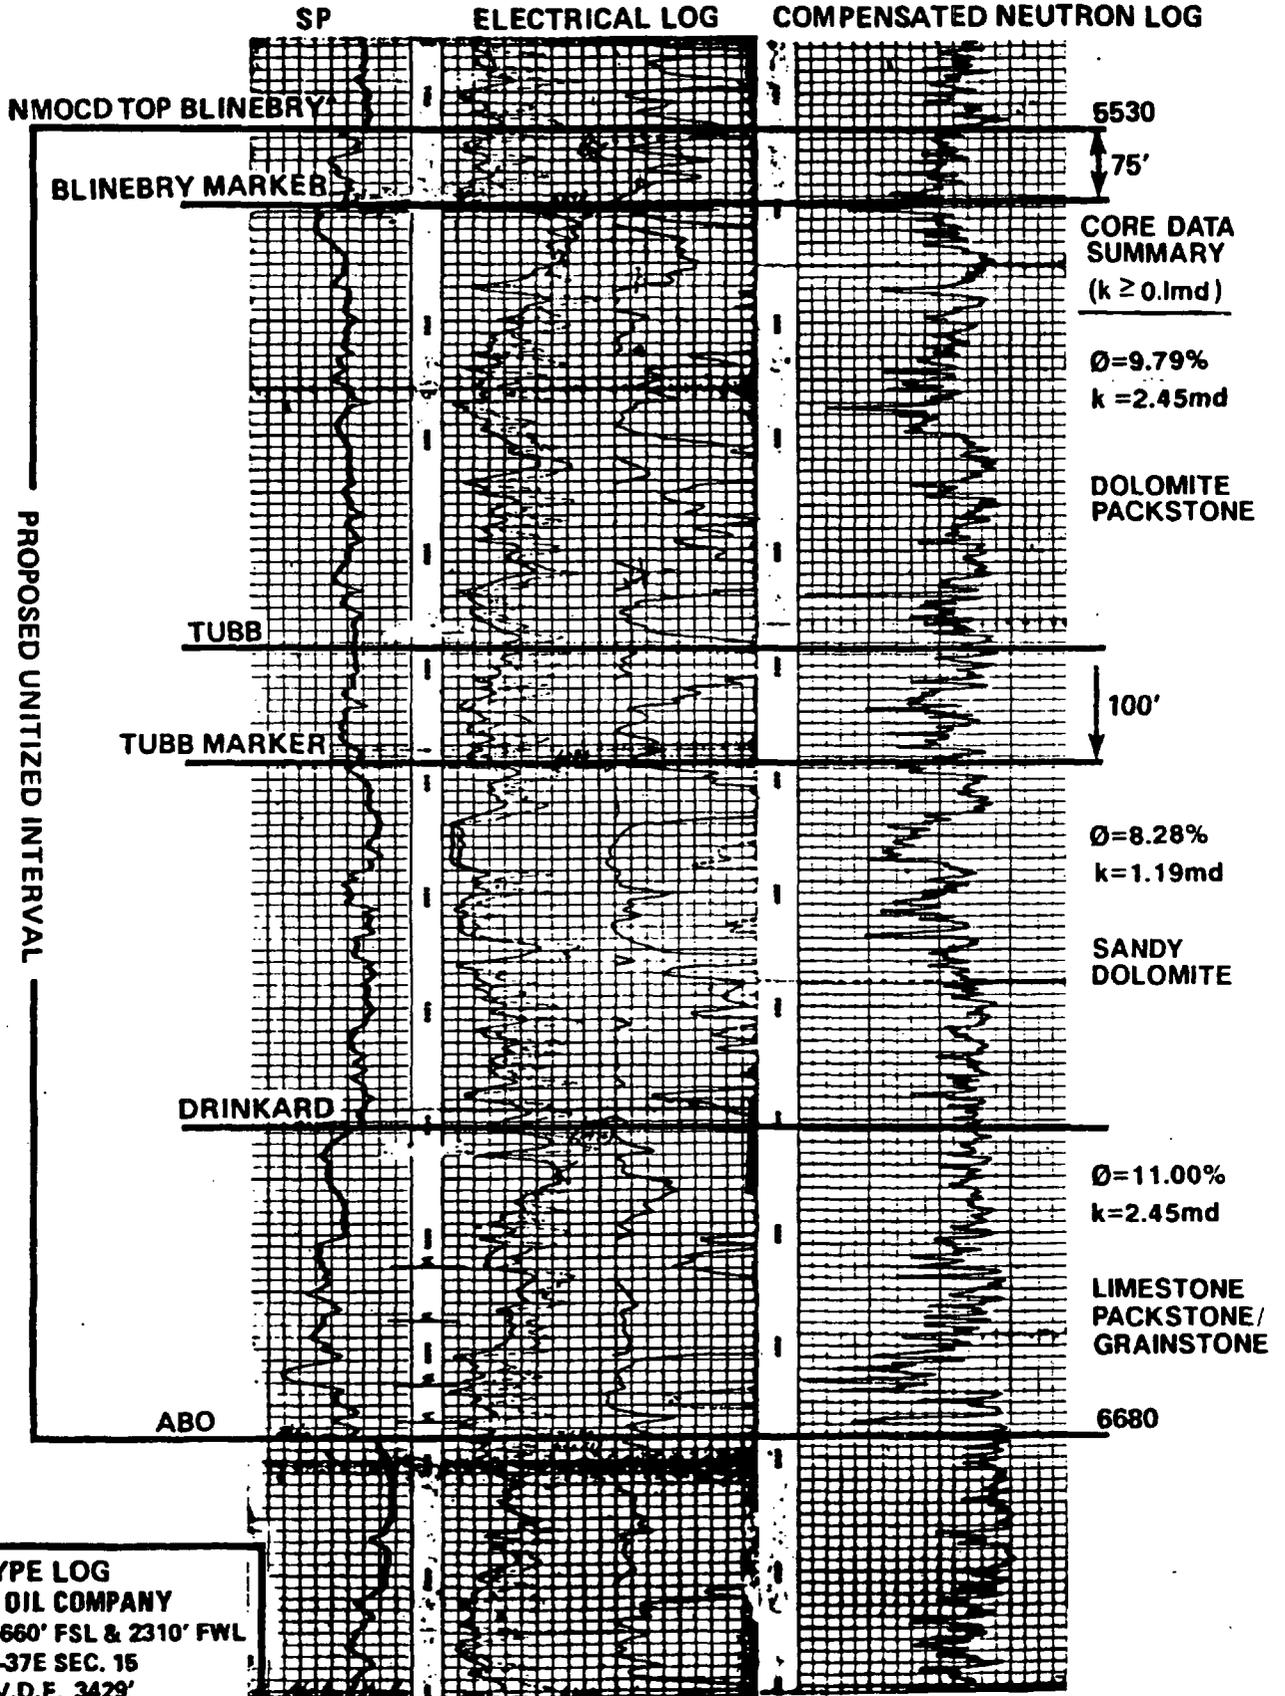

**TYPE LOG**  
**SHELL OIL COMPANY**  
 ARGO NO. 8 660' FSL & 2310' FWL  
 21S-37E SEC. 15  
 ELEV.D.F. 3429'  
 LEA COUNTY, NEW MEXICO

Northeast Drinkard Unit  
 Exhibit Fourteen  
 Cases 9230  
 9231  
 9232

# Well Selection Criteria Quick Print


tblWellMaster.api\_wellno Like '30025408460000'

API Well #	Well Name and No.	Operator Name	Typ	Stat	County	Surf	UL	Sec	Twp	Rng	Ft N/S	Ft E/W	UICPrmt	Lst Insp Dt
30-025-40846-00-00	NORTHEAST DRINKARD UNIT 174	APACHE CORP	O	N	Lea	P	C	3	21 S	37 E	3220 N	2605 W		

103.16667° W

103.15000° W

WGS84 103.13333° W

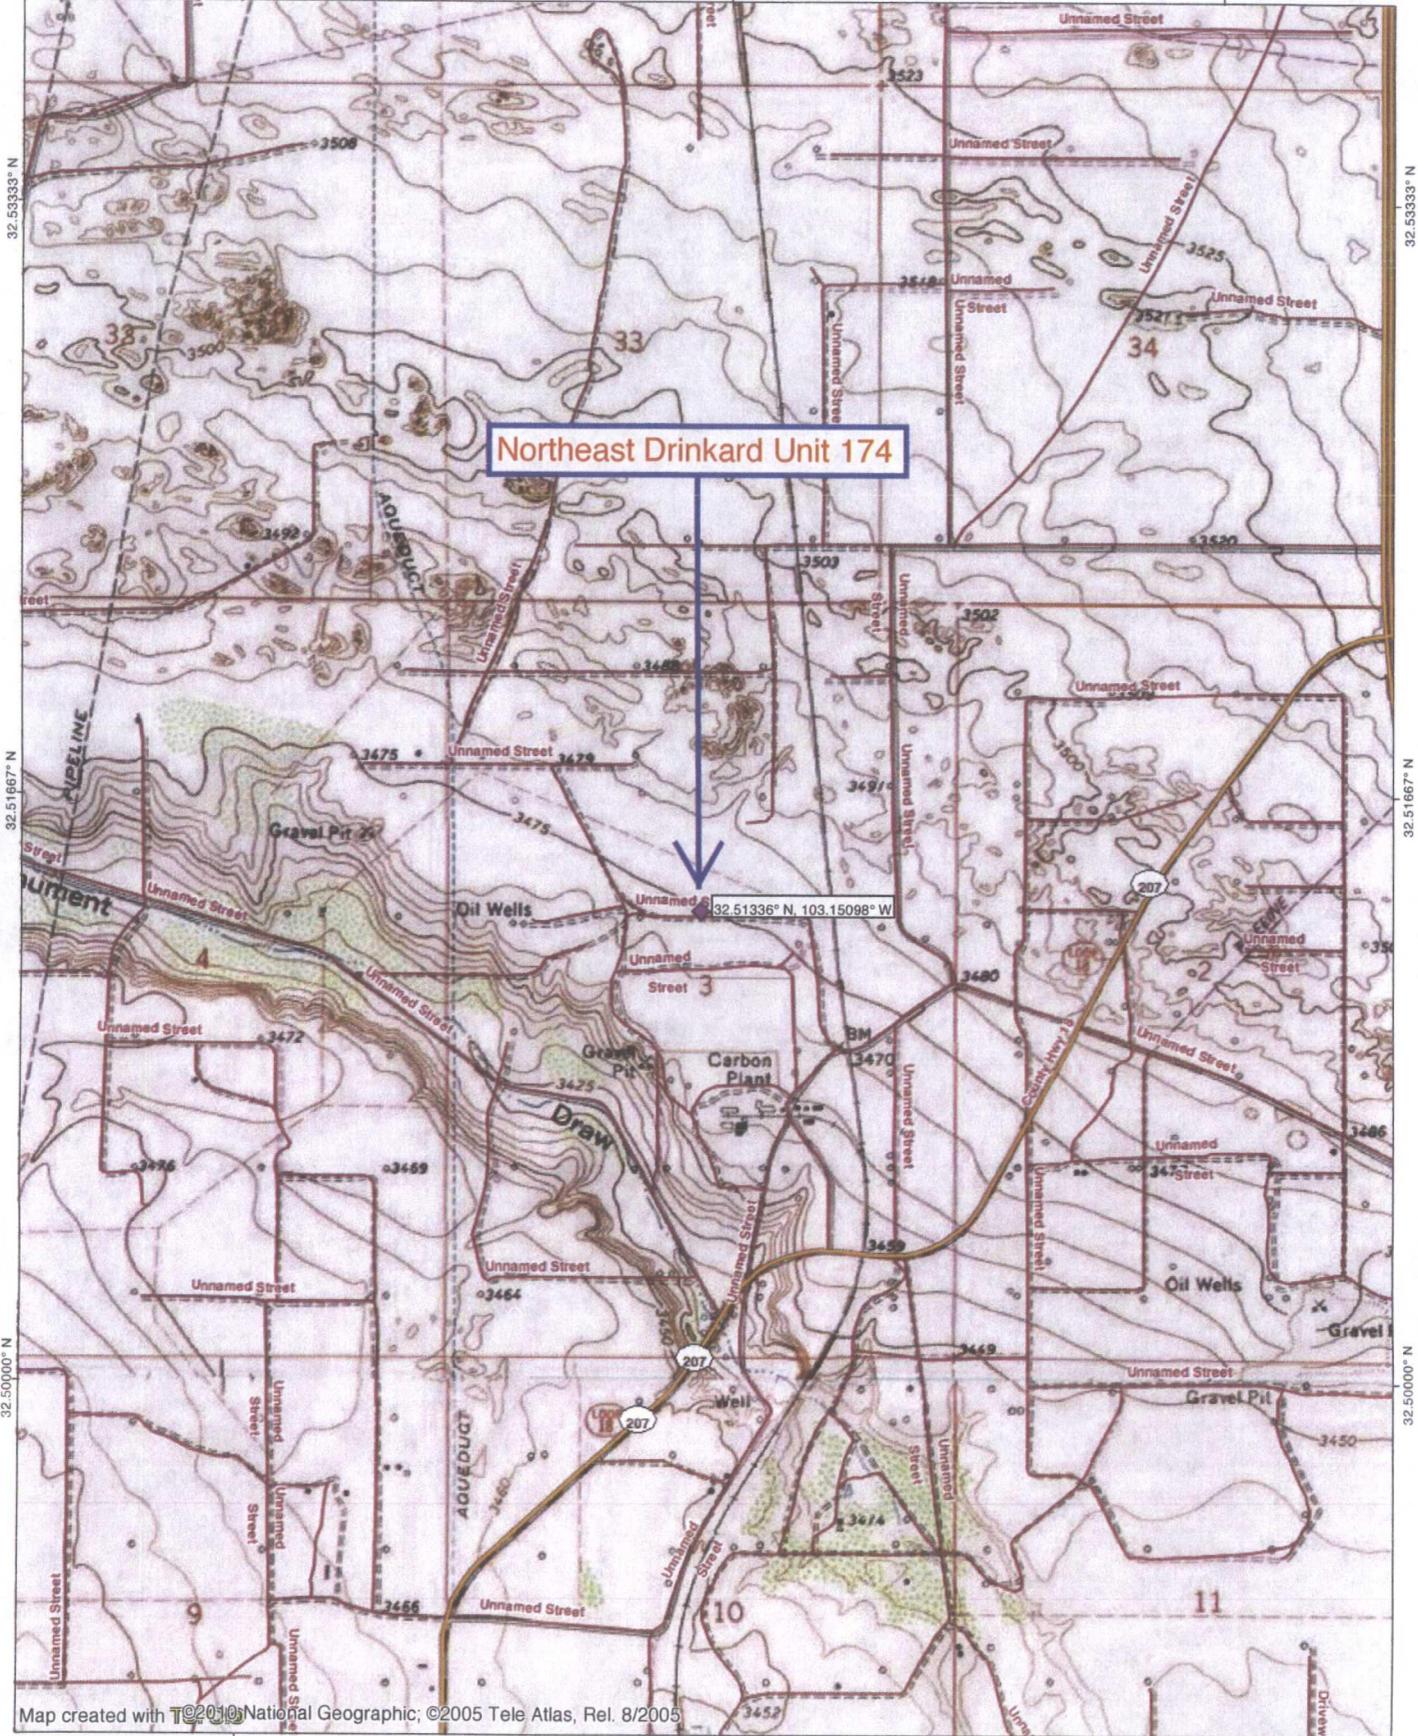


Map created with TOPO! National Geographic; ©2005 Tele Atlas, Rel. 8/2005

103.16667° W

103.15000° W

WGS84 103.13333° W



**EXHIBIT A**

TN MN

7°

02/03/13

DISTRICT I  
1625 N. French Dr., Hobbs, NM 88240  
Phone (575) 393-0101 Fax: (575) 393-0720

DISTRICT II  
611 S. First St., Artesia, NM 88210  
Phone (575) 746-1285 Fax: (575) 746-0720

DISTRICT III  
1000 Rio Brazos Rd., Aztec, NM 87410  
Phone (505) 354-8178 Fax: (505) 354-8170

DISTRICT IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505  
Phone (505) 476-3480 Fax: (505) 476-3482

State of New Mexico  
Energy, Minerals and Natural Resources Department

Form C-102  
Revised August 1, 2011

Submit one copy to appropriate  
District Office

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, New Mexico 87505

WELL LOCATION AND ACREAGE DEDICATION PLAT

AMENDED REPORT

API Number <b>30-025-</b>	Pool Code <b>40846</b>	Pool Name <b>22900</b>	<b>Eunice; Blinbry-Tubb-Drinkard - NORTH</b>
Property Code	Property Name <b>NORTHEAST DRINKARD UNIT</b>		Well Number <b>174W</b>
OGRID No. <b>873</b>	Operator Name <b>APACHE CORPORATION</b>		Elevation <b>3478'</b>

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
LOT 11	3	21 S	37 E		3220	NORTH	2605	WEST	LEA


Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County

Dedicated Acres <b>140</b>	Joint or Infill	Consolidation Code	Order No.
-------------------------------	-----------------	--------------------	-----------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

**SURFACE LOCATION**  
Lat - N 32°30'48.32"  
Long - W 103°09'03.74"  
NMSPC - N 552534.835  
E 905788.687  
(NAD-83)  
Lat - N 32°30'47.89"  
Long - W 103°09'02.04"  
NMSPC - N 552474.914  
E 864604.961  
(NAD-27)

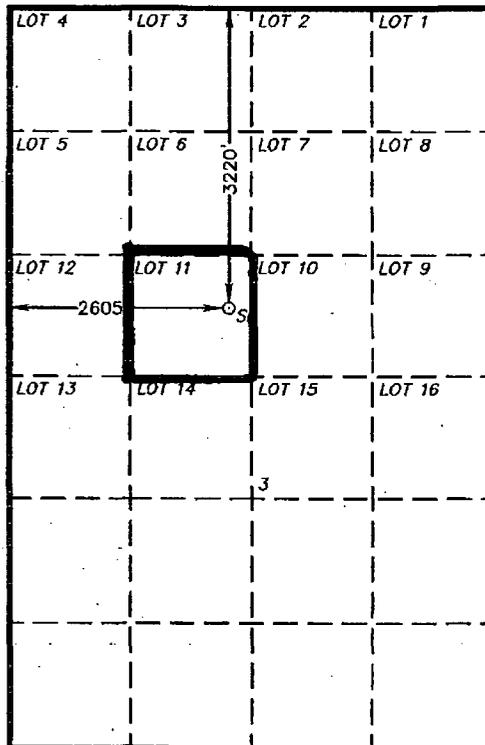

1" = 2000'

EXHIBIT A

OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

*Vicki Brown* 10/3/12  
Signature Date  
**Vicki Brown**  
Printed Name  
**vicki.brown@apachemp.com**  
Email Address

SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision and that the same is true and correct to the best of my belief.

SEPTEMBER 2012  
Date Surveyed  
Signature & Seal of  
Professional Surveyor  
*Gary L. Jones*  
Professional Surveyor No. 27322

Certificate No. Gary L. Jones 7977


BASIN SURVEYS 27322


32.513303  
103.150567

half mile radius

Northeast Drinkard Unit 174


EXHIBIT B

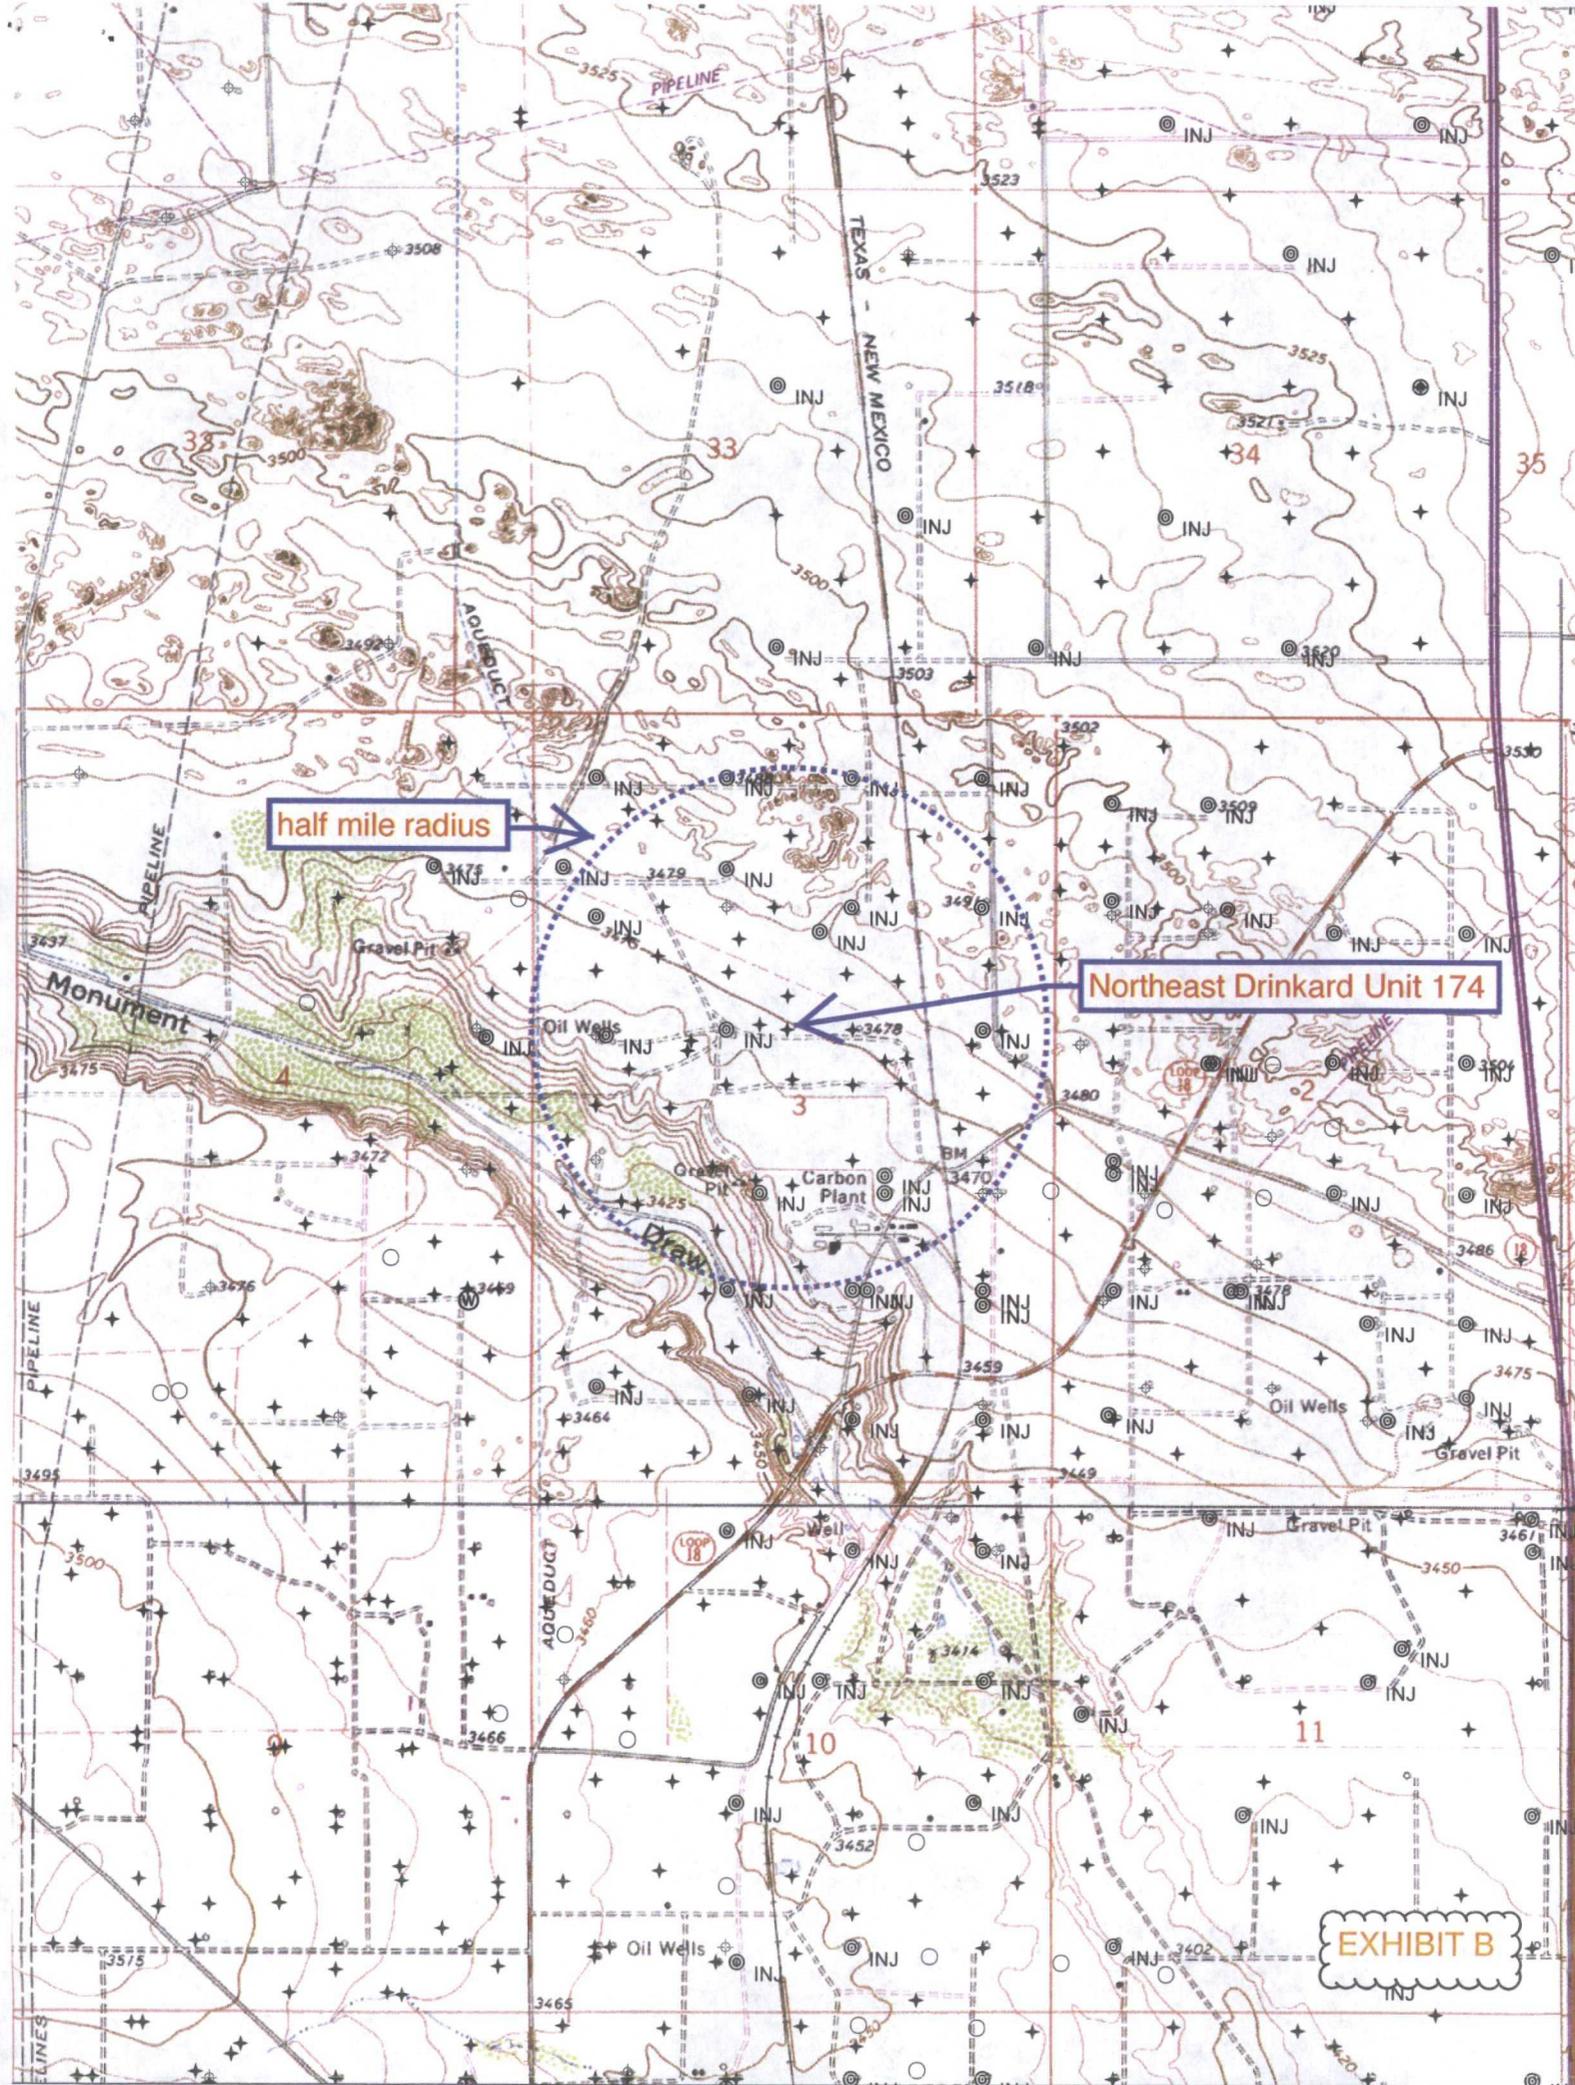

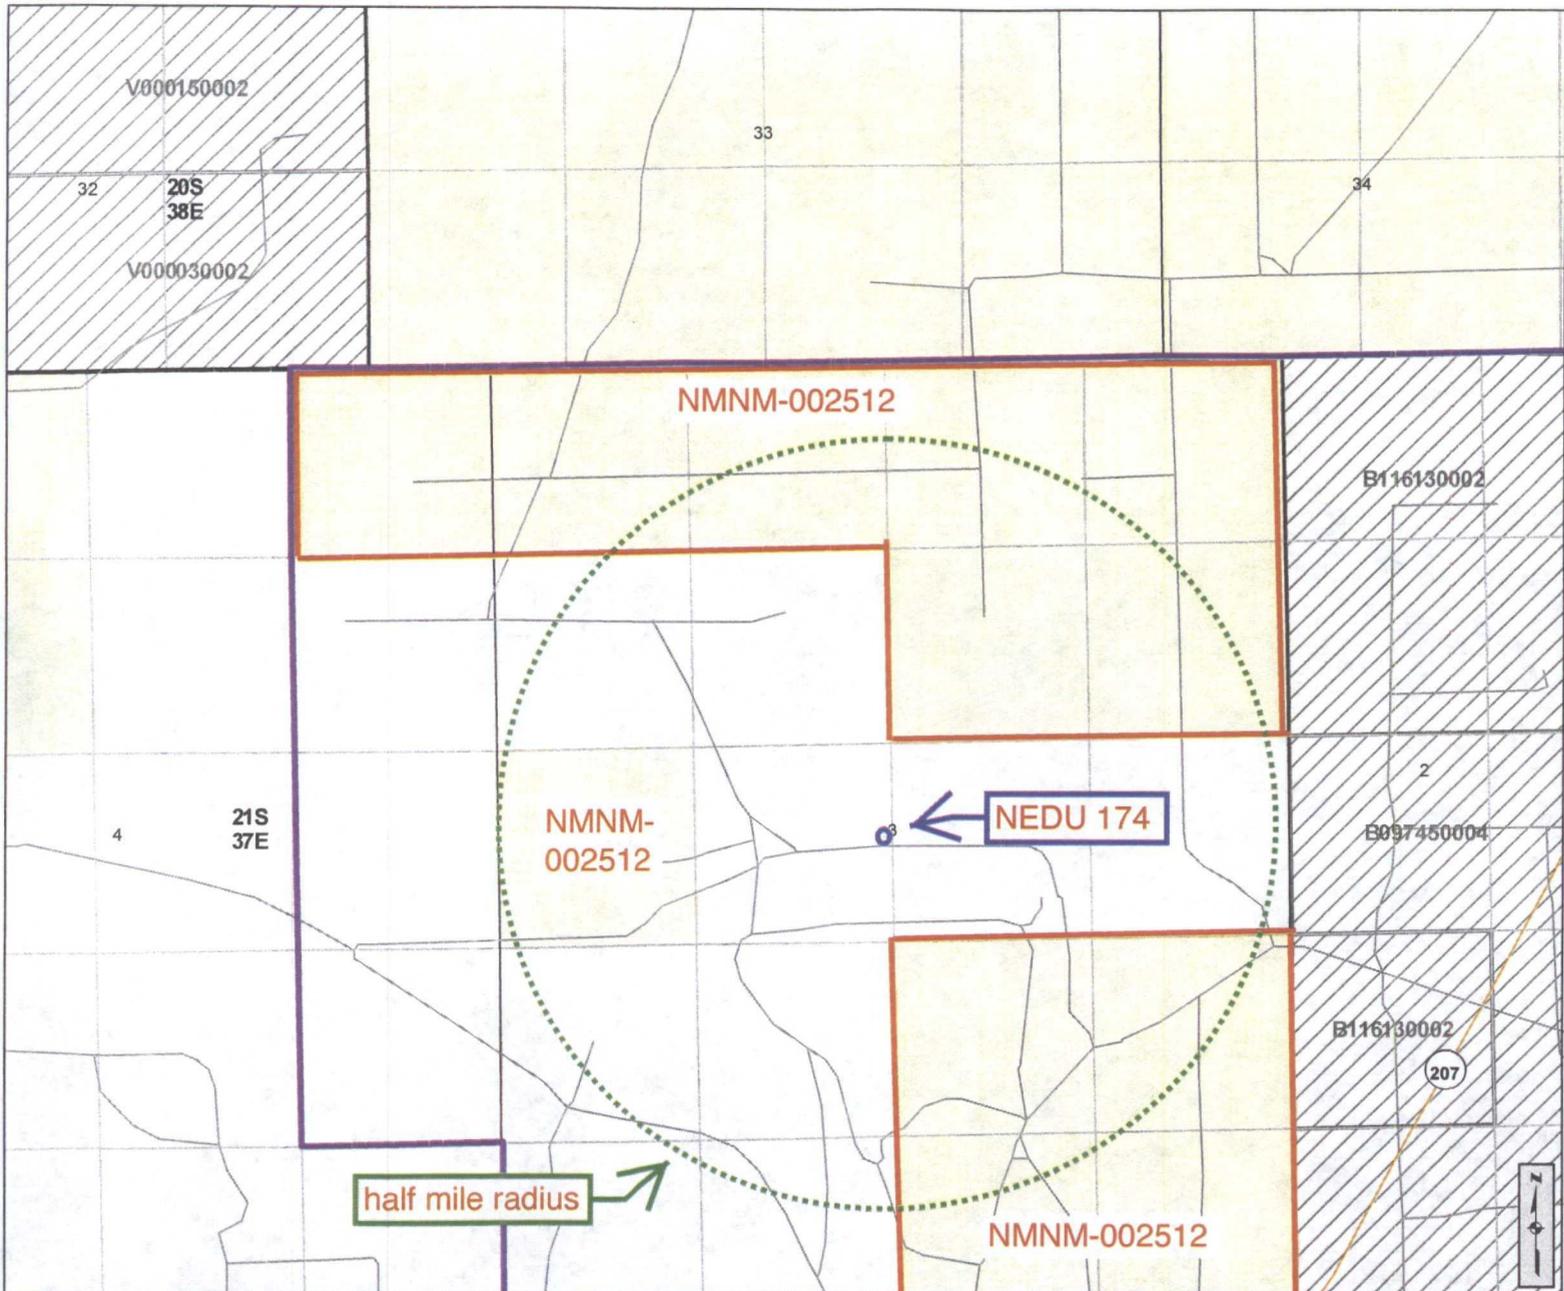

- Point Locations**
- County Seat
  - ▲ SLO District Offices
  - City, Town or Village
  - ★ Volcanic Vents
  - Highway Mileposts
- NMOCD Oil and Gas Wells**
- Oil
  - Injection
  - ★ Carbon Dioxide
  - Miscellaneous
  - ☆ Gas
  - ⊕ Water
  - ◇ DA or PA
  - △ Salt Water Disposal
- Federal Minerals**
- All Minerals
  - Coal Only
  - Oil and Gas Only
  - Oil, Gas and Coal Only
  - Other Minerals
- State Trust Lands**
- Surface Estate
  - Subsurface Estate
  - Both Estates
- NMSLO Leasing**
- Option Agreement
  - Commercial Lease
  - Minerals Lease
  - Oil and Gas Lease
  - Agricultural Lease
  - Not Available for Oil and Gas Leasing
  - Restriction Influences Oil and Gas Leasing
- Other Boundaries**
- Continental Divide
  - State Boundary
  - County Boundaries
  - Oil and Gas Unit Boundary
  - Participating Areas in Units
  - Geologic Regions
  - Potash Enclave (NMOCD R-11-P)

For detailed legend of the Geologic Map of New Mexico, please see <http://geoinfo.nmt.edu>



[www.nmstatelands.org](http://www.nmstatelands.org)

**New Mexico State Land Office**  
**Oil, Gas, and Minerals**


0 0.05 0.1 0.2 0.3 0.4 Miles  
 Universal Transverse Mercator Projection, Zone 13  
 1983 North American Datum

**EXHIBIT D**

The New Mexico State Land Office assumes no responsibility or liability for, or in connection with, the accuracy, reliability or use of the information provided here, in State Land Office data layers or any other data layer.

Land Office Geographic Information Center  
[logic@slo.state.nm.us](mailto:logic@slo.state.nm.us)

Created On: 1/1/2013 5:03:40 PM

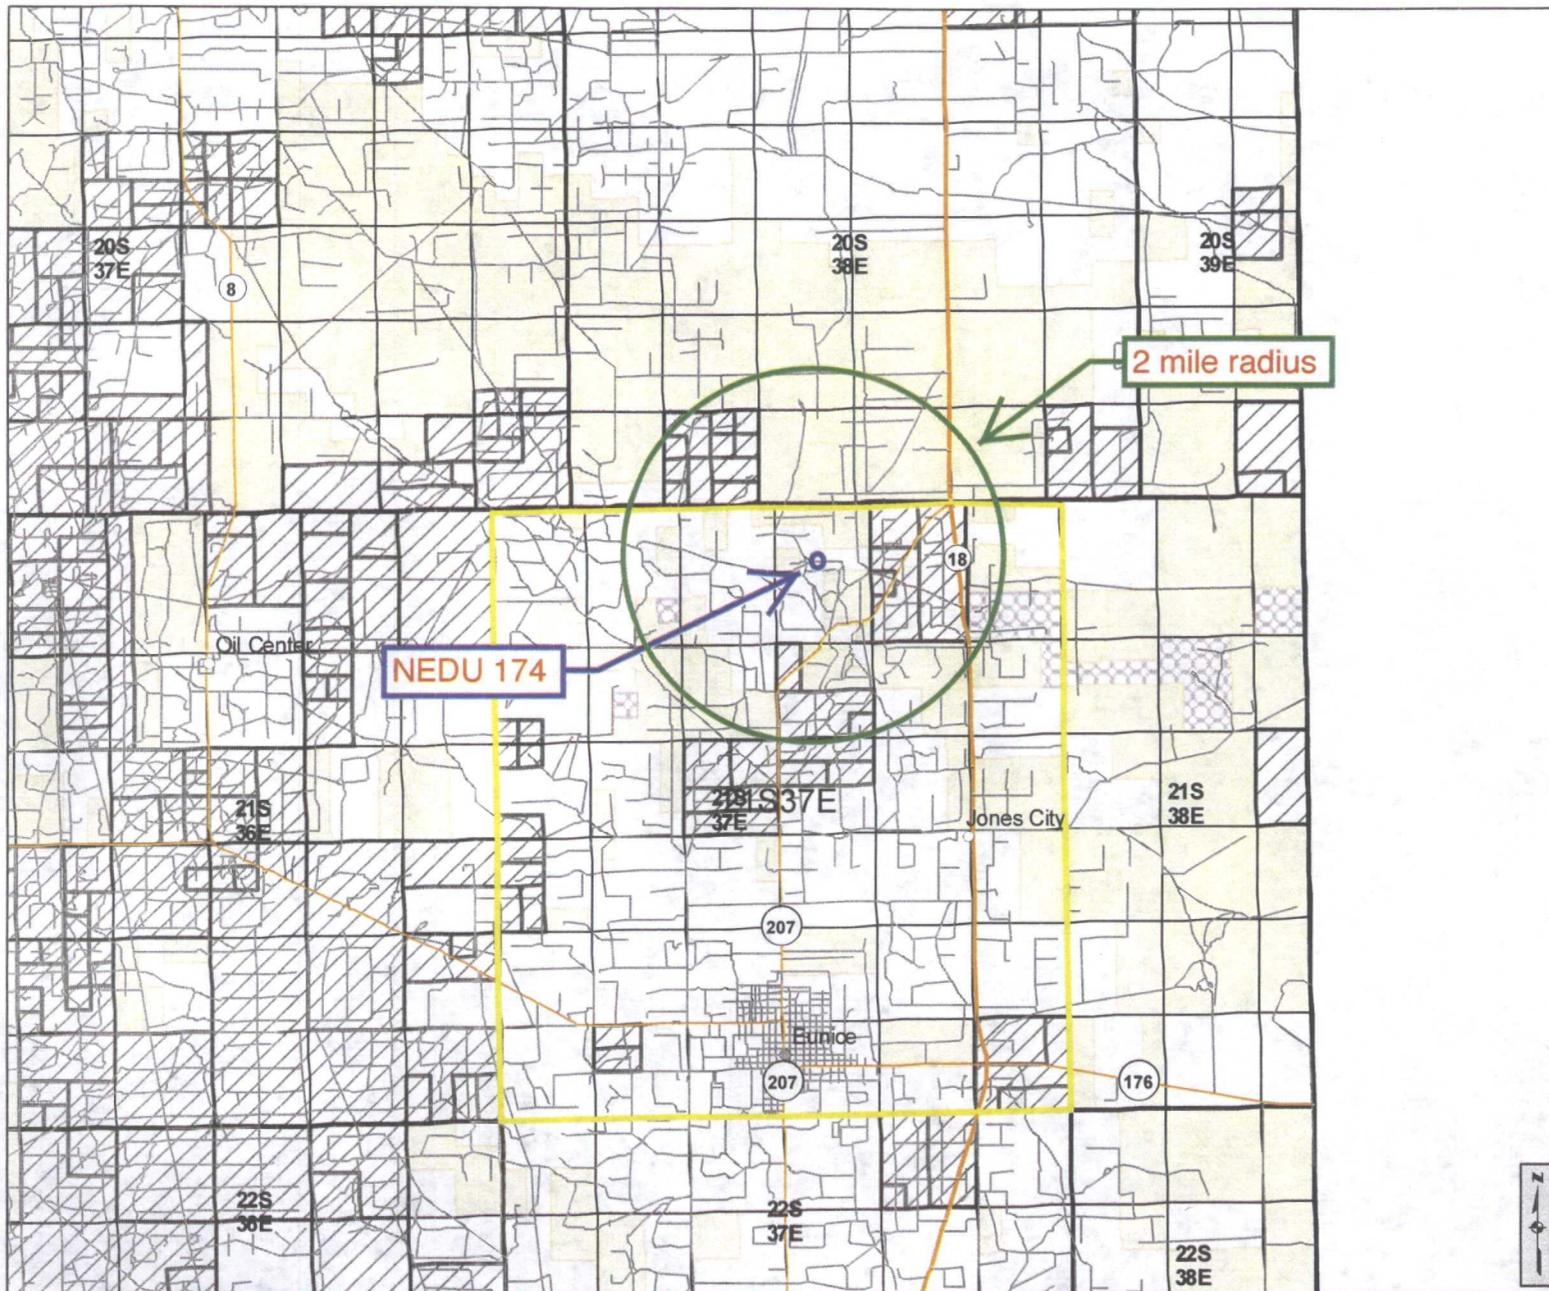

**Point Locations**

- County Seat
- ▲ SLO District Offices
- City, Town or Village
- ★ Volcanic Vents
- Highway Mileposts

**NMOCD Oil and Gas Wells**

- Oil
- Injection
- ★ Carbon Dioxide
- Miscellaneous
- ☆ Gas
- ◇ Water
- ◇ DA or PA
- △ Salt Water Disposal

**Federal Minerals**

- All Minerals
- Coal Only
- Oil and Gas Only
- Oil, Gas and Coal Only
- Other Minerals

**State Trust Lands**

- Surface Estate
- Subsurface Estate
- Both Estates

**NMSLO Leasing**

- Option Agreement
- Commercial Lease
- Minerals Lease
- Oil and Gas Lease
- Agricultural Lease
- Not Available for Oil and Gas Leasing
- Restriction Influences Oil and Gas Leasing

**Other Boundaries**

- Continental Divide
- State Boundary
- - - County Boundaries
- Oil and Gas Unit Boundary
- Participating Areas in Units
- Geologic Regions
- Potash Enclave (NMOCD R-111-P)

For detailed legend of the Geologic Map of New Mexico, please see <http://geoinfo.nmt.edu>

**New Mexico State Land Office**  
**Oil, Gas, and Minerals**


0 0.4 0.8 1.6 2.4 3.2 Miles  
 Universal Transverse Mercator Projection, Zone 13  
 1983 North American Datum

**EXHIBIT E**

The New Mexico State Land Office assumes no responsibility or liability for, or in connection with, the accuracy, reliability or use of the information provided here, in State Land Office data layers or any other data layer.

Land Office Geographic Information Center  
 logic@slo.state.nm.us

Created On: 1/20/2013 3:10:47 PM



[www.nmstatelands.org](http://www.nmstatelands.org)

Sorted by distance from center well

WELL	SPUD	TD	POOL	WELL TYPE	HOLE O.D.	CASING O.D.	SET @	CEMENT	TOC	HOW DETERMINED
NEDU 124	10/31/98	6910	Bliebry-Drinkard-Tubb	Oil	11	8.625	1309	410 sx	GL	circulated 76 sx to pit
30-025-34424					7.875	5.5	6910	1425 sx	GL	circulated 86 sx to pit
K-3-21s-37e										
NEDU 229	11/1/98	6910	Bliebry-Drinkard-Tubb	Oil	11	8.625	1309	410 sx	GL	circulated 126 sx to pit
30-025-34429					7.875	5.5	6910	1325 sx	GL	circulated 170 sx to pit
J-3-21s-37e										
NEDU 206	9/29/47	8590	Bliebry-Drinkard-Tubb	Injection	17	13.375	301	250 sx	GL	circulated
30-025-06522					11	8.625	3879	4300 sx	GL	circulated
K-3-21s-37e					7.875	5.5	8060	675 sx	2915	temperature
NEDU 208	7/27/52	6707	Bliebry-Drinkard-Tubb	Oil	17	13.375	225	250 sx	no report	no report
30-025-06385					11	8.625	3147	2000 sx	GL	circulated out 280 sx
J-3-21s-37e					7.875	5.5	6600	600 sx	GL	circulated out 25 sx

Sorted by distance from center well

NEDU 163	11/30/10	7025	Blinebry-Drinkard-Tubb	Oil	12.25	8.625	1422	720 sx	GL	circulated 180 sx to surface
30-025-39914					7.875	5.5	7025	1275 sx	GL	circulated 106 sx to surface
B-3-21s-37e										
NEDU 159	6/23/12	7024	Blinebry-Drinkard-Tubb	Oil	12.25	8.625	1327	675 sx	GL	circulated 109 sx to surface
30-025-40497					7.875	5.5	7024	1290 sx	GL	circulated 100 sx to surface
C-3-21s-37e										
NEDU 175	8/24/12	7050	Blinebry-Drinkard-Tubb	Oil	12.25	8.625	1371	700sx	GL	circulated 180 sx to surface
30-025-40516					7.875	5.5	7050	1150 sx	GL	circulated 106 sx to surface
C-3-21s-37e										
NEDU 173	8/16/12	7050	Blinebry-Drinkard-Tubb	Oil	12.25	8.625	1352	700 sx	GL	circulated 173 sx to surface
30-025-40554					7.875	5.5	7050	1220 sx	GL	circulated 72 bbls to surface
B-3-21s-37e										
NEDU 263	no spud yet	Planned 7000	Blinebry-Drinkard-Tubb	Oil	11	8.625	1330	490 sx	GL	circulate
30-025-40849					7.875	5.5	7000	1000 sx	GL	circulate
C-3-21s-37e										
NEDU 111	4/18/80	6875	Blinebry-Drinkard-Tubb	Injection	12.25	8.625	1395	674 sx	GL	circulated 75sx to surface
30-025-26670					7.875	5.5	6875	2782 sx	GL	circulated 170 sx to surface
G-3-21s-37e										

Sorted by distance from center well

TAYLOR GLENN 005	5/14/52	8361	Wantz Abo	Oil	17.25	13.375	225	250 sx	GL	circulated out 90 sx
30-025-06384					11	8.625	3147	2200 sx	GL	circulated out 400 sx
J-3-21s-37e					7.875	5.5	8355	850 sx	2943	calculated
NEDU 125	11/14/98	6910	Bliebry- Drinkard-Tubb	Oil	11	8.625	1300	410 sx	GL	circulated 120 sx to pit
30-025-34425					7.875	5.5	6910	1375 sx	GL	circulated 86 sx to pit
J-3-21s-37e										
NEDU 176	no spud yet	Planned 7050	Bliebry- Drinkard-Tubb	Oil	11	8.625	1355	490 sx	GL	circulate
30-025-40848					7.875	5.5	7050	1000 sx	GL	circulate
C-3-21s-37e										
NEDU 172	no spud yet	Planned 7050	Bliebry- Drinkard-Tubb	Oil	11	8.625	1372	500 sx	GL	circulate
30-025-40847					7.875	5.5	7050	1000 sx	GL	circulate
B-3-21s-37e										

Sorted by distance from center well

NEDU 228	10/18/98	6920	Blinebry-Drinkard-Tubb	Oil	11	8.625	1311	410 sx	GL	circulated 98 sx to pit
30-025-34427					7.875	5.5	6920	1200 sx	180	CBL
J-3-21s-37e										
NEDU 108	10/19/74	6805	Blinebry-Drinkard-Tubb	P&A	12.25	8.625	1361	600 sx	GL	circulated
30-025-24831					7.875	5.5	6805	1025 sx	2328	calculated
C-3-21s-37e										
NEDU 232	10/6/98	6890	Blinebry-Drinkard-Tubb	Oil	11	8.625	1302	410 sx	GL	circulated 110 sx to pit
30-025-34430					7.875	5.5	6890	1225 sx	GL	circulated 129 sx to pit
14 -3-21s-37e										
NEDU 128	7/25/99	6930	Blinebry-Drinkard-Tubb	Oil	12.25	8.625	1336	460 sx	GL	circulated 100 sx to pit
30-025-34651					7.875	5.5	6930	1000 sx	GL	circulated 129 sx to pit
E-3-21s-37e										
NEDU 242	6/10/06	6950	Blinebry-Drinkard-Tubb	Oil	12.25	8.625	1325	575 sx	GL	circulated
30-025-37875					7.875	5.5	6950	1000 sx	GL	circulated
G-3-21s-37e										
NEDU 207	7/31/52	6885	Blinebry-Drinkard-Tubb	Injection	17	13.375	215	250 sx	GL	circulated 65 sx to surface
30-025-06519					11	8.625	3153	1600 sx	GL	circulated 380 sx to surface
N-3-21s-37e					7.875	5.5	7000	810 sx	GL	reversed out 75 sx

Sorted by distance from center well

NEDU 157	8/8/12	7036	Bliebry-Drinkard-Tubb	Oil	12.25	8.625	1445	730 sx	GL	circulated 157 sx to surface
30-025-40696										
B-3-21s-37e					7.875	5.5	7036	1260 sx	GL	circulated 140 sx to surface
NEDU 209	3/4/53	8114	Bliebry-Drinkard-Tubb	Injection	17.5	13.375	250	250 sx	no report	no report
30-025-06508					12.25	9.625	3133	1370 sx	no report	no report
O-3-21s-37e					8.75	7	8113	940 sx	3140	CBL
NEDU 153	no spud yet	Planned 7000	Bliebry-Drinkard-Tubb	Oil	11	8.625	1336	490 sx	GL	circulate
30-025-40850					7.875	5.5	7000	1000 sx	GL	circulate
C-3-21s-37e										
NEDU 204	8/11/62	6800	Bliebry-Drinkard-Tubb	Injection	10.75	9.625	1310	625 sx	GL	circulated
30-025-06506					8.75	7	6800	650 sx	2200	temperature
L-3-21s-37e										
TAYLOR GLENN 004	3/10/52	8119	Hare Simpson	Oil	17.25	13.375	200	250 sx	GL	circulated out 50 sx
30-025-06383					11	8.625	3147	2200 sx	GL	circulated out 300 sx
A-3-21s-37e					7.875	5.5	8115	875 sx	GL	circulated out 75 sx
NEDU 210	8/2/52	8302	Bliebry-Drinkard-Tubb	Injection	17.25	13.375	269	260 sx	GL	circulated to surface
30-025-06502					12.25	9.625	3149	1360 sx	600	temperature

Sorted by distance from center well

G-3-21s-37e					8.75	7	8301	940 sx	3125	temperature
NEDU 130	6/26/99	6950	Blinebry-Drinkard-Tubb	Oil	12.25	8.625	1365	460 sx	GL	circulated 27 sx to pit
30-025-34617					7.875	5.5	6950	1400 sx	GL	circulated 220 sx to pit
F-3-21s-37e										
NEDU 211	1/4/1950	6780	Blinebry-Drinkard-Tubb	Injection	17.25	13.375	222	300 sx	GL	circulated 260 sx
30-025-06381					11	8.625	2920	2200 sx	GL	circulated
I-3-21s-37e					7.875	5.5	6665	600 sx	3236	calculated
NEDU 160	7/1/12	7100	Blinebry-Drinkard-Tubb	Oil	12.25	8.625	1395	685 sx	GL	circulated 51 sx to surface
30-025-40498					7.875	5.5	7100	1300 sx	GL	circulated 14 bbl to surface
D-3-21s-37e										
NEDU 154	10/25/10	7025	Blinebry-Drinkard-Tubb	Oil	12.25	8.625	1409	720 sx	GL	circulated 154 sx to surface
30-025-39439					7.875	5.5	7025	1340 sx	GL	circulated 152 sx to surface
B-3-21s-37e										
NEDU 171	7/9/12	7065	Blinebry-Drinkard-Tubb	Oil	12.25	8.625	1421	700 sx	GL	circulated 8 bbls to surface
30-025-40553					7.875	5.5	7065	1375 sx	GL	circulated 47 sx to surface
I-3-21s-37e										
NEDU 282	9/1/12	7050	Blinebry-Drinkard-Tubb	Oil	12.25	8.625	1356	670 sx	GL	circulated 141 sx to surface
30-025-40499					7.875	5.5	7050	1515 sx	GL	circulated 62 sx to surface

Sorted by distance from center well

E-3-21s-37e										
NEDU 158	11/7/10	7020	Blinebry-Drinkard-Tubb	Oil	12.25	8.625	1419	720 sx	GL	circulated 170 sx to surface
30-025-39440					7.875	5.5	7020	1250 sx	GL	circulated 124 sx to surface
A-3-21s-37e										
NEDU 268	10/31/12	7000	Blinebry-Drinkard-Tubb	Oil	11	8.625	1293	500 sx	GL	circulated 190 sx to surface
30-025-40779					7.785	5.5	7000	1210 sx	GL	circulated 140 sx to surface
K-3-21s-37e										
NEDU 105	7/1/75	6870	Blinebry-Drinkard-Tubb	Injection	11	8.625	1380	400 sx	GL	circulated
30-025-25008					7.875	5.5	6870	985 sx	410	temperature
E-3-21s-37e										
NEDU 240	7/26/02	6850	Blinebry-Drinkard-Tubb	Injection	12.25	8.625	1268	550 sx	GL	circulated 41 sx
30-025-35904					7.875	5.5	6850	1500 sx	GL	circulated 30 sx
M-3-21s-37e										
NEDU 113	4/15/58	6830	Blinebry-Drinkard-Tubb	Injection	17.5	13.375	211	250 sx	GL	circulated to surface
30-025-06496					12.25	9.625	3029	1210 sx	820	temperature

Sorted by distance from center well

H-3-21s-37e					8.75	7	6829	770 sx	3038	temperature
Taylor Glenn 3	11/11/51	8224	Wantz Abo	Oil	17.5	13.375	219	250 sx	GL	circulated out 50 sx
30-025-06382					11	8.625	3150	2000 sx	GL	circulated out 350 sx
A-3-21s-37e					7.875	5.5	8102	870 sx	GL	circulated out 10 sx
NEDU 205	11/26/61	6730	Blinebry-Drinkard-Tubb	Injection	12.25	9.625	259	250 sx	GL	circulated 35 sx to surface
30-025-06521					8.75	2.875	6715	635 sx	2400	temperature
M-3-21s-37e										
NEDU 212	5/14/57	6782	Blinebry-Drinkard-Tubb	Oil	17.5	13.375	222	250 sx	no report	no report
30-025-06492					12.25	9.625	2819	650 sx	no report	no report
P-3-21s-37e					8.75	7	6781	675 sx	3272	temperature
NEDU 131	7/10/99	6990	Blinebry-Drinkard-Tubb	Oil	12.25	8.625	1365	460 sx	GL	circulated 109 sx to pit
30-025-34609					7.875	5.5	6990	1525 sx	GL	circulated 125 sx to pit
A-3-21s-37e										
NEDU 227	10/17/98	6890	Blinebry-Drinkard-Tubb	Oil	11	8.625	1310	410 sx	GL	circulated 81 sx to pit

Sorted by distance from center well

30-025-34428					7.875	5.5	6890	1315 sx	GL	circulated 64 sx to pit
J-3-21s-37e										
NEDU 267	11/23/12	7010	Bliebry- Drinkard-Tubb	Oil	11	8.625	1283	485 sx	GL	circulated 157 sx to surface
30-025-40824					7.875	5.5	7009	1090 sx	GL	circulated 20 sx to surface
M-3-21s-37e										
NEDU 233	9/24/98	6870	Bliebry- Drinkard-Tubb	Oil	11	8.625	1285	410 sx	GL	circulated 63 sx to pit
30-025-34431					7.875	5.5	6870	1300 sx	GL	circulated 146 sx to pit
K-3-21s-37e										
NEDU 177	no spud yet	Planned 7200	Bliebry- Drinkard-Tubb	Oil	12.25	8.625	1390	700 sx	GL	circulate
30-025-40903					7.875	5.5	7200	950 sx	GL	circulate
C-3-21s-37e										
Livingston 14	4/10/84	7745	Wantz Abo	Oil	17.25	13.375	481	475 sx	GL	circulated
30-025-28671					12.25	8.625	2470	1425 sx	GL	circulated 250 sx
E-3-21s-37e					7.875	5.5	7745	1530 sx	364	calculated
NEDU 129	7/28/00	6980	Bliebry- Drinkard-Tubb	Oil	12.25	8.625	1321	460 sx	GL	circulated 87 sx to pit
30-025-34938					7.875	5.5	6980	1275 sx	GL	circulated 110 sx to pit
D-3-21s-37e										
NEDU 226	6/3/98	6850	Bliebry- Drinkard-Tubb	Oil	11	8.625	1370	410 sx	GL	circulated 40 sx to surface

Sorted by distance from center well

30-025-34380					7.875	5.5	6850	1200 sx	GL	circulated 25 sx to surface
Q-3-21s-37e										
HAWK B 3 008	9/23/56	8191	Ellenburger	P & A	13.375	10.75	265	250 sx	GL	circulated
30-025-06500					9.785	7.625	3149	1235 sx	975	temperature
P-3-21s-37e					6.75	5.5	8187	650 sx	3115	temperature
NEDU 106	2/26/87	6000	Blinebry- Drinkard-Tubb	Injection	13.75	10.75	260	250 sx	GL	circulated
30-025-06410					9.875	7.625	3049	900 sx	1740	temperature
C-3-21s-37e					6.5	5.5	6479	500 sx	2903	temperature



LEASE NAME	North East Drinkard Unit
WELL #	108
API #	30-025-24831
COUNTY	Lea, NM

**CURRENT WELLBORE SKETCH**

perf @ 400' & squeeze to GL

perf @ 1420' & tag @ 1295'

TOC cal @ 2328'

TOF @ 4628'

Communicated cmt sqz from 4628' - 5400'  
(ran CBL thru tbg) 10-4-1989  
772' of fill between tbg & 5.5" csg

CICR @ 6224" on 2 3/8" tbg stuck

CIBP @ 6430'


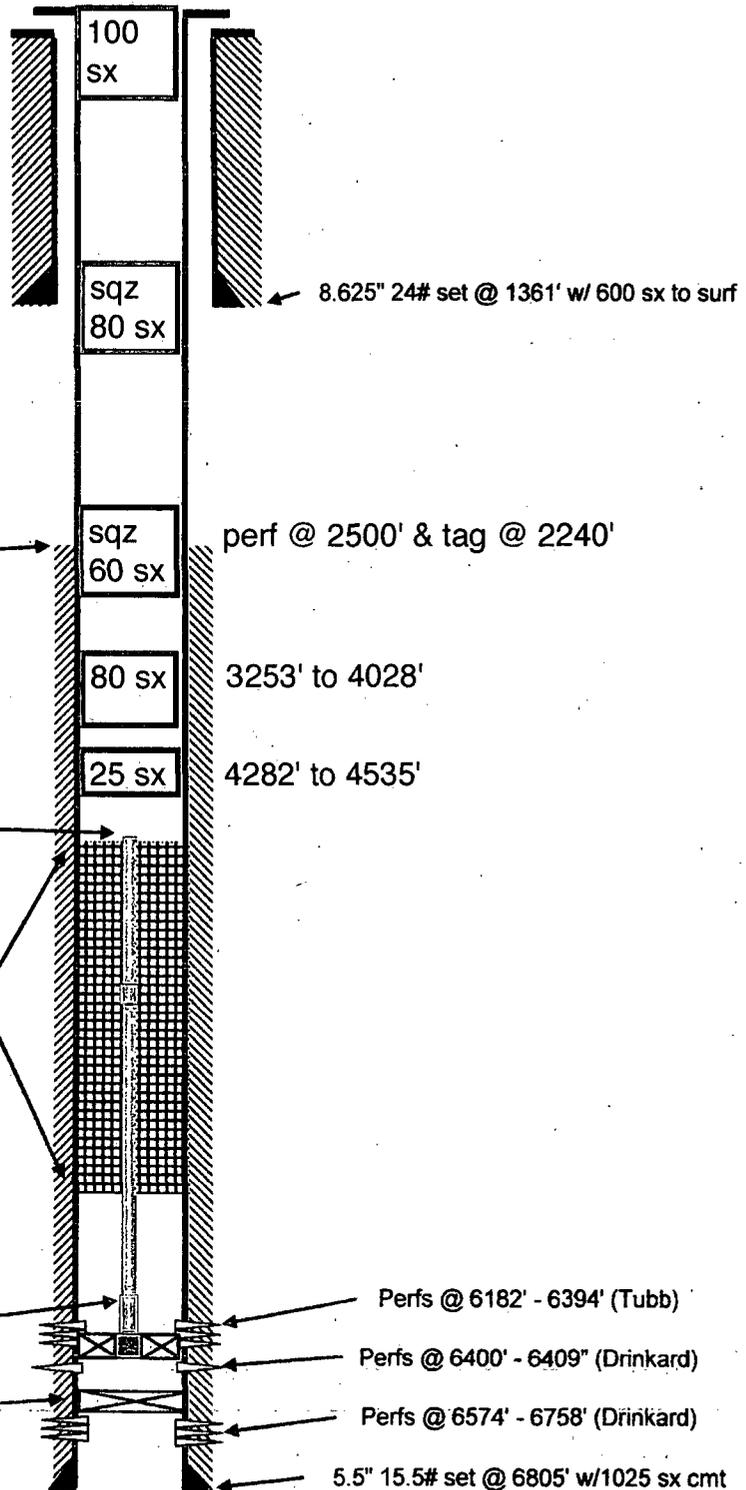


EXHIBIT F

HAWK B-3 No. 8

2970' FSL & 660' FEL  
UNIT P, SEC 3, T-215, R-37E

ELEVATION: 3480' DF  
3469' GL

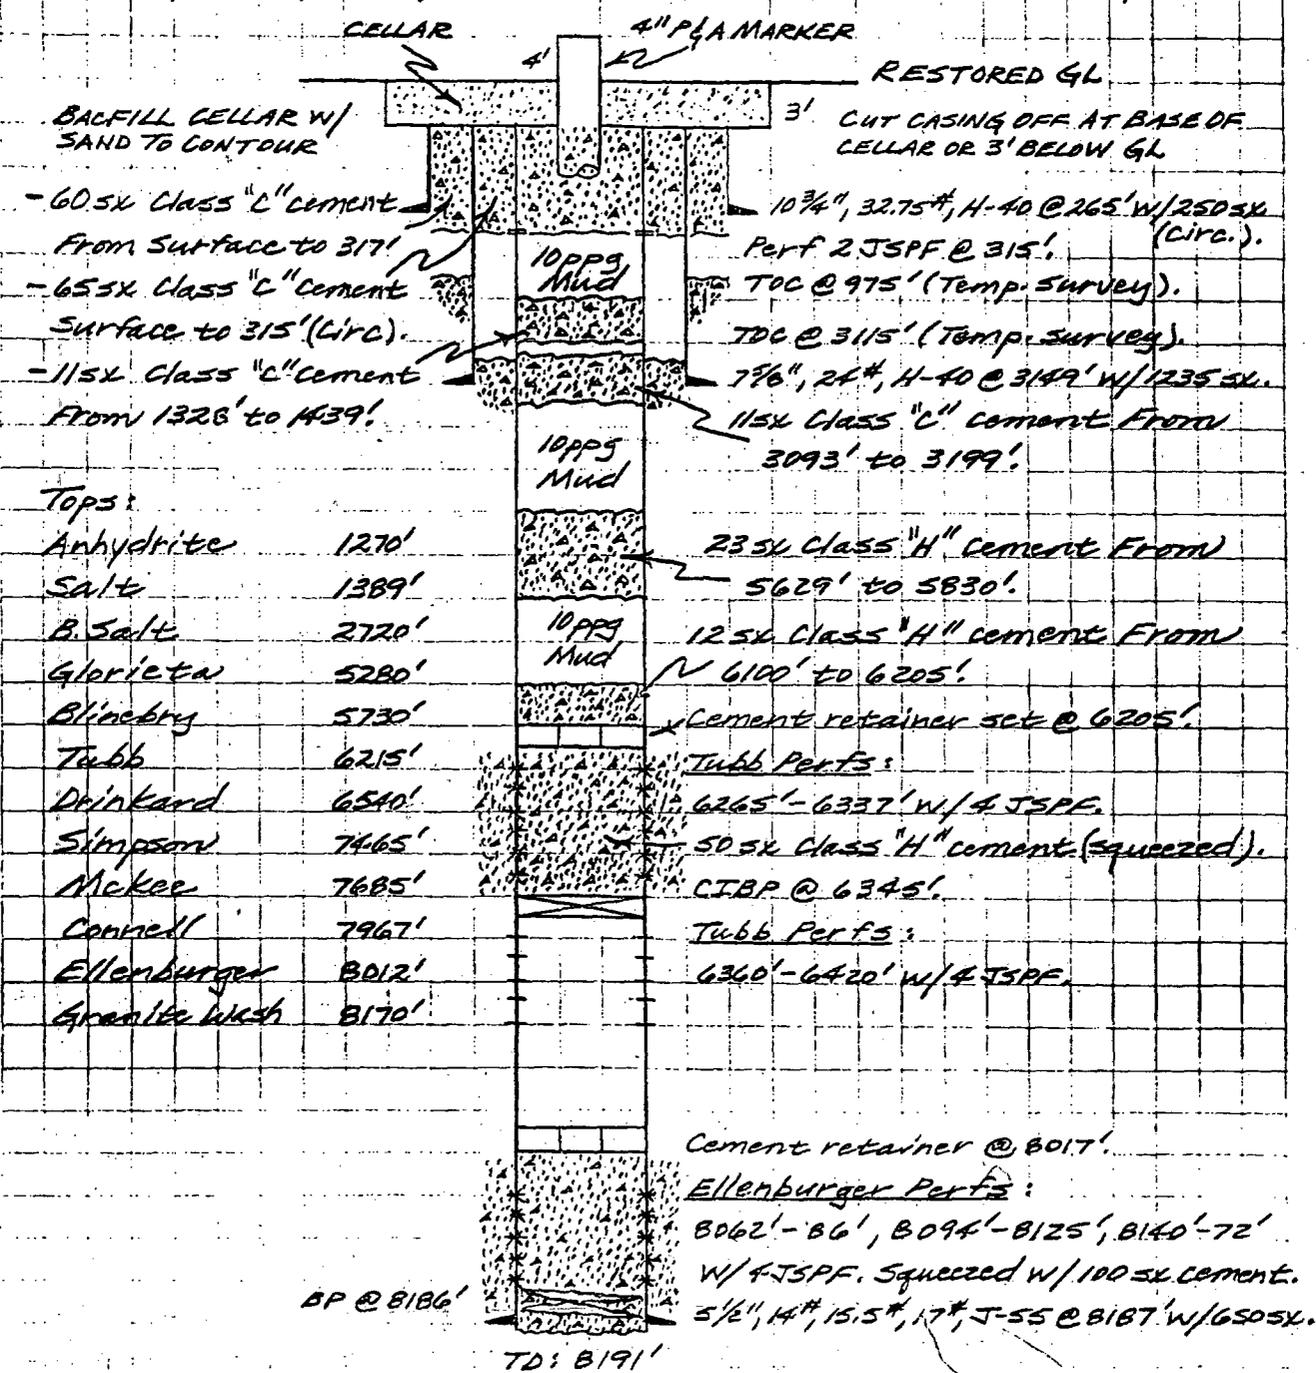

Tops:

Anhydrite	1270'
Salt	1389'
B. Salt	2720'
Glorieta	5280'
Blinbery	5730'
Tubb	6215'
Drinkard	6540'
Simpson	7465'
McKee	7685'
Connell	7967'
Ellenburger	8012'
Granite Wash	8170'

TCA

Station

~ Proposed P & A ~

10-30-89  
/ /

NMAFH  
Lea County, NM

EXHIBIT F



from WFX-784

South Permian Basin Region  
 10520 West I-20 East  
 Odessa, TX 79765  
 (915) 498-9191  
 Lab Team Leader - Sheila Hernandez  
 (915) 495-7240

## Water Analysis Report by Baker Petrolite

Company:	APACHE CORPORATION	Sales RDT:	33102
Region:	PERMIAN BASIN	Account Manager:	MIKE EDWARDS (505) 910-9517
Area:	EUNICE, NM	Sample #:	223099
Lease/Platform:	NORTHEAST DRINKARD UNIT	Analysis ID #:	28971
Entity (or well #):	WATER INJECTION STATION	Analysis Cost	\$40.00
Formation:	UNKNOWN		
Sample Point:	INJECTION PUMP DISCHARGE		

Summary		Analysis of Sample 223099 @ 75 °F					
Sampling Date:	10/3/02	Anions	mg/l	meq/l	Cations	mg/l	meq/l
Analysis Date:	10/4/02	Chloride:	10086.0	284.49	Sodium:	5799.5	252.26
Analyst:	SHEILA HERNANDEZ	Bicarbonate:	671.0	11.	Magnesium:	439.0	36.11
TDS (mg/l or g/m3):	20702.9	Carbonate:	0.0	0.	Calcium:	1099.0	54.84
Density (g/cm3, tonne/m3):	1.015	Sulfate	2465.0	61.32	Strontium:	28.0	0.64
Anion/Cation Ratio:	1.000000	Phosphate:			Barium:	0.1	0.
		Borate:			Iron:	0.3	0.01
		Silicate:			Potassium:	115.0	2.94
Carbon Dioxide:	80 PPM	Hydrogen Sulfide:		90 PPM	Aluminum:		
Oxygen:		pH at time of sampling:		7.5	Chromium:		
Comments:		pH at time of analysis:			Copper:		
		pH used in Calculation:		7.5	Lead:		
					Manganese:		
					Nickel:		

Conditions		Values Calculated at the Given Conditions - Amounts of Scale in lb/1000 bbl										
Temp	Gauge Press.	Calcite CaCO <sub>3</sub>		Gypsum CaSO <sub>4</sub> ·2H <sub>2</sub> O		Anhydrite CaSO <sub>4</sub>		Celestite SrSO <sub>4</sub>		Barite BaSO <sub>4</sub>		CO <sub>2</sub> Press.
		Index	Amount	Index	Amount	Index	Amount	Index	Amount	Index	Amount	
°F	psi											psi
80	0	1.18	75.54	-0.08	0.00	-0.14	0.00	0.07	2.75	0.75	0.00	0.21
100	0	1.25	85.15	-0.09	0.00	-0.09	0.00	0.07	3.09	0.60	0.00	0.3
120	0	1.33	95.11	-0.10	0.00	-0.02	0.00	0.09	3.78	0.47	0.00	0.42
140	0	1.41	105.41	-0.10	0.00	0.08	129.07	0.11	4.46	0.36	0.00	0.56

Note 1: When assessing the severity of the scale problem, both the saturation index (SI) and amount of scale must be considered.  
 Note 2: Precipitation of each scale is considered separately. Total scale will be less than the sum of the amounts of the five scales.  
 Note 3: The reported CO2 pressure is actually the calculated CO2 fugacity. It is usually nearly the same as the CO2 partial pressure.

EXHIBIT G

# UNICHEM

A Division of BJ Services Company

Lab Test No. 23748

Apache

Sample Date: 3/10/99

## Water Analysis

Listed below please find water analysis report from: NEDU

#919-S

Specific Gravity: 1.009  
 Total Dissolved Solids: 13273  
 pH: 6.49  
 Conductivity (µmhos):  
 Ionic Strength: 0.265

WFX-774 application indicates  
 this is San Andres source water

Cations:		mg/l	
Calcium	(Ca <sup>++</sup> ):	608	
Magnesium	(Mg <sup>++</sup> ):	244	
Sodium	(Na <sup>+</sup> ):	3909	
Iron	(Fe <sup>++</sup> ):	0.00	
Dissolved Iron	(Fe <sup>++</sup> ):		
Barium	(Ba <sup>++</sup> ):	0.38	
Strontium	(Sr):	19	
Manganese	(Mn <sup>++</sup> ):	0.01	
Resistivity:			
Anions:			
Bicarbonate	(HCO <sub>3</sub> <sup>-</sup> ):	562	
Carbonate	(CO <sub>3</sub> <sup>-</sup> ):		
Hydroxide	(OH <sup>-</sup> ):	0	
Sulfate	(SO <sub>4</sub> <sup>-</sup> ):	1750	
Chloride	(Cl <sup>-</sup> ):	6200	
Gases:		ppm	
Carbon Dioxide	(CO <sub>2</sub> ):	80.00	Oxygen (O <sub>2</sub> ):
Hydrogen Sulfide	(H <sub>2</sub> S):	408.00	

Scale Index (positive value indicates scale tendency) a blank indicates some tests were not run

Temperature	CaCO <sub>3</sub> SI	CaSO <sub>4</sub> SI
86F 30.0C	-0.14	-17.28
104F 40.0C	0.09	-17.28
122F 50.0C	0.35	-17.28
140F 60.0C	0.57	-16.80
168F 70.0C	0.87	-15.02
176F 80.0C	1.20	-15.51

Comments:

cc: Jerry White  
 Jay Brown


P.O. Box 61427 • Midland, TX 79711 • 4312 S. County Rd. 1208, Midland, TX 79765  
 Office: (915) 563-0241 • Fax: (915) 563-0243

#0240 P:002/010

UNICHEM LAB

MAR 25 1999 15:26 915 563 0243

EXHIBIT G

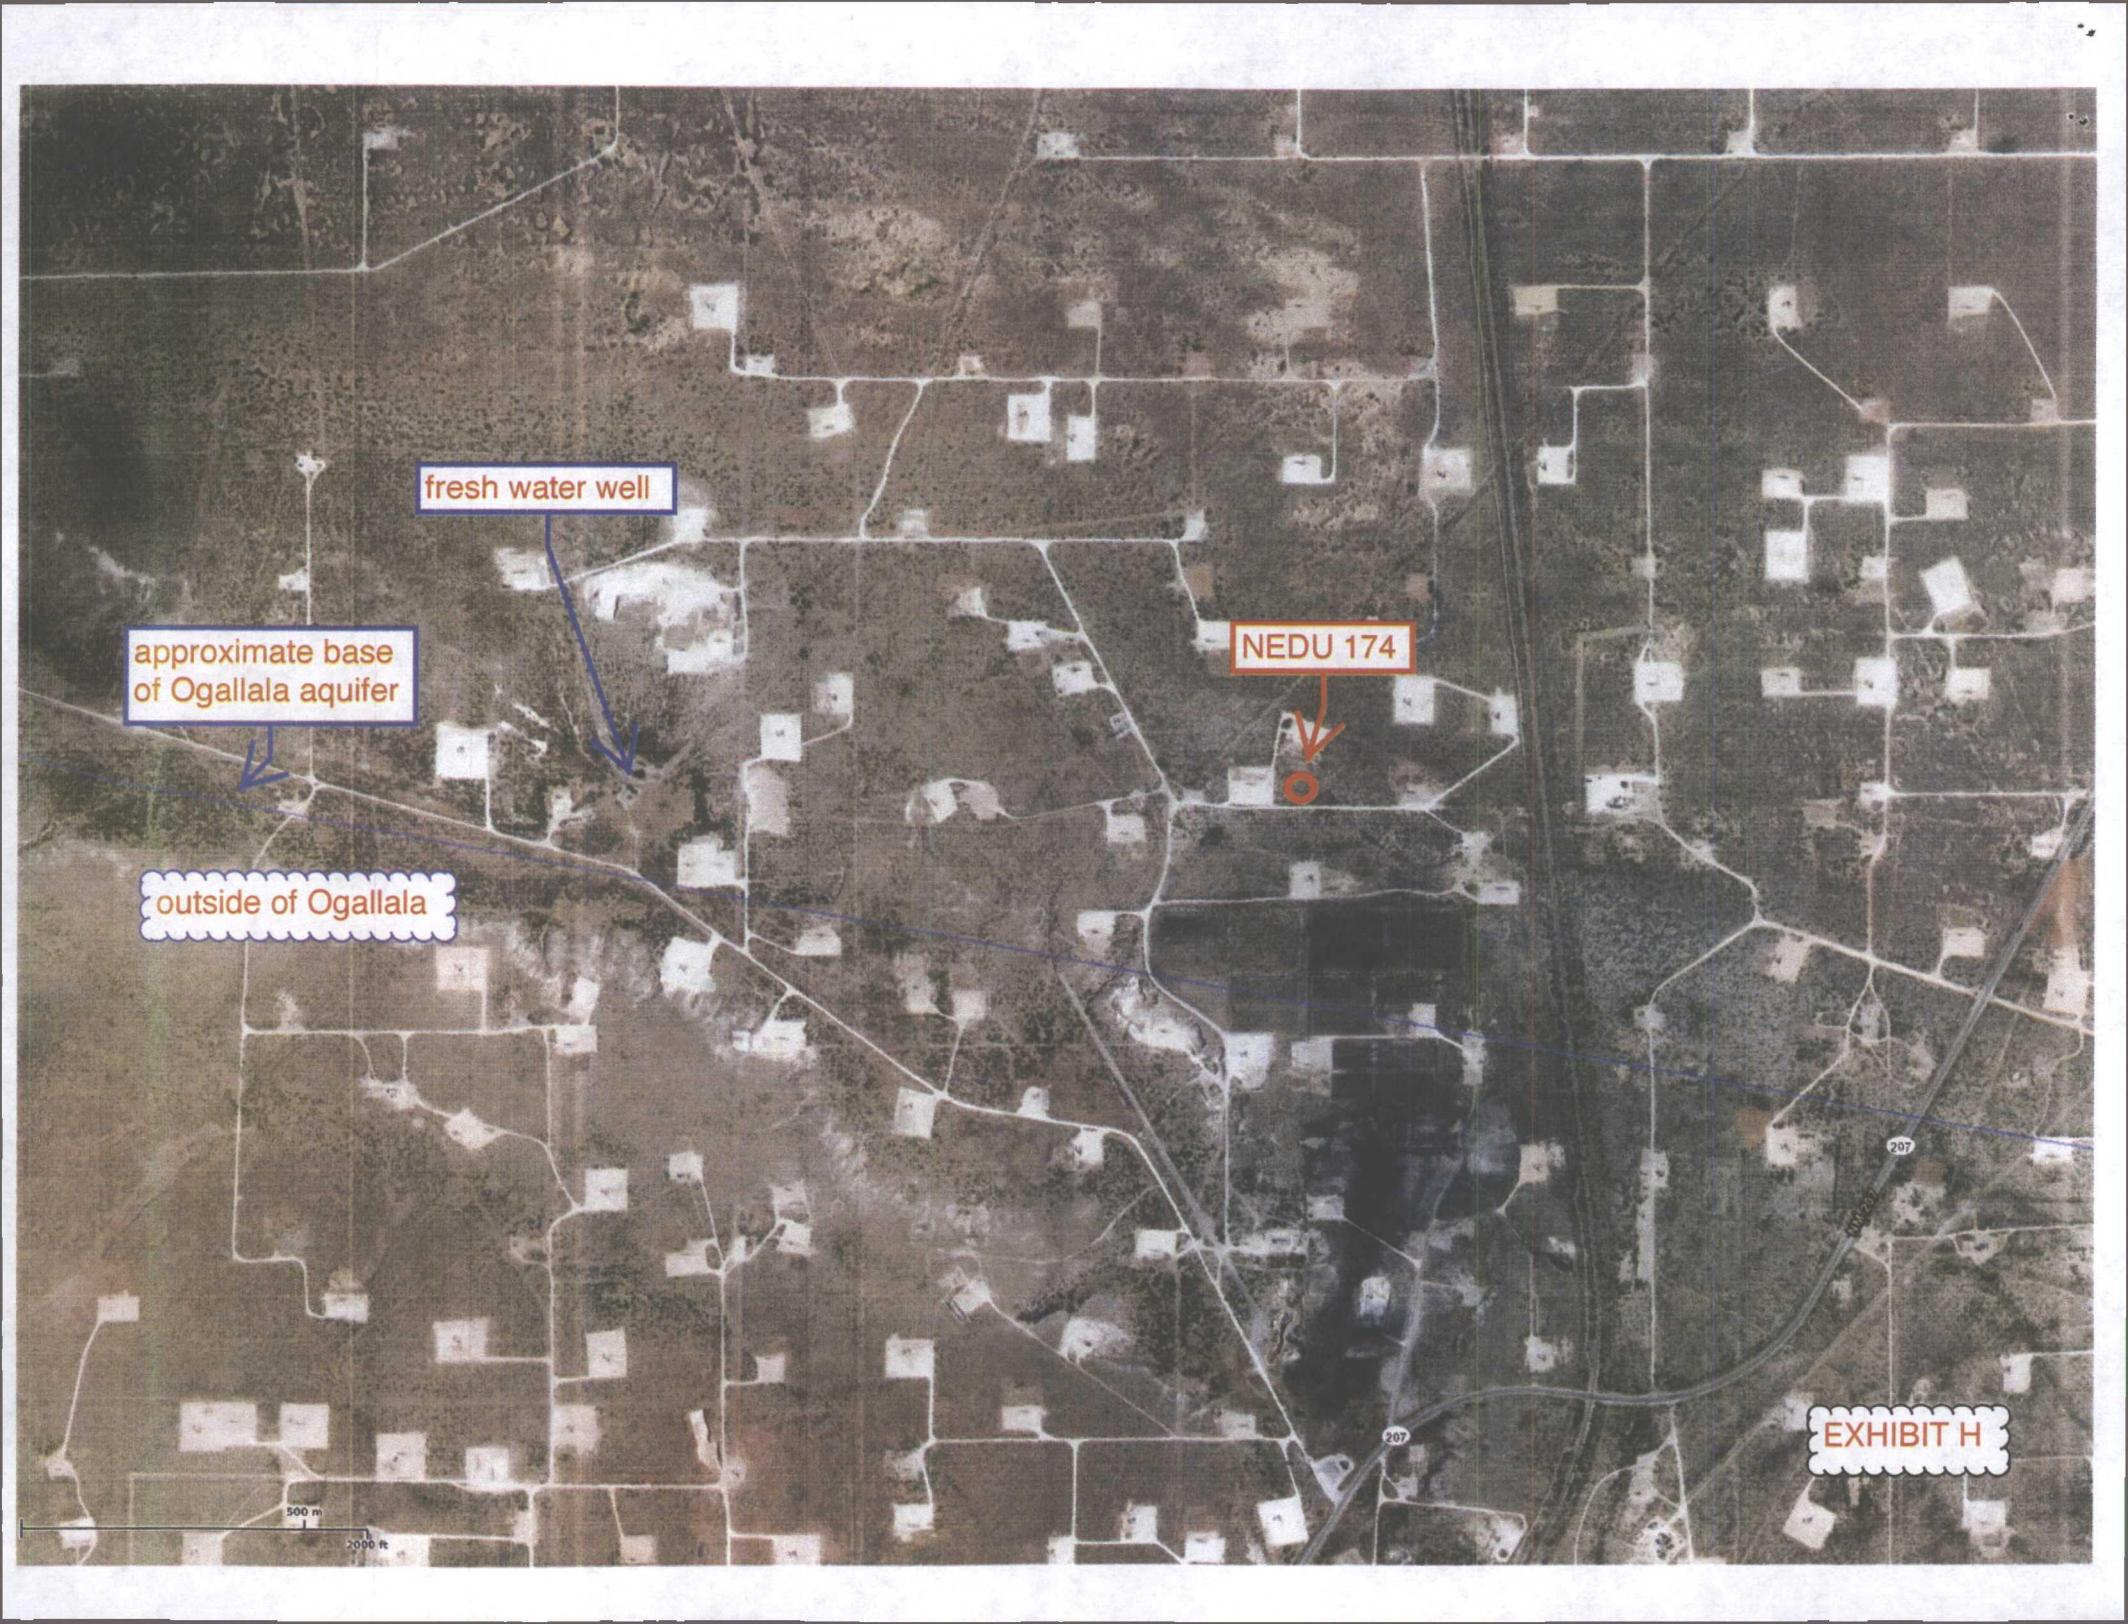

fresh water well

NEDU 174

approximate base  
of Ogallala aquifer

outside of Ogallala

500 m  
2000 ft

EXHIBIT H



# New Mexico Office of the State Engineer

## Water Column/Average Depth to Water

(A CLW##### in the POD suffix indicates the POD has been replaced & no longer serves a water right file.)

(R=POD has been replaced,  
O=orphaned,  
C=the file is closed)

(quarters are 1=NW 2=NE 3=SW 4=SE)  
(quarters are smallest to largest)

(NAD83 UTM in meters)

(In feet)

POD Number	POD Code	Subbasin	County	Q	Q	Q	Sec	Tws	Rng	X	Y	Distance	Depth Well	Depth Water	Water Column
------------	----------	----------	--------	---	---	---	-----	-----	-----	---	---	----------	------------	-------------	--------------

CP 00552		LE		2	4	04	21S	37E		672700	3598022*	1283	90	75	15
----------	--	----	--	---	---	----	-----	-----	--	--------	----------	------	----	----	----

CP 00553		LE		2	4	04	21S	37E		672700	3598022*	1283	90	75	15
----------	--	----	--	---	---	----	-----	-----	--	--------	----------	------	----	----	----

Average Depth to Water: **75 feet**

Minimum Depth: **75 feet**

Maximum Depth: **75 feet**

**Record Count: 2**

**UTMNAD83 Radius Search (in meters):**

**Easting (X): 673677**

**Northing (Y): 3598854**

**Radius: 2000**



\*UTM location was derived from PLSS - see Help

The data is furnished by the NMOSE/ISC and is accepted by the recipient with the expressed understanding that the OSE/ISC make no warranties, expressed or implied, concerning the accuracy, completeness, reliability, usability, or suitability for any particular purpose of the data.

**Hall Environmental Analysis Laboratory, Inc.**

CLIENT: Permits West

Client Sample ID: A NEDU SWD Wind#1

Project: Apache-NEDU SWD

Collection Date: 11/15/2012 6:02:00 PM

Lab ID: 1211780-001

Matrix: AQUEOUS

Received Date: 11/19/2012 1:36:00 PM

Analyses	Result	RL	Qual	Units	DF	Date Analyzed
EPA METHOD 1664A						Analyst: JAL
N-Hexane Extractable Material	6.9	5.0		mg/L	1	11/26/2012

EXHIBIT H

**Qualifiers:**

- \* Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH greater than 2
- RL Reporting Detection Limit

- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- S Spike Recovery outside accepted recovery limits

**Analytical Report**

Lab Order 1211780

Date Reported: 11/28/2012

**Hall Environmental Analysis Laboratory, Inc.**

**CLIENT:** Permits West

**Client Sample ID:** A NEDU SWD Wind #2

**Project:** Apache-NEDU SWD

**Collection Date:** 11/15/2012 6:02:00 PM

**Lab ID:** 1211780-002

**Matrix:** AQUEOUS

**Received Date:** 11/19/2012 1:36:00 PM

Analyses	Result	RL	Qual	Units	DF	Date Analyzed
<b>SM2540C MOD: TOTAL DISSOLVED SOLIDS</b>						Analyst: <b>JML</b>
Total Dissolved Solids	1520	20.0		mg/L	1	11/21/2012 1:57:00 PM

**EXHIBIT H**

**Qualifiers:**

- \* Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH greater than 2
- RL Reporting Detection Limit

- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- S Spike Recovery outside accepted recovery limits

# QC SUMMARY REPORT

## Hall Environmental Analysis Laboratory, Inc.

WO#: 1211780

28-Nov-12

**Client:** Permits West  
**Project:** Apache-NEDU SWD

Sample ID	MB-4953	SampType:	MBLK	TestCode:	EPA Method 1664A					
Client ID:	PBW	Batch ID:	4953	RunNo:	7100					
Prep Date:	11/26/2012	Analysis Date:	11/26/2012	SeqNo:	205931	Units:	mg/L			
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
N-Hexane Extractable Material	ND	5.0								

Sample ID	LCS-4953	SampType:	LCS	TestCode:	EPA Method 1664A					
Client ID:	LCSW	Batch ID:	4953	RunNo:	7100					
Prep Date:	11/26/2012	Analysis Date:	11/26/2012	SeqNo:	205932	Units:	mg/L			
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
N-Hexane Extractable Material	34	5.0	40.00	0	84.8	78	114			

Sample ID	MB-4953	SampType:	MBLK	TestCode:	EPA Method 1664A					
Client ID:	PBW	Batch ID:	4953	RunNo:	7101					
Prep Date:	11/26/2012	Analysis Date:	11/27/2012	SeqNo:	205949	Units:	mg/L			
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Silica Gel Treated N-Hexane Extrac	ND	5.0								

Sample ID	LCS-4953	SampType:	LCS	TestCode:	EPA Method 1664A					
Client ID:	LCSW	Batch ID:	4953	RunNo:	7101					
Prep Date:	11/26/2012	Analysis Date:	11/27/2012	SeqNo:	205950	Units:	mg/L			
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Silica Gel Treated N-Hexane Extrac	13	5.0	20.00	0	66.5	64	132			

EXHIBIT H

**Qualifiers:**

- \* Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH greater than 2
- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits

# QC SUMMARY REPORT

## Hall Environmental Analysis Laboratory, Inc.

WO#: 1211780

28-Nov-12

**Client:** Permits West  
**Project:** Apache-NEDU SWD

Sample ID	MB-4917	SampType:	MBLK	TestCode:	SM2540C MOD: Total Dissolved Solids					
Client ID:	PBW	Batch ID:	4917	RunNo:	7074					
Prep Date:	11/20/2012	Analysis Date:	11/21/2012	SeqNo:	204919	Units:	mg/L			
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Total Dissolved Solids	ND	20.0								

Sample ID	LCS-4917	SampType:	LCS	TestCode:	SM2540C MOD: Total Dissolved Solids					
Client ID:	LCSW	Batch ID:	4917	RunNo:	7074					
Prep Date:	11/20/2012	Analysis Date:	11/21/2012	SeqNo:	204920	Units:	mg/L			
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Total Dissolved Solids	996	20.0	1000	0	99.6	80	120			

Sample ID	1211677-002AMS	SampType:	MS	TestCode:	SM2540C MOD: Total Dissolved Solids					
Client ID:	BatchQC	Batch ID:	4917	RunNo:	7074					
Prep Date:	11/20/2012	Analysis Date:	11/21/2012	SeqNo:	204932	Units:	mg/L			
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Total Dissolved Solids	1050	20.0	1000	36.00	101	80	120			

Sample ID	1211677-002AMSD	SampType:	MSD	TestCode:	SM2540C MOD: Total Dissolved Solids					
Client ID:	BatchQC	Batch ID:	4917	RunNo:	7074					
Prep Date:	11/20/2012	Analysis Date:	11/21/2012	SeqNo:	204933	Units:	mg/L			
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Total Dissolved Solids	1060	20.0	1000	36.00	103	80	120	1.42	5	

EXHIBIT H

**Qualifiers:**

- \* Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH greater than 2
- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits



## Geologic Hazards Science Center

### EHP Quaternary Faults

Search for fault:

Select a state or region map:

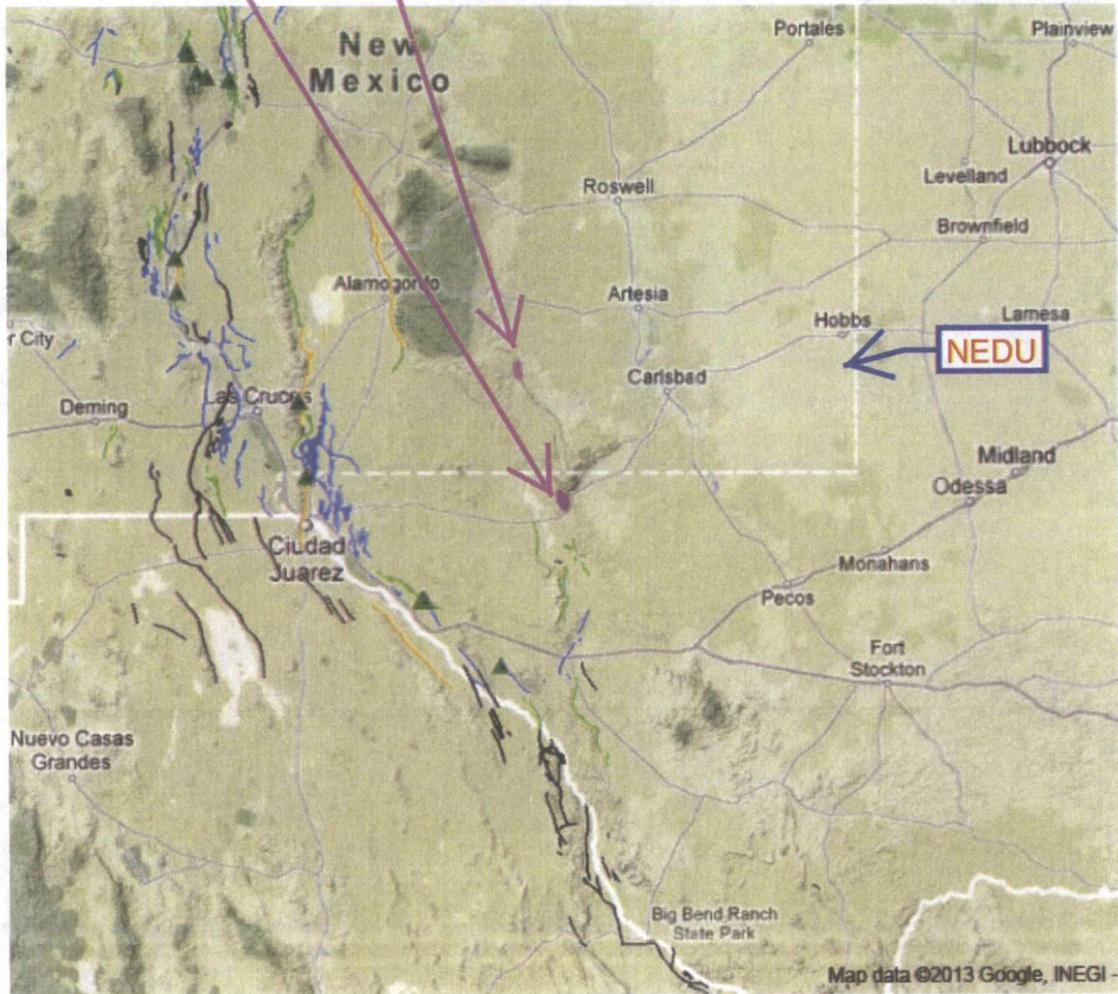


EXHIBIT I

**PERMITS WEST, INC.**  
 PROVIDING PERMITS for LAND USERS  
 37 Verano Loop, Santa Fe, New Mexico 87508 (505) 466-8120

February 22, 2013

Elizabeth Gervis Taylor, et al  
 614 W. Parkside Dr.  
 Palatine, IL 60067

Dear Ms. Taylor:

Apache Corporation is applying (see attached application) to drill its Northeast Drinkard Unit #174 well as a water injection well. As required by NM Oil Conservation Division (NMOCD) Rules, I am notifying you of the following proposed water injection well. This letter is a notice only. No action is needed unless you have questions or objections.

Well Name: Northeast Drinkard Unit #174 (private lease) TD = 7,000'  
Proposed Injection Zone: Drinkard from 6,537' to 6,814'  
Location: 3220' FNL & 2605' FWL Sec. 3, T. 21 S., R. 37 E., Lea County, NM  
Approximate Location: ~5 air miles north of Eunice, NM  
Applicant Name: Apache Corporation (432) 818-1167  
Applicant's Address: 303 Veterans Airpark Lane, #3000, Midland, TX 79705

Submittal Information: Application for a water injection well will be filed with the NMOCD. If you have an objection, or wish to request a hearing, then it must be filed with the NMOCD within 15 days of receipt of this letter. The New Mexico Oil Conservation Division address is 1220 South St. Francis Dr. Santa Fe, NM 87505. Their phone number is (505) 476-3440.

Please call me if you have any questions.


Sincerely,



Brian Wood

EXHIBIT J

7012 0470 0001 5938 5637
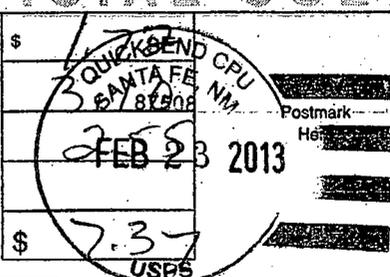
<b>U.S. Postal Service™</b>	
<b>CERTIFIED MAIL™ RECEIPT</b>	
<i>(Domestic Mail Only; No Insurance Coverage Provided)</i>	
For delivery information, visit our website at <a href="http://www.usps.com">www.usps.com</a>	
<b>OFFICIAL USE</b>	
Postage	\$
Certified Fee	
Return Receipt Fee (Endorsement Required)	
Restricted Delivery Fee (Endorsement Required)	
Total Postage & Fees	\$ 7.37
	
Sent To	
Taylor	
Street, Apt. No., or PO Box No.	
City, State, ZIP+4	
PS Form 3800, August 2006 See Reverse for Instructions	

# Affidavit of Publication

State of New Mexico,  
County of Lea.

I, JUDY HANNA  
PUBLISHER


of the Hobbs News-Sun, a  
newspaper published at Hobbs, New  
Mexico, do solemnly swear that the  
clipping attached hereto was  
published in the regular and entire  
issue of said newspaper, and not a  
supplement thereof for a period

of 1 issue(s).

Beginning with the issue dated  
February 05, 2013  
and ending with the issue dated  
February 05, 2013


  
PUBLISHER

Sworn and subscribed to before me  
this 5th day of  
February, 2013



Notary Public

My commission expires  
January 29, 2015  
(Seal)

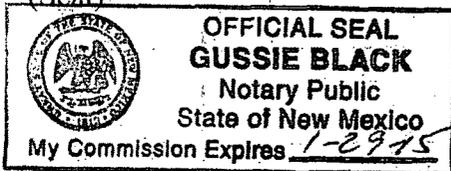

This newspaper is duly qualified to  
publish legal notices or  
advertisements within the meaning of  
Section 3, Chapter 167, Laws of  
1937 and payment of fees for said  
publication has been made.

LEGAL	LEGAL
<b>Legal Notice</b> <b>February 5, 2013</b>	
<p>Apache Corporation is applying to drill the Northeast Drinkard Unit #174 well as a water injection well. The well is staked at 3220 FNL &amp; 2605 FWL, Sec. 3, T. 21 S., R. 37 E., Lea County, NM. This is 5 miles north of Eunice, NM. It will inject water into the Drinkard (maximum injection pressure = 1,307 psi) from 6,537' to 6,815'. Injection will be at a maximum rate of 1,000 bwpd. Interested parties must file objections or requests for hearing with the NM Oil Conservation Division, 1220 South Saint Francis Dr., Santa Fe, NM 87505 within 15 days. Additional information can be obtained by contacting: Brian Wood, Permits West, Inc., 37 Verano Loop, Santa Fe, NM 87508. Phone number is (505) 466-8120.</p> <p>#27885</p>	

02108485      00108591  
BRIAN WOOD  
PERMITS WEST  
37 VERANO LOOP  
SANTA FE, NM 87508

EXHIBIT K

Northeast Drinkard Unit 174

two mile radius

EXHIBIT C

