



STATE OF NEW MEXICO
ENERGY AND MINERALS DEPARTMENT
OIL CONSERVATION DIVISION

TONEY ANAYA
GOVERNOR

POST OFFICE BOX 2088
STATE LAND OFFICE BUILDING
SANTA FE, NEW MEXICO 87501
(505) 827-5800

June 25, 1984

HNG Oil Co.
P.O. Box 2267
Midland, Texas 79702

Attention: Betty Gildon

Administrative Order TX-135

Dear Ms. Gildon:

Reference is made to your request for an exception to the tubing setting requirements as contained in Division Rule 107(d)(3) for the below-named well.


Pursuant to the authority granted me by Rule 107(d)(4), you are hereby authorized to set tubing at 12,640 feet in the following well:

Well Name and Number: Pitchfork Ranch 28 Federal Com
Well No. 1

Location: Unit G, Sec. 28, T-24S, R-34E, Lea County, NM

The Division reserves the right to rescind this authority in the event that waste appears to be resulting therefrom.

Very truly yours,

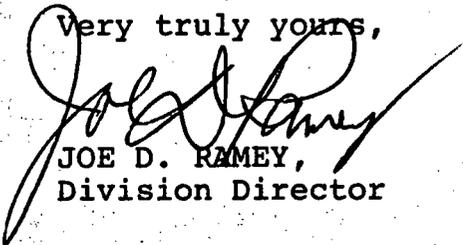
JOE D. RAMEY,
Division Director

JDR/MES/dr

cc: Oil Conservation Division - Hobbs

PVZV0002005036936




P. O. BOX 2267, MIDLAND, TEXAS 79702 (915) 683-4871

ok

February 22, 1984

Oil Conservation Commission
State of New Mexico
P. O. Box 2088
Santa Fe, NM 87501

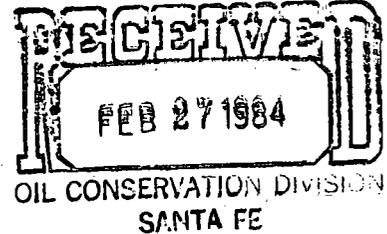

Attn: Mr. Dan Nutter

In Re: Pitchfork Ranch 28 Federal Com., Well No. 1
Sec. 28, T24S, R34E, Lea County, NM
NM 19452

Dear Mr. Nutter:

Tubing for the above-named well has been set at 12,640 feet, and casing perforated from 14,793 to 14,883 feet.

This office requests administrative exception to Rule 107d.

Very truly yours,

HNG OIL COMPANY

Betty Gildon
Regulatory Analyst


bg

enclosures



P. O. BOX 2267, MIDLAND, TEXAS 79702 (915) 683-4871

February 22, 1984

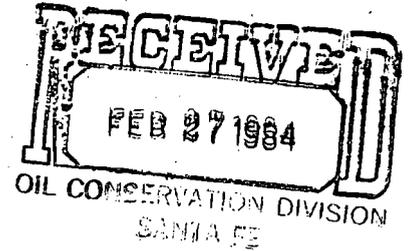

Oil Conservation Division
State Land Office Bldg.
Santa Fe, New Mexico 87501

Attn: Mr. Dan Nutter:

Re: Pitchfork Ranch 28 Federal Com., Well #1
Sec. 28, T24S, R34E, Lea County, NM
NM 19452

Dear Mr. Nutter:

There are several reasons why we feel that completions utilizing a TIW Polish Bore Receptacle or Insert Seal Assembly is the most advantageous method to complete a well.

- (1) The inside diameter of the seal assembly is the same as the diameter of the tubing. Therefore, there is no restriction that would reduce the size of Wireline Tools that could be run in the hole.
- (2) The Polish Bore Receptacle has a full bore opening to the liner below it. This allows us to run bridge plugs, retainers, or bits into the liner if necessary.
- (3) The seal assembly - PBR hook-up allows for tubing movement while treating the well. It will withstand higher treating pressures during stimulation than would be possible with most other production packers.
- (4) In most of the wells drilled in this area there are several zones of interest. By having the seal assembly stung into the PBR, the lowest zone can be tested and if non-productive squeezed. The next zone of interest can then be perforated, acidized and tested. All this can be accomplished without pulling the tubing. This can save a considerable amount of time and money.

The Polish Bore Receptacle is run on the top of the liner. The Insert Seal Assembly sets in the tie back sleeve at the top of the liner.

We feel that this Packer system not only saves us a considerable amount of time and money, but also is the most reliable Packer system available. Of the several hundred wells in which HNG Oil Company has utilized this system over the past years, we have had very few failures. If you have any questions, please feel free to give me a call.

Very truly yours,

George M. Hover
George M. Hover
Completion Engineer

GMH/bg

**UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY**

SUBMIT IN DUPLICATE*
(See other instructions on reverse side)

Form approved.
Budget Bureau No. 42-R355.5.

5. LEASE DESIGNATION AND SERIAL NO.

NM 19452

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

UNIT AGREEMENT NAME

FARM OR LEASE NAME

Pitchfork Ranch 28 Fed. Com

WELL NO.

1

10. FIELD AND POOL, OR WILDCAT

Pitchfork Ranch Morrow

11. SEC., T., R., M., OR BLOCK AND SURVEY OR AREA

Sec. 28, T24S, R34E

12. COUNTY OR PARISH

Lea NM

13. STATE

19. ELEV. CASINGHEAD

3476'

23. INTERVALS DRILLED BY

X

25. WAS DIRECTIONAL SURVEY MADE

No

27. WAS WELL CORED

No

1a. TYPE OF WELL: OIL WELL GAS WELL DRY Other

b. TYPE OF COMPLETION: NEW WELL WORK OVER DEEP-EN PLUG BACK DIFF. LESVR. Other

2. NAME OF OPERATOR
HNG OIL COMPANY

3. ADDRESS OF OPERATOR
P. O. Box 2267, Midland, Texas 79702

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)*

At surface 1980' FNL & 1980' FEL

At top prod. interval reported below
Same

At total depth
Same

14. PERMIT NO. DATE ISSUED
- 11/15/83

15. DATE SPUNDED 16. DATE T.D. REACHED 17. DATE COMPL. (Ready to prod.) 18. ELEVATIONS (DF, BKB, RT, GR, ETC.)* 19. ELEV. CASINGHEAD
12-2-83 1-24-84 2-7-84 3476' GR 3476'

20. TOTAL DEPTH, MD & TVD 21. PLUG, BACK T.D., MD & TVD 22. IF MULTIPLE COMPL., HOW MANY* 23. INTERVALS DRILLED BY ROTARY TOOLS CABLE TOOLS
15,250' 15,205' -> X

24. PRODUCING INTERVAL(S), OF THIS COMPLETION—TOP, BOTTOM, NAME (MD AND TVD)* 25. WAS DIRECTIONAL SURVEY MADE
14,793 - 14,883 (Morrow) No

26. TYPE ELECTRIC AND OTHER LOGS RUN 27. WAS WELL CORED
Comp. of Dual Laterolog and Dual Ind., Comp. Neutron-Litho Dens. No

28. CASING RECORD (Report all strings set in well)

CASING SIZE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	CEMENTING RECORD	AMOUNT PULLED
13-3/8"	61#	595'	17-1/2"	265 HLC & 250 C1 C	Circulated
9-5/8"	36# & 40#	5250'	12-1/4"	2000 HLC & 500 C1 C	Circulated
7"	26#	13000'	8-3/4"	775 HLW & 400 C1 H	-

29. LINER RECORD				30. TUBING RECORD			
SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT*	SCREEN (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)
4-1/2"	12,640'	15,250'	475 C1 H	-	2-7/8"	12,640'	PBR 12,640'

31. PERFORATION RECORD (Interval, size and number)		32. ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.	
INTERVAL (MD)	SIZE	DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED
14,793' - 14,883'	(.20" 33)	14,793 - 14,883	None

33.* PRODUCTION							
DATE FIRST PRODUCTION		PRODUCTION METHOD (Flowing, gas lift, pumping—size and type of pump)				WELL STATUS (Producing or shut-in)	
2-7-84		Flowing				Shut-in	
DATE OF TEST	HOURS TESTED	CHOKE SIZE	PROD'N. FOR TEST PERIOD	OIL—BBL.	GAS—MCF.	WATER—BBL.	GAS-OIL RATIO
2-13-84	24	10/64"	->	2	3500	1	1750
FLOW. TUBING PRESS.	CASING PRESSURE	CALCULATED 24-HOUR RATE	OIL—BBL.	GAS—MCF.	WATER—BBL.	OIL GRAVITY-API (CORR.)	
5000	Sealed	->				40.0	

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.) TEST WITNESSED BY
Vented

35. LIST OF ATTACHMENTS

Logs

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records

SIGNED Betty Giddon TITLE Regulatory Analyst DATE 2/22/84

*(See Instructions and Spaces for Additional Data on Reverse Side)

INSTRUCTIONS

General: This form is designed for submitting a complete and correct well completion report and log on all types of lands and leases to either a Federal agency or a State agency, or both, pursuant to applicable Federal and/or State laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office. See instructions on items 22 and 24, and 33, below regarding separate reports for separate completions.

If not filed prior to the time this summary record is submitted, copies of all currently available logs (drillers, geologists, sample and core analysis, all types electric, etc.), formation and pressure tests, and directional surveys, should be attached hereto, to the extent required by applicable Federal and/or State laws and regulations. All attachments should be listed on this form, see item 35.

Item 4: If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

Item 18: Indicate which elevation is used as reference (where not otherwise shown) for depth measurements given in other spaces on this form and in any attachments.

Items 22 and 24: If this well is completed for separate production from more than one interval zone (multiple completion), so state in item 22, and in item 24 show the producing interval, or intervals, top(s), bottom(s) and name(s) (if any) for only the interval reported in item 33. Submit a separate report (page) on this form, adequately identified, for each additional interval to be separately produced, showing the additional data pertinent to such interval.

Item 29: "Sacks Cement": Attached supplemental records for this well should show the details of any multiple stage cementing and the location of the cementing tool.

Item 33: Submit a separate completion report on this form for each interval to be separately produced. (See instruction for items 22 and 24 above.)

37. SUMMARY OF POROUS ZONES:

SHOW ALL IMPORTANT ZONES OF POROSITY AND CONTENTS THEREOF; CORED INTERVALS; AND ALL DRILL-STEM TESTS, INCLUDING DEPTH INTERVAL TESTED, CUSHION USED, TIME TOOL OPEN, FLOWING AND SHUT-IN PRESSURES, AND RECOVERIES

FORMATION	TOP	BOTTOM	DESCRIPTION, CONTENTS, ETC.
	0	1322	Surface Rock and Redbeds
	1322	3830	Salt, Anhy, Shale
Cherry Canyon	3830	6181	100% Anhy
Bone Springs	6181	9720	Sand, Shale, Lime
Wlfcamp, Strawn, Atoka	9720	13705	Chert, Lime, Shale, Sand
Morrow	13705	15250	Sand, Shale, Lime

38. GEOLOGIC MARKERS

NAME	TOP	
	MEAS. DEPTH	TRUE VERT. DEPTH
Delaware	5353	
Cherry Canyon	6315	
C. Canyon Marker	6538	
Bone Springs	9215	
Wolfcamp	12225	
Strawn	13450	
Atoka	13592	
Morrow Lime	14020	
Morrow Clastics	14288	