

August 18, 1995

Enron Oil & Gas Company
P. O. Box 2267
Midland, Texas 79702

Attention: Betty Gildon

Administrative Order TX-228

Dear Ms. Gildon:

Reference is made to your request for an exception to the tubing setting requirements as contained in Division Rule 107 (d) (3) for the below-named well.

Pursuant to the authority granted me by Rule 107 (d) (4), you are hereby authorized to make a tubingless completion in the following well:


Well Name and Number: Javelina 17 Federal Well No. 2

Location: Section 17, Township 25 South, Range 34 East, NMPM,
Lea County, New Mexico

Remarks: Production tubing will be required when this well ceases to flow.

The Division reserves the right to rescind this authority in the event that waste appears to be resulting therefrom.

Sincerely,

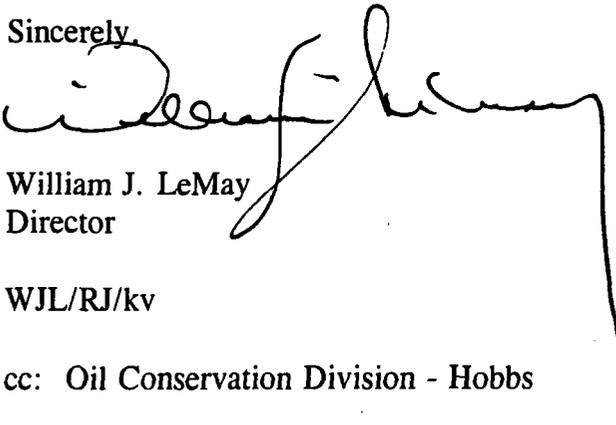
William J. LeMay
Director

WJL/RJ/kv

cc: Oil Conservation Division - Hobbs

PV2V2005536950

OIL CONSERVATION DIVISION
RECEIVED

ENRON
Oil & Gas Company

'95 AUG 17 AM 8 52

P. O. Box 2267 Midland, Texas 79702 (915) 686-3600

August 14, 1995

Mr. William J. LeMay, Director
New Mexico Oil Conservation Commission
P. O. Box 2088
Santa Fe, New Mexico 87501

Re: Javelina 17 Federal No. 2
Sec 17, T25S, R34E
Red Hills Field
Lea County, New Mexico

Dear Mr. LeMay:

Enron Oil & Gas respectfully requests your approval to complete and produce the above-referenced well from the Bone Spring formation (perforations 12260 -12288) without the use of production tubing . The referenced well contains the following tubulars:

<u>CASING</u>	<u>GRADE</u>	<u>DEPTH</u>	<u>TOP OF CEMENT</u>
11-3/4"	H-40	653	Circulated
8-5/8"	FS80 & J-55	5035	Circulated
5-1/2"	P-110 & CF95	12492	5500

The well was fracture treated via the 5-1/2" production casing and has been allowed to flowback through that casing to achieve faster cleanup and to minimize the risk of formation damage. Our plans are to install 2-7/8" production tubing when the well ceases to flow, which should occur within the first year or two of production.


We believe this "tubingless" completion technique is completely safe and effective for the following reasons:

- The well is in a known producing field
- No corrosive or pressure problems are know to exist
- The well is a single completion
- The 5-1/2" production string has been cemented into the base of the 8-5/8" casing
- The 5-1/2" is very high strength casing
- The stabilized after-frac flowing tubing pressures are low (less than 1,000 psig)
- The technique lowers the cost of the completion, thereby improving the economics of the project

Thank you for your consideration of this request. If you need additional information, please contact me.

Sincerely,

Betty A. Gildon



Regulatory Analyst

cc: NMOCD-HOBBS