



STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT

OIL CONSERVATION DIVISION

2040 S. PACHECO
SANTA FE, NEW MEXICO 87505
(505) 827-7131

September 29, 1995

Enron Oil & Gas Company
P. O. Box 2267
Midland, Texas 79702

Attention: Betty Gildon

Administrative Order TX-231

Dear Ms. Gildon:

Reference is made to your request for an exception to the tubing setting requirements as contained in Division Rule 107 (d) (3) for the below-named well.

Pursuant to the authority granted me by Rule 107 (d) (4), you are hereby authorized to make a tubingless completion in the following well:


Well Name and Number: Hallwood Federal Well No. 5

Location: Section 1, Township 25 South, Range 33 East, NMPM,
Lea County, New Mexico

Remarks: Production tubing will be required when this well ceases to flow.

The Division reserves the right to rescind this authority in the event that waste appears to be resulting therefrom.

Sincerely,

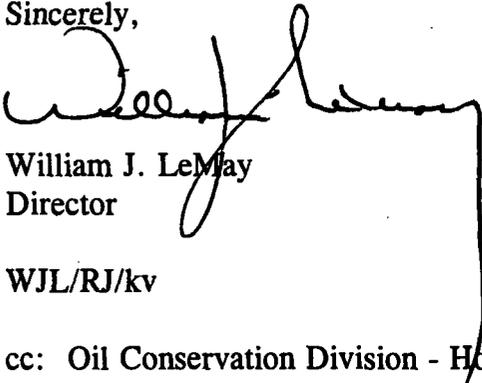

William J. Lemay
Director

WJL/RJ/kv

cc: Oil Conservation Division - Hobbs

PVZV2005629796

OIL CONSERVATION DIVISION
RECEIVED

'95 SEP 28 AM 8 52

ENRON Oil & Gas Company

P. O. Box 2267 Midland, Texas 79702 (915) 686-3600
September 22, 1995

Mr. William J. LeMay, Director
New Mexico Oil Conservation Commission
P. O. Box 2088
Santa Fe, New Mexico 87501

Re: Hallwood 1 Federal No. 5
Sec 1, T25S, R33E
Red Hills Field
Lea County, New Mexico

Dear Mr. LeMay:

Enron Oil & Gas respectfully requests your approval to complete and produce the above-referenced well from the Bone Spring formation (perforations 12266 -12360) without the use of production tubing . The referenced well contains the following tubulars:

<u>CASING</u>	<u>GRADE</u>	<u>DEPTH</u>	<u>TOP OF CEMENT</u>
11-3/4"	H-40	668	Circulated
8-5/8"	K-55	4930	Circulated
5-1/2"	P-110 & CF95	12550	4900

The well was fracture treated via the 5-1/2" production casing and has been allowed to flowback through that casing to achieve faster cleanup and to minimize the risk of formation damage. Our plans are to install 2-7/8" production tubing when the well ceases to flow, which should occur within the first year or two of production.

We believe this "tubingless" completion technique is completely safe and effective for the following reasons:

- The well is in a known producing field
- No corrosive or pressure problems are know to exist
- The well is a single completion
- The 5-1/2" production string has been cemented into the base of the 8-5/8" casing
- The 5-1/2" is very high strength casing
- The stabilized after-frac flowing tubing pressures are low (less than 1,000 psig)
- The technique lowers the cost of the completion, thereby improving the economics of the project

Thank you for your consideration of this request. If you need additional information, please contact me.

Sincerely,


Betty A. Gildon

cc: NMOCD-HOBBS

Part of the Enron Group of Energy Companies Regulatory Analyst

5150-4
(July 1992)

CONFIDENTIAL UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

SUBMIT IN DUPLICATE*

(See other instructions on reverse side)

FORM APPROVED
OMB NO. 1004-0137
Expires: February 28, 1995

5. LEASE DESIGNATION AND SERIAL NO.

NM 19859

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME, WELL NO.

Hallwood 1 Federal #5

9. API WELL NO.

30 025 33070

10. FIELD AND POOL, OR WILDCAT

Red Hills Bone Spring

11. SEC., T., R., M., OR BLOCK AND SURVEY OR AREA

Sec 1, T25S, R33E

12. COUNTY OR PARISH
Lea

13. STATE
NM

WELL COMPLETION OR RECOMPLETION REPORT AND LOG*

1a. TYPE OF WELL: OIL WELL GAS WELL DRY Other _____

b. TYPE OF COMPLETION: NEW WELL WORK OVER DEEPEN PLUG BACK DIFF. EXHA. Other _____

2. NAME OF OPERATOR

Enron Oil & Gas Company

3. ADDRESS AND TELEPHONE NO.

P. O. Box 2267, Midland, Texas 79702

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)*

At surface
2130' FNL & 2130' FEL
At top prod. interval reported below
2130' FNL & 2130' FEL
At total depth
2130' FNL & 2130' FEL

14. PERMIT NO. - DATE ISSUED 8-17-95

15. DATE SPUNDED 8-24-95 16. DATE T.D. REACHED 9-9-95 17. DATE COMPL. (Ready to prod.) 9-14-95 18. ELEVATIONS (DF, RKB, ST, CR, ETC.)* 3447' GR 19. ELEV. CASINGHEAD 3447

20. TOTAL DEPTH, MD & TYD 12550 21. PLUG, BACK T.D., MD & TYD 12450 22. IF MULTIPLE COMPL., HOW MANY* 23. INTERVALS DRILLED BY → 24. PRODUCING INTERVAL(S), OF THIS COMPLETION—TOP, BOTTOM, NAME (MD AND TYD)* 12266-12360 (3rd Bone Spring) 25. WAS DIRECTIONAL SURVEY MADE No 26. TYPE ELECTRIC AND OTHER LOGS RUN DAC/FWAVE; ZDL/CN/GR 27. WAS WELL CORRED No

24. PRODUCING INTERVAL(S), OF THIS COMPLETION—TOP, BOTTOM, NAME (MD AND TYD)*

12266-12360 (3rd Bone Spring)

26. TYPE ELECTRIC AND OTHER LOGS RUN

DAC/FWAVE; ZDL/CN/GR

27. WAS WELL CORRED

No

28. CASING RECORD (Report all strings set in well)

CASING SIZE/GRADE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	TOP OF CEMENT, CEMENTING RECORD	AMOUNT PULLED
11-3/4 H-40 ST&C	42	668	14-3/4	350 Prem Plus	CIRCULATED
8-5/8 K-55 ST&C	32	4930	11	1400 Prem H Lite	CIRCULATED
5-1/2 CF-95 & P-110 LT&C	17	12550	7-7/8	1087 Prem + & 235 Prem 50/50 Poz A	TOC 4900' per Temp Survey

29. LINER RECORD 30. TUBING RECORD

SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT*	SCREEN (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)
					None		

31. PERFORATION RECORD (Interval, size and number) 32. ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.

12266-12360 (.62" 208)

DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED
12266-12360	89,000 gal Medallion 3000 with 153,000# 20-40 Interprop Plus

33. PRODUCTION

DATE FIRST PRODUCTION 9-17-95 PRODUCTION METHOD (Flowing, gas lift, pumping—size and type of pump) Flowing WELL STATUS (Producing or shut-in) Producing

DATE OF TEST 9-19-95 HOURS TESTED 24 CHOKE SIZE 17/64 PROD'N. FOR TEST PERIOD → OIL—BSL. 707 GAS—MCF. 935 WATER—BSL. 57 GAS-OIL RATIO 1322

FLOW, TURNING POINT, CASINO PRESSURE 1400 CALCULATED 24-HOUR RATE → OIL—BSL. GAS—MCF. WATER—BSL. OIL GRAVITY-API (CORR.) 45.0

34. DISPOSITION OF GAS (Bold, used for fuel, vented, etc.) TEST WITNESSED BY

Sold

35. LIST OF ATTACHMENTS

Logs

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records

SIG Betty Gildon Betty Gildon TITLE Regulatory Analyst DATE 9/22/95

*(See Instructions and Spaces for Additional Data on Reverse Side)

37. SUMMARY OF POROUS ZONES: (Show all important zones of porosity and contents thereof; cored intervals; and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries):

38. GEOLOGIC MARKERS

FORMATION	TOP	BOTTOM	DESCRIPTION, CONTENTS, ETC.	NAME	TOP	
					MEAS. DEPTH	TRUE VERT. DEPTH
	0	4620	Salt, Anhy			
Delaware	4620	5930	Lime			
Delaware & Bone	5930	8610	Lime, Sand	Delaware	5146	
Spring	8610	9480	Lime, Sand, Shale	Bone Spring	9250	
Bone Spring	9480	10985	Lime, Shale	Wolfcamp	12384	
Bone Spring &	10985	11535	Lime, Shale, Chert			
Wolfcamp	11535	12550	Lime, Shale, Sand			