

DHC 4/4/00

2701

20 North Broadway, Suite 1500
Oklahoma City, Oklahoma 73102-8260


Telephone 405/235-3611
FAX 405/552-4550

devon
ENERGY CORPORATION

March 10, 2000

Certified Mail No. Z 068 589 789

STATE OF NEW MEXICO
Energy, Minerals and Natural Resources Dept.
Oil Conservation Division
2040 S. Pacheco
Santa Fe, NM 87505-6429

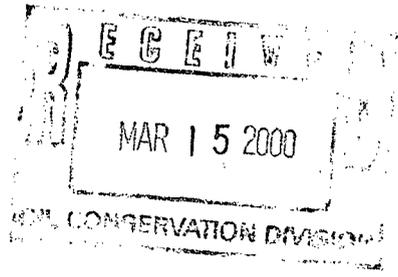

RE: Downhole Commingling
Logan 35 B Federal #8
Section N-35-17S-27E
API #30-015-30440
Red Lake (Q-GB-SA) and
Red Lake (Glorieta-Yeso), NE Fields
Eddy County, NM

Gentlemen:

Concerning the referenced, enclosed please find the Form C-107A Application for Downhole Commingling and attachments (and three copies).

Please direct inquiries concerning this application to Ernie Buttross at (405) 235-3611, X4509.

Yours truly,

DEVON ENERGY CORPORATION (NEVADA)

Tonja Rutelonis
Engineering Tech.

/trr
Enclosures

DISTRICT I
P.O. Box 1980, Hobbs, NM 88241-1980
DISTRICT II
811 South First St., Artesia, NM 88210-2835
DISTRICT III
1000 Rio Brazos Rd, Aztec, NM 87410-1893
DISTRICT IV
2040 S. Pacheco, Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-107-A
Revised August 1999

OIL CONSERVATION DIVISION

2040 S. Pacheco
Santa Fe, New Mexico 87505-6429

APPROVAL PROCESS:

Administrative Hearing

EXISTING WELLBORE

YES NO

APPLICATION FOR DOWNHOLE COMMINGLING

Devon Energy Corporation (Nevada) 20 N. Broadway, Suite 1500, Oklahoma City OK 73102-8260

Operator Address

Logan 35 B Federal 8 N - 35-17S-27E Eddy

Lease Well No. Unit Ltr. - Sec - Twp - Rge County Spacing Unit Lease Types: (check 1 or more)

OGRID NO. 6137 Property Code 23831 API NO. 30-015-30440 Federal State (and/or) Fee

The following facts are submitted in support of downhole commingling	Upper Zone	Intermediate Zone	Lower Zone
1. Pool Name and Pool Code	Red Lake (Q-GB-SA)		Red Lake; Glor-Yeso, NE
2. Top and Bottom of Pay Section (Perforations)	To be perforated 2024'-2890'		3126'-3262'
3. Type of production (Oil or Gas)	Oil		Oil
4. Method of Production (Flowing or Artificial Lift)	Artificial Lift		Artificial Lift
5. Bottomhole Pressure Oil Zones - Artificial Lift: Gas & Oil - Flowing: All Gas Zones: Estimated Current Measured Current Estimated Or Measured Original	a. (Current) 50 psi producing BHP	a.	a. 100 psi producing BHP
	b. (Original)	b.	b.
6. Oil Gravity (°API) or Gas BTU Content	38.5°		41.8°
7. Producing or Shut-In?	Awaiting perms		Producing
Production Marginal? (yes or no) • If Shut-In, give date and oil/gas/water rates of last production Note: For new zones with no production history, applicant shall be required to attach production estimates and supporting data • If Producing, give date and oil/gas/water rates of recent test (within 60 days)	Expected to be marginal		Yes
	Date: N/A Rates:	Date: Rates:	Date: N/A Rates:
	Date: N/A Rates:	Date: Rates:	Date: 3/6/00 Rates: 33 BOPD, 105 MCFGPD, 161 BWPD
8. Fixed Percentage Allocation Formula - % for each zone (total of %'s to equal 100%)	Oil: 61 % Gas: 61 %	Oil: % Gas: %	Oil: 39 % Gas: 39 %

9. If allocation formula is based upon something other than current or past production, or is based upon some other method, submit attachments with supporting data and/or explaining method and providing rate projections or other required data.
10. Are all working, overriding, and royalty interests identical in all commingled zones? Yes No
If not, have all working, overriding, and royalty interests been notified by certified mail? Yes No
11. Will cross-flow occur? Yes No If yes, are fluids compatible, will the formations not be damaged, will any cross-flowed production be recovered, and will the allocation formula be reliable. Yes No (If No, attach explanation)
12. Are all produced fluids from all commingled zones compatible with each other? Yes No
13. Will the value of production be decreased by commingling? Yes No (If Yes, attach explanation)
14. If this well is on, or communitized with, state or federal lands, either the Commissioner of Public Lands or the United States Bureau of Land Management has been notified in writing of this application. Yes No
15. NMOCD Reference Cases for Rule 303(D) Exceptions: ORDER NO(S) _____
16. ATTACHMENTS:
* C-102 for each zone to be commingled showing its spacing unit and acreage dedication.
* Production curve for each zone for at least one year. (if not available, attach explanation.)
* For zones with no production history, estimated production rates and supporting data.
* Data to support allocation method or formula.
* Notification list of working, overriding, and royalty interests for uncommon interest cases.
* Any additional statements, data, or documents required to support commingling.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Tonia Rutelonis TITLE Engineering Technician DATE 3/8/00

TYPE OR PRINT NAME Tonia Rutelonis TELEPHONE NO. (405) 552-4515

Amended

DISTRICT I
P.O. Box 1990, Hobbs, NM 88240

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-102
Revised February 10, 1994
Instruction on back
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

DISTRICT II
P.O. Drawer DD, Artesia, NM 88210

OIL CONSERVATION DIVISION

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

P.O. Box 2088

Santa Fe, New Mexico 87504-2088

AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-015-30440	Pool Code 51300	Pool Name Red Lake (Q-GB-SA) Red Lake; Glor. Yeso, NE
Property Code 23831	Property Name LOGAN "35" FEDERAL	Well Number 8
OGRID No. 6137	Operator Name DEVON ENERGY CORPORATION	Elevation 3614'

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
N	35	17 S	27 E		650	SOUTH	1800	WEST	EDDY

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County

Dedicated Acres	Joint or Infill	Consolidation Code	Order No.

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

	<p>OPERATOR CERTIFICATION</p> <p>I hereby certify the the information contained herein is true and complete to the best of my knowledge and belief.</p> <p><i>E. L. Buttross Jr.</i> Signature</p> <p>E. L. Buttross, Jr. Printed Name</p> <p>District Engineer Title</p> <p>11/6/98 Date</p>
	<p>SURVEYOR CERTIFICATION</p> <p>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</p> <p>August 20, 1998 Date Surveyed</p> <p><i>E. L. Jones</i> Signature & Seal Professional Surveyor</p> <p>Professional Surveyor No. 82978 Certificate No. 7977</p> <p>BASIN SURVEYS</p>

Logan 35 B Federal #8


Allocation Formula

<u>Well Name</u>	<u>Producing Formation</u>	<u>*Daily Production Test 3-month average</u>	<u>% of Total</u>
Eagle 35 Federal #2	Red Lake (Q-GB-SA)	23 BO/42 MCF/16 BW	61 %
Logan 35 B Federal #9	Red Lake; Glorieta-Yeso, NE	15 BO/46 MCF/85 BW	39 %


* From attached production plots

The above production test represents stable production from a San Andres producer (Eagle 35 Federal #2) and a Yeso producer (Logan 35 B Federal #9). We believe these rates of production represent an acceptable means to allocate production. **We have previously received approval for downhole commingling in these fields utilizing a similar allocation method.**

Eagle 35 L Federal #2 (San Andres)

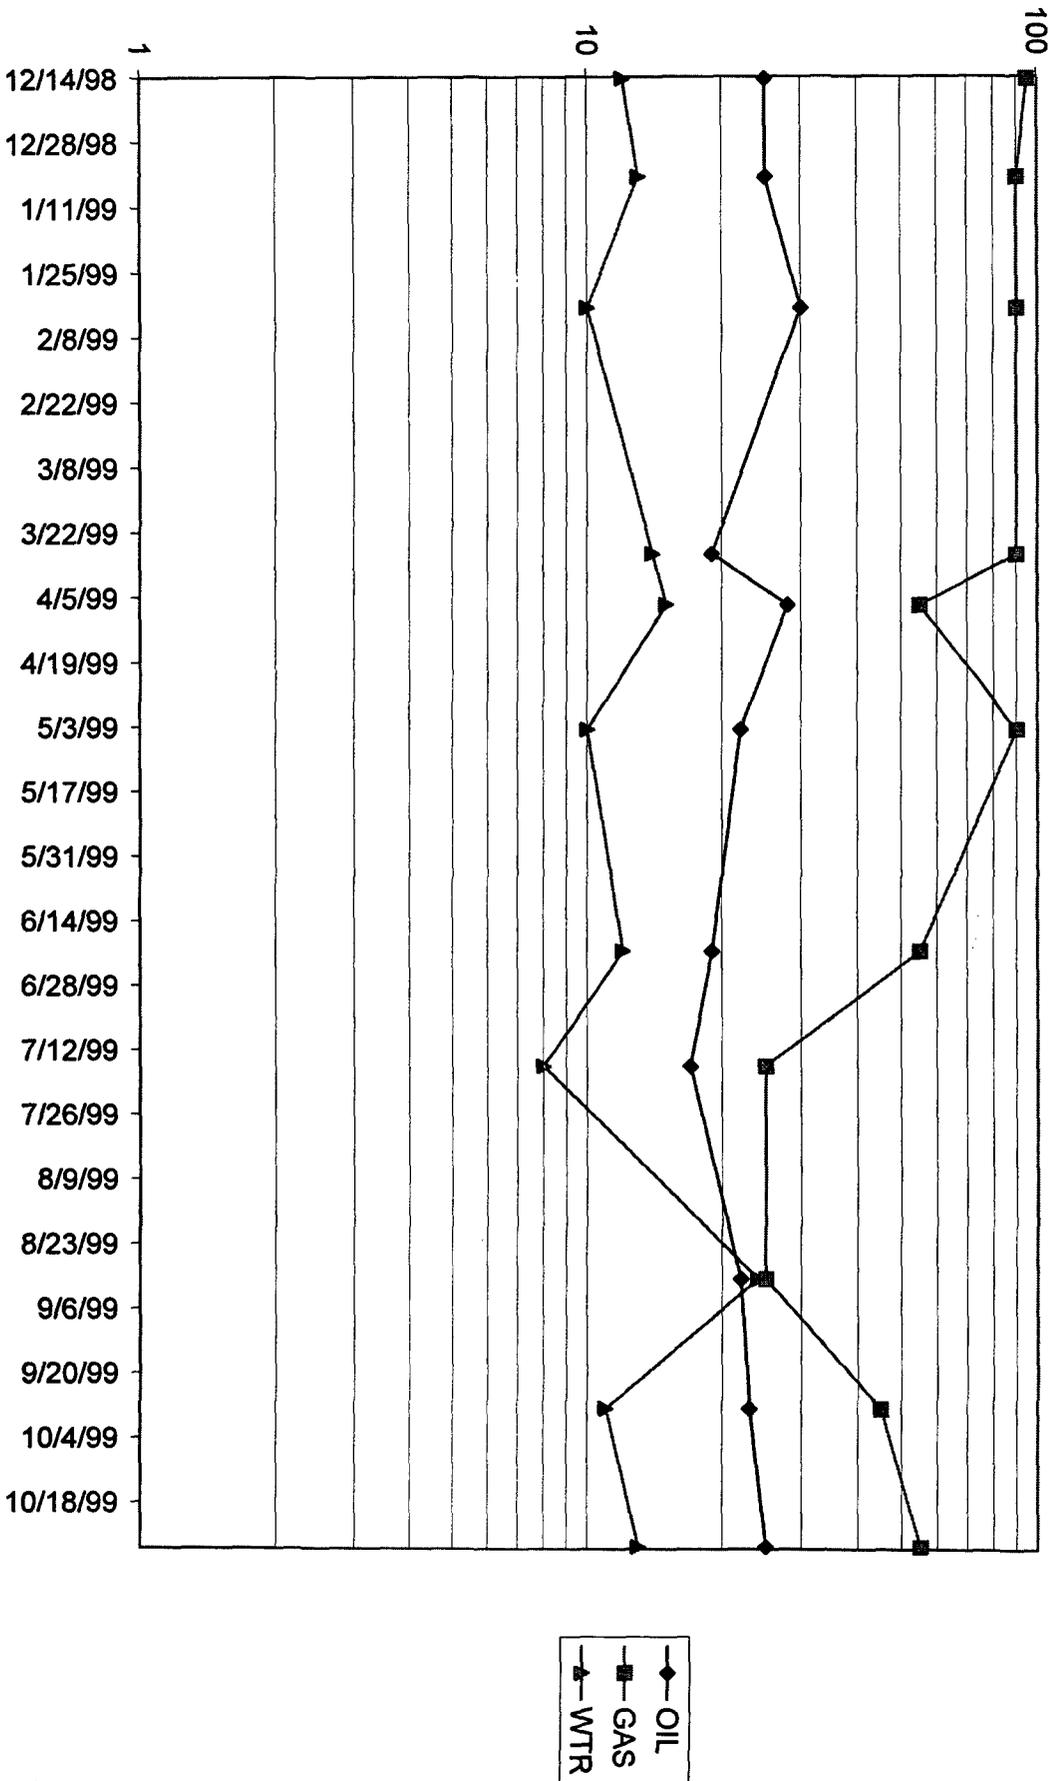


Logan 35 B Federal #9 (Yeso)

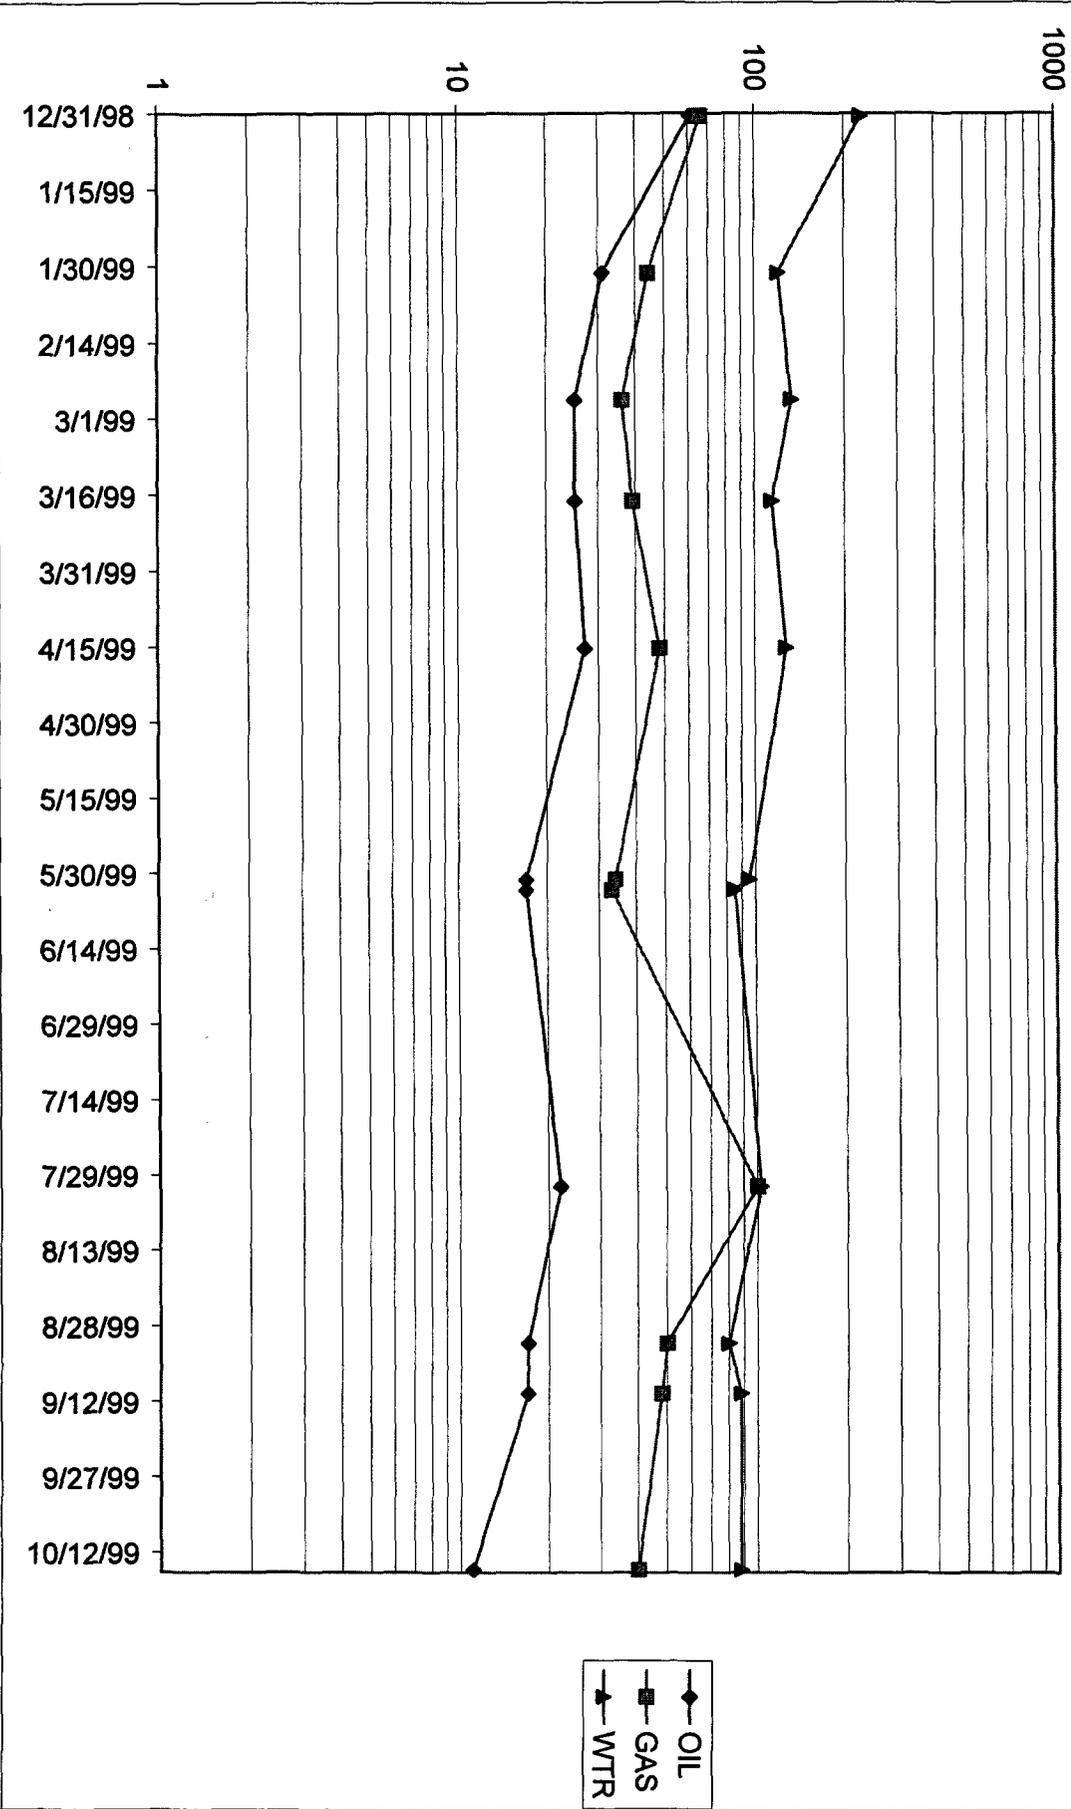

DEVON ENERGY CORPORATION - WELLBORE SCHEMATIC

WELL NAME: Logan 35 B Federal #8		FIELD: Red Lake; Glorieta-Yeso, NE	
LOCATION: 650' FSL & 1800' FWL, Section 35-17S-27E		COUNTY: Eddy	STATE: NM
ELEVATION: GL = 3614'		SPUD DATE: 9/21/99	COMP DATE: 10/16/99
API#: 30-015-30440	PREPARED BY: T. Rutelonis		DATE: 3/8/00

	DEPTH	SIZE	WEIGHT	GRADE	THREAD	HOLE SIZE
CASING:	0' - 1150'	8-5/8"	24#	J-55		12-1/4"
CASING:	0' - 3710'	5 1/2"	15.5#	J-55		7-7/8"
CASING:						
TUBING:	0' - 2800'	2-7/8"				
TUBING:						

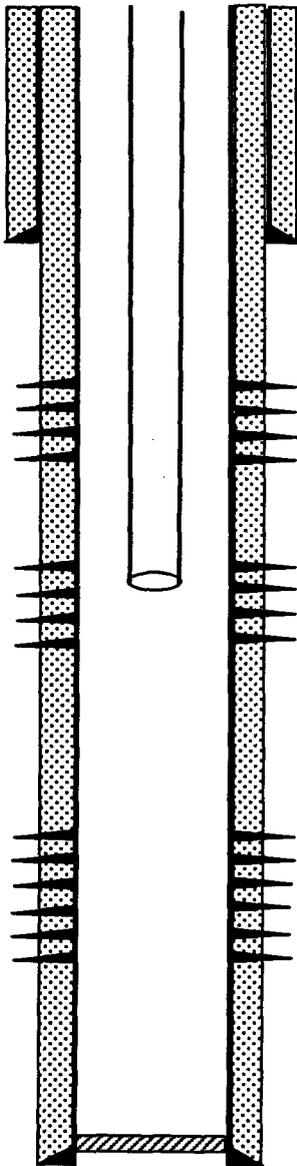

CURRENT PROPOSED

OPERATOR: DEVON ENERGY CORPORATION

8-5/8" Casing, Set @ 1150' w/ 650 sxs cmt. TOC @ surface

San Andres Perforations:
2024'-2410'

Lower San Andres Perforations:
2768'-2890'

2-7/8" tbg w/ SN @ 2800'

Yeso Perforations:
3126'-3262' (25 holes)

PBTd @ 3663'
5 1/2" casing, set @ 3710' w/ 825 sxs cmt. TOC @ surf.
TD @ 3710'

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN DUPLICATE
(See other instructions on reverse side)

FORM APPROVED

OPERATOR'S COPY

WELL COMPLETION OR RECOMPLETION REPORT AND LOG*

1a. TYPE OF WELL: OIL WELL GAS WELL DRY Other

b. TYPE OF COMPLETION: NEW WELL WORK OVER DEEP-EN PLUG BACK DIFF. RESVR Other

2. NAME OF OPERATOR
DEVON ENERGY CORPORATION (NEVADA)

3. ADDRESS AND TELEPHONE NO.
20 N. BROADWAY, SUITE 1500, OKC, OK 73102-8260 (405) 235-3611

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)*
At surface **650' FSL & 1800' FWL, Unit "N"**

At top prod. interval reported below (SAME)
At total depth (SAME)

5. LEASE DESIGNATION AND SERIAL NO.
LC-028755-A

6. IF INDIAN, ALLOTTEE OR TRIBE NAME
NA

7. UNIT AGREEMENT NAME
NA

8. FARM OR LEASE NAME, WELL NO.
Logan 35B Federal #8

9. API WELL NO.
30-015-30440

10. FIELD AND POOL, OR WILDCAT
Red Lake; Glorieta-Yeso, NE

11. SEC., T., R., M., OR BLOCK AND SURVEY OR AREA
Section 35-17S-27E

FILE COPY

14. PERMIT NO. _____ DATE ISSUED **10/13/98**

12. COUNTY OR PARISH **Eddy County** 13. STATE **NM**

15. DATE SPUNDED **9/21/99** 16. DATE T.D. REACHED **9/30/99** 17. DATE COMPL. (Ready to prod.) **10/16/99**

18. ELEVATIONS (DF, RKB, RT, GR, ETC.)* **KB 3623'; GL 3614'; DF 3622'**

19. ELEV. CASINGHEAD _____

20. TOTAL DEPTH, MD & TVD **3710'** 21. PLUG, BACK T.D., MD & TVD **3663'** 22. IF MULTIPLE COMPL., HOW MANY* **NA**

23. INTERVALS DRILLED BY **→** 24. ROTARY TOOLS **X** 25. CABLE TOOLS _____

24. PRODUCING INTERVAL(S), OF THIS COMPLETION—TOP, BOTTOM, NAME (MD AND TVD)*
Yeso 3126'-3262'

25. WAS DIRECTIONAL SURVEY MADE **No**

26. TYPE ELECTRIC AND OTHER LOGS RUN
TDD/CNL/ALL/MCFL/GR;CBL

27. WAS WELL CORED **No**

28. CASING RECORD (Report all strings set in well)

CASING SIZE/GRADE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	TOP OF CEMENT, CEMENTING RECORD	AMOUNT PULLED
8-5/8 J-55	24#	1150'	12-1/4"	surf;300 sx "C",350 sx 35:65:6	NA
5-1/2" J-55	15.5#	3710'	7-7/8"	surf;225 sx Lite,600 sx 50-50 POZ	NA
				"C"	

29. LINER RECORD

SIZE	TOP (MD)	BOTTOM (MD)	SCREEN (MD)

30. TUBING RECORD

SIZE	DEPTH SET (MD)	PACKER SET (MD)
2-7/8"	3158'	

31. PERFORATION RECORD (Interval, size and number)
YESO
3126'-3262' (25'-40" EHD holes)
(ORIG. SGD.) GARY GOURLY BLM

32. ACID SHOT, FRACTURE, CEMENT SQUEEZE, ETC.

DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED
3126'-3262'	2500 gals 15% NE-FE acid
3126'-3262'	90,000 gals liengar gel wtr + 3000# 100 mesh sd + 88,000# 20/40 Brady sd w/ Sand Wedge Additive

33.* PRODUCTION

DATE FIRST PRODUCTION **10/25/99** PRODUCTIONS METHOD I (Flowing, gas lift, pumping—size and type of pump)
Pumping (2-1/2" x 2" x 16' RWTC Pump) WELL STATUS (Producing or shut-in)
Producing

DATE OF TEST **11/23/99** HOURS TESTED **24** CHOKER SIZE _____ PROD'N FOR TEST PERIOD **→** OIL-BBL. **72** GAS-MCF. **85** WATER-BBL. **320** GAS-OIL RATIO **1181/1**

FLOW. TUBING PRESS. _____ CASING PRESSURE _____ CALCULATED 24-HOUR RATE **→** OIL-BBL. **72** GAS-MCF. **85** WATER-BBL. **320** OIL GRAVITY-API (CORR.) **42**

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.)
Sold TEST WITNESSED BY **Danny Hokett**

35. LIST OF ATTACHMENTS _____

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records

SIGNED *Tonja Rutelonis* TITLE **ENGINEERING TECHNICIAN** DATED **December 2, 1998**

By *Devon-Operations*

*(See Instructions and Spaces for Additional Data on Reverse Side)

Water Analysis Report from Baker Petrolite

Summary of Mixing Waters		
Sample Number	133534	112098
Company	DEVON ENERGY	DEVON ENERGY
Lease Well Sample Location	HAWK 8 WELL #3 WELLHEAD <i>yeso</i>	HAWK "8" BATTERY FWKO <i>SAN ANDRES</i>
Anions (mg/L)		
Chloride	106,253	99,569
Bicarbonate	573	497
Carbonate	0.00	0.00
Sulfate	3,912	4,489
Phosphate	0.00	0.00
Borate	0.00	0.00
Silicate	0.00	0.00
Cations (mg/L)		
Sodium	67,918	63,725
Magnesium	369	509
Calcium	1,749	1,770
Strontium	36.0	49.0
Barium	0.06	0.10
Iron	48.0	0.40
Potassium	523	269
Aluminum	0.00	0.00
Chromium	0.00	0.00
Copper	0.00	0.00
Lead	0.00	0.00
Manganese	0.00	0.00
Nickel	0.00	0.00
Anion/Cation Ratio	1.00	1.00
TDS (mg/L)	181,381	170,877
Density (g/cm)	1.12	1.11
Sampling Date	10/26/99	7/28/99
Account Manager	CURRY PRUIT	CURRY PRUIT
Analyst	JOANNA RAGAN	JOANNA RAGAN
Analysis Date		8/4/99
pH at time of sampling	5.90	7.90
pH at time of analysis		
pH used in Calculations	5.90	7.90

Water Analysis Report from Baker Petrolite

Mixes at 80°F and 0 psi

<i>Predictions of Carbon Dioxide Pressure, Saturation Index and Amount of Scale in lb/1000bbl</i>												
Mix Waters		CO ₂	Calcite CaCO ₃		Gypsum CaSO ₄ ·2H ₂ O		Anhydrite CaSO ₄		Celestite SrSO ₄		Barite BaSO ₄	
133534	112098	psi	Index	Amount	Index	Amount	Index	Amount	Index	Amount	Index	Amount
100%	0%	5.52	-0.31		-0.20		-0.18		-0.21		0.13	0.01
90%	10%	4.90	-0.27		-0.19		-0.17		-0.18		0.17	0.01
80%	20%	4.30	-0.22		-0.18		-0.16		-0.16		0.20	0.01
70%	30%	3.70	-0.17		-0.17		-0.16		-0.14		0.23	0.02
60%	40%	3.10	-0.10		-0.17		-0.15		-0.12		0.26	0.02
50%	50%	2.51	-0.01		-0.16		-0.14		-0.10		0.29	0.02
40%	60%	1.92	0.09	7.5	-0.15		-0.14		-0.08		0.32	0.02
30%	70%	1.34	0.24	16.9	-0.15		-0.13		-0.06		0.35	0.03
20%	80%	0.78	0.46	26.8	-0.14		-0.13		-0.04		0.38	0.03
10%	90%	0.27	0.89	37.5	-0.14		-0.12		-0.02		0.40	0.03
0%	100%	0.05	1.51	48.8	-0.13		-0.12		0.00	0.18	0.43	0.03

Note 1: When assessing the severity of the scale problem, both the saturation index (SI) and amount of scale must be considered.


Note 2: Precipitation of each scale is considered separately. Total scale will be less than the sum of the amounts of the five scales.

Note 3: CO₂ Pressure is absolute pressure. Total Pressure is gauge pressure.

Mixture Predictions from Baker-Petrolite

133534 with 112098 at 80°F and 0 psi

Analysis: 24190

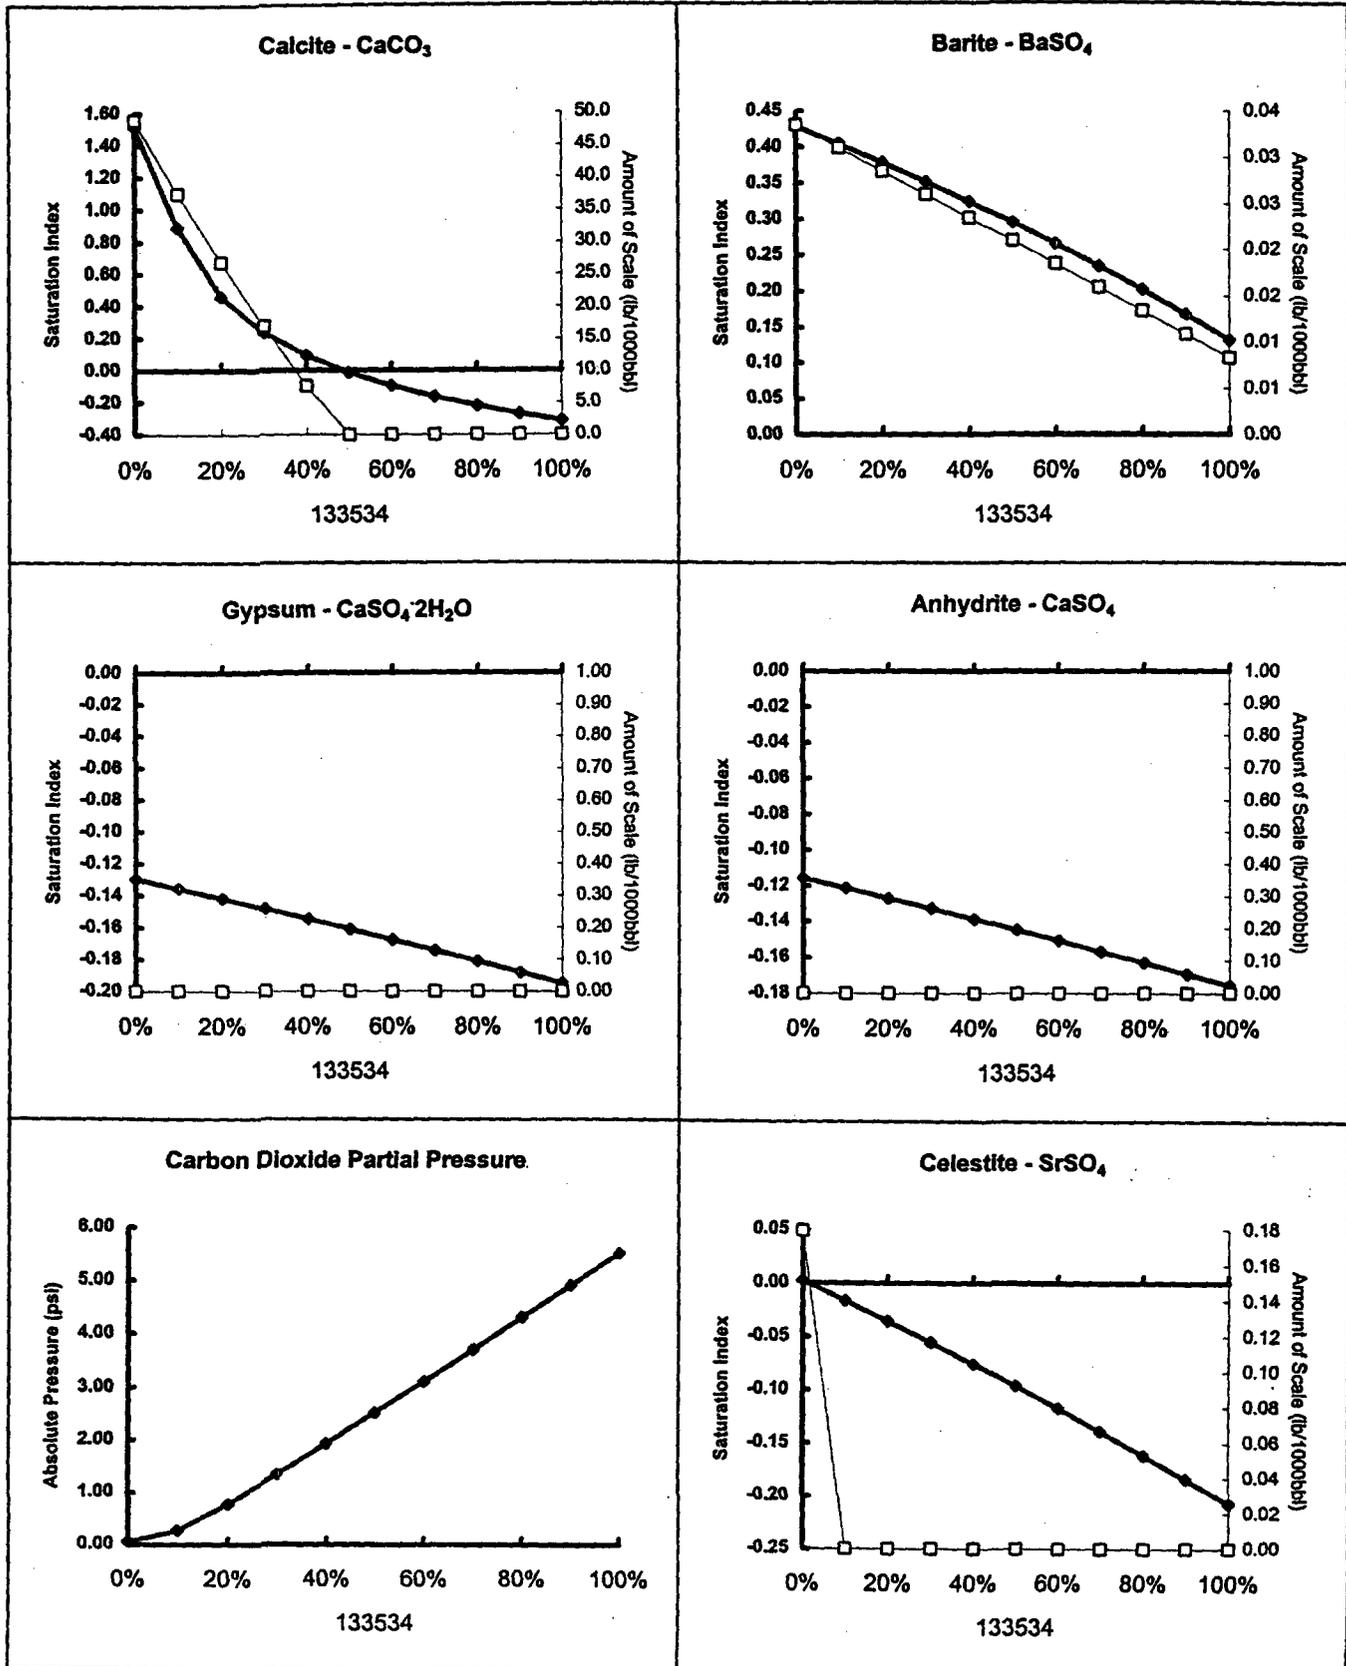

Water Analysis Report from Baker Petrolite

Mixes at 100°F and 0 psi

Predictions of Carbon Dioxide Pressure, Saturation Index and Amount of Scale in lb/1000bbl

Mix Waters		CO ₂	Calcite CaCO ₃		Gypsum CaSO ₄ ·2H ₂ O		Anhydrite CaSO ₄		Celestite SrSO ₄		Barite BaSO ₄	
			psi	Index	Amount	Index	Amount	Index	Amount	Index	Amount	Index
133534	112098											
100%	0%	6.73	-0.22		-0.27		-0.19		-0.24		-0.08	
90%	10%	5.99	-0.18		-0.27		-0.18		-0.22		-0.04	
80%	20%	5.25	-0.13		-0.26		-0.18		-0.19		-0.01	
70%	30%	4.52	-0.07		-0.25		-0.17		-0.17		0.03	0.00
60%	40%	3.80	-0.00		-0.25		-0.16		-0.15		0.06	0.01
50%	50%	3.08	0.08	7.2	-0.24		-0.16		-0.13		0.09	0.01
40%	60%	2.37	0.18	15.2	-0.23		-0.15		-0.11		0.12	0.01
30%	70%	1.67	0.32	23.8	-0.22		-0.14		-0.09		0.15	0.01
20%	80%	0.99	0.53	32.8	-0.22		-0.14		-0.07		0.17	0.02
10%	90%	0.40	0.89	42.5	-0.21		-0.13		-0.05		0.20	0.02
0%	100%	0.11	1.37	53.0	-0.20		-0.12		-0.03		0.22	0.02

Note 1: When assessing the severity of the scale problem, both the saturation index (SI) and amount of scale must be considered.


Note 2: Precipitation of each scale is considered separately. Total scale will be less than the sum of the amounts of the five scales.

Note 3: CO₂ Pressure is absolute pressure. Total Pressure is gauge pressure.

Mixture Predictions from Baker-Petrolite

133534 with 112098 at 100°F and 0 psi

Analysis: 24190

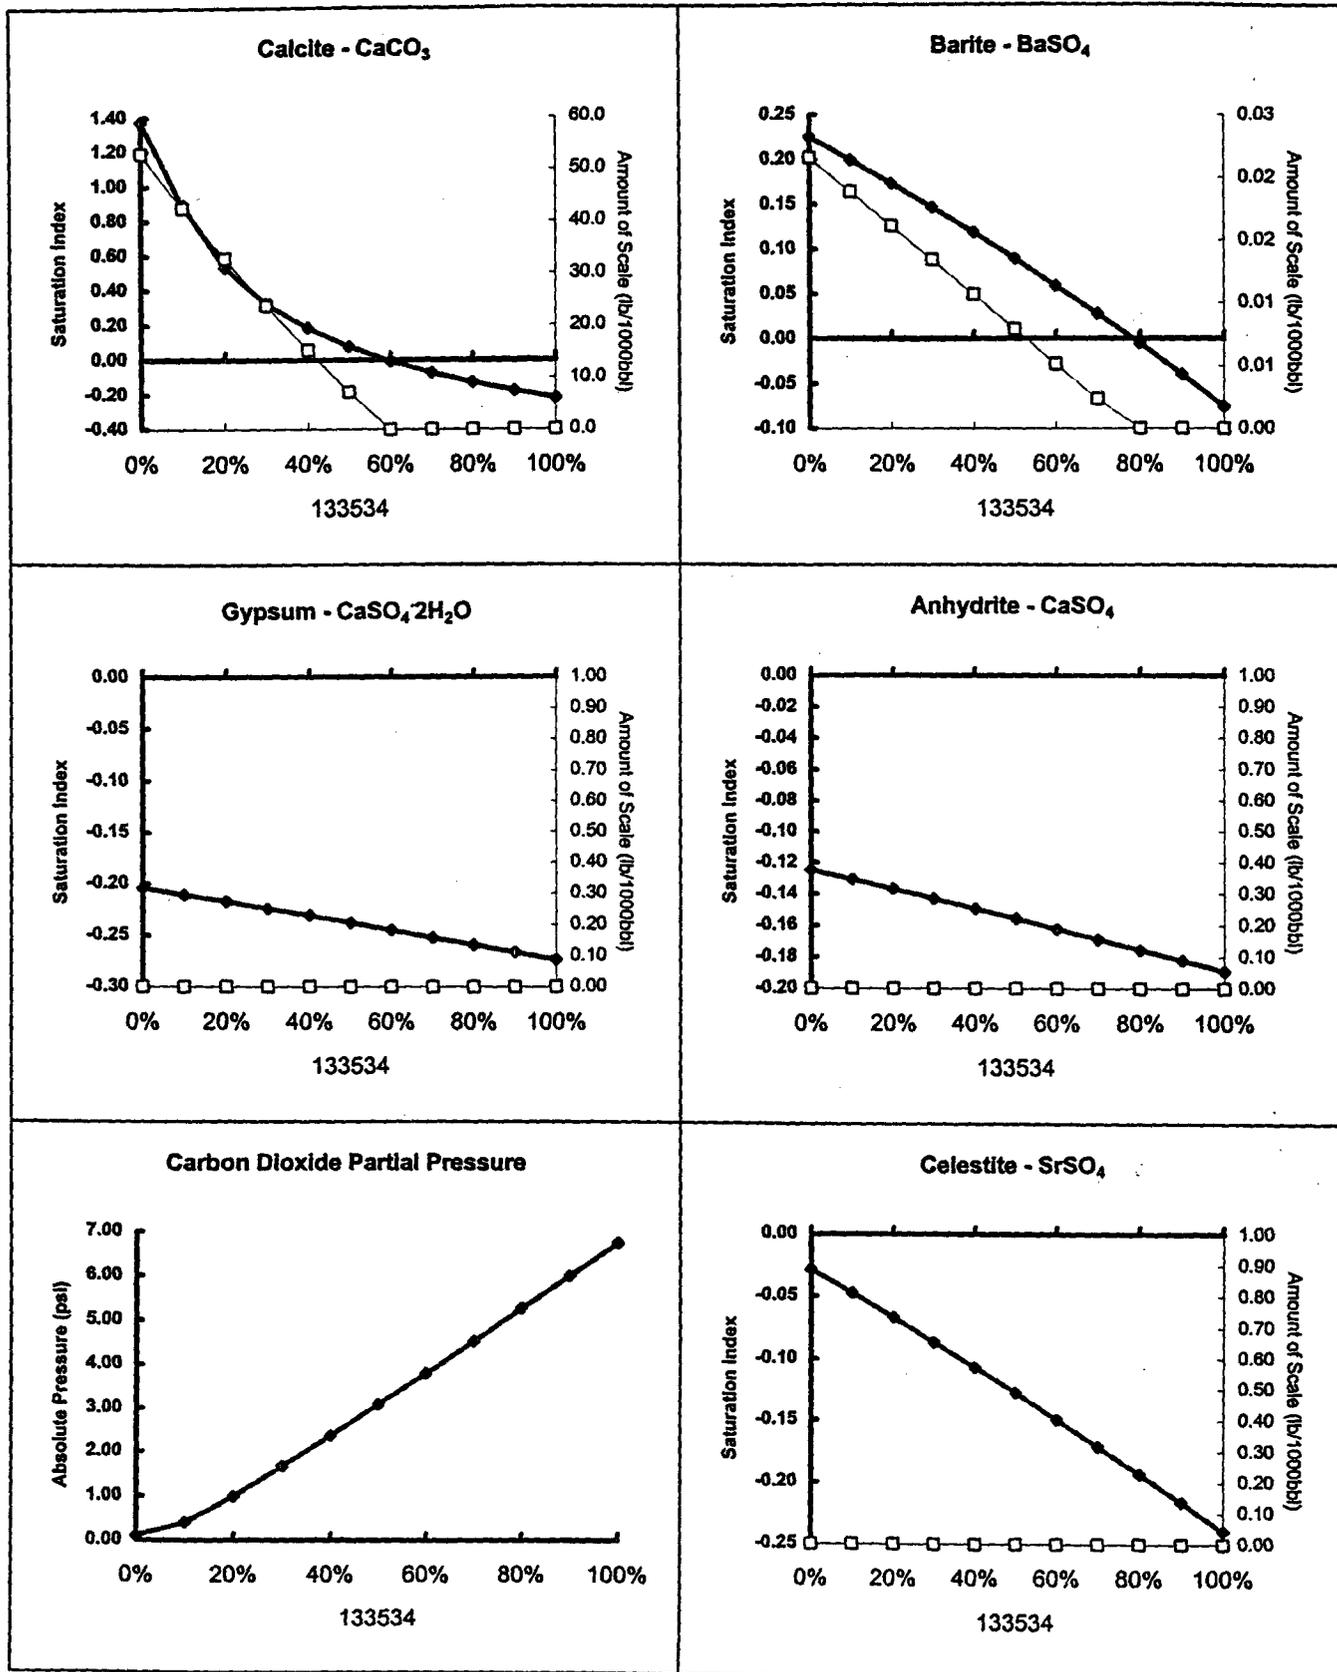

Water Analysis Report from Baker Petrolite

Mixes at 120°F and 0 psi

Predictions of Carbon Dioxide Pressure, Saturation Index and Amount of Scale in lb/1000bbl

Mix Waters		CO ₂	Calcite CaCO ₃		Gypsum CaSO ₄ ·2H ₂ O		Anhydrite CaSO ₄		Celestite SrSO ₄		Barite BaSO ₄	
			psi	Index	Amount	Index	Amount	Index	Amount	Index	Amount	Index
133534	112098											
100%	0%	7.93	-0.12		-0.34		-0.18		-0.26		-0.26	
90%	10%	7.06	-0.08		-0.33		-0.17		-0.24		-0.22	
80%	20%	6.20	-0.03		-0.33		-0.16		-0.21		-0.19	
70%	30%	5.34	0.02	2.7	-0.32		-0.16		-0.19		-0.15	
60%	40%	4.49	0.09	9.2	-0.31		-0.15		-0.17		-0.12	
50%	50%	3.65	0.17	16.1	-0.30		-0.14		-0.15		-0.09	
40%	60%	2.83	0.27	23.3	-0.30		-0.13		-0.13		-0.06	
30%	70%	2.01	0.41	31.0	-0.29		-0.13		-0.11		-0.03	
20%	80%	1.24	0.60	39.2	-0.28		-0.12		-0.09		-0.01	
10%	90%	0.58	0.90	47.9	-0.27		-0.11		-0.07		0.02	0.00
0%	100%	0.20	1.26	57.4	-0.27		-0.11		-0.05		0.04	0.01

Note 1: When assessing the severity of the scale problem, both the saturation index (SI) and amount of scale must be considered.







Note 2: Precipitation of each scale is considered separately. Total scale will be less than the sum of the amounts of the five scales.

Note 3: CO₂ Pressure is absolute pressure. Total Pressure is gauge pressure.

Mixture Predictions from Baker-Petrolite

133534 with 112098 at 120°F and 0 psi

Analysis: 24190

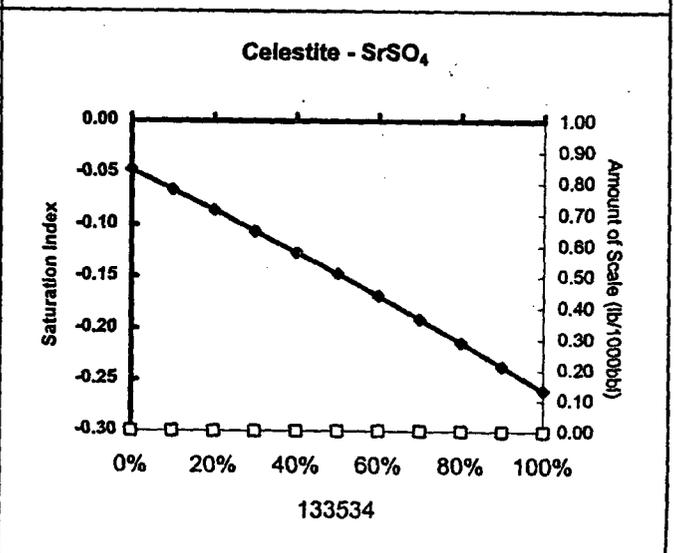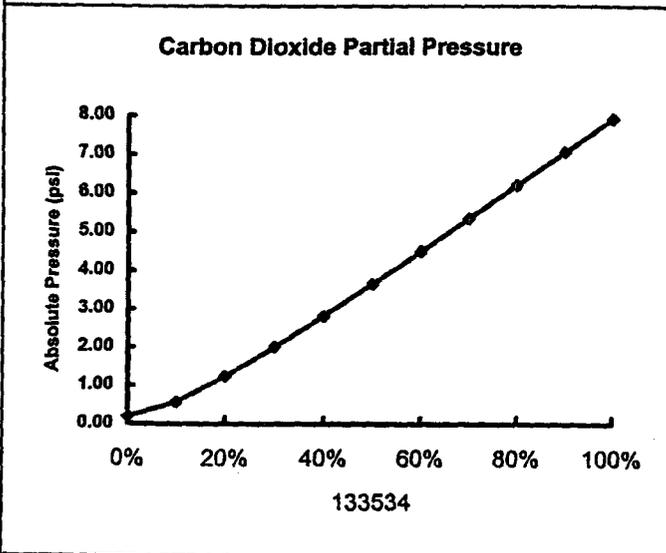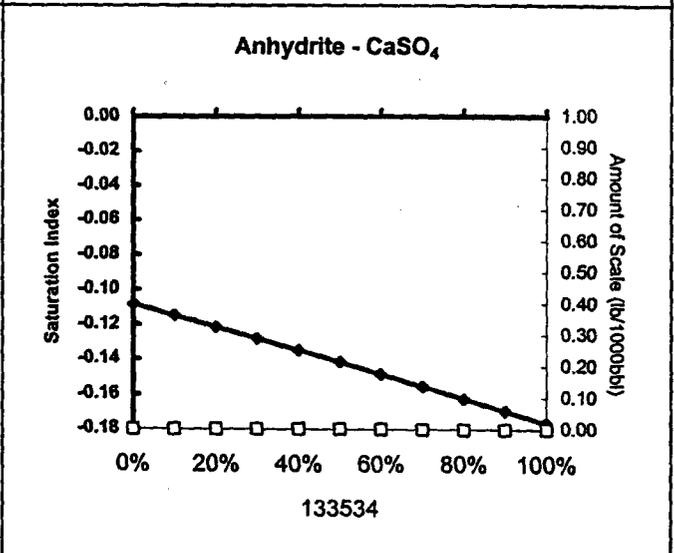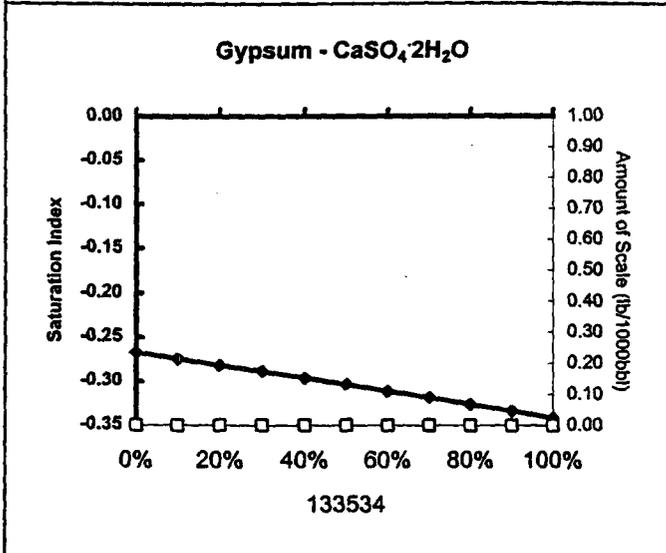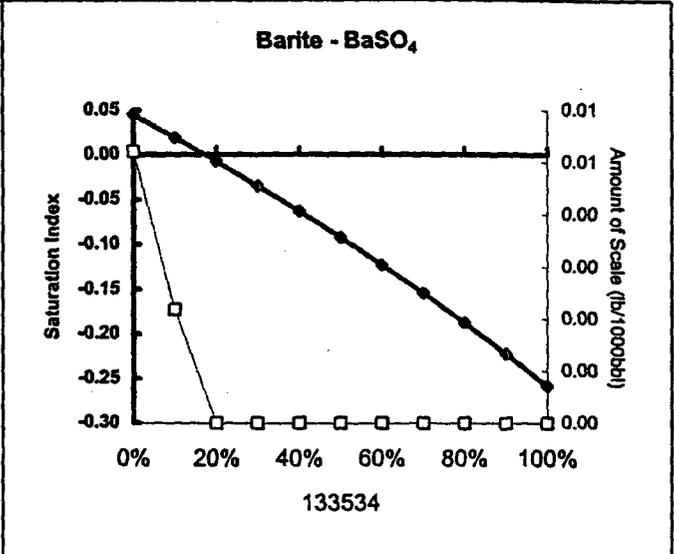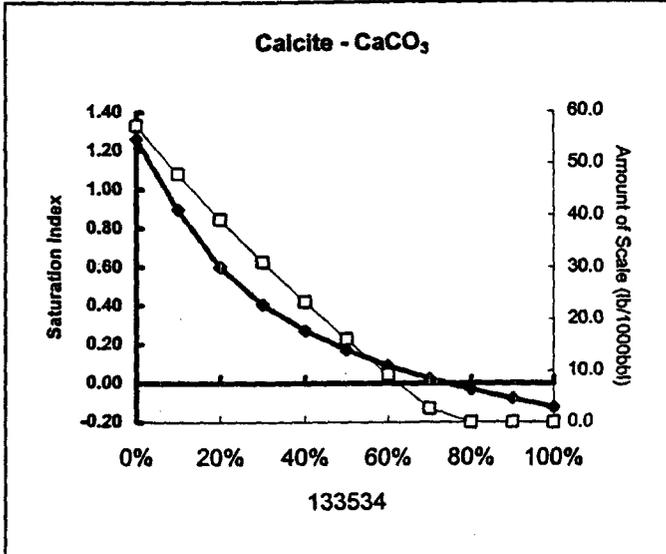

Water Analysis Report from Baker Petrolite

Mixes at 140°F and 0 psi

Predictions of Carbon Dioxide Pressure, Saturation Index and Amount of Scale in lb/1000bbl

Mix Waters		CO ₂	Calcite CaCO ₃		Gypsum CaSO ₄ ·2H ₂ O		Anhydrite CaSO ₄		Celestite SrSO ₄		Barite BaSO ₄	
133534	112098	psi	Index	Amount	Index	Amount	Index	Amount	Index	Amount	Index	Amount
100%	0%	9.05	-0.02		-0.40		-0.14		-0.27		-0.42	
90%	10%	8.07	0.02	2.7	-0.39		-0.13		-0.25		-0.38	
80%	20%	7.09	0.07	8.0	-0.38		-0.13		-0.22		-0.35	
70%	30%	6.13	0.13	13.5	-0.38		-0.12		-0.20		-0.31	
60%	40%	5.17	0.19	19.3	-0.37		-0.11		-0.18		-0.28	
50%	50%	4.22	0.27	25.4	-0.36		-0.11		-0.16		-0.25	
40%	60%	3.29	0.37	31.9	-0.35		-0.10		-0.14		-0.22	
30%	70%	2.38	0.49	38.7	-0.34		-0.09		-0.12		-0.19	
20%	80%	1.53	0.66	46.0	-0.34		-0.08		-0.10		-0.17	
10%	90%	0.80	0.90	53.8	-0.33		-0.08		-0.08		-0.14	
0%	100%	0.34	1.18	62.3	-0.32		-0.07		-0.06		-0.11	

Note 1: When assessing the severity of the scale problem, both the saturation index (SI) and amount of scale must be considered.







Note 2: Precipitation of each scale is considered separately. Total scale will be less than the sum of the amounts of the five scales.

Note 3: CO₂ Pressure is absolute pressure. Total Pressure is gauge pressure.

Mixture Predictions from Baker-Petrolite

133534 with 112098 at 140°F and 0 psi

Analysis: 24190

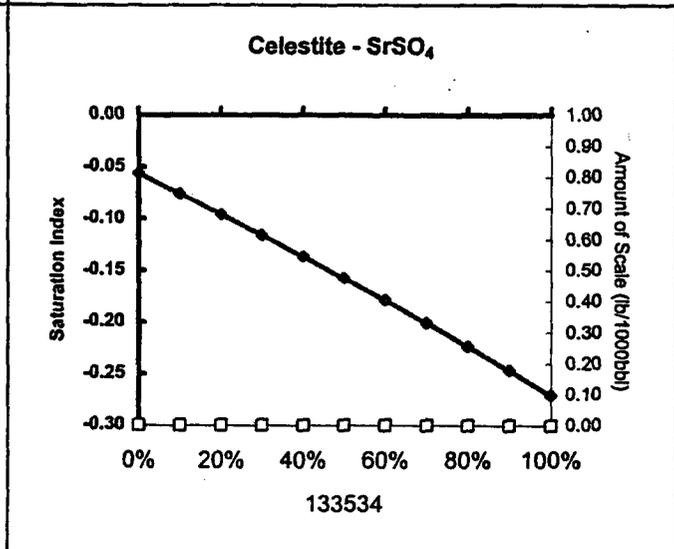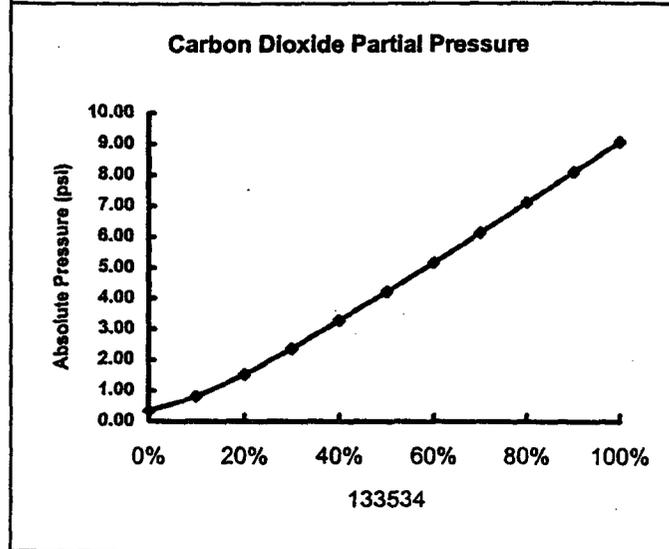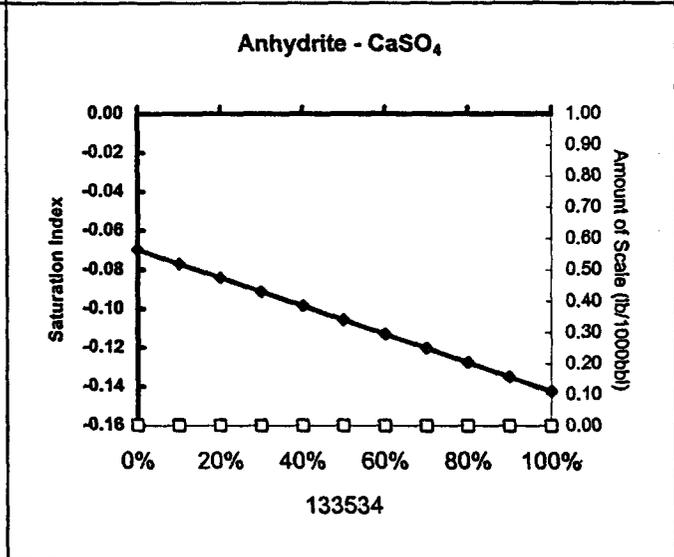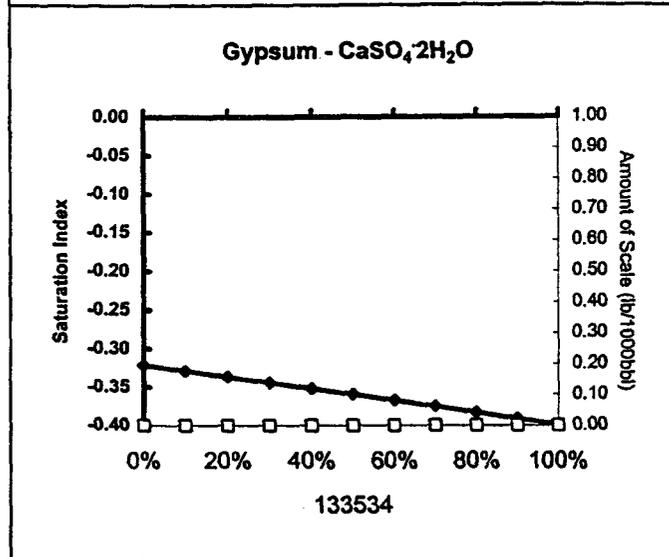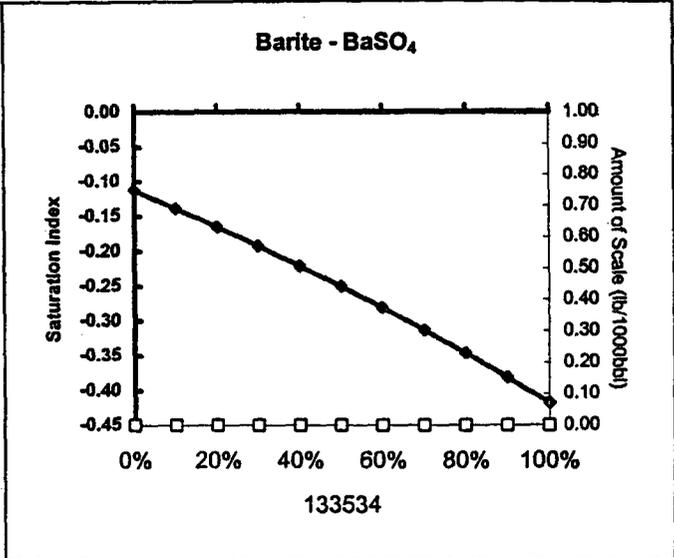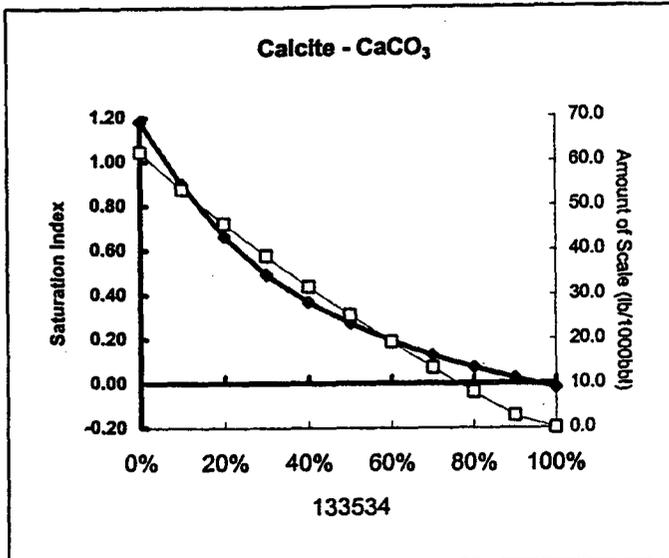



Mobil Analytical Laboratories

LABORATORIES IN COESSE, SIDDINGS & STACY DAM
 WEST UNIVERSITY AND WESTOVER STREET
 P.O. BOX 68216
 COESSE, TEXAS 75768-0216
 PHONE 117-4744
 FAX 117-4781

FEBRUARY 07, 1997

MR. ROLLAND W. PERRY
 LABORATORY SERVICES
 1331 TASKER DR.
 HOBBS, NEW MEXICO 88240

DEAR MR PERRY:

THE FOLLOWING ARE THE RESULTS OF THE FOUR OIL SAMPLES FOR SULFUR
 CONTENT AND GRAVITY, RECEIVED 02/03/97, LAB NOS. 260-263:


	SULFUR	API GRAVITY @ 60 °F	SPECIFIC GRAVITY @ 60 °F
LAB NO. 260: DEVON ENERGY FALCON 3 "B" FED #1 (SAN ANDRES) 01/30/97	0.547 wt%	38.5	0.8325
LAB NO. 261: DEVON ENERGY EAGLE 33 "O" FED #11 01/30/97	0.556 wt%	38.4	0.8327
LAB NO. 262: DEVON ENERGY EAGLE 33 "N" FED #9 01/30/97	0.651 wt%	37.4	0.8377
LAB NO. 263: DEVON ENERGY EAGLE 34 "M" FED #25 01/30/97	0.565 wt%	37.3	0.8384

TEST METHOD: SULFUR ASTM D-4294

WE APPRECIATE THE OPPORTUNITY TO WORK WITH YOU ON THESE TESTS.
 IF YOU HAVE ANY QUESTIONS OR REQUIRE ANY FURTHER INFORMATION, PLEASE
 FEEL FREE TO CONTACT ME AT ANY TIME.

SINCERELY,

STEPHEN REID
 SR/ct

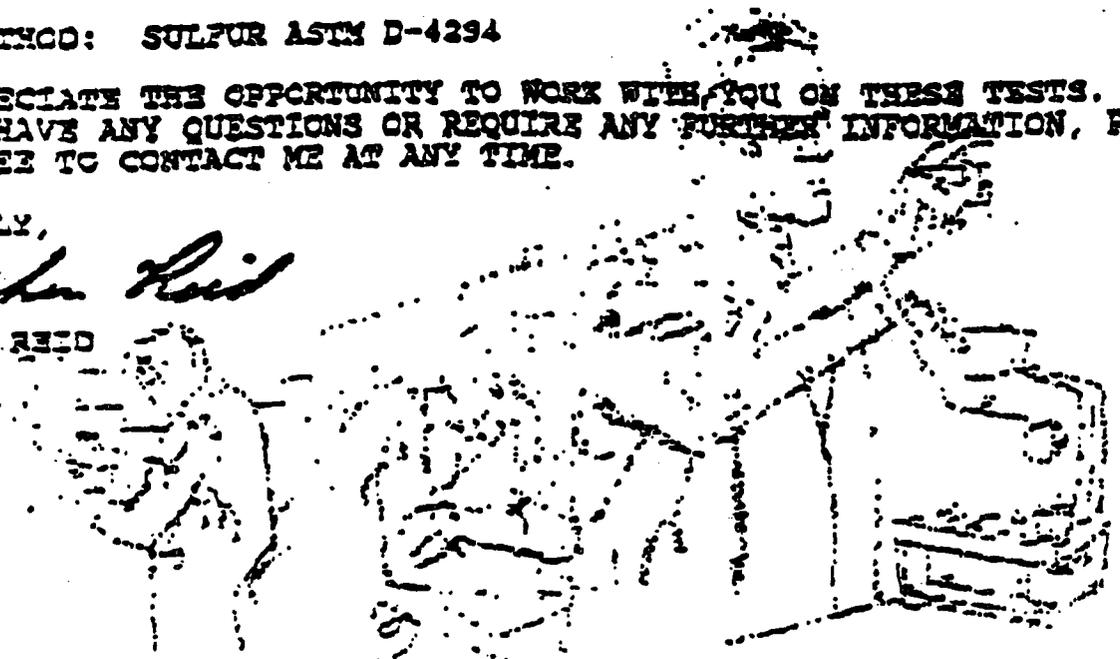

Laboratory Services, Inc.

 4018 Fiesta Drive
 Hobbs, New Mexico 88240
 Telephone: (505) 397-3713

SULFUR IN CRUDE OIL

 Devon Energy
 P. O. Box 240
 Artesia, New Mexico 88211-0250

Dec 15, 1999

YESO OIL Samples

	Total Sulfur	API Gravity @ 60° F	Specific Gravity @ 60° F
Hawk 8-3	0.4118 wt. %	42.6	0.8128
Eagle 83-9	0.4382 wt. %	37.3	0.8383
Logan 35-9	0.4752 wt. %	41.8	0.8165
Logan 35-14	0.4430 wt. %	41.8	0.8165

 Thank You,
 Rolland Perry