

DHC 4/20/00

devon

ENERGY CORPORATION

20 North Broadway, Suite 1500
Oklahoma City, Oklahoma 73102-8260


Telephone 405/235-3611
FAX 405/552-4550

March 23, 2000

Certified Mail No. Z 068 589 798

STATE OF NEW MEXICO
Energy, Minerals and Natural Resources Dept.
Oil Conservation Division
2040 S. Pacheco
Santa Fe, NM 87505-6429

2745

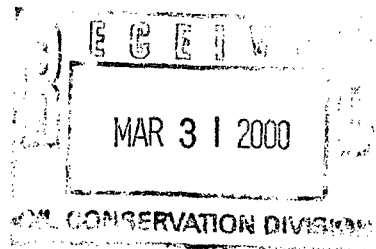

RE: Downhole Commingling
Kite 5 I Federal #2
Section I-5-18S-27E
API #30-015-29067
Red Lake (Q-GB-SA) and
Red Lake (Glorieta-Yeso) Fields
Eddy County, NM

Gentlemen:

Concerning the referenced, enclosed please find the Form C-107A Application for Downhole Commingling and attachments (and three copies).

Please direct inquiries concerning this application to Ernie Buttross at (405) 235-3611, X4509.

Yours truly,

DEVON ENERGY CORPORATION (NEVADA)

Tonja Rutelonis
Engineering Tech.

/trr
Enclosures

RECEIVED

MAR 31 2000

Oil Conservation Division

DISTRICT I
P.O. Box 1980, Hobbs, NM 88241-1980
DISTRICT II
811 South First St., Artesia, NM 88210-2835
DISTRICT III
1000 Rio Brazos Rd. Aztec, NM 87410-1693
DISTRICT IV
2040 S. Pacheco, Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources Department

OIL CONSERVATION DIVISION

2040 S. Pacheco
Santa Fe, New Mexico 87505-6429

Form C-107-A
Revised August 1999

APPROVAL PROCESS:

Administrative Hearing

EXISTING WELLBORE

YES NO

APPLICATION FOR DOWNHOLE COMMINGLING

Devon Energy Corporation (Nevada)

20 N. Broadway, Suite 1500, Oklahoma City OK 73102-8260

Operator

Address

Kite 5 I Federal

2

I - 5-18S-27E

Eddy

Lease

Well No.

Unit Ltr. - Sec - Twp - Rge

County
Spacing Unit Lease Types: (check 1 or more)

OGRID NO. 6137

Property Code

19136

API NO.

30-015-29067

Federal

X

State

and/or

Fee

The following facts are submitted in support of downhole commingling:	Upper Zone	Intermediate Zone	Lower Zone
1. Pool Name and Pool Code	Red Lake (Q-GB-SA)		Red Lake (Glor-Yeso)
2. Top and Bottom of Pay Section (Perforations)	1648'-2123'		To be perforated 2850'-3150'
3. Type of production (Oil or Gas)	Oil		Oil
4. Method of Production (Flowing or Artificial Lift)	Artificial Lift		Artificial Lift
5. Bottomhole Pressure Oil Zones - Artificial Lift: Gas & Oil - Flowing: All Gas Zones: Estimated Current Measured Current Estimated Or Measured Original	a. (Current) 50 psi producing BHP	a.	a. 100 psi producing BHP
	b. (Original)	b.	b.
6. Oil Gravity (°API) or Gas BTU Content	39.5°		41.8°
7. Producing or Shut-In?	Producing		Awaiting perms
Production Marginal? (yes or no) • If Shut-In, give date and oil/gas/water rates of last production Note: For new zones with no production history, applicant shall be required to attach production estimates and supporting data • If Producing, give date and oil/gas/water rates of recent test (within 60 days)	Yes		Expected to be marginal
	Date: N/A Rates:	Date: Rates:	Date: N/A Rates:
	Date: 3/8/00 Rates: 11 BOPD, 50 MCFGPD, 64 BWPD	Date: Rates:	Date: N/A Rates:
8. Fixed Percentage Allocation Formula - % for each zone (total of %'s to equal 100%)	Oil: 48 % Gas: 48 %	Oil: % Gas: %	Oil: 52 % Gas: 52 %

9. If allocation formula is based upon something other than current or past production, or is based upon some other method, submit attachments with supporting data and/or explaining method and providing rate projections or other required data.

10. Are all working, overriding, and royalty interests identical in all commingled zones? ☒ Yes ☐ No
If not, have all working, overriding, and royalty interests been notified by certified mail? ☐ Yes ☐ No

11. Will cross-flow occur? ☐ Yes ☒ No If yes, are fluids compatible, will the formations not be damaged, will any cross-flowed production be recovered, and will the allocation formula be reliable. ☐ Yes ☐ No (If No, attach explanation)

12. Are all produced fluids from all commingled zones compatible with each other? ☒ Yes ☐ No

13. Will the value of production be decreased by commingling? ☐ Yes ☒ No (If Yes, attach explanation)

14. If this well is on, or communitized with, state or federal lands, either the Commissioner of Public Lands or the United States Bureau of Land Management has been notified in writing of this application. ☒ Yes ☐ No

15. NMOCD Reference Cases for Rule 303(D) Exceptions: ORDER NO(S).

16. ATTACHMENTS:

- * C-102 for each zone to be commingled showing its spacing unit and acreage dedication.
- * Production curve for each zone for at least one year. (If not available, attach explanation.)
- * For zones with no production history, estimated production rates and supporting data.
- * Data to support allocation method or formula.
- * Notification list of working, overriding, and royalty interests for uncommon interest cases.
- * Any additional statements, data, or documents required to support commingling.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Tonja Rutelonis TITLE Engineering Technician DATE 3/23/00

TYPE OR PRINT NAME Tonja Rutelonis TELEPHONE NO. (405) 552-4515

DISTRICT I
P.O. Box 1980, Hobbs, NM 88240

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-102
Revised February 10, 1994
Instruction on back
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

DISTRICT II
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION

P.O. Box 2088
Santa Fe, New Mexico 87504-2088

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-015-29067	Pool Code 51300	Pool Name Red Lake (Q-GB-SA) & Red Lake; Gbrieta-Yeso
Property Code 19136	Property Name Kite 5 (I) Federal	Well Number 2
OGRID No. 6137	Operator Name Devon Energy Corporation (Nevada)	Elevation 3508'

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
1	5	18 S	27 E		2310	South	890	East	Eddy

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres 40	Joint or Infill	Consolidation Code	Order No.						

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

Lot 4 Lot 3 Lot 2 Lot 1				OPERATOR CERTIFICATION I hereby certify the the information contained herein is true and complete to the best of my knowledge and belief. <u>E.L. Buttross, Jr.</u> Signature <u>E.L. Buttross, Jr.</u> Printed Name <u>District Engineer</u> Title <u>June 18, 1996</u> Date	
Diagram: A well location diagram showing a well (circle) located within a shaded area. Dimensions are given: 3507.4' (top), 3520.0' (top right), 890' (horizontal distance from well to right boundary), 3493.3' (left), 3505.7' (bottom right), and 2310' (vertical distance from well to bottom boundary).				SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. <u>June 5, 1996</u> Date Surveyed <u>L. JONES</u> Signature & Seal of Professional Surveyor <u>W.O. No. 62024</u> Certificate No. Gary L. Jones 7977 BASIN SURVEYS	

Kite 5 I Federal #2


Allocation Formula

Well Name	Producing Formation	*Daily Production Test	
		Average	% of Total
Kite 5 I Federal #2	Red Lake (Q-GB-SA)	16 BO/54 MCF/60 BW	48 %
ARCO-Lago Rosa 4 Federal #5 (offset Yeso producer)	Red Lake (Glor-Yeso)	17 BO/27 MCF/83 BW	52 %


* From attached production plots

The above production test represents stable production from a San Andres producer (Kite 5 I Federal #2) and a Yeso producer (ARCO-Lago Rosa 4 Federal #5). We believe these rates of production represent an acceptable means to allocate production. **We have previously received approval for downhole commingling in these fields utilizing a similar allocation method.**

Kite 5 I Federal #2 (San Andres)

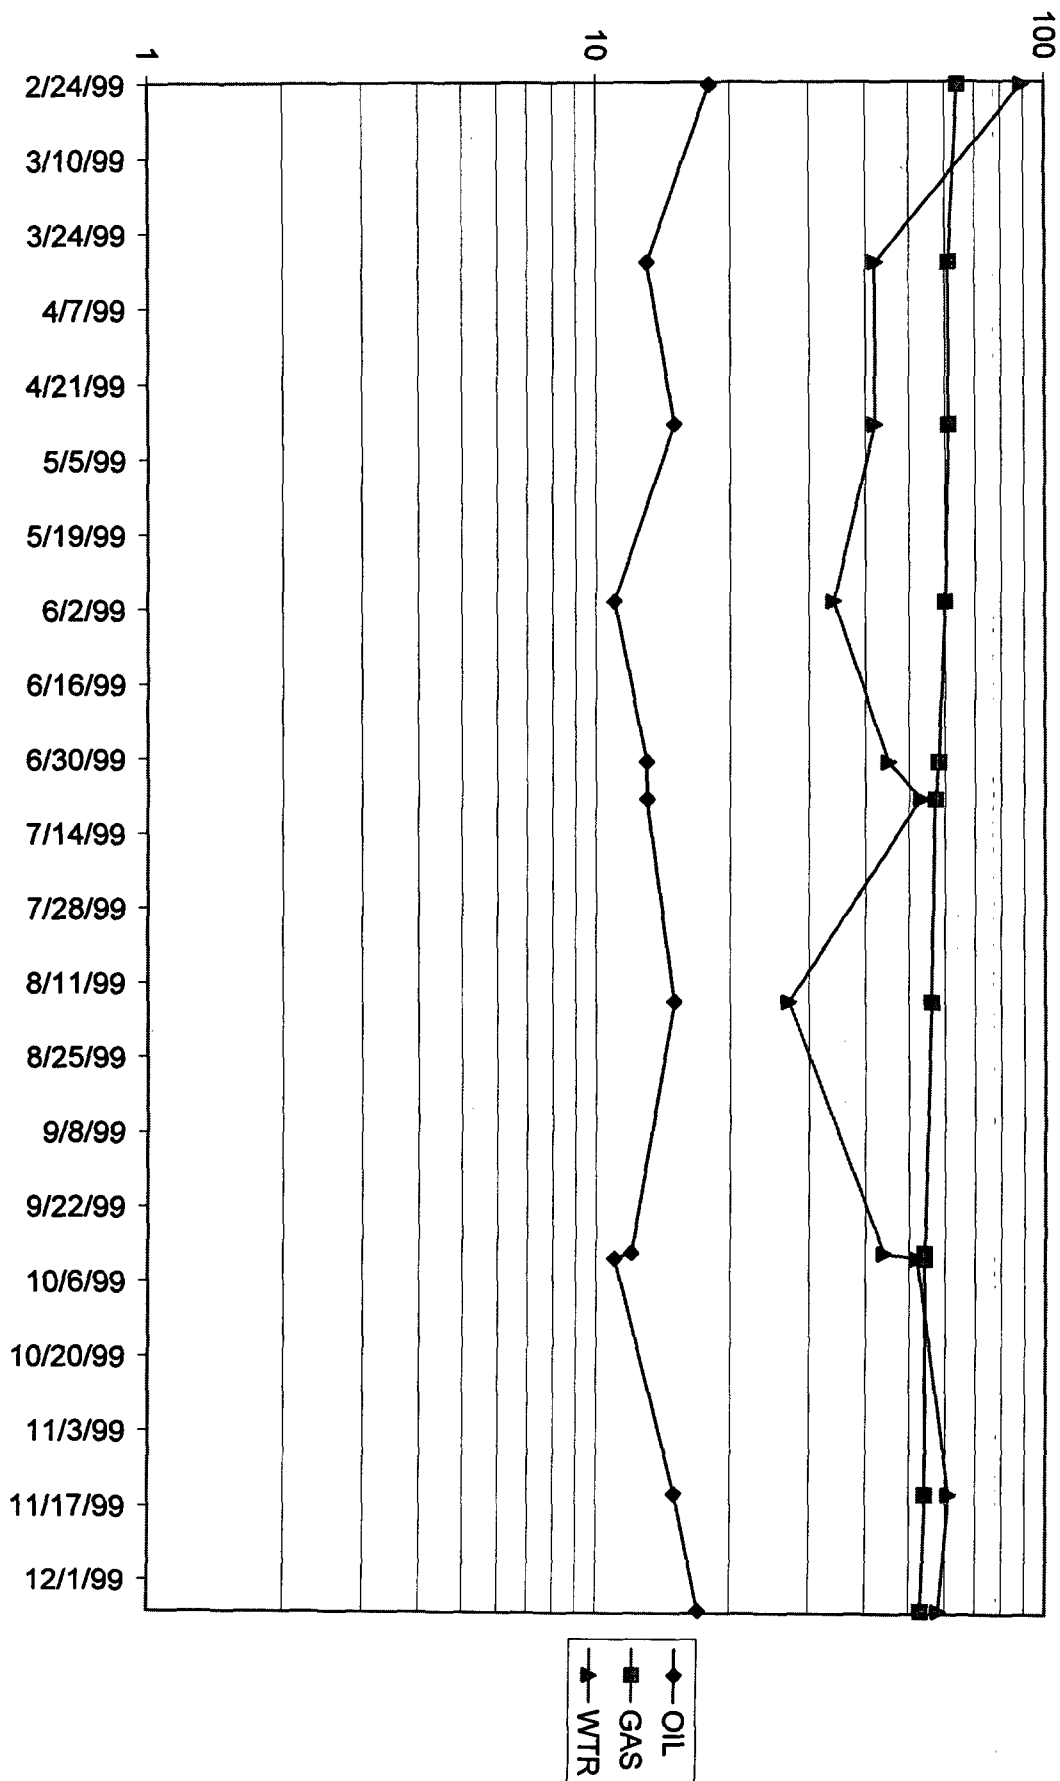

Lago Rosa "4" Fed #5 (Yeso)

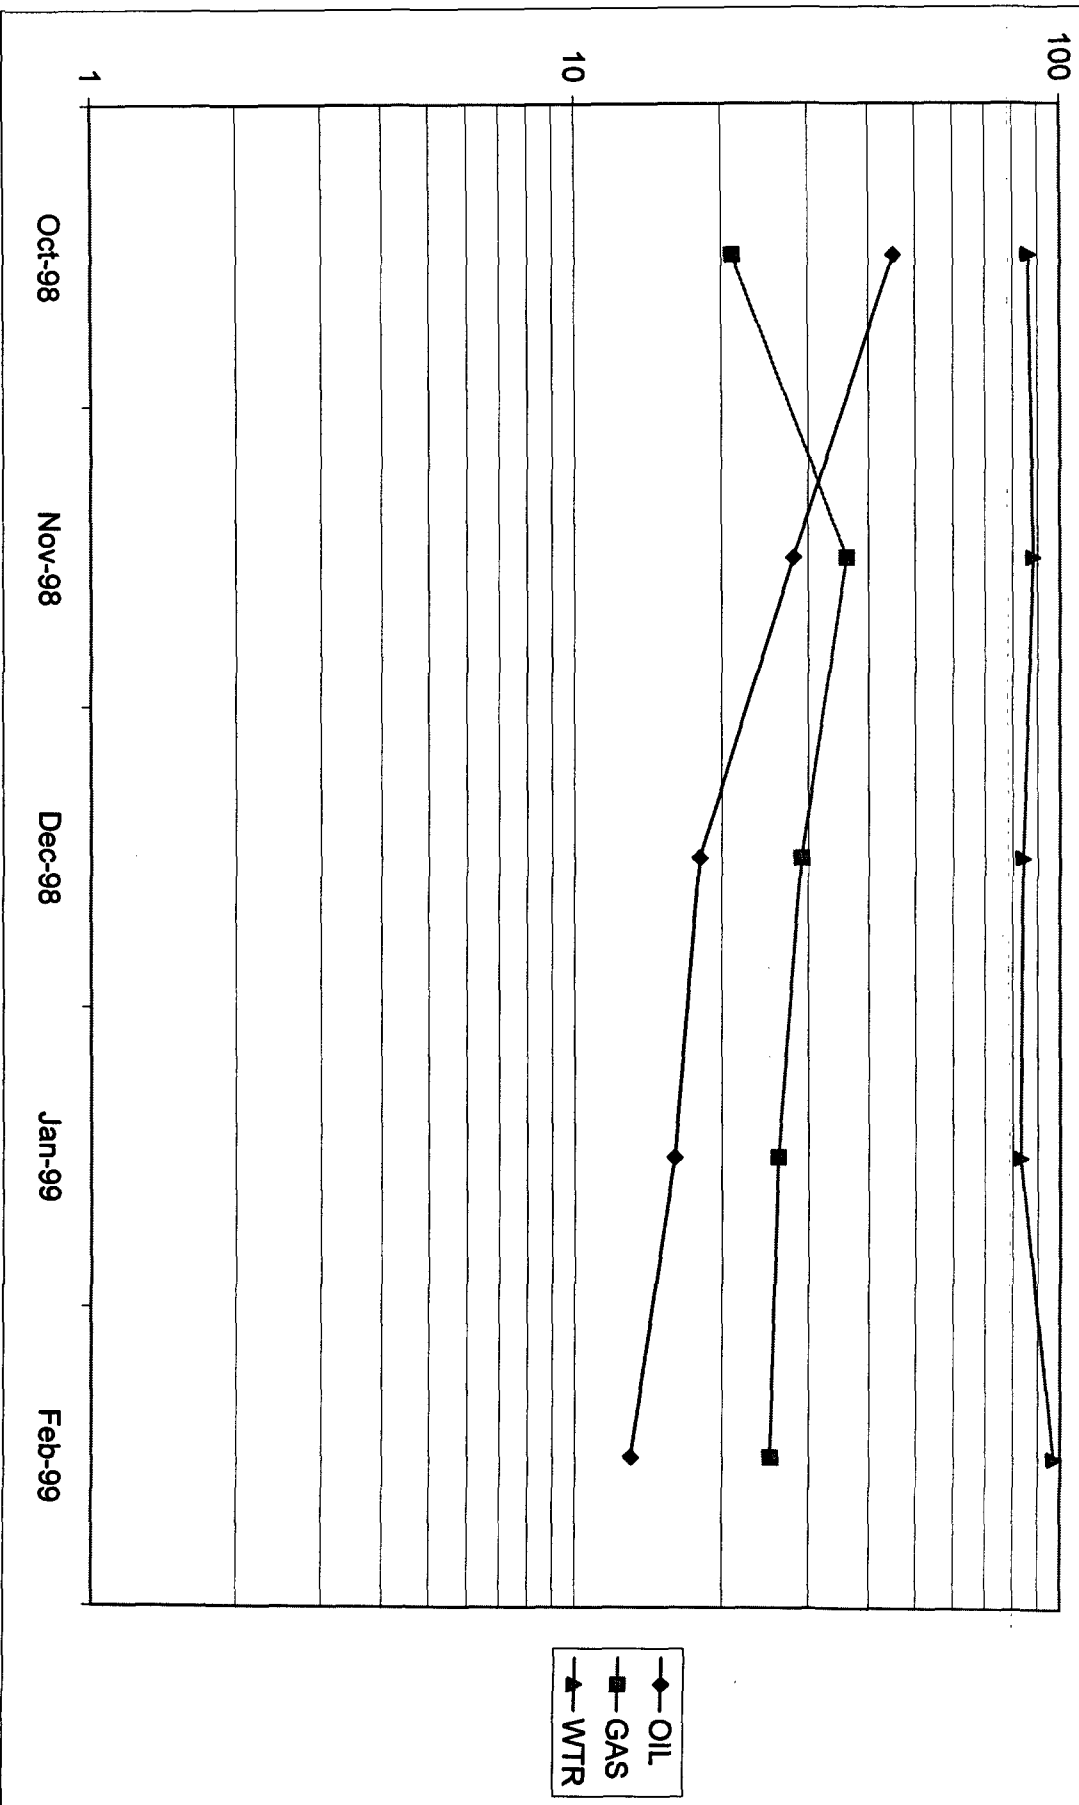

3
10
3
10

Lease: LAGO ROSA 4 FEDERAL (5)

Dwights-1
Retrieval Code: 150,015,0153023451120
07/29/99

3
10

2
10
2
10

2
10

10
10

10

1
1


1

1998 2000

Oil (bbl/day)	County: EDDY, NM	F.P. Date: 07/98	Gas (mcf/day)
Water (bbl/day)	Field: RED LAKE (GLORIETA Y Oil Cum: 6125 bbl		
	Reservoir: GLORIETA YESA	Gas Cum: 8248 mcf	
	Operator: ARCO PERMIAN	Location: 4L 18S 27E	

DEVON ENERGY CORPORATION - WELLBORE SCHEMATIC

WELL NAME: Kite 5 I Federal #2			FIELD: Red Lake			
LOCATION: 2310' FSL & 890' FEL, Section 5-18S-27E			COUNTY: Eddy			STATE: NM
ELEVATION: GL = 3508'			SPUD DATE: 9/20/96		COMP DATE: 10/11/96	
API#: 30-015-29067		PREPARED BY: T. Rutelonis			DATE: 2/10/00	
	DEPTH	SIZE	WEIGHT	GRADE	THREAD	HOLE SIZE
CASING:	0' - 1081'	8-5/8"	24#	J-55		12-1/4"
CASING:	0' - 2349'	5 1/2"	15.5#	J-55		7-7/8"
LINER:	2250' - 4000'	4"	10.46#	J-55	FL4S	4-3/4"
TUBING:	0' - 2220'	2-7/8"				
TUBING:						

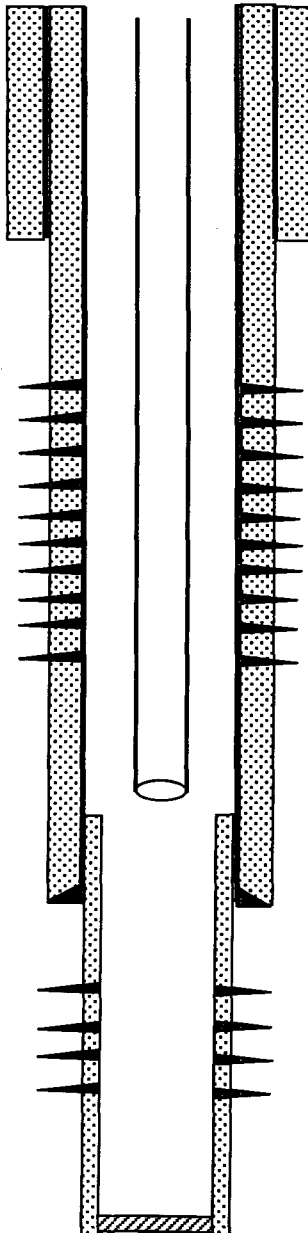

CURRENT



PROPOSED

OPERATOR: DEVON ENERGY CORPORATION

8-5/8" Casing, Set @ 1081' w/ 500 sxs cmt. TOC @ surface

SAN ANDRES PERFORATIONS:
1648'-2123'

2-7/8" tbg w/ SN @ 2220'

TOL @ 2250'

5 1/2" 15.5# J-55 Casing Set @ 2349' w/ 450 sxs cmt. TOC @ surf.

YESO PERFORATIONS:
±2850'- ±3150' (20 HOLES, .38")

TD @ 4000'

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN DUPLICATE*

(See other instructions on reverse side)

FORM APPROVED

WELL COMPLETION OR RECOMPLETION REPORT AND LOG*

a. TYPE OF WELL: OIL WELL ☒ GAS WELL ☐ DRY ☐ Other _____

b. TYPE OF COMPLETION: NEW WELL ☒ WORK OVER ☐ DEEP-EN ☐ PLUG BACK ☐ DIFF. RESVR ☐ Other _____

OPERATOR'S COPY

2. NAME OF OPERATOR

DEVON ENERGY CORPORATION (NEVADA)

3. ADDRESS AND TELEPHONE NO.

20 N. BROADWAY, SUITE 1500, OKC, OK 73102-8260 (405) 235-3611

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)*

At surface 2310' FSL & 890' FEL; Unit "I"

At top prod. interval reported below (SAME)

At total depth (SAME)

5. LEASE DESIGNATION AND SERIAL NO.
LC-055383-A6. IF INDIAN, ALLOTTEE OR TRIBE NAME
NA7. UNIT AGREEMENT NAME
NA8. FARM OR LEASE NAME, WELL NO.
Kite "51" Federal #29. API WELL NO.
30-015-2906710. FIELD AND POOL, OR WILDCAT
Red Lake (Q0GB-SA)11. SEC., T., R., M., OR BLOCK AND SURVEY OR AREA
"I" Section 5-18S-27E

14. PERMIT NO.		DATE ISSUED 7/29/96		12. COUNTY OR PARISH Eddy County		13. STATE NM			
15. DATE SPUDDED 9/20/96		16. DATE T.D. REACHED 9/24/96		17. DATE COMPL. (Ready to prod.) 10/11/96		18. ELEVATIONS (DF, RKB, RT, GR, ETC.)* KB 3517'; GL 3508'; DF 3516'		19. ELEV. CASINGHEAD	
20. TOTAL DEPTH, MD & TVD 2350'		21. PLUG, BACK T.D., MD & TVD 2303'		22. IF MULTIPLE COMPL., HOW MANY* NA		23. INTERVALS DRILLED BY →		ROTARY TOOLS X	
24. PRODUCING INTERVAL(S), OF THIS COMPLETION—TOP, BOTTOM, NAME (MD AND TVD)* San Andres - 1648-2123'								25. WAS DIRECTIONAL SURVEY MADE No	
26. TYPE ELECTRIC AND OTHER LOGS RUN LDT/CNL/DLL/MSFL/GR; CBL								27. WAS WELL CORED No	

28. CASING RECORD (Report all strings set in well)					
CASING SIZE/GRADE	WEIGHT, LB./FT.	DEPTH SET (MD)	SOLE SIZE	TOP OF CEMENT, CEMENTING RECORD	AMOUNT PULLED
8-5/8" J-55	24#	1081'	12-1/4"	surf; 300 sxs lite & 200 sxs "C"	NA
5-1/2" J-55	15.5#	2349'	7-7/8"	surf; 150 sxs lite C & 300 sxs "C"	NA

29. LINER RECORD					30. TUBING RECORD		
SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT*	SCREEN (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)
					2-7/8"	2162'	(OET)

31. PERFORATION RECORD (Interval, size and number)				32. ACID SHOT, FRACTURE, CEMENT SQUEEZE, ETC.	
1648-1753' ALPHA (8 - .40" EHD Holes)				DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED
1852-1884' "A" (5 - .40" EHD Holes)				1648-2123'	2500 gals of 15% NeFe acid
1930-2010' "B" (7 - .40" EHD Holes)				1648-2123'	1,000 gals PrePad + 2 drum Pro-Kem scale inhibitor + 180,000 gals gel water + 6000# 100 mesh sand + 237,000# 20/40 Brady sand
2024-2066' "C" (8 - .40" EHD Holes)					
2075-2123' "D" (4 - .40" EHD Holes)					

33.* PRODUCTION							
DATE FIRST PRODUCTION 10/18/96		PRODUCTIONS METHOD (Flowing, gas lift, pumping—size and type of pump) Pumping (2-1/2" x 2" x 12' RWTC Pump)				WELL STATUS (Producing or shut-in) Producing	
DATE OF TEST 10/27/96	HOURS TESTED 24	CHOKER SIZE	PROD'N FOR TEST PERIOD →	OIL-BBL. 127	GAS-MCF. 127	WATER-BBL. 311	GAS-OIL RATIO 1000/1
FLOW. TUBING PRESS.	CASING PRESSURE	CALCULATED 24-HOUR RATE →	OIL-BBL. 127	GAS-MCF. 127	WATER-BBL. 311	OIL GRAVITY-APT (CORR.) 38°	

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.)
Vented (To be connected)35. LIST OF ATTACHMENTS
Logs, Deviation Surveys

36. I hereby certify that the foregoing and attached information is complete and correct as determined by me and is available for review.

SIGNED *Deana Keys*

TITLE ENGINEERING TECHNICIAN

DATE October 30, 1996

*(See Instructions and Spaces for Additional Data on Reverse Side)

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

11-25 dk

Analysis: 24190

Water Analysis Report from Baker Petrolite

Summary of Mixing Waters		
Sample Number	133534	112098
Company	DEVON ENERGY	DEVON ENERGY
Lease	HAWK 8	HAWK "8"
Well	WELL #3 <i>yeso</i>	BATTERY <i>SAN ANDRES</i>
Sample Location	WELLHEAD	FWKO
Anions (mg/L)		
Chloride	106,253	99,569
Bicarbonate	573	497
Carbonate	0.00	0.00
Sulfate	3,912	4,489
Phosphate	0.00	0.00
Borate	0.00	0.00
Silicate	0.00	0.00
Cations (mg/L)		
Sodium	67,918	63,725
Magnesium	369	509
Calcium	1,749	1,770
Strontium	36.0	49.0
Barium	0.06	0.10
Iron	48.0	0.40
Potassium	523	269
Aluminum	0.00	0.00
Chromium	0.00	0.00
Copper	0.00	0.00
Lead	0.00	0.00
Manganese	0.00	0.00
Nickel	0.00	0.00
Anion/Cation Ratio	1.00	1.00
TDS (mg/L)	181,381	170,877
Density (g/cm)	1.12	1.11
Sampling Date	10/26/99	7/28/99
Account Manager	CURRY PRUIT	CURRY PRUIT
Analyst	JOANNA RAGAN	JOANNA RAGAN
Analysis Date		8/4/99
pH at time of sampling	5.90	7.90
pH at time of analysis		
pH used in Calculations	5.90	7.90

Analysis: 24190

Water Analysis Report from Baker Petrolite

Mixes at 80°F and 0 psi

Predictions of Carbon Dioxide Pressure, Saturation Index and Amount of Scale in lb/1000bbl												
Mix Waters		CO ₂	Calcite CaCO ₃		Gypsum CaSO ₄ ·2H ₂ O		Anhydrite CaSO ₄		Celestite SrSO ₄		Barite BaSO ₄	
133534	112098	psi	Index	Amount	Index	Amount	Index	Amount	Index	Amount	Index	Amount
100%	0%	5.52	-0.31		-0.20		-0.18		-0.21		0.13	0.01
90%	10%	4.90	-0.27		-0.19		-0.17		-0.18		0.17	0.01
80%	20%	4.30	-0.22		-0.18		-0.16		-0.16		0.20	0.01
70%	30%	3.70	-0.17		-0.17		-0.16		-0.14		0.23	0.02
60%	40%	3.10	-0.10		-0.17		-0.15		-0.12		0.26	0.02
50%	50%	2.51	-0.01		-0.16		-0.14		-0.10		0.29	0.02
40%	60%	1.92	0.09	7.5	-0.15		-0.14		-0.08		0.32	0.02
30%	70%	1.34	0.24	16.9	-0.15		-0.13		-0.06		0.35	0.03
20%	80%	0.78	0.46	26.8	-0.14		-0.13		-0.04		0.38	0.03
10%	90%	0.27	0.89	37.5	-0.14		-0.12		-0.02		0.40	0.03
0%	100%	0.05	1.51	48.8	-0.13		-0.12		0.00	0.18	0.43	0.03

Note 1: When assessing the severity of the scale problem, both the saturation index (SI) and amount of scale must be considered.


Note 2: Precipitation of each scale is considered separately. Total scale will be less than the sum of the amounts of the five scales.

Note 3: CO₂ Pressure is absolute pressure. Total Pressure is gauge pressure.

Mixture Predictions from Baker-Petrolite

133534 with 112098 at 80°F and 0 psi

Analysis: 24190

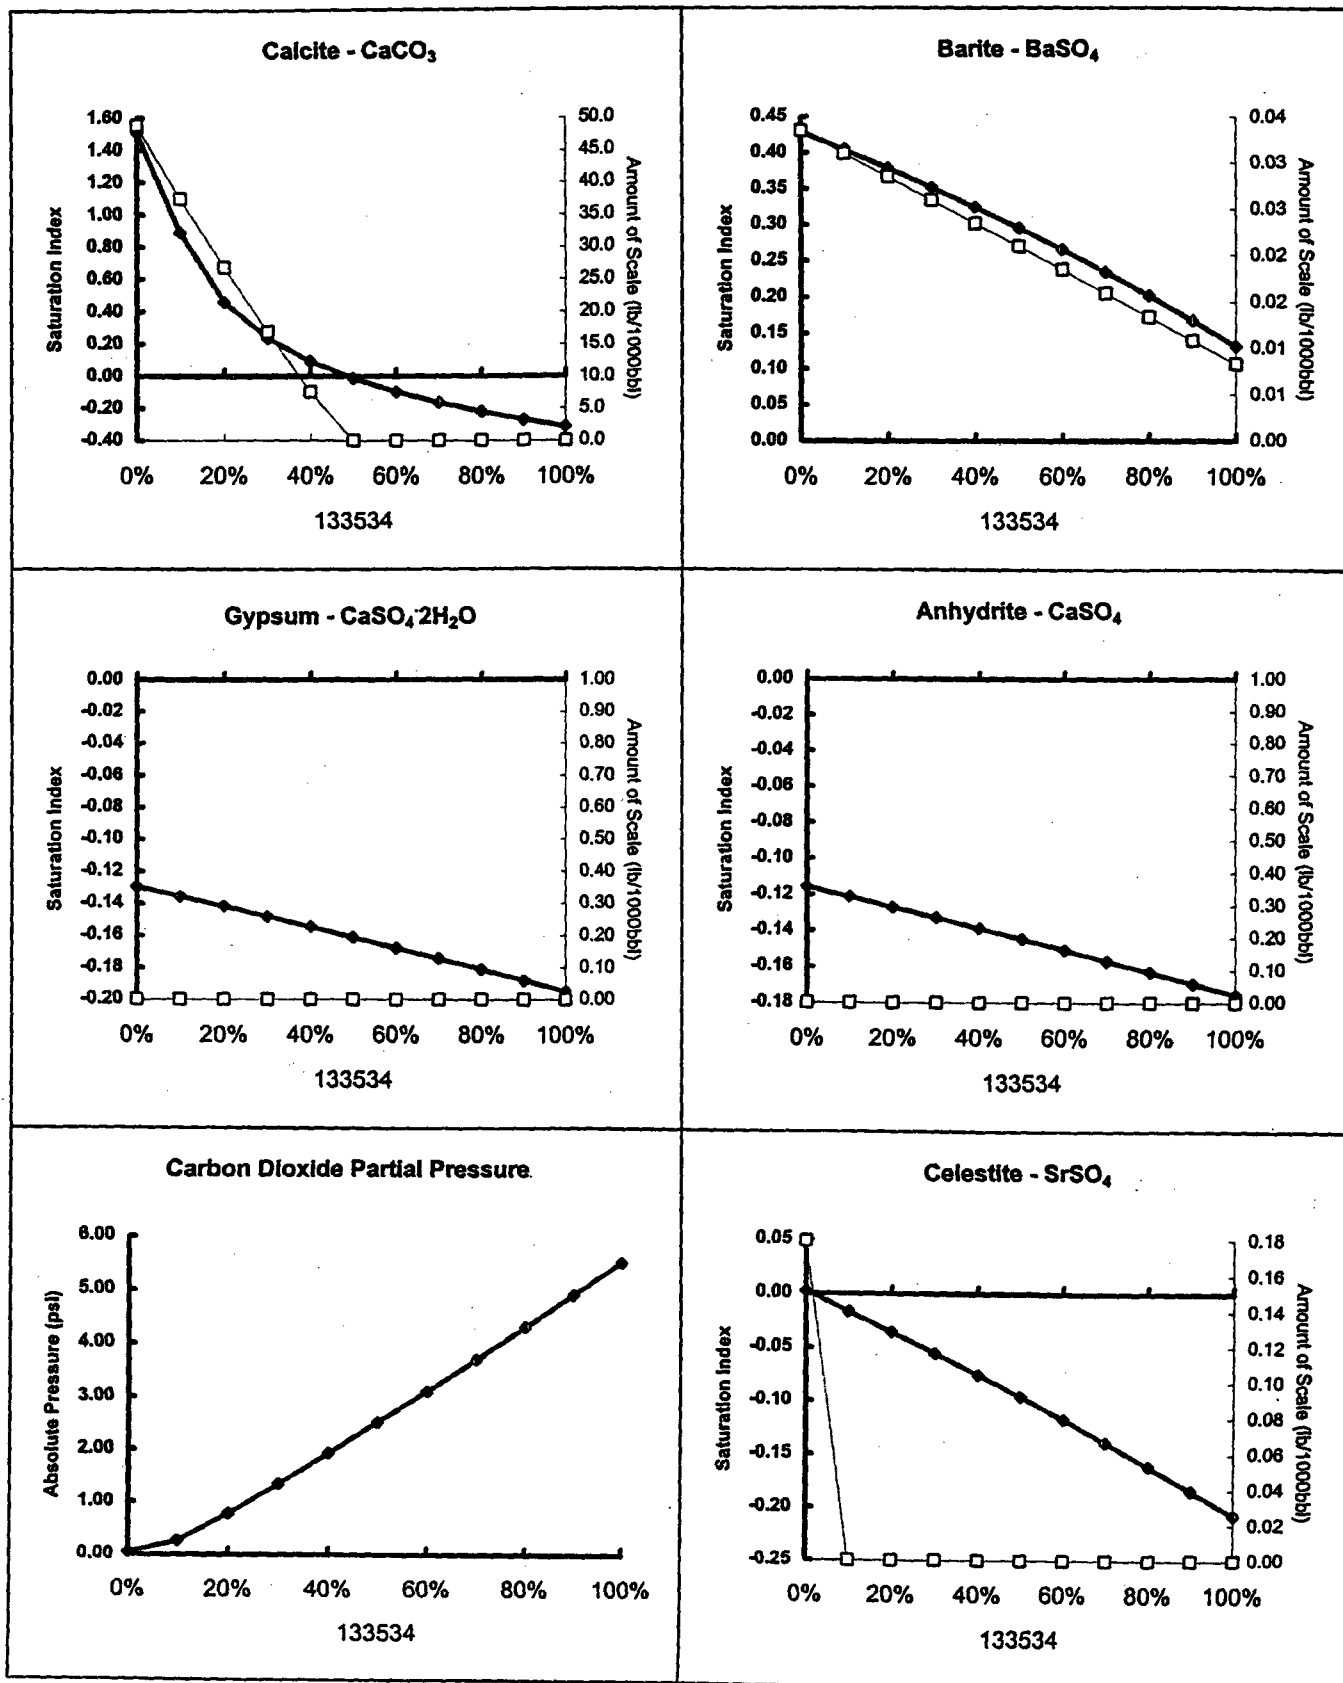

Analysis: 24190

Water Analysis Report from Baker Petrolite

Mixes at 100°F and 0 psi

Predictions of Carbon Dioxide Pressure, Saturation Index and Amount of Scale in lb/1000bbl

Mix Waters		CO ₂	Calcite CaCO ₃		Gypsum CaSO ₄ ·2H ₂ O		Anhydrite CaSO ₄		Celestite SrSO ₄		Barite BaSO ₄	
133534	112098	psi	Index	Amount	Index	Amount	Index	Amount	Index	Amount	Index	Amount
100%	0%	6.73	-0.22		-0.27		-0.19		-0.24		-0.08	
90%	10%	5.99	-0.18		-0.27		-0.18		-0.22		-0.04	
80%	20%	5.25	-0.13		-0.26		-0.18		-0.19		-0.01	
70%	30%	4.52	-0.07		-0.25		-0.17		-0.17		0.03	0.00
60%	40%	3.80	-0.00		-0.25		-0.16		-0.15		0.06	0.01
50%	50%	3.08	0.08	7.2	-0.24		-0.16		-0.13		0.09	0.01
40%	60%	2.37	0.18	15.2	-0.23		-0.15		-0.11		0.12	0.01
30%	70%	1.67	0.32	23.8	-0.22		-0.14		-0.09		0.15	0.01
20%	80%	0.99	0.53	32.8	-0.22		-0.14		-0.07		0.17	0.02
10%	90%	0.40	0.89	42.5	-0.21		-0.13		-0.05		0.20	0.02
0%	100%	0.11	1.37	53.0	-0.20		-0.12		-0.03		0.22	0.02

Note 1: When assessing the severity of the scale problem, both the saturation index (SI) and amount of scale must be considered.


Note 2: Precipitation of each scale is considered separately. Total scale will be less than the sum of the amounts of the five scales.

Note 3: CO₂ Pressure is absolute pressure. Total Pressure is gauge pressure.

Mixture Predictions from Baker-Petrolite

133534 with 112098 at 100°F and 0 psi

Analysis: 24190

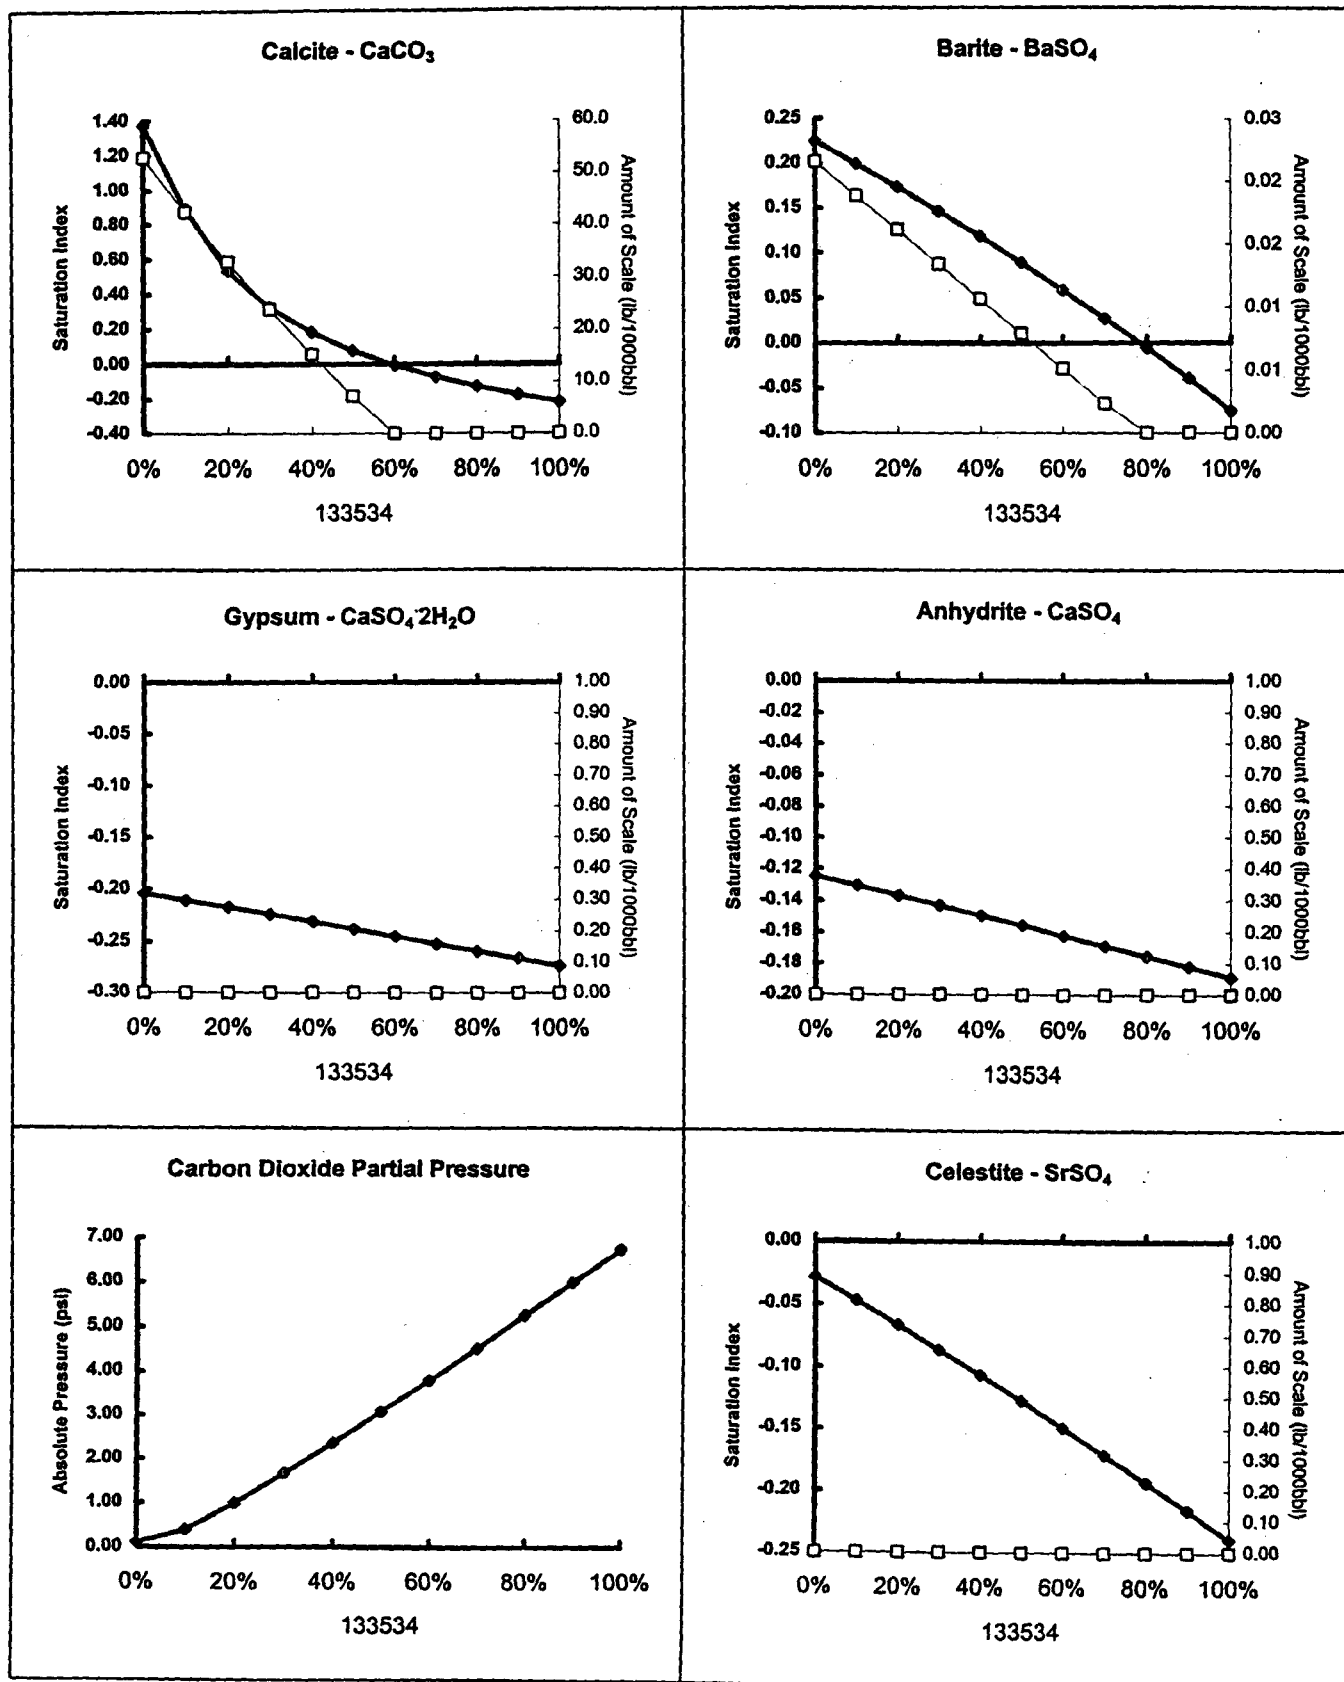

Analysis: 24190

Water Analysis Report from Baker Petrolite

Mixes at 120°F and 0 psi

Predictions of Carbon Dioxide Pressure, Saturation Index and Amount of Scale in lb/1000bbl												
Mix Waters		CO ₂	Calcite CaCO ₃		Gypsum CaSO ₄ ·2H ₂ O		Anhydrite CaSO ₄		Celestite SrSO ₄		Barite BaSO ₄	
133534	112098	psi	Index	Amount	Index	Amount	Index	Amount	Index	Amount	Index	Amount
100%	0%	7.93	-0.12		-0.34		-0.18		-0.26		-0.26	
90%	10%	7.06	-0.08		-0.33		-0.17		-0.24		-0.22	
80%	20%	6.20	-0.03		-0.33		-0.16		-0.21		-0.19	
70%	30%	5.34	0.02	2.7	-0.32		-0.16		-0.19		-0.15	
60%	40%	4.49	0.09	9.2	-0.31		-0.15		-0.17		-0.12	
50%	50%	3.65	0.17	16.1	-0.30		-0.14		-0.15		-0.09	
40%	60%	2.83	0.27	23.3	-0.30		-0.13		-0.13		-0.06	
30%	70%	2.01	0.41	31.0	-0.29		-0.13		-0.11		-0.03	
20%	80%	1.24	0.60	39.2	-0.28		-0.12		-0.09		-0.01	
10%	90%	0.58	0.90	47.9	-0.27		-0.11		-0.07		0.02	0.00
0%	100%	0.20	1.26	57.4	-0.27		-0.11		-0.05		0.04	0.01

Note 1: When assessing the severity of the scale problem, both the saturation index (SI) and amount of scale must be considered.


Note 2: Precipitation of each scale is considered separately. Total scale will be less than the sum of the amounts of the five scales.

Note 3: CO₂ Pressure is absolute pressure. Total Pressure is gauge pressure.

Mixture Predictions from Baker-Petrolite

133534 with 112098 at 120°F and 0 psi

Analysis: 24190

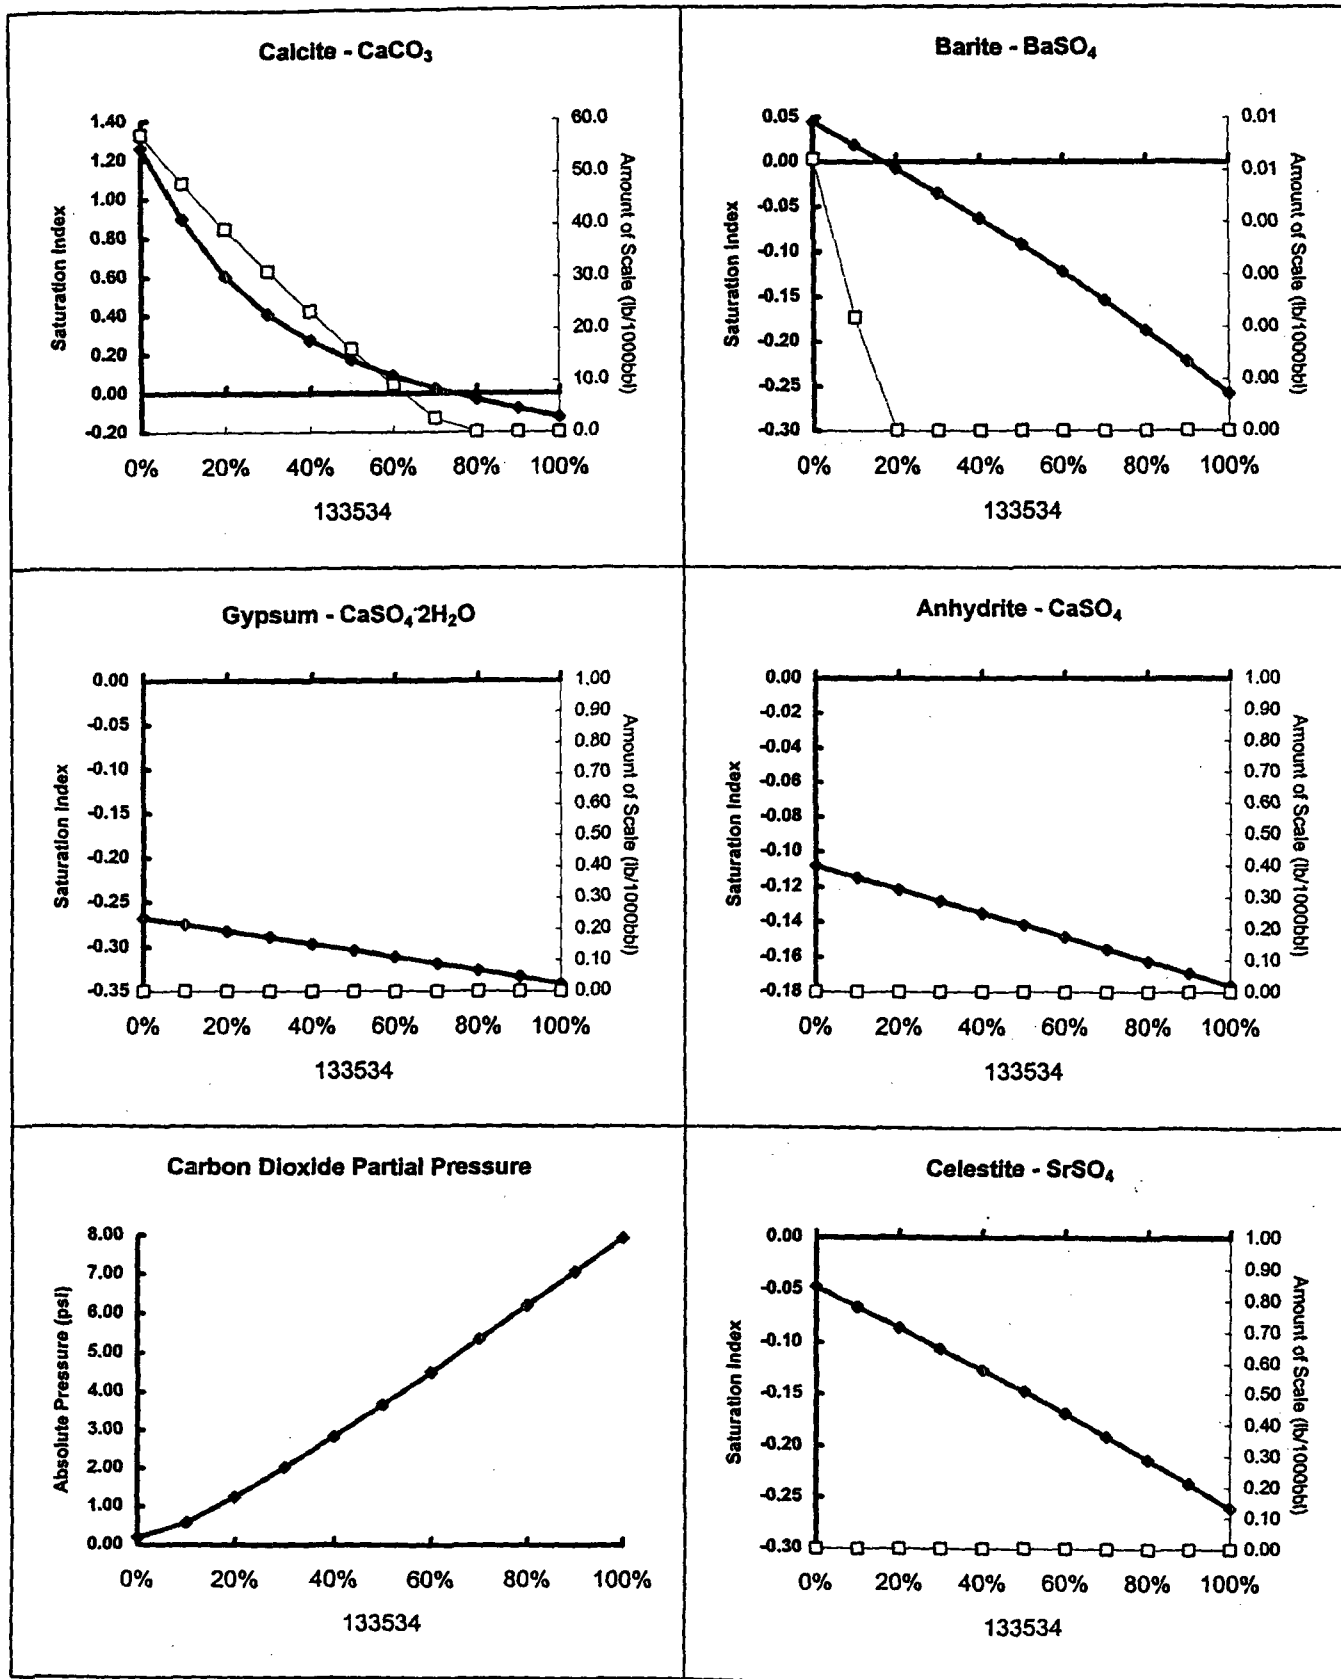

Analysis: 24190

Water Analysis Report from Baker Petrolite

Mixes at 140°F and 0 psi

Predictions of Carbon Dioxide Pressure, Saturation Index and Amount of Scale in lb/1000bbl

Mix Waters		CO ₂	Calcite CaCO ₃		Gypsum CaSO ₄ ·2H ₂ O		Anhydrite CaSO ₄		Celestite SrSO ₄		Barite BaSO ₄	
133534	112098	psi	Index	Amount	Index	Amount	Index	Amount	Index	Amount	Index	Amount
100%	0%	9.05	-0.02		-0.40		-0.14		-0.27		-0.42	
90%	10%	8.07	0.02	2.7	-0.39		-0.13		-0.25		-0.38	
80%	20%	7.09	0.07	8.0	-0.38		-0.13		-0.22		-0.35	
70%	30%	6.13	0.13	13.5	-0.38		-0.12		-0.20		-0.31	
60%	40%	5.17	0.19	19.3	-0.37		-0.11		-0.18		-0.28	
50%	50%	4.22	0.27	25.4	-0.36		-0.11		-0.16		-0.25	
40%	60%	3.29	0.37	31.9	-0.35		-0.10		-0.14		-0.22	
30%	70%	2.38	0.49	38.7	-0.34		-0.09		-0.12		-0.19	
20%	80%	1.53	0.66	46.0	-0.34		-0.08		-0.10		-0.17	
10%	90%	0.80	0.90	53.8	-0.33		-0.08		-0.08		-0.14	
0%	100%	0.34	1.18	62.3	-0.32		-0.07		-0.06		-0.11	

Note 1: When assessing the severity of the scale problem, both the saturation index (SI) and amount of scale must be considered.


Note 2: Precipitation of each scale is considered separately. Total scale will be less than the sum of the amounts of the five scales.

Note 3: CO₂ Pressure is absolute pressure. Total Pressure is gauge pressure.

Mixture Predictions from Baker-Petrolite

133534 with 112098 at 140°F and 0 psi

Analysis: 24190

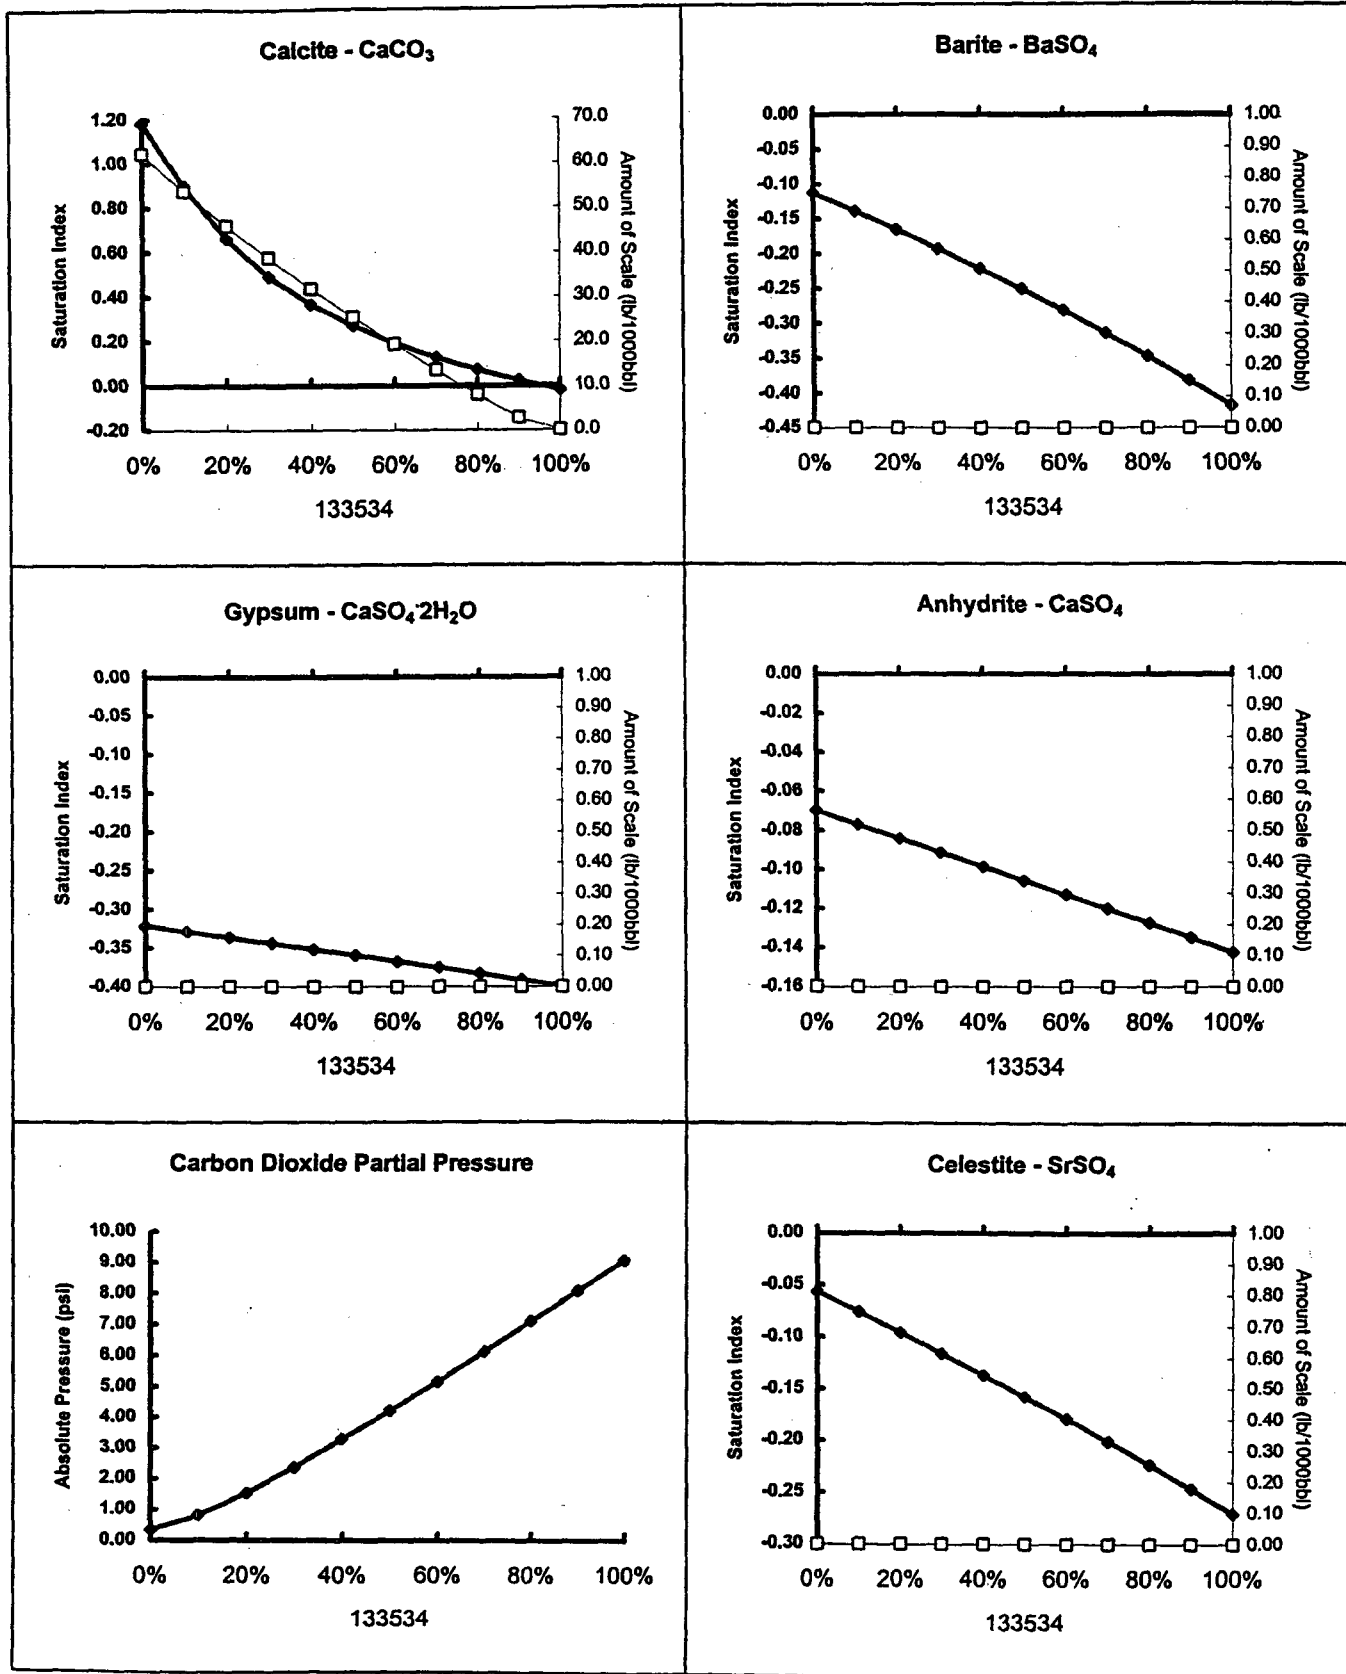



Mobile Analytical Laboratories

LABORATORIES IN ODESSA, GIDDINGS & STACY DAM
WEST UNIVERSITY AND WESTOVER STREET

P.O. BOX 89210

ODESSA, TEXAS 79769-0210

PHONE 337-4744

FAX 337-4781

SEPTEMBER 16, 1996

MR. ROLLAND W. PERRY
LABORATORY SERVICES
1331 TASKER DR.
HOBBS, NEW MEXICO 88240

DEAR MR. PERRY:

THE FOLLOWING ARE THE RESULTS OF THE SEVEN OIL SAMPLES FOR SULFUR
CONTENT AND GRAVITY, SAMPLED 09/14/96, RECEIVED 09/15/96,
LAB NOS. 1483-1489:

	SULFUR	API GRAVITY @ 60 °F	SPECIFIC GRAVITY @ 60 °F
LAB NO. 1483: DEVON HAWK #8-1	1.347 %wt	31.3	0.8691
LAB NO. 1484: DEVON HAWK #8-3	0.684 %wt	41.3	0.8188
LAB NO. 1485: DEVON HAWK #8-11	0.700 %wt	35.1	0.8492
LAB NO. 1486: DEVON HAWK #8-4	0.643 %wt	37.4	0.8380
SAN ANDRES			
LAB NO. 1487: DEVON HAWK #8-5	0.609 %wt	39.5	0.8275
LAB NO. 1488: DEVON WEST RED LAKE	0.690 %wt	39.0	0.8299
LAB NO. 1489: DEVON HONDO FED	0.522 %wt	38.2	0.8338

TEST METHOD: SULFUR ASTM D-4294

WE APPRECIATE THE OPPORTUNITY TO WORK WITH YOU ON THESE TESTS. IF YOU
HAVE ANY QUESTIONS OR REQUIRE ANY FURTHER INFORMATION, PLEASE FEEL
FREE TO CONTACT ME AT ANY TIME.

SINCERELY,


STEPHEN REID
SR/dt

DEC-15-99 LIED

= 34 Laboratory Services

P. 02

L
S**Laboratory Services, Inc.**4016 Fiesta Drive
Hobbs, New Mexico 88240
Telephone: (505) 397-3713**SULFUR IN CRUDE OIL**Devon Energy
P. O. Box 240
Artesia, New Mexico 88211-0250

Dec. 15, 1999

YESO OIL Samples

	Total Sulfur	API Gravity @ 60° F	Specific Gravity @ 60° F
Hawk 8-3	0.4116 wt. %	42.6	0.8128
Eagle 93-9	0.4382 wt. %	37.3	0.8383
Logan 35-9	0.4752 wt. %	41.8	0.8165
Logan 35-14	0.4430 wt. %	41.8	0.8165

Thank You,
Rolland Perry