

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-141
Revised October 10, 2003

Submit 2 Copies to appropriate
District Office in accordance
with Rule 116 on back
side of form

Release Notification and Corrective Action

OPERATOR

x Initial Report Final Report

Name of Company: Occidental Permian Limited Partnership	Contact: Tony Summers
Address: 1017 West Stanolind Road, Hobbs, N.M. 88240	Telephone No: 505.397.8236 or 505.390.9228
Facility Name Warren McKee Unit Salt Water Disposal	Facility Type Production

Surface Owner	Mineral Owner Oxy	Lease No.
---------------	--------------------------	-----------

LOCATION OF RELEASE

Unit Letter	Section	Township	Range	Feet from the	North/South Line	Feet from the	East/West Line	County Lea
F	7	20-S	38E					

73'

Latitude N 32° 35.329' Longitude W 103° 11.331'

NATURE OF RELEASE

Type of Release Produced Water	Volume of Release 350 bbls	Volume Recovered 180 bbls
Source of Release SWD tank ran over	Date and Hour of Occurrence 03/12/07 1:00am	Date and Hour of Discovery 03/12/07 10:30 am
Was Immediate Notice Given? x Yes <input type="checkbox"/> No <input type="checkbox"/> Not Required	If YES, To Whom? Chris Williams	
By Whom? Tony Summers	Date and Hour 03/12/07 2:00pm	
Was a Watercourse Reached? <input type="checkbox"/> Yes x No	If YES, Volume Impacting the Watercourse.	

If a Watercourse was Impacted, Describe Fully.*

Describe Cause of Problem and Remedial Action Taken.* Storm knocked down electricity and alarm communications causing pumps to go down and no alarms sent. SWD tanks ran over approximately 350 barrels of produced water into diked area. Vacuum truck picked up 180 bbls.

Describe Area Affected and Cleanup Action Taken.* Spill area was inside diked are of SWD. Vacuum truck picked up all free standing fluid. NMSEO states average depth to water of 80 feet giving a ranking of 10.

I hereby certify that the information given above is true and complete to the best of my knowledge and understand that pursuant to NMOCD rules and regulations all operators are required to report and/or file certain release notifications and perform corrective actions for releases which may endanger public health or the environment. The acceptance of a C-141 report by the NMOCD marked as "Final Report" does not relieve the operator of liability should their operations have failed to adequately investigate and remediate contamination that pose a threat to ground water, surface water, human health or the environment. In addition, NMOCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other federal, state, or local laws and/or regulations.

Signature:		OIL CONSERVATION DIVISION	
Printed Name: Tony Summers		Approved by District Supervisor: <i>Chris Williams</i>	
Title: HES Technician		Approval Date: <i>3/20/07</i>	Expiration Date: <i>3/20/08</i>
E-mail Address: tony_summers@oxy.com		Conditions of Approval:	
Date:		Attached <input type="checkbox"/>	
Phone: 505.397.8236			

* Attach Additional Sheets If Necessary

Facility - FPAC 0708023650
Incident - NPAC 0708023750

application - FPAC 0708023845 RPT# 1249



Occidental Permian Limited Partnership

March 16, 2007

New Mexico Oil Conservation Division
District I
1625 N. French Drive
Hobbs, New Mexico 88240

Attn: Environmental Engineering

RE: Remediation Plan
Warren McKee Unit SWD
UL 'F, Sec. 7, T-20S, R-38E

79

At 10:30 am on 03/12/07 tanks from Warren McKee SWD were found running over. Storm from night before had knocked down electricity, pumps, and alarm communications at around 1:00 am. Approx. 350 barrels of produced water were spilled into diked area. Vacuum truck picked up 180 barrels of free standing fluid. Average chlorides for this produced water are 78,000 ppm. No fluid got into pasture. The NMSEO states the average depth to water is 80' giving area a ranking of 10. Remediation of spill site will be as follows:

1. ~~3"~~^{6"} to ~~6"~~^{12"} of caliche in dike will be removed and area tested for chlorides along with background samples.
2. Caliche will be disposed of to JL Land farm.
3. NMOCD will be notified as to sample contents and asked for guidance for further action.
4. NMOCD guidelines will be used to insure entire site is in compliance with guidelines.


If you have any questions, or if I can be of further assistance, please contact me at (505) 397-8251.

Tony Summers

HES Technician/Seminole RMT
Tony_summers@oxy.com
(505) 397-8236

Attachments: Initial C-141
Hand drawn map of spill site.

WELL SWD #1
SE NW 7-205-38 E

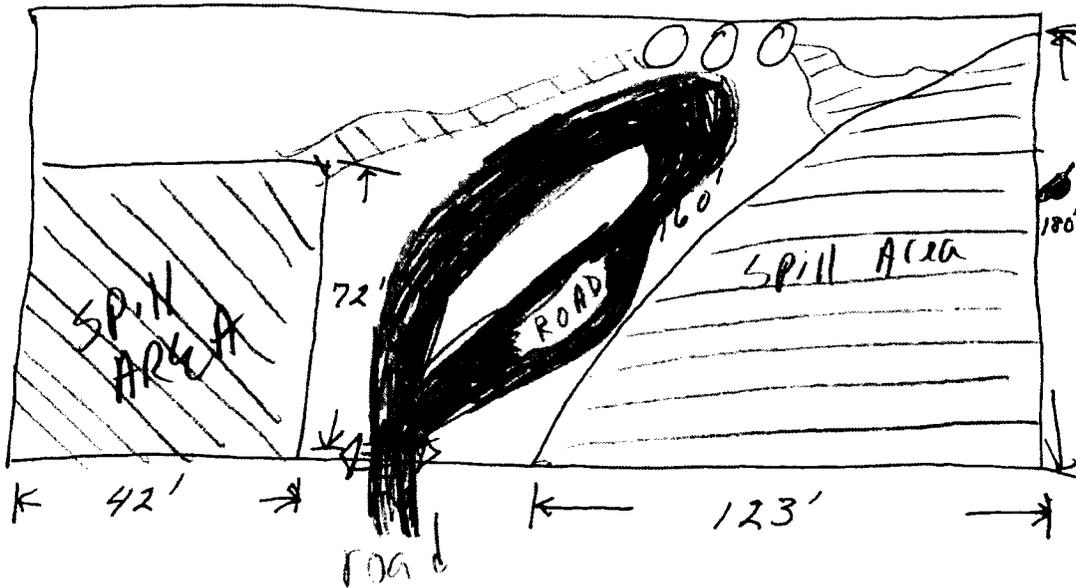

Spill 350 WTR
Recovered 160 WTR 180 Solids

3-12-07