

GW-007

SONAR SURVEY

WELL # 4

YEAR(S):

08/31/2007

SONARWIRE, INC.

P.O. BOX 576
ABITA SPRINGS, LA 70420
Office: 985-893-9221
Toll free: 888-211-6037
Fax: 985-893-4798
E-mail: gary@sonarwire.com

Survey conducted by: Gary McCool

WESTERN REFINING
JAL, NM
STATE LPG WELL NO. 4
AUGUST 31, 2007
SONAR-THRU-PIPE SURVEY

Survey from 1666 ft. to 2614 ft.
Sonar T.D. at 2616 ft.
9 5/8 inch cemented casing at 1666 ft.
4 1/2 inch tubing at 2607 ft.
Zero sonar tool at B.H.F.
Site personnel: Mr. Jerry Lindt
Lonquist Field Services

SONARWIRE INC.
Depth versus Volume

WESTERN REFINING
JAL, NM

STATE LPG WELL NO. 4
Fri, Aug 31, 2007

Depth	Cubic ft. per ft.	Cubic ft. total	Barrels per ft.	Barrels total
1667	325.6	325.6	58.0	58.0
1668	264.4	589.9	47.1	105.1
1669	209.6	799.5	37.3	142.4
1670	205.7	1005.2	36.6	179.0
1671	201.8	1207.1	36.0	215.0
1672	200.9	1407.9	35.8	250.8
1673	199.9	1607.8	35.6	286.4
1674	198.9	1806.7	35.4	321.8
1675	198.0	2004.8	35.3	357.1
1676	180.0	2184.7	32.1	389.1
1677	163.1	2347.8	29.0	418.2
1678	147.2	2495.0	26.2	444.4
1679	132.4	2627.5	23.6	468.0
1680	69.1	2696.6	12.3	480.3
1681	28.6	2725.2	5.1	485.4
1682	1.3	2726.5	0.2	485.6
1683	1.3	2727.7	0.2	485.8
1684	1.3	2729.0	0.2	486.1
1685	1.3	2730.2	0.2	486.3
1686	1.3	2731.5	0.2	486.5
1687	1.3	2732.7	0.2	486.7
1688	1.3	2734.0	0.2	486.9
1689	1.3	2735.2	0.2	487.2
1690	1.3	2736.5	0.2	487.4
1691	139.8	2876.3	24.9	512.3
1692	135.2	3011.5	24.1	536.4
1693	130.8	3142.3	23.3	559.7
1694	126.4	3268.7	22.5	582.2
1695	122.1	3390.9	21.8	603.9
1696	1.3	3392.1	0.2	604.2
1697	1.3	3393.4	0.2	604.4
1698	1.3	3394.6	0.2	604.6
1699	1.3	3395.9	0.2	604.8
1700	1.3	3397.1	0.2	605.1
1701	116.0	3513.1	20.7	625.7
1702	114.3	3627.4	20.4	646.1
1703	112.6	3740.0	20.1	666.1
1704	111.0	3851.0	19.8	685.9
1705	109.4	3960.3	19.5	705.4
1706	107.7	4068.1	19.2	724.6
1707	106.1	4174.2	18.9	743.5
1708	104.5	4278.7	18.6	762.1
1709	103.0	4381.7	18.3	780.4
1710	101.4	4483.1	18.1	798.5
1711	99.9	4583.0	17.8	816.3
1712	98.3	4681.3	17.5	833.8

WESTERN REFINING
JAL, NM

STATE LPG WELL NO. 4
Fri, Aug 31, 2007

Depth	Cubic ft. per ft.	Cubic ft. total	Barrels per ft.	Barrels total
1713	96.8	4778.1	17.2	851.0
1714	95.1	4873.1	16.9	867.9
1715	93.3	4966.5	16.6	884.6
1716	91.6	5058.1	16.3	900.9
1717	89.9	5148.0	16.0	916.9
1718	88.3	5236.3	15.7	932.6
1719	86.6	5322.9	15.4	948.1
1720	85.0	5407.9	15.1	963.2
1721	83.3	5491.2	14.8	978.0
1722	81.7	5572.9	14.6	992.6
1723	80.1	5653.1	14.3	1006.9
1724	78.6	5731.6	14.0	1020.9
1725	77.0	5808.7	13.7	1034.6
1726	75.5	5884.1	13.4	1048.0
1727	73.9	5958.1	13.2	1061.2
1728	72.4	6030.5	12.9	1074.1
1729	70.9	6101.4	12.6	1086.7
1730	69.5	6170.9	12.4	1099.1
1731	68.0	6238.8	12.1	1111.2
1732	53.6	6292.4	9.5	1120.7
1733	41.6	6334.0	7.4	1128.1
1734	31.9	6365.9	5.7	1133.8
1735	1.3	6367.1	0.2	1134.0
1736	1.3	6368.4	0.2	1134.3
1737	1.3	6369.6	0.2	1134.5
1738	1.3	6370.9	0.2	1134.7
1739	1.3	6372.2	0.2	1134.9
1740	1.3	6373.4	0.2	1135.2
1741	1.3	6374.7	0.2	1135.4
1742	1.3	6375.9	0.2	1135.6
1743	1.3	6377.2	0.2	1135.8
1744	9.7	6386.8	1.7	1137.5
1745	26.6	6413.4	4.7	1142.3
1746	51.9	6465.3	9.2	1151.5
1747	1.3	6466.6	0.2	1151.7
1748	1.3	6467.8	0.2	1152.0
1749	1.3	6469.1	0.2	1152.2
1750	1.3	6470.3	0.2	1152.4
1751	1.3	6471.6	0.2	1152.6
1752	1.3	6472.8	0.2	1152.9
1753	1.3	6474.1	0.2	1153.1
1754	1.3	6475.3	0.2	1153.3
1755	1.3	6476.6	0.2	1153.5
1756	1.3	6477.9	0.2	1153.8
1757	1.3	6479.1	0.2	1154.0
1758	1.3	6480.4	0.2	1154.2
1759	1.3	6481.6	0.2	1154.4
1760	1.3	6482.9	0.2	1154.6

WESTERN REFINING
JAL, NM

STATE LPG WELL NO. 4
Fri, Aug 31, 2007

Depth	Cubic ft. per ft.	Cubic ft. total	Barrels per ft.	Barrels total
1761	1.3	6484.1	0.2	1154.9
1762	8.0	6492.1	1.4	1156.3
1763	19.1	6511.2	3.4	1159.7
1764	35.8	6547.0	6.4	1166.1
1765	1.3	6548.2	0.2	1166.3
1766	1.3	6549.5	0.2	1166.5
1767	1.3	6550.7	0.2	1166.7
1768	1.3	6552.0	0.2	1167.0
1769	1.3	6553.2	0.2	1167.2
1770	1.3	6554.5	0.2	1167.4
1771	1.3	6555.7	0.2	1167.6
1772	54.7	6610.5	9.7	1177.4
1773	54.9	6665.3	9.8	1187.1
1774	55.0	6720.3	9.8	1196.9
1775	55.1	6775.4	9.8	1206.7
1776	55.2	6830.6	9.8	1216.6
1777	55.3	6885.9	9.9	1226.4
1778	55.4	6941.3	9.9	1236.3
1779	55.6	6996.9	9.9	1246.2
1780	55.7	7052.6	9.9	1256.1
1781	55.8	7108.4	9.9	1266.1
1782	54.5	7163.0	9.7	1275.8
1783	53.3	7216.3	9.5	1285.3
1784	52.0	7268.3	9.3	1294.5
1785	50.8	7319.1	9.0	1303.6
1786	49.6	7368.7	8.8	1312.4
1787	48.4	7417.1	8.6	1321.0
1788	47.2	7464.3	8.4	1329.4
1789	46.0	7510.3	8.2	1337.6
1790	44.9	7555.2	8.0	1345.6
1791	43.7	7599.0	7.8	1353.4
1792	42.6	7641.6	7.6	1361.0
1793	41.5	7683.1	7.4	1368.4
1794	40.4	7723.5	7.2	1375.6
1795	39.4	7762.9	7.0	1382.6
1796	39.3	7802.2	7.0	1389.6
1797	39.3	7841.5	7.0	1396.6
1798	39.2	7880.7	7.0	1403.6
1799	39.2	7919.9	7.0	1410.6
1800	39.2	7959.1	7.0	1417.6
1801	39.1	7998.3	7.0	1424.6
1802	39.1	8037.4	7.0	1431.5
1803	39.1	8076.4	7.0	1438.5
1804	39.0	8115.5	7.0	1445.4
1805	39.0	8154.5	6.9	1452.4
1806	39.0	8193.5	6.9	1459.3
1807	39.0	8232.4	6.9	1466.3
1808	38.9	8271.4	6.9	1473.2

WESTERN REFINING
JAL, NM

STATE LPG WELL NO. 4
Fri, Aug 31, 2007

Depth	Cubic ft. per ft.	Cubic ft. total	Barrels per ft.	Barrels total
1809	38.9	8310.3	6.9	1480.1
1810	38.9	8349.1	6.9	1487.0
1811	38.9	8388.0	6.9	1494.0
1812	38.8	8426.9	6.9	1500.9
1813	38.8	8465.7	6.9	1507.8
1814	38.8	8504.5	6.9	1514.7
1815	38.8	8543.3	6.9	1521.6
1816	38.8	8582.1	6.9	1528.5
1817	38.8	8620.9	6.9	1535.4
1818	13.5	8634.4	2.4	1537.8
1819	1.3	8635.6	0.2	1538.1
1820	1.3	8636.9	0.2	1538.3
1821	1.3	8638.1	0.2	1538.5
1822	1.3	8639.4	0.2	1538.7
1823	1.3	8640.6	0.2	1539.0
1824	1.3	8641.9	0.2	1539.2
1825	28.7	8670.6	5.1	1544.3
1826	28.9	8699.5	5.1	1549.4
1827	29.1	8728.6	5.2	1554.6
1828	29.3	8757.9	5.2	1559.8
1829	29.5	8787.4	5.3	1565.1
1830	29.7	8817.2	5.3	1570.4
1831	30.0	8847.1	5.3	1575.7
1832	30.2	8877.3	5.4	1581.1
1833	30.4	8907.7	5.4	1586.5
1834	30.6	8938.4	5.5	1592.0
1835	30.9	8969.2	5.5	1597.5
1836	31.1	9000.3	5.5	1603.0
1837	31.3	9031.6	5.6	1608.6
1838	31.6	9063.2	5.6	1614.2
1839	31.8	9094.9	5.7	1619.9
1840	32.0	9127.0	5.7	1625.6
1841	32.3	9159.2	5.7	1631.3
1842	32.5	9191.7	5.8	1637.1
1843	32.7	9224.5	5.8	1642.9
1844	33.0	9257.5	5.9	1648.8
1845	33.2	9290.7	5.9	1654.7
1846	33.5	9324.2	6.0	1660.7
1847	33.7	9357.9	6.0	1666.7
1848	34.0	9391.9	6.1	1672.8
1849	34.2	9426.1	6.1	1678.9
1850	34.1	9460.2	6.1	1684.9
1851	34.0	9494.2	6.1	1691.0
1852	33.8	9528.1	6.0	1697.0
1853	33.7	9561.8	6.0	1703.0
1854	33.6	9595.4	6.0	1709.0
1855	33.5	9628.8	6.0	1715.0
1856	33.3	9662.1	5.9	1720.9

WESTERN REFINING
JAL, NM

STATE LPG WELL NO. 4
Fri, Aug 31, 2007

Depth	Cubic ft. per ft.	Cubic ft. total	Barrels per ft.	Barrels total
1857	33.2	9695.3	5.9	1726.8
1858	33.1	9728.4	5.9	1732.7
1859	32.9	9761.4	5.9	1738.6
1860	32.8	9794.2	5.8	1744.4
1861	32.7	9826.9	5.8	1750.2
1862	32.6	9859.5	5.8	1756.0
1863	32.4	9891.9	5.8	1761.8
1864	32.3	9924.2	5.8	1767.6
1865	32.2	9956.4	5.7	1773.3
1866	32.1	9988.5	5.7	1779.0
1867	32.0	10020.4	5.7	1784.7
1868	31.8	10052.3	5.7	1790.4
1869	31.7	10084.0	5.6	1796.0
1870	31.6	10115.6	5.6	1801.7
1871	31.5	10147.0	5.6	1807.3
1872	31.3	10178.4	5.6	1812.8
1873	31.2	10209.6	5.6	1818.4
1874	31.1	10240.7	5.5	1823.9
1875	31.0	10271.7	5.5	1829.5
1876	30.9	10302.6	5.5	1835.0
1877	30.8	10333.3	5.5	1840.4
1878	30.6	10363.9	5.5	1845.9
1879	30.5	10394.5	5.4	1851.3
1880	30.4	10424.9	5.4	1856.7
1881	1.3	10426.1	0.2	1857.0
1882	1.3	10427.4	0.2	1857.2
1883	1.3	10428.6	0.2	1857.4
1884	1.3	10429.9	0.2	1857.6
1885	25.7	10455.6	4.6	1862.2
1886	25.7	10481.3	4.6	1866.8
1887	25.7	10507.0	4.6	1871.4
1888	25.7	10532.8	4.6	1876.0
1889	25.8	10558.5	4.6	1880.6
1890	25.8	10584.3	4.6	1885.2
1891	25.8	10610.1	4.6	1889.7
1892	25.8	10635.9	4.6	1894.3
1893	25.8	10661.8	4.6	1898.9
1894	25.9	10687.6	4.6	1903.6
1895	25.9	10713.5	4.6	1908.2
1896	25.9	10739.4	4.6	1912.8
1897	25.9	10765.3	4.6	1917.4
1898	25.9	10791.3	4.6	1922.0
1899	26.0	10817.3	4.6	1926.6
1900	26.0	10843.3	4.6	1931.3
1901	26.0	10869.3	4.6	1935.9
1902	25.9	10895.1	4.6	1940.5
1903	25.7	10920.8	4.6	1945.1
1904	25.5	10946.4	4.5	1949.6

WESTERN REFINING
JAL, NM

STATE LPG WELL NO. 4
Fri, Aug 31, 2007

Depth	Cubic ft. per ft.	Cubic ft. total	Barrels per ft.	Barrels total
1905	25.4	10971.8	4.5	1954.2
1906	25.2	10997.0	4.5	1958.6
1907	25.1	11022.0	4.5	1963.1
1908	24.9	11046.9	4.4	1967.5
1909	24.8	11071.7	4.4	1972.0
1910	24.6	11096.3	4.4	1976.3
1911	24.5	11120.8	4.4	1980.7
1912	24.3	11145.1	4.3	1985.0
1913	24.2	11169.3	4.3	1989.3
1914	24.0	11193.3	4.3	1993.6
1915	23.9	11217.2	4.3	1997.9
1916	23.7	11240.9	4.2	2002.1
1917	23.6	11264.5	4.2	2006.3
1918	23.5	11288.0	4.2	2010.5
1919	23.3	11311.3	4.2	2014.6
1920	23.2	11334.5	4.1	2018.8
1921	23.1	11357.6	4.1	2022.9
1922	23.0	11380.6	4.1	2027.0
1923	22.8	11403.4	4.1	2031.0
1924	23.3	11426.7	4.1	2035.2
1925	23.7	11450.4	4.2	2039.4
1926	24.2	11474.6	4.3	2043.7
1927	24.7	11499.3	4.4	2048.1
1928	25.1	11524.4	4.5	2052.6
1929	25.6	11550.0	4.6	2057.1
1930	26.1	11576.1	4.6	2061.8
1931	26.6	11602.6	4.7	2066.5
1932	27.1	11629.7	4.8	2071.3
1933	27.6	11657.2	4.9	2076.2
1934	27.0	11684.2	4.8	2081.1
1935	26.4	11710.6	4.7	2085.8
1936	25.9	11736.5	4.6	2090.4
1937	25.3	11761.8	4.5	2094.9
1938	24.8	11786.6	4.4	2099.3
1939	24.3	11810.9	4.3	2103.6
1940	23.8	11834.7	4.2	2107.8
1941	23.3	11858.0	4.1	2112.0
1942	22.8	11880.8	4.1	2116.1
1943	22.3	11903.1	4.0	2120.0
1944	22.5	11925.6	4.0	2124.0
1945	22.6	11948.2	4.0	2128.1
1946	22.7	11971.0	4.1	2132.1
1947	22.9	11993.8	4.1	2136.2
1948	23.0	12016.9	4.1	2140.3
1949	23.2	12040.0	4.1	2144.4
1950	23.3	12063.4	4.2	2148.6
1951	23.5	12086.8	4.2	2152.8
1952	23.6	12110.4	4.2	2157.0

WESTERN REFINING
JAL, NM

STATE LPG WELL NO. 4
Fri, Aug 31, 2007

Depth	Cubic ft. per ft.	Cubic ft. total	Barrels per ft.	Barrels total
1953	23.8	12134.2	4.2	2161.2
1954	23.9	12158.1	4.3	2165.5
1955	24.1	12182.2	4.3	2169.8
1956	24.4	12206.6	4.3	2174.1
1957	24.7	12231.3	4.4	2178.5
1958	25.0	12256.3	4.5	2182.9
1959	25.3	12281.7	4.5	2187.5
1960	25.6	12307.3	4.6	2192.0
1961	26.0	12333.3	4.6	2196.7
1962	26.3	12359.6	4.7	2201.3
1963	26.6	12386.2	4.7	2206.1
1964	27.0	12413.2	4.8	2210.9
1965	1.3	12414.4	0.2	2211.1
1966	1.3	12415.7	0.2	2211.3
1967	1.3	12416.9	0.2	2211.6
1968	1.3	12418.2	0.2	2211.8
1969	1.3	12419.4	0.2	2212.0
1970	1.3	12420.7	0.2	2212.2
1971	1.3	12422.0	0.2	2212.4
1972	1.3	12423.2	0.2	2212.7
1973	1.3	12424.5	0.2	2212.9
1974	1.3	12425.7	0.2	2213.1
1975	1.3	12427.0	0.2	2213.3
1976	1.3	12428.2	0.2	2213.6
1977	1.3	12429.5	0.2	2213.8
1978	1.3	12430.7	0.2	2214.0
1979	1.3	12432.0	0.2	2214.2
1980	1.3	12433.2	0.2	2214.5
1981	1.3	12434.5	0.2	2214.7
1982	1.3	12435.7	0.2	2214.9
1983	1.3	12437.0	0.2	2215.1
1984	1.3	12438.3	0.2	2215.3
1985	1.3	12439.5	0.2	2215.6
1986	1.3	12440.8	0.2	2215.8
1987	1.3	12442.0	0.2	2216.0
1988	1.3	12443.3	0.2	2216.2
1989	28.1	12471.3	5.0	2221.2
1990	28.4	12499.7	5.1	2226.3
1991	28.7	12528.3	5.1	2231.4
1992	29.0	12557.3	5.2	2236.6
1993	29.3	12586.6	5.2	2241.8
1994	29.6	12616.1	5.3	2247.0
1995	29.9	12646.0	5.3	2252.4
1996	30.2	12676.2	5.4	2257.7
1997	30.5	12706.7	5.4	2263.2
1998	30.8	12737.6	5.5	2268.7
1999	31.2	12768.7	5.5	2274.2
2000	31.5	12800.2	5.6	2279.8

WESTERN REFINING
JAL, NM

STATE LPG WELL NO. 4
Fri, Aug 31, 2007

Depth	Cubic ft. per ft.	Cubic ft. total	Barrels per ft.	Barrels total
2001	31.8	12832.0	5.7	2285.5
2002	32.4	12864.5	5.8	2291.3
2003	33.1	12897.5	5.9	2297.2
2004	33.7	12931.3	6.0	2303.2
2005	34.4	12965.6	6.1	2309.3
2006	35.0	13000.7	6.2	2315.5
2007	35.7	13036.4	6.4	2321.9
2008	36.4	13072.7	6.5	2328.4
2009	37.0	13109.7	6.6	2334.9
2010	37.7	13147.5	6.7	2341.7
2011	38.4	13185.9	6.8	2348.5
2012	39.1	13225.0	7.0	2355.5
2013	39.8	13264.8	7.1	2362.6
2014	40.5	13305.3	7.2	2369.8
2015	41.2	13346.5	7.3	2377.1
2016	42.0	13388.5	7.5	2384.6
2017	42.7	13431.2	7.6	2392.2
2018	1.3	13432.4	0.2	2392.4
2019	1.3	13433.7	0.2	2392.6
2020	1.3	13435.0	0.2	2392.9
2021	1.3	13436.2	0.2	2393.1
2022	1.3	13437.5	0.2	2393.3
2023	1.3	13438.7	0.2	2393.5
2024	1.3	13440.0	0.2	2393.8
2025	1.3	13441.2	0.2	2394.0
2026	1.3	13442.5	0.2	2394.2
2027	1.3	13443.7	0.2	2394.4
2028	1.3	13445.0	0.2	2394.7
2029	1.3	13446.2	0.2	2394.9
2030	1.3	13447.5	0.2	2395.1
2031	1.3	13448.7	0.2	2395.3
2032	1.3	13450.0	0.2	2395.5
2033	1.3	13451.3	0.2	2395.8
2034	1.3	13452.5	0.2	2396.0
2035	1.3	13453.8	0.2	2396.2
2036	1.3	13455.0	0.2	2396.4
2037	1.3	13456.3	0.2	2396.7
2038	1.3	13457.5	0.2	2396.9
2039	139.2	13596.8	24.8	2421.7
2040	139.0	13735.8	24.8	2446.5
2041	138.9	13874.7	24.7	2471.2
2042	140.0	14014.7	24.9	2496.1
2043	141.2	14155.9	25.1	2521.3
2044	142.3	14298.2	25.3	2546.6
2045	143.5	14441.7	25.6	2572.2
2046	144.6	14586.3	25.8	2597.9
2047	145.8	14732.1	26.0	2623.9
2048	147.0	14879.1	26.2	2650.1

WESTERN REFINING
JAL, NM

STATE LPG WELL NO. 4
Fri, Aug 31, 2007

Depth	Cubic ft. per ft.	Cubic ft. total	Barrels per ft.	Barrels total
2049	148.1	15027.2	26.4	2676.5
2050	149.3	15176.6	26.6	2703.1
2051	150.5	15327.1	26.8	2729.9
2052	151.7	15478.8	27.0	2756.9
2053	152.9	15631.8	27.2	2784.1
2054	154.5	15786.3	27.5	2811.7
2055	156.2	15942.5	27.8	2839.5
2056	157.8	16100.3	28.1	2867.6
2057	159.4	16259.7	28.4	2896.0
2058	161.1	16420.8	28.7	2924.7
2059	162.8	16583.5	29.0	2953.7
2060	164.4	16748.0	29.3	2982.9
2061	166.1	16914.1	29.6	3012.5
2062	167.9	17082.0	29.9	3042.4
2063	169.6	17251.6	30.2	3072.6
2064	171.3	17422.9	30.5	3103.2
2065	172.6	17595.4	30.7	3133.9
2066	173.8	17769.3	31.0	3164.8
2067	175.1	17944.3	31.2	3196.0
2068	176.3	18120.7	31.4	3227.4
2069	177.6	18298.3	31.6	3259.1
2070	178.9	18477.2	31.9	3290.9
2071	180.2	18657.4	32.1	3323.0
2072	181.5	18838.9	32.3	3355.4
2073	182.8	19021.7	32.6	3387.9
2074	191.2	19212.9	34.0	3422.0
2075	199.8	19412.6	35.6	3457.5
2076	208.7	19621.3	37.2	3494.7
2077	217.8	19839.1	38.8	3533.5
2078	227.2	20066.3	40.5	3574.0
2079	236.9	20303.2	42.2	3616.2
2080	246.8	20550.0	44.0	3660.1
2081	257.0	20807.0	45.8	3705.9
2082	248.1	21055.1	44.2	3750.1
2083	239.4	21294.5	42.6	3792.7
2084	230.8	21525.3	41.1	3833.8
2085	222.5	21747.8	39.6	3873.5
2086	214.3	21962.1	38.2	3911.6
2087	206.3	22168.4	36.7	3948.4
2088	198.5	22366.9	35.3	3983.7
2089	190.8	22557.7	34.0	4017.7
2090	183.3	22741.0	32.7	4050.4
2091	176.1	22917.1	31.4	4081.7
2092	177.9	23095.0	31.7	4113.4
2093	179.8	23274.8	32.0	4145.4
2094	181.7	23456.5	32.4	4177.8
2095	183.6	23640.1	32.7	4210.5
2096	185.5	23825.5	33.0	4243.5

WESTERN REFINING
JAL, NM

STATE LPG WELL NO. 4
Fri, Aug 31, 2007

Depth	Cubic ft. per ft.	Cubic ft. total	Barrels per ft.	Barrels total
2097	187.4	24013.0	33.4	4276.9
2098	189.4	24202.3	33.7	4310.6
2099	191.3	24393.7	34.1	4344.7
2100	193.3	24586.9	34.4	4379.1
2101	195.3	24782.2	34.8	4413.9
2102	194.0	24976.2	34.6	4448.5
2103	192.8	25169.0	34.3	4482.8
2104	191.6	25360.6	34.1	4516.9
2105	190.4	25550.9	33.9	4550.8
2106	189.2	25740.1	33.7	4584.5
2107	188.0	25928.1	33.5	4618.0
2108	186.8	26114.9	33.3	4651.3
2109	185.7	26300.5	33.1	4684.3
2110	186.2	26486.8	33.2	4717.5
2111	186.8	26673.6	33.3	4750.8
2112	187.4	26861.0	33.4	4784.1
2113	188.0	27049.0	33.5	4817.6
2114	188.6	27237.5	33.6	4851.2
2115	189.2	27426.8	33.7	4884.9
2116	189.8	27616.6	33.8	4918.7
2117	190.5	27807.0	33.9	4952.6
2118	191.1	27998.1	34.0	4986.7
2119	191.7	28189.9	34.1	5020.8
2120	192.4	28382.2	34.3	5055.1
2121	193.1	28575.3	34.4	5089.5
2122	192.2	28767.5	34.2	5123.7
2123	191.3	28958.8	34.1	5157.8
2124	190.5	29149.3	33.9	5191.7
2125	189.7	29339.0	33.8	5225.5
2126	188.9	29527.9	33.6	5259.1
2127	188.1	29716.0	33.5	5292.6
2128	185.0	29901.0	32.9	5325.6
2129	181.9	30082.8	32.4	5358.0
2130	178.9	30261.7	31.9	5389.8
2131	175.9	30437.6	31.3	5421.2
2132	148.7	30586.3	26.5	5447.7
2133	123.8	30710.1	22.0	5469.7
2134	101.3	30811.3	18.0	5487.7
2135	81.2	30892.5	14.5	5502.2
2136	1.3	30893.8	0.2	5502.4
2137	1.3	30895.1	0.2	5502.6
2138	1.3	30896.3	0.2	5502.9
2139	1.3	30897.6	0.2	5503.1
2140	1.3	30898.8	0.2	5503.3
2141	1.3	30900.1	0.2	5503.5
2142	1.3	30901.3	0.2	5503.8
2143	1.3	30902.6	0.2	5504.0
2144	1.3	30903.8	0.2	5504.2

WESTERN REFINING
JAL, NM

STATE LPG WELL NO. 4
Fri, Aug 31, 2007

Depth	Cubic ft. per ft.	Cubic ft. total	Barrels per ft.	Barrels total
2145	1.3	30905.1	0.2	5504.4
2146	1.3	30906.3	0.2	5504.7
2147	204.4	31110.7	36.4	5541.1
2148	212.5	31323.2	37.8	5578.9
2149	220.8	31544.0	39.3	5618.2
2150	229.3	31773.3	40.8	5659.1
2151	238.1	32011.4	42.4	5701.5
2152	247.1	32258.6	44.0	5745.5
2153	256.3	32514.9	45.7	5791.2
2154	255.8	32770.7	45.6	5836.7
2155	255.3	33026.0	45.5	5882.2
2156	254.9	33281.0	45.4	5927.6
2157	254.6	33535.6	45.4	5972.9
2158	245.6	33781.2	43.7	6016.7
2159	237.0	34018.2	42.2	6058.9
2160	228.7	34246.9	40.7	6099.6
2161	220.9	34467.8	39.3	6139.0
2162	240.2	34707.9	42.8	6181.8
2163	260.4	34968.3	46.4	6228.1
2164	281.4	35249.7	50.1	6278.2
2165	303.3	35553.0	54.0	6332.3
2166	310.4	35863.5	55.3	6387.6
2167	317.6	36181.1	56.6	6444.1
2168	325.0	36506.1	57.9	6502.0
2169	332.4	36838.4	59.2	6561.2
2170	335.4	37173.9	59.7	6621.0
2171	338.5	37512.3	60.3	6681.2
2172	341.6	37853.9	60.8	6742.1
2173	344.7	38198.7	61.4	6803.5
2174	353.6	38552.3	63.0	6866.5
2175	362.7	38915.0	64.6	6931.1
2176	372.0	39287.0	66.3	6997.3
2177	381.6	39668.6	68.0	7065.3
2178	388.5	40057.1	69.2	7134.5
2179	395.5	40452.6	70.4	7204.9
2180	402.6	40855.2	71.7	7276.6
2181	409.9	41265.1	73.0	7349.6
2182	407.1	41672.2	72.5	7422.1
2183	404.3	42076.5	72.0	7494.1
2184	401.7	42478.2	71.5	7565.7
2185	399.1	42877.3	71.1	7636.8
2186	390.6	43267.8	69.6	7706.3
2187	382.3	43650.2	68.1	7774.4
2188	374.5	44024.7	66.7	7841.1
2189	367.0	44391.7	65.4	7906.5
2190	324.3	44716.0	57.8	7964.3
2191	286.8	45002.8	51.1	8015.3
2192	254.5	45257.3	45.3	8060.7

WESTERN REFINING
JAL, NM

STATE LPG WELL NO. 4
Fri, Aug 31, 2007

Depth	Cubic ft. per ft.	Cubic ft. total	Barrels per ft.	Barrels total
2193	227.3	45484.6	40.5	8101.2
2194	250.1	45734.7	44.5	8145.7
2195	277.1	46011.8	49.4	8195.1
2196	308.5	46320.3	54.9	8250.0
2197	344.2	46664.5	61.3	8311.3
2198	324.8	46989.4	57.9	8369.2
2199	306.2	47295.6	54.5	8423.7
2200	288.5	47584.1	51.4	8475.1
2201	271.7	47855.8	48.4	8523.5
2202	257.0	48112.8	45.8	8569.3
2203	243.6	48356.4	43.4	8612.6
2204	231.5	48587.9	41.2	8653.9
2205	220.7	48808.6	39.3	8693.2
2206	299.2	49107.8	53.3	8746.5
2207	392.9	49500.8	70.0	8816.5
2208	501.9	50002.7	89.4	8905.9
2209	626.2	50628.9	111.5	9017.4
2210	644.8	51273.7	114.8	9132.2
2211	663.8	51937.5	118.2	9250.5
2212	683.1	52620.6	121.7	9372.1
2213	702.9	53323.5	125.2	9497.3
2214	701.1	54024.6	124.9	9622.2
2215	699.3	54723.9	124.6	9746.7
2216	697.6	55421.5	124.3	9871.0
2217	696.0	56117.5	124.0	9995.0
2218	690.1	56807.6	122.9	10117.9
2219	684.3	57491.9	121.9	10239.8
2220	678.6	58170.5	120.9	10360.6
2221	672.9	58843.4	119.8	10480.5
2222	687.5	59530.8	122.4	10602.9
2223	702.3	60233.2	125.1	10728.0
2224	717.4	60950.6	127.8	10855.8
2225	732.8	61683.4	130.5	10986.3
2226	663.9	62347.3	118.2	11104.5
2227	598.6	62945.9	106.6	11211.1
2228	537.0	63482.9	95.6	11306.8
2229	479.1	63962.0	85.3	11392.1
2230	460.9	64422.9	82.1	11474.2
2231	443.6	64866.4	79.0	11553.2
2232	427.3	65293.8	76.1	11629.3
2233	412.0	65705.8	73.4	11702.7
2234	288.3	65994.1	51.4	11754.1
2235	186.7	66180.9	33.3	11787.3
2236	107.3	66288.2	19.1	11806.4
2237	50.0	66338.2	8.9	11815.4
2238	2.2	66340.5	0.4	11815.7
2239	2.2	66342.7	0.4	11816.1
2240	2.2	66344.9	0.4	11816.5

WESTERN REFINING
JAL, NM

STATE LPG WELL NO. 4
Fri, Aug 31, 2007

Depth	Cubic ft. per ft.	Cubic ft. total	Barrels per ft.	Barrels total
2241	2.2	66347.2	0.4	11816.9
2242	2.2	66349.4	0.4	11817.3
2243	2.2	66351.6	0.4	11817.7
2244	2.2	66353.9	0.4	11818.1
2245	2.2	66356.1	0.4	11818.5
2246	2.2	66358.3	0.4	11818.9
2247	2.2	66360.6	0.4	11819.3
2248	2.2	66362.8	0.4	11819.7
2249	2.2	66365.0	0.4	11820.1
2250	2.2	66367.3	0.4	11820.5
2251	2.2	66369.5	0.4	11820.9
2252	2.2	66371.7	0.4	11821.3
2253	2.2	66374.0	0.4	11821.7
2254	2.2	66376.2	0.4	11822.1
2255	2.2	66378.4	0.4	11822.5
2256	2.2	66380.7	0.4	11822.9
2257	2.2	66382.9	0.4	11823.3
2258	2.2	66385.1	0.4	11823.7
2259	2.2	66387.4	0.4	11824.1
2260	2.2	66389.6	0.4	11824.5
2261	2.2	66391.8	0.4	11824.9
2262	2.2	66394.1	0.4	11825.3
2263	2.2	66396.3	0.4	11825.7
2264	2.2	66398.5	0.4	11826.1
2265	2.2	66400.8	0.4	11826.5
2266	2.2	66403.0	0.4	11826.9
2267	2.2	66405.2	0.4	11827.3
2268	2.2	66407.5	0.4	11827.7
2269	2.2	66409.7	0.4	11828.1
2270	2.2	66411.9	0.4	11828.5
2271	2.2	66414.2	0.4	11828.9
2272	2.2	66416.4	0.4	11829.3
2273	2.2	66418.6	0.4	11829.7
2274	2.2	66420.9	0.4	11830.1
2275	2.2	66423.1	0.4	11830.5
2276	2.2	66425.3	0.4	11830.9
2277	2.2	66427.6	0.4	11831.3
2278	2.2	66429.8	0.4	11831.7
2279	2.2	66432.0	0.4	11832.1
2280	2.2	66434.3	0.4	11832.5
2281	2.2	66436.5	0.4	11832.9
2282	2.2	66438.7	0.4	11833.3
2283	2324.3	68763.1	414.0	12247.2
2284	2336.2	71099.3	416.1	12663.3
2285	2348.3	73447.6	418.2	13081.6
2286	2360.4	75808.0	420.4	13502.0
2287	2372.6	78180.6	422.6	13924.6
2288	2368.5	80549.1	421.8	14346.4

WESTERN REFINING
JAL, NM

STATE LPG WELL NO. 4
Fri, Aug 31, 2007

Depth	Cubic ft. per ft.	Cubic ft. total	Barrels per ft.	Barrels total
2289	2364.3	82913.4	421.1	14767.5
2290	2360.3	85273.7	420.4	15187.9
2291	2356.3	87630.0	419.7	15607.6
2292	2374.8	90004.8	423.0	16030.5
2293	2393.6	92398.4	426.3	16456.9
2294	2412.5	94810.9	429.7	16886.6
2295	2431.7	97242.6	433.1	17319.7
2296	2287.6	99530.2	407.4	17727.1
2297	2148.3	101678.4	382.6	18109.7
2298	2013.7	103692.1	358.6	18468.4
2299	1883.8	105575.9	335.5	18803.9
2300	1714.8	107290.7	305.4	19109.3
2301	1554.2	108844.9	276.8	19386.1
2302	1402.1	110247.0	249.7	19635.8
2303	1258.4	111505.4	224.1	19860.0
2304	1084.9	112590.3	193.2	20053.2
2305	924.9	113515.2	164.7	20217.9
2306	778.3	114293.5	138.6	20356.6
2307	645.2	114938.7	114.9	20471.5
2308	290.4	115229.1	51.7	20523.2
2309	89.6	115318.7	16.0	20539.2
2310	1.3	115320.0	0.2	20539.4
2311	1.3	115321.2	0.2	20539.6
2312	1.3	115322.5	0.2	20539.8
2313	1.3	115323.7	0.2	20540.0
2314	1.3	115325.0	0.2	20540.3
2315	1.3	115326.2	0.2	20540.5
2316	1.3	115327.5	0.2	20540.7
2317	1.3	115328.8	0.2	20540.9
2318	1.3	115330.0	0.2	20541.2
2319	1.3	115331.3	0.2	20541.4
2320	1.3	115332.5	0.2	20541.6
2321	1.3	115333.8	0.2	20541.8
2322	1.3	115335.0	0.2	20542.1
2323	1.3	115336.3	0.2	20542.3
2324	1.3	115337.5	0.2	20542.5
2325	1.3	115338.8	0.2	20542.7
2326	1.3	115340.1	0.2	20543.0
2327	1.3	115341.3	0.2	20543.2
2328	1.3	115342.6	0.2	20543.4
2329	1.3	115343.8	0.2	20543.6
2330	1.3	115345.1	0.2	20543.8
2331	1.3	115346.3	0.2	20544.1
2332	1.3	115347.6	0.2	20544.3
2333	1.3	115348.9	0.2	20544.5
2334	1.3	115350.1	0.2	20544.7
2335	123.5	115473.6	22.0	20566.7
2336	428.3	115902.0	76.3	20643.0

WESTERN REFINING
JAL, NM

STATE LPG WELL NO. 4
Fri, Aug 31, 2007

Depth	Cubic ft. per ft.	Cubic ft. total	Barrels per ft.	Barrels total
2337	953.5	116855.4	169.8	20812.9
2338	1698.9	118554.3	302.6	21115.4
2339	2664.6	121218.9	474.6	21590.0
2340	2278.8	123497.7	405.9	21995.9
2341	1924.7	125422.4	342.8	22338.7
2342	1602.3	127024.7	285.4	22624.1
2343	1311.6	128336.2	233.6	22857.7
2344	1143.9	129480.2	203.7	23061.4
2345	988.9	130469.1	176.1	23237.5
2346	846.4	131315.5	150.8	23388.3
2347	716.6	132032.1	127.6	23515.9
2348	535.3	132567.4	95.3	23611.3
2349	381.2	132948.6	67.9	23679.2
2350	254.2	133202.8	45.3	23724.4
2351	154.5	133357.3	27.5	23752.0
2352	1.7	133359.0	0.3	23752.3
2353	1.7	133360.7	0.3	23752.6
2354	1.7	133362.4	0.3	23752.9
2355	1.7	133364.1	0.3	23753.2
2356	1.7	133365.8	0.3	23753.5
2357	1.7	133367.5	0.3	23753.8
2358	1.7	133369.2	0.3	23754.1
2359	1.7	133371.0	0.3	23754.4
2360	1.7	133372.7	0.3	23754.7
2361	1.7	133374.4	0.3	23755.0
2362	1.7	133376.1	0.3	23755.3
2363	1.7	133377.8	0.3	23755.6
2364	1.7	133379.5	0.3	23755.9
2365	1.7	133381.2	0.3	23756.2
2366	1.7	133382.9	0.3	23756.5
2367	1.7	133384.6	0.3	23756.8
2368	1.7	133386.3	0.3	23757.1
2369	111.6	133497.9	19.9	23777.0
2370	396.2	133894.1	70.6	23847.6
2371	1.7	133895.9	0.3	23847.9
2372	1.7	133897.6	0.3	23848.2
2373	1.7	133899.3	0.3	23848.5
2374	1.7	133901.0	0.3	23848.8
2375	1.7	133902.7	0.3	23849.1
2376	1.7	133904.4	0.3	23849.4
2377	1.7	133906.1	0.3	23849.7
2378	1.7	133907.8	0.3	23850.0
2379	1.7	133909.5	0.3	23850.3
2380	1.7	133911.2	0.3	23850.6
2381	1.7	133913.0	0.3	23850.9
2382	884.0	134796.9	157.4	24008.4
2383	863.9	135660.9	153.9	24162.2
2384	844.2	136505.1	150.4	24312.6

WESTERN REFINING
JAL, NM

STATE LPG WELL NO. 4
Fri, Aug 31, 2007

Depth	Cubic ft. per ft.	Cubic ft. total	Barrels per ft.	Barrels total
2385	824.8	137329.9	146.9	24459.5
2386	805.7	138135.6	143.5	24603.0
2387	786.9	138922.5	140.2	24743.2
2388	768.4	139691.0	136.9	24880.0
2389	750.3	140441.2	133.6	25013.7
2390	732.4	141173.6	130.4	25144.1
2391	714.9	141888.5	127.3	25271.4
2392	697.6	142586.1	124.3	25395.7
2393	680.7	143266.8	121.2	25516.9
2394	573.4	143840.2	102.1	25619.0
2395	477.3	144317.5	85.0	25704.1
2396	392.5	144710.0	69.9	25774.0
2397	318.9	145028.9	56.8	25830.8
2398	255.3	145284.2	45.5	25876.2
2399	202.6	145486.8	36.1	25912.3
2400	160.7	145647.6	28.6	25941.0
2401	129.7	145777.2	23.1	25964.0
2402	474.7	146252.0	84.6	26048.6
2403	1090.9	147342.8	194.3	26242.9
2404	1084.4	148427.3	193.1	26436.0
2405	1078.1	149505.4	192.0	26628.1
2406	1071.9	150577.3	190.9	26819.0
2407	1065.9	151643.2	189.8	27008.8
2408	1059.9	152703.1	188.8	27197.6
2409	1054.0	153757.1	187.7	27385.3
2410	977.8	154734.9	174.2	27559.5
2411	904.8	155639.7	161.2	27720.6
2412	835.1	156474.8	148.7	27869.4
2413	768.6	157243.4	136.9	28006.3
2414	683.1	157926.5	121.7	28127.9
2415	604.0	158530.5	107.6	28235.5
2416	531.2	159061.7	94.6	28330.1
2417	464.6	159526.3	82.8	28412.9
2418	520.2	160046.5	92.7	28505.5
2419	579.2	160625.8	103.2	28608.7
2420	641.7	161267.5	114.3	28723.0
2421	707.5	161975.0	126.0	28849.0
2422	776.8	162751.8	138.4	28987.3
2423	849.5	163601.3	151.3	29138.6
2424	925.6	164526.8	164.8	29303.5
2425	1005.1	165531.9	179.0	29482.5
2426	1088.0	166619.9	193.8	29676.3
2427	1174.3	167794.2	209.2	29885.4
2428	1264.1	169058.2	225.1	30110.6
2429	1357.2	170415.5	241.7	30352.3
2430	1284.0	171699.5	228.7	30581.0
2431	1213.4	172912.9	216.1	30797.1
2432	1145.4	174058.3	204.0	31001.1

WESTERN REFINING
JAL, NM

STATE LPG WELL NO. 4
Fri, Aug 31, 2007

Depth	Cubic ft. per ft.	Cubic ft. total	Barrels per ft.	Barrels total
2433	1080.0	175138.4	192.4	31193.5
2434	1069.4	176207.8	190.5	31384.0
2435	1059.0	177266.8	188.6	31572.6
2436	1048.7	178315.5	186.8	31759.4
2437	1038.6	179354.1	185.0	31944.3
2438	1028.7	180382.8	183.2	32127.6
2439	1019.0	181401.8	181.5	32309.1
2440	1051.3	182453.1	187.2	32496.3
2441	1084.2	183537.3	193.1	32689.4
2442	1117.9	184655.2	199.1	32888.5
2443	1152.2	185807.4	205.2	33093.7
2444	1187.2	186994.7	211.5	33305.2
2445	1222.9	188217.6	217.8	33523.0
2446	1259.3	189476.9	224.3	33747.3
2447	1296.3	190773.2	230.9	33978.2
2448	1334.1	192107.3	237.6	34215.8
2449	1372.5	193479.8	244.5	34460.2
2450	1411.6	194891.4	251.4	34711.7
2451	1451.4	196342.8	258.5	34970.2
2452	1491.9	197834.7	265.7	35235.9
2453	1533.0	199367.7	273.0	35508.9
2454	1540.3	200908.0	274.3	35783.3
2455	1553.6	202461.6	276.7	36060.0
2456	1573.2	204034.8	280.2	36340.2
2457	1598.8	205633.6	284.8	36624.9
2458	1191.5	206825.1	212.2	36837.1
2459	877.8	207702.8	156.3	36993.5
2460	657.8	208360.6	117.2	37110.6
2461	531.4	208892.0	94.7	37205.3
2462	293.3	209185.3	52.2	37257.5
2463	142.5	209327.8	25.4	37282.9
2464	53.1	209380.9	9.5	37292.4
2465	2.2	209383.1	0.4	37292.8
2466	2.3	209385.4	0.4	37293.2
2467	2.3	209387.7	0.4	37293.6
2468	2.3	209390.0	0.4	37294.0
2469	2.3	209392.3	0.4	37294.4
2470	2.3	209394.6	0.4	37294.8
2471	2.3	209396.9	0.4	37295.2
2472	2.4	209399.3	0.4	37295.6
2473	2.4	209401.7	0.4	37296.1
2474	2.4	209404.1	0.4	37296.5
2475	2.4	209406.5	0.4	37296.9
2476	2.4	209409.0	0.4	37297.4
2477	2.5	209411.4	0.4	37297.8
2478	2.5	209413.9	0.4	37298.2
2479	2.5	209416.4	0.4	37298.7
2480	2.5	209418.9	0.4	37299.1

WESTERN REFINING
JAL, NM

STATE LPG WELL NO. 4
Fri, Aug 31, 2007

Depth	Cubic ft. per ft.	Cubic ft. total	Barrels per ft.	Barrels total
2481	2.5	209421.5	0.5	37299.6
2482	2.6	209424.0	0.5	37300.0
2483	2.6	209426.6	0.5	37300.5
2484	2.6	209429.2	0.5	37301.0
2485	2.6	209431.8	0.5	37301.4
2486	2.6	209434.5	0.5	37301.9
2487	2.7	209437.1	0.5	37302.4
2488	2.7	209439.8	0.5	37302.8
2489	2.7	209442.5	0.5	37303.3
2490	2.7	209445.3	0.5	37303.8
2491	2.7	209448.0	0.5	37304.3
2492	2.8	209450.8	0.5	37304.8
2493	2.8	209453.6	0.5	37305.3
2494	2.8	209456.4	0.5	37305.8
2495	2.8	209459.2	0.5	37306.3
2496	4094.7	213553.9	729.3	38035.6
2497	4044.4	217598.3	720.3	38755.9
2498	3994.8	221593.1	711.5	39467.4
2499	3946.0	225539.1	702.8	40170.3
2500	3897.8	229436.9	694.2	40864.5
2501	3850.4	233287.3	685.8	41550.3
2502	3783.7	237071.0	673.9	42224.2
2503	3719.3	240790.3	662.4	42886.6
2504	3657.1	244447.5	651.4	43538.0
2505	3597.2	248044.7	640.7	44178.7
2506	3521.9	251566.6	627.3	44806.0
2507	3451.8	255018.4	614.8	45420.7
2508	3386.9	258405.3	603.2	46024.0
2509	3327.2	261732.5	592.6	46616.6
2510	3473.7	265206.1	618.7	47235.3
2511	3636.1	268842.2	647.6	47882.9
2512	3814.3	272656.4	679.3	48562.2
2513	4008.3	276664.8	713.9	49276.1
2514	4025.0	280689.7	716.9	49993.0
2515	4053.2	284743.0	721.9	50714.9
2516	4093.1	288836.1	729.0	51443.9
2517	4144.5	292980.6	738.2	52182.1
2518	4445.7	297426.3	791.8	52973.9
2519	4794.1	302220.4	853.9	53827.8
2520	5189.6	307410.0	924.3	54752.1
2521	5632.2	313042.2	1003.1	55755.2
2522	5763.5	318805.7	1026.5	56781.8
2523	5901.1	324706.8	1051.0	57832.8
2524	6045.0	330751.8	1076.7	58909.5
2525	6195.2	336947.0	1103.4	60012.9
2526	6178.5	343125.6	1100.4	61113.3
2527	6162.4	349287.9	1097.6	62210.9
2528	6146.7	355434.7	1094.8	63305.7

WESTERN REFINING
JAL, NM

STATE LPG WELL NO. 4
Fri, Aug 31, 2007

Depth	Cubic ft. per ft.	Cubic ft. total	Barrels per ft.	Barrels total
2529	6131.6	361566.3	1092.1	64397.7
2530	6167.0	367733.3	1098.4	65496.1
2531	6203.4	373936.7	1104.9	66601.0
2532	6240.9	380177.6	1111.6	67712.6
2533	6279.5	386457.1	1118.4	68831.0
2534	6307.8	392765.0	1123.5	69954.5
2535	6337.3	399102.3	1128.7	71083.2
2536	6368.0	405470.2	1134.2	72217.4
2537	6399.8	411870.0	1139.9	73357.2
2538	6360.4	418230.5	1132.8	74490.1
2539	6321.7	424552.2	1125.9	75616.0
2540	6283.5	430835.7	1119.1	76735.2
2541	6245.9	437081.6	1112.4	77847.6
2542	6223.7	443305.3	1108.5	78956.1
2543	6202.0	449507.3	1104.6	80060.7
2544	6180.8	455688.2	1100.9	81161.6
2545	6160.2	461848.3	1097.2	82258.7
2546	6141.7	467990.1	1093.9	83352.6
2547	6123.8	474113.9	1090.7	84443.3
2548	6106.3	480220.2	1087.6	85530.9
2549	6089.3	486309.5	1084.6	86615.5
2550	6113.9	492423.4	1088.9	87704.4
2551	6139.1	498562.5	1093.4	88797.8
2552	6165.0	504727.4	1098.0	89895.9
2553	6191.5	510918.9	1102.7	90998.6
2554	6143.3	517062.2	1094.2	92092.8
2555	6096.1	523158.3	1085.8	93178.5
2556	6049.8	529208.2	1077.5	94256.1
2557	6004.5	535212.7	1069.5	95325.5
2558	5936.2	541148.9	1057.3	96382.8
2559	5868.9	547017.9	1045.3	97428.1
2560	5802.6	552820.5	1033.5	98461.6
2561	5737.3	558557.9	1021.9	99483.5
2562	5520.3	564078.1	983.2	100466.7
2563	5307.9	569386.0	945.4	101412.0
2564	5100.1	574486.1	908.4	102320.4
2565	4896.9	579383.0	872.2	103192.6
2566	4725.8	584108.8	841.7	104034.3
2567	4562.7	588671.4	812.6	104846.9
2568	4407.6	593079.0	785.0	105632.0
2569	4260.6	597339.7	758.8	106390.8
2570	4149.2	601488.9	739.0	107129.8
2571	4041.7	605530.6	719.9	107849.7
2572	3938.0	609468.6	701.4	108551.1
2573	3838.2	613306.8	683.6	109234.7
2574	3765.3	617072.2	670.6	109905.3
2575	3694.7	620766.9	658.1	110563.4
2576	3626.3	624393.2	645.9	111209.2

WESTERN REFINING
JAL, NM


STATE LPG WELL NO. 4
Fri, Aug 31, 2007

Depth	Cubic ft. per ft.	Cubic ft. total	Barrels per ft.	Barrels total
2577	3545.4	627938.6	631.5	111840.7
2578	3467.8	631406.4	617.6	112458.4
2579	3393.4	634799.8	604.4	113062.7
2580	3366.3	638166.2	599.6	113662.3
2581	3341.5	641507.6	595.1	114257.5
2582	3307.2	644814.8	589.0	114846.5
2583	3276.1	648090.9	583.5	115430.0
2584	3248.3	651339.3	578.6	116008.5
2585	3223.8	654563.0	574.2	116582.7
2586	3556.5	658119.6	633.4	117216.2
2587	3923.6	662043.1	698.8	117915.0
2588	4324.9	666368.0	770.3	118685.3
2589	4760.6	671128.6	847.9	119533.2
2590	4899.7	676028.3	872.7	120405.9
2591	5044.2	681072.5	898.4	121304.3
2592	5194.2	686266.7	925.1	122229.4
2593	5349.6	691616.3	952.8	123182.2
2594	5395.0	697011.3	960.9	124143.1
2595	5442.2	702453.5	969.3	125112.4
2596	5491.3	707944.8	978.0	126090.4
2597	5542.2	713487.1	987.1	127077.5
2598	5481.1	718968.1	976.2	128053.8
2599	5425.4	724393.5	966.3	129020.1
2600	5375.3	729768.8	957.4	129977.5
2601	5330.7	735099.6	949.4	130926.9
2602	4867.5	739967.0	866.9	131793.8
2603	4431.0	744398.0	789.2	132583.0
2604	4021.3	748419.4	716.2	133299.3
2605	3638.5	752057.9	648.0	133947.3
2606	3536.1	755594.0	629.8	134577.1
2607	3440.6	759034.5	612.8	135189.9
2608	3351.9	762386.5	597.0	135786.9
2609	3270.2	765656.7	582.4	136369.4
2610	1082.7	766739.4	192.8	136562.2
2611	95.0	766834.4	16.9	136579.1
2612	86.4	766920.8	15.4	136594.5
2613	78.8	766999.6	14.0	136608.5
2614	50.9	767050.5	9.1	136617.6
2615	30.4	767080.9	5.4	136623.0
2616	14.9	767095.9	2.7	136625.7

WESTERN REFINING
JAL, NM

SONARWIRE, INC
Depth -vs- Volume

STATE LPG WELL NO. 4
Fri, Aug 31, 2007

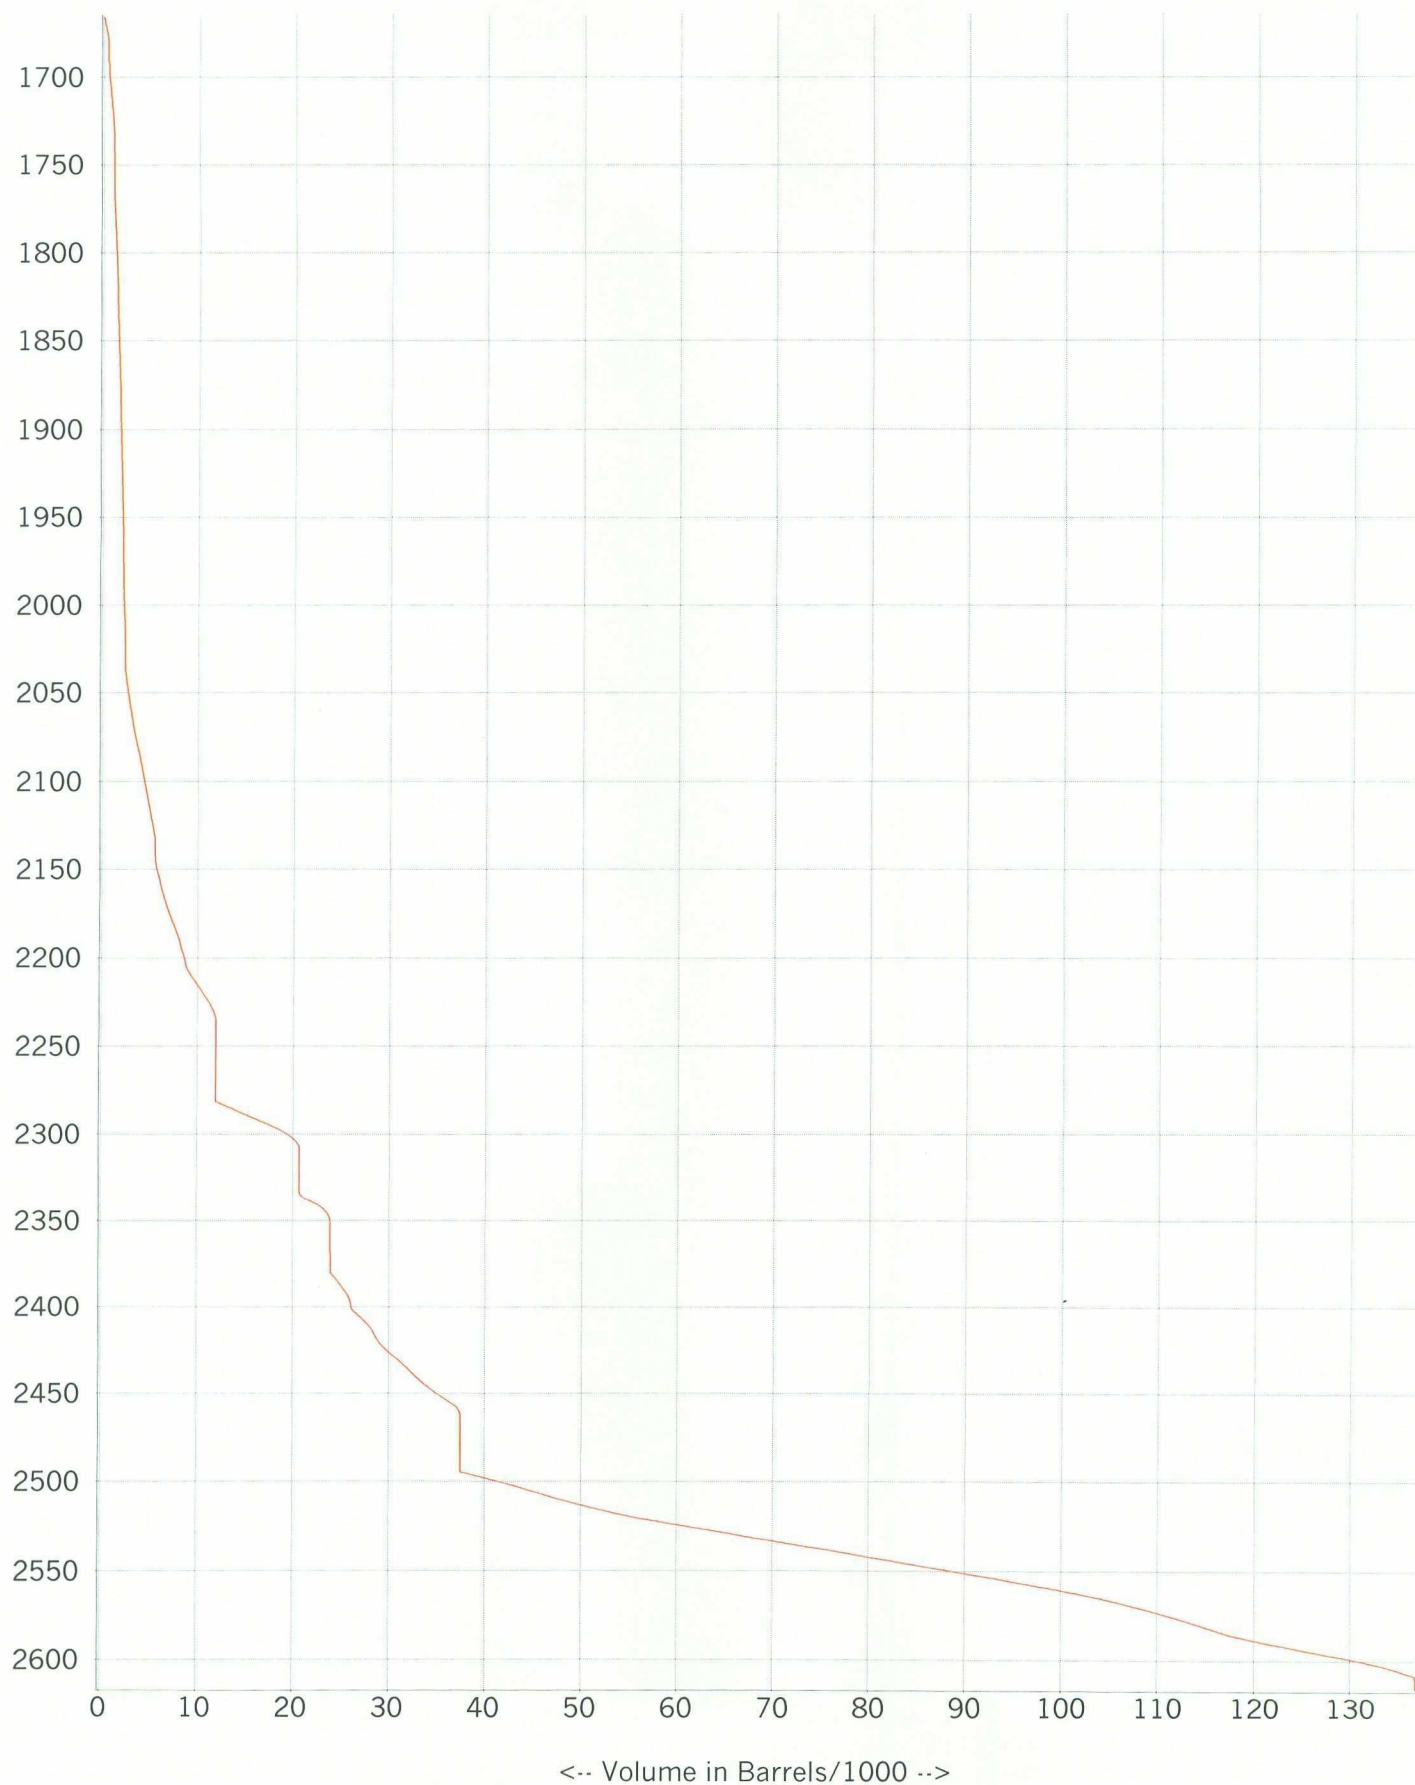

SONARWIRE INC.
Max Radius & Depth vs Bearing

WESTERN REFINING
JAL, NM

STATE LPG WELL NO. 4
Fri, Aug 31, 2007

This table lists the maximum radius (in feet) found at each of the 128 bearings at which soundings were taken. Also listed after each radius, (separated by ':'), is the depth (in feet) at which that maximum radius was found. Bearings are shown, (in degrees), for each row of four 'radius : depth' pairs.


Bearing	+0.0	+2.8	+5.6	+8.4
0.0	26.5: 2338	26.1: 2338	26.0: 2338	26.0: 2338
11.3	26.0: 2338	26.0: 2338	26.0: 2338	26.0: 2338
22.5	26.0: 2338	26.0: 2338	26.0: 2338	26.0: 2338
33.8	26.0: 2338	25.7: 2338	25.6: 2338	25.3: 2338
45.0	25.6: 2338	25.7: 2338	26.0: 2338	26.0: 2338
56.3	26.3: 2532	26.3: 2532	26.3: 2532	27.4: 2532
67.5	29.1: 2532	29.1: 2532	29.4: 2532	30.5: 2532
78.8	31.3: 2532	32.7: 2532	33.2: 2536	34.9: 2532
90.0	34.9: 2532	34.9: 2532	35.7: 2536	36.8: 2536
101.3	37.9: 2536	39.3: 2536	40.4: 2552	41.7: 2536
112.5	42.8: 2536	43.9: 2536	45.4: 2532	46.3: 2532
123.8	47.2: 2528	49.0: 2552	50.7: 2548	53.5: 2596
135.0	56.9: 2596	58.3: 2596	60.3: 2596	60.9: 2596
146.3	61.7: 2596	62.0: 2596	62.0: 2596	62.0: 2544
157.5	64.3: 2532	65.1: 2532	67.0: 2532	67.3: 2532
168.8	67.3: 2532	67.9: 2532	68.4: 2552	68.7: 2532
180.0	69.0: 2532	69.0: 2532	69.0: 2532	69.0: 2532
191.3	69.3: 2596	69.6: 2596	69.7: 2600	70.0: 2600
202.5	70.4: 2596	69.9: 2596	68.7: 2596	67.8: 2536
213.8	67.3: 2536	67.3: 2536	67.0: 2536	66.4: 2536
225.0	65.1: 2536	64.5: 2536	64.0: 2536	63.2: 2536
236.3	62.3: 2536	61.0: 2536	60.1: 2536	58.8: 2536
247.5	57.0: 2516	55.5: 2536	54.1: 2536	52.7: 2536
258.8	50.8: 2536	49.6: 2520	48.5: 2520	47.5: 2536
270.0	44.5: 2524	44.0: 2524	41.2: 2528	40.0: 2548
281.3	38.6: 2548	37.3: 2556	36.2: 2556	35.4: 2528
292.5	35.4: 2528	34.0: 2540	33.0: 2528	32.0: 2524
303.8	31.4: 2524	30.6: 2524	29.8: 2524	28.7: 2524
315.0	28.0: 2338	28.3: 2338	28.3: 2338	28.0: 2338
326.3	27.9: 2338	27.6: 2338	26.9: 2338	26.8: 2338
337.5	26.5: 2338	26.1: 2338	26.0: 2338	26.0: 2338
348.8	26.1: 2338	26.4: 2338	26.5: 2338	26.8: 2338

Between 1666 and 2616 foot depths, maximum radius was 70.4 feet at bearing 202.5 at 2596.0 foot depth

WESTERN REFINING
STATE LPG WELL NO. 4
JAL, NM

SONARWIRE, INC
Max Range vs Bearing

Max Radius= 70.4 ft @ 202.5 deg
Depth= 2596 ft. Fri, Aug 31, 2007

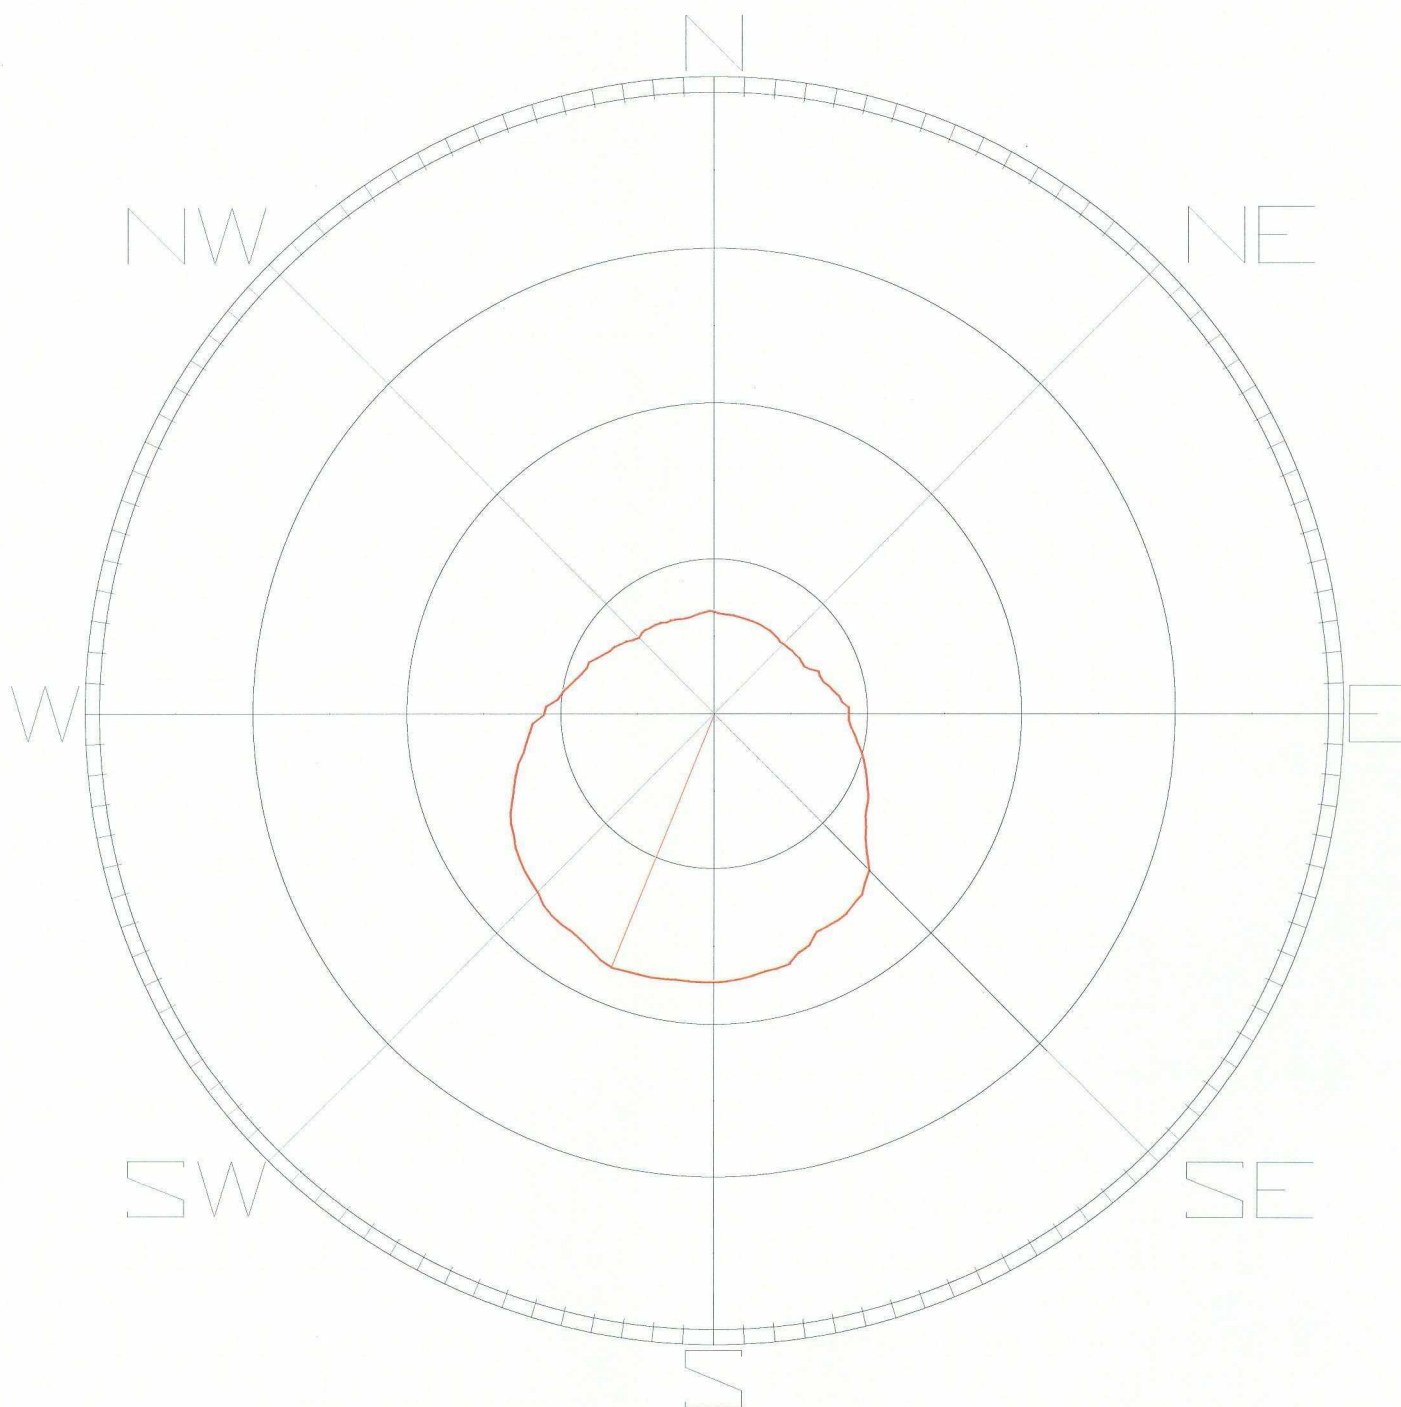

1 inch = 50.0 ft.

160 140 120 100 80 60 40 20 0 20 40 60 80 100 120 140 160

SONARWIRE INC.
Average Wall Range versus Depth (ft.)

WESTERN REFINING
JAL, NM

STATE LPG WELL NO. 4
Fri, Aug 31, 2007

Depth	Avg Rad ft.	Min Rad ft @ Az	Max Rad ft @ Az	Min Dia ft @ Az	Max Dia ft @ Az
1666	11	10 @ 275.7	11 @ 191.3	20 @ 16.9-196.9	21 @ 160.4-340.4
1668	9	8 @ 140.7	9 @ 199.7	17 @ 73.2-253.2	17 @ 42.2-222.2
1670	9	8 @ 309.4	9 @ 194.1	16 @ 163.2-343.2	17 @ 14.1-194.1
1674	8	8 @ 351.6	9 @ 188.5	16 @ 137.9-317.9	17 @ 47.9-227.9
1678	7	5 @ 16.9	8 @ 216.6	12 @ 16.9-196.9	15 @ 90.0-270.1
1680	3	2 @ 8.5	5 @ 115.4	5 @ 70.4-250.4	7 @ 104.1-284.1
1681	1	1 @ 0.1	1 @ 357.2	2 @ 0.1-180.1	2 @ 0.1-180.1
1689	1	1 @ 0.1	1 @ 357.2	2 @ 0.1-180.1	2 @ 0.1-180.1
1690	7	7 @ 343.2	8 @ 199.7	13 @ 151.9-331.9	14 @ 19.7-199.7
1694	7	6 @ 16.9	7 @ 180.1	13 @ 56.3-236.3	13 @ 171.6-351.6
1695	1	1 @ 0.1	1 @ 357.2	2 @ 0.1-180.1	2 @ 0.1-180.1
1699	1	1 @ 0.1	1 @ 357.2	2 @ 0.1-180.1	2 @ 0.1-180.1
1700	7	6 @ 309.4	7 @ 191.3	12 @ 92.9-272.9	13 @ 19.7-199.7
1712	6	6 @ 36.6	6 @ 199.7	11 @ 70.4-250.4	12 @ 8.5-188.5
1730	5	5 @ 351.6	5 @ 196.9	9 @ 135.1-315.1	10 @ 19.7-199.7
1733	4	1 @ 16.9	4 @ 95.7	5 @ 19.7-199.7	8 @ 101.3-281.3
1734	1	1 @ 0.1	1 @ 357.2	2 @ 0.1-180.1	2 @ 0.1-180.1
1742	1	1 @ 0.1	1 @ 357.2	2 @ 0.1-180.1	2 @ 0.1-180.1
1745	4	2 @ 14.1	6 @ 73.2	6 @ 8.5-188.5	10 @ 92.9-272.9
1746	1	1 @ 0.1	1 @ 357.2	2 @ 0.1-180.1	2 @ 0.1-180.1
1760	1	1 @ 0.1	1 @ 357.2	2 @ 0.1-180.1	2 @ 0.1-180.1
1761	2	2 @ 81.6	3 @ 216.6	3 @ 135.1-315.1	4 @ 33.8-213.8
1763	4	3 @ 239.1	4 @ 180.1	6 @ 59.1-239.1	8 @ 104.1-284.1
1764	1	1 @ 0.1	1 @ 357.2	2 @ 0.1-180.1	2 @ 0.1-180.1
1770	1	1 @ 0.1	1 @ 357.2	2 @ 0.1-180.1	2 @ 0.1-180.1
1771	5	4 @ 298.2	5 @ 177.2	8 @ 118.2-298.2	9 @ 160.4-340.4
1780	5	4 @ 357.2	5 @ 211.0	9 @ 129.4-309.4	9 @ 31.0-211.0
1794	4	4 @ 270.1	4 @ 182.9	7 @ 73.2-253.2	8 @ 143.5-323.5
1816	4	4 @ 56.3	4 @ 188.5	7 @ 19.7-199.7	8 @ 42.2-222.2
1818	1	1 @ 0.1	1 @ 357.2	2 @ 0.1-180.1	2 @ 0.1-180.1
1823	1	1 @ 0.1	1 @ 357.2	2 @ 0.1-180.1	2 @ 0.1-180.1
1824	4	3 @ 337.6	4 @ 180.1	6 @ 53.5-233.5	7 @ 22.6-202.6
1848	4	3 @ 36.6	4 @ 171.6	7 @ 76.0-256.0	8 @ 171.6-351.6
1879	4	3 @ 61.9	4 @ 196.9	6 @ 47.9-227.9	7 @ 87.2-267.2
1880	1	1 @ 0.1	1 @ 357.2	2 @ 0.1-180.1	2 @ 0.1-180.1
1883	1	1 @ 0.1	1 @ 357.2	2 @ 0.1-180.1	2 @ 0.1-180.1
1884	3	3 @ 2.9	4 @ 227.9	6 @ 5.7-185.7	7 @ 140.7-320.7
1900	3	3 @ 16.9	4 @ 275.7	6 @ 16.9-196.9	7 @ 90.0-270.1
1912	3	3 @ 81.6	4 @ 281.3	6 @ 67.5-247.6	6 @ 95.7-275.7
1922	3	3 @ 289.7	4 @ 180.1	6 @ 109.7-289.7	6 @ 8.5-188.5
1932	3	3 @ 281.3	4 @ 205.4	6 @ 61.9-241.9	7 @ 171.6-351.6
1942	3	3 @ 45.0	4 @ 225.1	6 @ 59.1-239.1	6 @ 19.7-199.7
1954	3	3 @ 2.9	4 @ 180.1	6 @ 121.0-301.0	6 @ 166.0-346.0
1963	3	3 @ 357.2	4 @ 208.2	6 @ 163.2-343.2	7 @ 33.8-213.8
1964	1	1 @ 0.1	1 @ 357.2	2 @ 0.1-180.1	2 @ 0.1-180.1
1987	1	1 @ 0.1	1 @ 357.2	2 @ 0.1-180.1	2 @ 0.1-180.1
1988	3	3 @ 357.2	4 @ 185.7	6 @ 64.7-244.7	7 @ 5.7-185.7

WESTERN REFINING
JAL, NM

STATE LPG WELL NO. 4
Fri, Aug 31, 2007

Depth	Avg Rad ft.	Min Rad ft @ Az	Max Rad ft @ Az	Min Dia ft @ Az	Max Dia ft @ Az
2000	4	3 @ 343.2	4 @ 140.7	6 @ 53.5-233.5	7 @ 126.6-306.6
2016	4	4 @ 309.4	5 @ 247.6	8 @ 84.4-264.4	8 @ 22.6-202.6
2017	1	1 @ 0.1	1 @ 357.2	2 @ 0.1-180.1	2 @ 0.1-180.1
2037	1	1 @ 0.1	1 @ 357.2	2 @ 0.1-180.1	2 @ 0.1-180.1
2038	7	7 @ 76.0	8 @ 208.2	13 @ 140.7-320.7	14 @ 2.9-182.9
2040	7	7 @ 36.6	8 @ 258.8	13 @ 36.6-216.6	14 @ 146.3-326.3
2052	7	7 @ 81.6	8 @ 236.3	14 @ 87.2-267.2	15 @ 149.1-329.1
2063	8	7 @ 33.8	9 @ 225.1	15 @ 76.0-256.0	16 @ 112.6-292.6
2072	8	7 @ 22.6	9 @ 199.7	15 @ 95.7-275.7	16 @ 2.9-182.9
2080	9	7 @ 323.5	11 @ 253.2	17 @ 106.9-286.9	20 @ 64.7-244.7
2090	8	7 @ 0.1	9 @ 194.1	15 @ 106.9-286.9	16 @ 25.4-205.4
2100	8	7 @ 354.4	9 @ 180.1	16 @ 47.9-227.9	17 @ 22.6-202.6
2108	8	7 @ 19.7	9 @ 180.1	15 @ 160.4-340.4	16 @ 36.6-216.6
2120	8	6 @ 343.2	10 @ 191.3	15 @ 67.5-247.6	17 @ 11.3-191.3
2126	8	7 @ 33.8	10 @ 171.6	15 @ 70.4-250.4	17 @ 171.6-351.6
2130	8	6 @ 5.7	9 @ 225.1	14 @ 61.9-241.9	16 @ 112.6-292.6
2134	5	4 @ 5.7	7 @ 182.9	10 @ 163.2-343.2	11 @ 76.0-256.0
2135	1	1 @ 0.1	1 @ 357.2	2 @ 0.1-180.1	2 @ 0.1-180.1
2145	1	1 @ 0.1	1 @ 357.2	2 @ 0.1-180.1	2 @ 0.1-180.1
2146	8	7 @ 19.7	11 @ 230.7	15 @ 112.6-292.6	18 @ 47.9-227.9
2152	9	7 @ 2.9	12 @ 222.2	18 @ 101.3-281.3	19 @ 42.2-222.2
2156	9	7 @ 320.7	12 @ 219.4	17 @ 140.7-320.7	20 @ 56.3-236.3
2160	9	7 @ 8.5	11 @ 196.9	16 @ 90.0-270.1	18 @ 0.1-180.1
2164	10	8 @ 36.6	13 @ 219.4	19 @ 67.5-247.6	21 @ 160.4-340.4
2168	11	8 @ 33.8	13 @ 202.6	20 @ 33.8-213.8	21 @ 5.7-185.7
2172	11	8 @ 16.9	13 @ 222.2	21 @ 81.6-261.6	22 @ 36.6-216.6
2176	11	9 @ 8.5	14 @ 188.5	21 @ 98.5-278.5	23 @ 160.4-340.4
2180	12	9 @ 14.1	15 @ 171.6	22 @ 98.5-278.5	24 @ 61.9-241.9
2184	12	9 @ 22.6	15 @ 202.6	22 @ 76.0-256.0	24 @ 0.1-180.1
2188	11	9 @ 33.8	15 @ 182.9	19 @ 101.3-281.3	24 @ 177.2-357.2
2192	8	3 @ 309.4	13 @ 222.2	11 @ 90.0-270.1	22 @ 168.8-348.8
2196	11	7 @ 354.4	14 @ 182.9	20 @ 174.4-354.4	22 @ 118.2-298.2
2200	10	6 @ 59.1	13 @ 168.8	17 @ 59.1-239.1	20 @ 0.1-180.1
2204	9	4 @ 42.2	13 @ 182.9	14 @ 31.0-211.0	20 @ 163.2-343.2
2208	14	11 @ 2.9	18 @ 185.7	27 @ 70.4-250.4	29 @ 146.3-326.3
2212	15	12 @ 2.9	19 @ 180.1	29 @ 81.6-261.6	31 @ 0.1-180.1
2216	15	12 @ 2.9	18 @ 191.3	29 @ 112.6-292.6	31 @ 160.4-340.4
2220	15	12 @ 22.6	18 @ 188.5	29 @ 22.6-202.6	30 @ 98.5-278.5
2224	16	12 @ 351.6	19 @ 194.1	29 @ 76.0-256.0	32 @ 106.9-286.9
2228	13	10 @ 346.0	17 @ 202.6	23 @ 109.7-289.7	26 @ 177.2-357.2
2232	12	8 @ 343.2	17 @ 202.6	19 @ 95.7-275.7	25 @ 28.2-208.2
2236	4	3 @ 326.3	6 @ 191.3	7 @ 109.7-289.7	10 @ 19.7-199.7
2237	1	1 @ 357.2	1 @ 0.1	2 @ 0.1-180.1	2 @ 0.1-180.1
2281	1	1 @ 357.2	1 @ 0.1	2 @ 0.1-180.1	2 @ 0.1-180.1
2282	28	25 @ 357.2	31 @ 182.9	54 @ 73.2-253.2	56 @ 126.6-306.6
2286	28	25 @ 14.1	32 @ 188.5	54 @ 92.9-272.9	56 @ 143.5-323.5
2290	28	25 @ 357.2	32 @ 182.9	54 @ 78.8-258.8	56 @ 2.9-182.9
2294	28	25 @ 22.6	32 @ 205.4	54 @ 126.6-306.6	57 @ 0.1-180.1
2298	25	21 @ 19.7	30 @ 188.5	47 @ 121.0-301.0	52 @ 8.5-188.5
2302	20	16 @ 357.2	25 @ 202.6	38 @ 106.9-286.9	42 @ 154.7-334.7

WESTERN REFINING
JAL, NM

STATE LPG WELL NO. 4
Fri, Aug 31, 2007

Depth	Avg Rad ft.	Min Rad ft @ Az	Max Rad ft @ Az	Min Dia ft @ Az	Max Dia ft @ Az
2306	14	11 @ 11.3	20 @ 196.9	27 @ 109.7-289.7	30 @ 16.9-196.9
2308	5	1 @ 357.2	10 @ 275.7	6 @ 104.1-284.1	11 @ 95.7-275.7
2309	1	1 @ 0.1	1 @ 357.2	2 @ 0.1-180.1	2 @ 0.1-180.1
2333	1	1 @ 0.1	1 @ 357.2	2 @ 0.1-180.1	2 @ 0.1-180.1
2334	6	2 @ 19.7	10 @ 135.1	10 @ 39.4-219.4	14 @ 123.8-303.8
2338	30	26 @ 42.2	35 @ 202.6	56 @ 112.6-292.6	61 @ 22.6-202.6
2342	21	18 @ 284.1	25 @ 213.8	37 @ 104.1-284.1	45 @ 11.3-191.3
2346	15	12 @ 334.7	21 @ 225.1	27 @ 157.6-337.6	36 @ 45.0-225.1
2350	7	5 @ 239.1	11 @ 196.9	11 @ 104.1-284.1	17 @ 16.9-196.9
2351	1	1 @ 0.1	1 @ 357.2	2 @ 0.1-180.1	2 @ 0.1-180.1
2367	1	1 @ 0.1	1 @ 357.2	2 @ 0.1-180.1	2 @ 0.1-180.1
2369	11	6 @ 11.3	18 @ 216.6	18 @ 84.4-264.4	24 @ 154.7-334.7
2370	1	1 @ 0.1	1 @ 357.2	2 @ 0.1-180.1	2 @ 0.1-180.1
2380	1	1 @ 0.1	1 @ 357.2	2 @ 0.1-180.1	2 @ 0.1-180.1
2381	17	10 @ 22.6	23 @ 211.0	30 @ 109.7-289.7	34 @ 135.1-315.1
2392	14	8 @ 45.0	22 @ 146.3	25 @ 84.4-264.4	33 @ 126.6-306.6
2396	9	4 @ 42.2	17 @ 185.7	14 @ 123.8-303.8	21 @ 5.7-185.7
2400	6	2 @ 50.7	14 @ 194.1	9 @ 70.4-250.4	19 @ 14.1-194.1
2402	18	11 @ 19.7	28 @ 160.4	33 @ 121.0-301.0	39 @ 160.4-340.4
2408	18	11 @ 11.3	27 @ 160.4	33 @ 126.6-306.6	38 @ 160.4-340.4
2412	16	11 @ 11.3	23 @ 180.1	27 @ 101.3-281.3	33 @ 0.1-180.1
2416	12	6 @ 357.2	20 @ 180.1	19 @ 115.4-295.4	26 @ 19.7-199.7
2428	20	13 @ 11.3	31 @ 194.1	37 @ 106.9-286.9	44 @ 174.4-354.4
2432	18	10 @ 0.1	28 @ 216.6	31 @ 135.1-315.1	38 @ 36.6-216.6
2438	17	10 @ 2.9	29 @ 191.3	30 @ 118.2-298.2	39 @ 11.3-191.3
2452	21	10 @ 19.7	38 @ 191.3	33 @ 137.9-317.9	49 @ 8.5-188.5
2456	20	6 @ 50.7	40 @ 194.1	27 @ 92.9-272.9	51 @ 11.3-191.3
2460	12	5 @ 180.1	27 @ 222.2	15 @ 0.1-180.1	39 @ 42.2-222.2
2462	7	2 @ 92.9	14 @ 219.4	10 @ 106.9-286.9	18 @ 39.4-219.4
2463	4	1 @ 180.1	10 @ 258.8	3 @ 56.3-236.3	11 @ 78.8-258.8
2464	1	1 @ 357.2	1 @ 0.1	2 @ 0.1-180.1	2 @ 0.1-180.1
2494	1	1 @ 357.2	1 @ 0.1	2 @ 0.1-180.1	2 @ 0.1-180.1
2495	35	19 @ 8.5	54 @ 205.4	64 @ 90.0-270.1	73 @ 39.4-219.4
2500	33	18 @ 5.7	54 @ 196.9	60 @ 98.5-278.5	72 @ 39.4-219.4
2504	32	16 @ 8.5	54 @ 208.2	54 @ 87.2-267.2	71 @ 28.2-208.2
2508	30	12 @ 47.9	54 @ 211.0	47 @ 115.4-295.4	67 @ 16.9-196.9
2512	31	9 @ 56.3	64 @ 196.9	41 @ 104.1-284.1	79 @ 14.1-194.1
2516	30	10 @ 25.4	62 @ 188.5	35 @ 95.7-275.7	74 @ 2.9-182.9
2520	39	20 @ 19.7	68 @ 177.2	65 @ 104.1-284.1	89 @ 5.7-185.7
2524	41	20 @ 8.5	69 @ 182.9	72 @ 104.1-284.1	89 @ 177.2-357.2
2528	41	21 @ 25.4	69 @ 196.9	74 @ 92.9-272.9	90 @ 11.3-191.3
2532	42	20 @ 2.9	70 @ 199.7	71 @ 109.7-289.7	90 @ 19.7-199.7
2536	42	21 @ 11.3	69 @ 202.6	75 @ 95.7-275.7	89 @ 2.9-182.9
2540	42	21 @ 0.1	69 @ 199.7	75 @ 106.9-286.9	90 @ 16.9-196.9
2544	41	20 @ 8.5	69 @ 194.1	74 @ 84.4-264.4	90 @ 0.1-180.1
2548	41	20 @ 0.1	69 @ 196.9	72 @ 112.6-292.6	89 @ 16.9-196.9
2552	41	20 @ 0.1	70 @ 191.3	73 @ 95.7-275.7	90 @ 11.3-191.3
2556	41	20 @ 2.9	69 @ 196.9	72 @ 98.5-278.5	89 @ 16.9-196.9
2560	40	20 @ 22.6	66 @ 199.7	71 @ 106.9-286.9	85 @ 28.2-208.2
2564	37	18 @ 16.9	62 @ 182.9	65 @ 109.7-289.7	80 @ 2.9-182.9

WESTERN REFINING
JAL, NM

STATE LPG WELL NO. 4
Fri, Aug 31, 2007

Depth	Avg Rad ft.	Min Rad ft @ Az	Max Rad ft @ Az	Min Dia ft @ Az	Max Dia ft @ Az
2568	33	13 @ 14.1	62 @ 185.7	54 @ 106.9-286.9	75 @ 5.7-185.7
2572	30	9 @ 16.9	61 @ 188.5	48 @ 109.7-289.7	70 @ 8.5-188.5
2575	29	9 @ 16.9	60 @ 182.9	44 @ 101.3-281.3	69 @ 2.9-182.9
2578	28	8 @ 19.7	59 @ 188.5	40 @ 115.4-295.4	67 @ 8.5-188.5
2580	27	8 @ 22.6	60 @ 188.5	36 @ 104.1-284.1	68 @ 8.5-188.5
2584	26	5 @ 5.7	60 @ 188.5	27 @ 106.9-286.9	65 @ 14.1-194.1
2588	34	12 @ 11.3	68 @ 211.0	54 @ 115.4-295.4	81 @ 31.0-211.0
2592	37	15 @ 357.2	70 @ 199.7	66 @ 129.4-309.4	85 @ 16.9-196.9
2596	38	14 @ 357.2	71 @ 202.6	65 @ 101.3-281.3	87 @ 25.4-205.4
2600	37	15 @ 357.2	71 @ 199.7	59 @ 121.0-301.0	86 @ 19.7-199.7
2604	30	9 @ 5.7	58 @ 188.5	43 @ 126.6-306.6	68 @ 31.0-211.0
2608	27	7 @ 31.0	58 @ 180.1	35 @ 109.7-289.7	66 @ 177.2-357.2
2610	6	5 @ 191.3	11 @ 171.6	9 @ 59.1-239.1	16 @ 171.6-351.6
2612	5	4 @ 239.1	9 @ 163.2	8 @ 59.1-239.1	14 @ 163.2-343.2
2614	4	2 @ 67.5	4 @ 180.1	6 @ 67.5-247.6	8 @ 160.4-340.4
2616	2	2 @ 357.2	2 @ 0.1	3 @ 0.1-180.1	3 @ 0.1-180.1

SONARWIRE INC.
Wall Ranges versus Depth (ft.)

WESTERN REFINING
JAL, NM

STATE LPG WELL NO. 4
Fri, Aug 31, 2007

Depth	Tilt	N	NE	E	SE	S	SW	W	NW
1666	0	9.8	10.1	10.4	10.2	10.5	10.2	9.8	10.0
1668	0	8.3	8.2	8.4	8.2	8.2	8.4	8.1	8.1
1670	0	8.1	8.2	8.2	8.0	8.2	7.9	8.0	7.9
1674	0	7.7	8.1	7.9	7.8	8.2	8.1	7.9	7.8
1678	0	5.1	5.5	7.2	6.7	7.1	7.4	7.3	5.5
1680	0	1.5	1.5	2.6	4.5	4.4	3.5	2.2	1.5
1681	0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
1689	0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
1690	0	6.5	6.5	6.7	6.7	6.9	6.9	7.0	6.4
1694	0	6.0	6.1	6.1	6.1	6.7	6.4	6.4	6.2
1695	0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
1699	0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
1700	0	5.9	6.0	5.9	6.1	6.4	6.3	6.0	5.9
1712	0	5.5	5.3	5.4	5.7	5.8	5.8	5.6	5.5
1730	0	4.5	4.6	4.6	4.5	4.7	4.7	4.7	4.4
1733	0	1.3	3.0	3.8	4.0	3.7	3.3	3.2	3.2
1734	0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
1742	0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
1745	0	1.2	4.6	4.9	4.6	4.6	4.5	4.6	1.3
1746	0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
1760	0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
1761	0	1.9	1.4	1.1	1.1	1.3	2.0	2.0	1.7
1763	0	3.2	3.2	3.3	3.6	3.8	3.3	3.5	3.3
1764	0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
1770	0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
1771	0	3.9	4.2	4.4	4.3	4.5	4.1	4.2	3.9
1780	0	4.0	4.1	4.2	4.4	4.4	4.4	4.1	4.1
1794	0	3.3	3.6	3.7	3.7	4.0	3.4	3.2	3.5
1816	0	3.3	3.6	3.3	3.3	3.9	3.8	3.7	3.6
1818	0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
1823	0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
1824	0	2.5	2.7	3.2	3.3	3.8	3.0	2.8	2.9
1848	0	3.3	2.8	3.0	3.3	3.7	3.5	3.4	3.5
1879	0	2.9	2.8	3.2	3.2	3.2	3.2	3.3	3.2
1880	0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
1883	0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
1884	0	2.7	2.6	2.7	2.9	2.7	2.9	2.9	3.1
1900	0	2.6	2.7	3.1	3.2	3.1	3.1	3.1	2.7
1912	0	2.7	2.7	2.5	2.7	2.7	2.8	2.9	2.9
1922	0	2.5	2.6	2.7	2.7	3.1	2.7	2.5	2.5
1932	0	2.9	3.3	2.8	3.2	3.2	2.8	2.7	2.8
1942	0	2.5	2.1	2.5	2.8	2.8	3.2	2.9	2.4
1954	0	2.5	2.6	2.7	2.8	3.2	2.7	2.8	2.6
1963	0	2.7	2.9	3.1	3.1	3.1	2.9	2.9	2.8
1964	0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
1987	0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
1988	0	2.7	3.2	3.2	3.3	3.4	2.8	2.7	2.8

WESTERN REFINING
JAL, NM

STATE LPG WELL NO. 4
Fri, Aug 31, 2007

Depth	Tilt	N	NE	E	SE	S	SW	W	NW
2000	0	3.1	2.9	3.1	3.4	3.4	3.2	3.2	3.3
2016	0	3.5	3.6	3.7	3.8	3.8	3.9	3.5	3.4
2017	0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
2037	0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
2038	0	6.5	6.3	6.3	6.5	7.1	6.8	6.8	6.7
2040	0	6.3	6.3	6.2	6.7	7.0	7.1	7.0	6.6
2052	0	7.1	6.4	6.3	6.7	7.1	7.4	7.3	7.2
2063	0	6.8	6.8	6.8	7.5	7.9	8.1	7.8	7.2
2072	0	6.9	6.7	7.0	7.8	8.5	8.2	7.9	7.6
2080	0	7.8	8.5	8.4	10.4	9.9	10.3	9.7	7.0
2090	0	6.6	6.6	7.1	7.9	8.3	8.3	7.6	7.1
2100	0	6.8	7.1	7.7	8.8	8.9	8.4	8.1	7.2
2108	0	6.4	6.6	7.3	8.0	9.0	8.6	8.1	7.1
2120	0	6.4	6.8	7.5	8.6	9.7	8.9	7.8	6.6
2126	0	6.6	6.7	7.2	8.8	8.8	8.6	8.0	6.9
2130	0	6.1	6.2	7.4	8.4	8.9	9.0	7.4	6.4
2134	0	3.2	3.7	4.9	5.6	6.6	6.1	5.3	4.0
2135	0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
2145	0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
2146	0	6.8	6.5	7.0	8.4	9.7	10.3	7.7	7.2
2152	0	7.1	7.1	8.7	9.9	10.9	10.9	8.9	7.8
2156	0	7.1	7.7	9.0	10.3	10.3	11.4	9.1	6.8
2160	0	6.5	6.6	6.9	9.0	10.8	10.5	8.1	7.5
2164	0	8.0	7.5	8.4	10.6	11.8	12.0	10.5	8.4
2168	0	8.1	7.8	9.0	10.9	12.4	12.5	11.4	9.1
2172	0	8.4	8.0	9.0	11.2	12.2	12.8	11.2	9.6
2176	0	8.4	8.2	9.7	12.7	13.5	13.1	11.5	9.6
2180	0	8.7	8.8	9.9	12.6	13.9	13.7	12.1	10.0
2184	0	9.0	8.5	10.0	13.0	14.2	13.3	11.5	9.6
2188	0	9.1	8.7	9.3	11.6	14.4	13.5	10.1	9.7
2192	0	9.1	6.5	6.5	9.9	12.0	12.6	4.0	2.5
2196	0	7.0	8.6	10.5	12.0	13.3	12.3	9.5	8.9
2200	0	6.7	6.3	9.3	11.4	12.6	11.2	9.1	7.4
2204	0	4.4	3.8	7.4	8.0	12.0	9.7	10.3	7.8
2208	0	11.2	12.5	14.6	16.2	17.3	15.4	13.5	11.6
2212	0	12.3	12.4	14.8	16.7	18.4	17.1	14.3	12.6
2216	0	12.2	12.0	14.1	16.9	17.9	17.1	14.8	12.8
2220	0	11.6	11.8	14.1	16.7	17.3	16.9	15.0	12.5
2224	0	12.0	12.5	14.3	18.3	18.3	17.0	15.4	13.1
2228	0	10.1	9.5	12.3	13.7	15.6	15.0	11.4	10.3
2232	0	7.8	8.9	11.4	13.9	15.6	15.4	7.6	8.7
2236	0	2.7	3.6	3.6	4.8	4.8	4.8	3.6	2.3
2237	0	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8
2281	0	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8
2282	0	24.5	24.7	27.0	28.5	30.3	29.5	27.1	25.6
2286	0	24.4	25.1	26.9	28.9	30.9	29.6	27.6	26.2
2290	0	24.4	24.8	26.9	28.9	30.9	29.7	27.4	25.9
2294	0	25.1	25.1	26.8	28.0	31.4	30.8	28.3	26.4
2298	0	21.6	21.6	23.9	25.4	28.6	28.5	24.1	21.6
2302	0	16.1	17.0	20.0	21.8	24.5	23.3	19.1	16.6

WESTERN REFINING
JAL, NM


STATE LPG WELL NO. 4
Fri, Aug 31, 2007


Depth	Tilt	N	NE	E	SE	S	SW	W	NW
2306	0	10.4	11.0	13.3	16.0	19.2	17.9	14.5	11.4
2308	0	0.8	0.8	1.3	7.4	7.2	7.0	9.5	1.5
2309	0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
2333	0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
2334	0	1.9	1.5	2.3	9.7	8.6	8.4	7.8	3.6
2338	0	26.5	25.6	27.9	29.7	32.8	33.1	30.1	28.0
2342	0	20.0	20.0	19.8	21.1	24.0	23.9	17.6	17.4
2346	0	12.0	15.6	15.8	15.6	16.2	20.1	13.7	12.5
2350	0	6.7	7.0	6.0	7.9	9.5	9.7	5.3	5.0
2351	0	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
2367	0	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
2369	0	6.2	6.4	7.6	10.6	16.8	16.7	9.8	7.4
2370	0	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
2380	0	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
2381	0	10.7	10.2	12.7	20.2	22.0	22.3	18.3	13.5
2392	0	8.9	7.5	10.0	20.1	19.7	19.1	15.2	12.2
2396	0	3.7	3.5	5.8	10.9	16.6	14.2	10.5	4.3
2400	0	5.9	2.1	2.3	3.0	7.8	9.7	6.5	6.5
2402	0	11.2	11.2	15.1	20.6	25.5	24.2	19.8	12.8
2408	0	11.0	11.6	14.1	19.7	24.9	24.3	20.3	13.1
2412	0	10.4	11.0	11.6	16.4	22.6	21.5	15.4	12.0
2416	0	5.9	6.4	7.6	13.1	19.4	17.1	11.6	7.1
2428	0	12.7	12.4	15.1	21.3	30.4	27.8	21.9	15.7
2432	0	9.5	10.4	14.4	19.4	27.4	26.9	18.9	11.6
2438	0	9.9	10.2	13.5	18.5	26.6	27.0	19.6	11.4
2452	0	11.4	9.7	15.6	19.0	37.2	32.0	21.5	15.8
2456	0	10.7	10.2	7.8	24.8	38.5	34.7	19.6	14.2
2460	0	10.0	12.4	14.3	8.2	4.8	25.7	17.5	11.8
2462	0	7.0	3.6	2.1	3.6	5.3	13.1	9.3	6.7
2463	0	5.5	2.5	0.8	0.8	0.8	0.8	8.2	6.5
2464	0	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8
2494	0	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
2495	0	19.5	20.6	26.6	39.5	49.9	51.8	37.4	25.7
2500	0	18.1	19.3	24.4	38.9	49.9	51.6	37.6	25.9
2504	0	16.1	16.8	21.3	37.9	52.3	49.9	32.9	23.5
2508	0	13.6	12.3	18.7	38.5	47.8	52.5	34.9	20.2
2512	0	15.1	10.5	10.7	34.2	62.9	50.6	35.0	15.8
2516	0	12.6	9.9	10.1	41.4	60.4	60.7	25.4	15.3
2520	0	20.3	21.9	26.0	39.3	67.4	57.1	44.4	26.5
2524	0	19.9	22.1	30.6	51.9	68.0	62.3	44.5	26.8
2528	0	20.6	21.7	31.3	52.4	67.8	60.7	42.8	25.5
2532	0	20.8	23.0	34.9	53.2	69.0	61.8	43.2	25.5
2536	0	20.3	22.2	34.6	52.2	67.8	65.1	43.4	26.6
2540	0	20.6	22.8	33.5	50.5	68.1	63.7	42.8	25.3
2544	0	21.2	21.8	31.7	51.0	68.4	61.5	43.6	25.6
2548	0	19.0	21.2	30.3	52.1	67.3	61.8	43.8	25.1
2552	0	19.7	21.9	31.6	53.2	69.0	62.9	41.6	25.5
2556	0	20.3	22.2	31.0	51.6	67.8	64.5	42.0	26.4
2560	0	19.5	20.3	30.0	49.8	64.9	60.7	42.0	25.3
2564	0	17.6	18.4	28.5	45.1	61.0	55.5	39.4	23.8


WESTERN REFINING
JAL, NM


STATE LPG WELL NO. 4
Fri, Aug 31, 2007

Depth	Tilt	N	NE	E	SE	S	SW	W	NW
2568	0	13.0	13.5	23.8	42.5	60.4	58.4	33.6	17.4
2572	0	10.3	9.4	19.0	38.2	58.4	54.3	32.7	13.0
2575	0	9.5	8.8	17.7	37.9	58.9	53.7	29.3	12.1
2578	0	8.4	8.4	14.8	37.1	57.5	54.4	27.9	11.5
2580	0	8.5	8.5	12.8	36.6	57.9	53.2	26.9	10.2
2584	0	5.9	5.9	11.3	35.4	58.1	48.4	26.2	7.1
2588	0	12.7	15.1	26.4	47.2	64.5	56.9	35.9	12.7
2592	0	14.4	17.7	27.4	47.6	66.7	58.9	41.2	17.7
2596	0	13.8	18.0	27.9	56.9	67.6	57.5	40.6	18.9
2600	0	14.8	17.4	29.4	46.8	64.1	63.6	42.6	21.6
2604	0	9.2	11.5	24.6	30.3	56.0	53.5	34.7	12.6
2608	0	8.0	7.6	14.0	32.6	57.4	50.9	30.3	14.0
2610	0	4.7	4.7	4.2	6.3	9.3	5.1	4.7	4.7
2612	0	4.7	4.7	4.2	5.9	7.6	4.7	3.8	3.8
2614	0	3.4	2.5	2.1	2.5	3.8	3.8	3.4	3.4
2616	0	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3

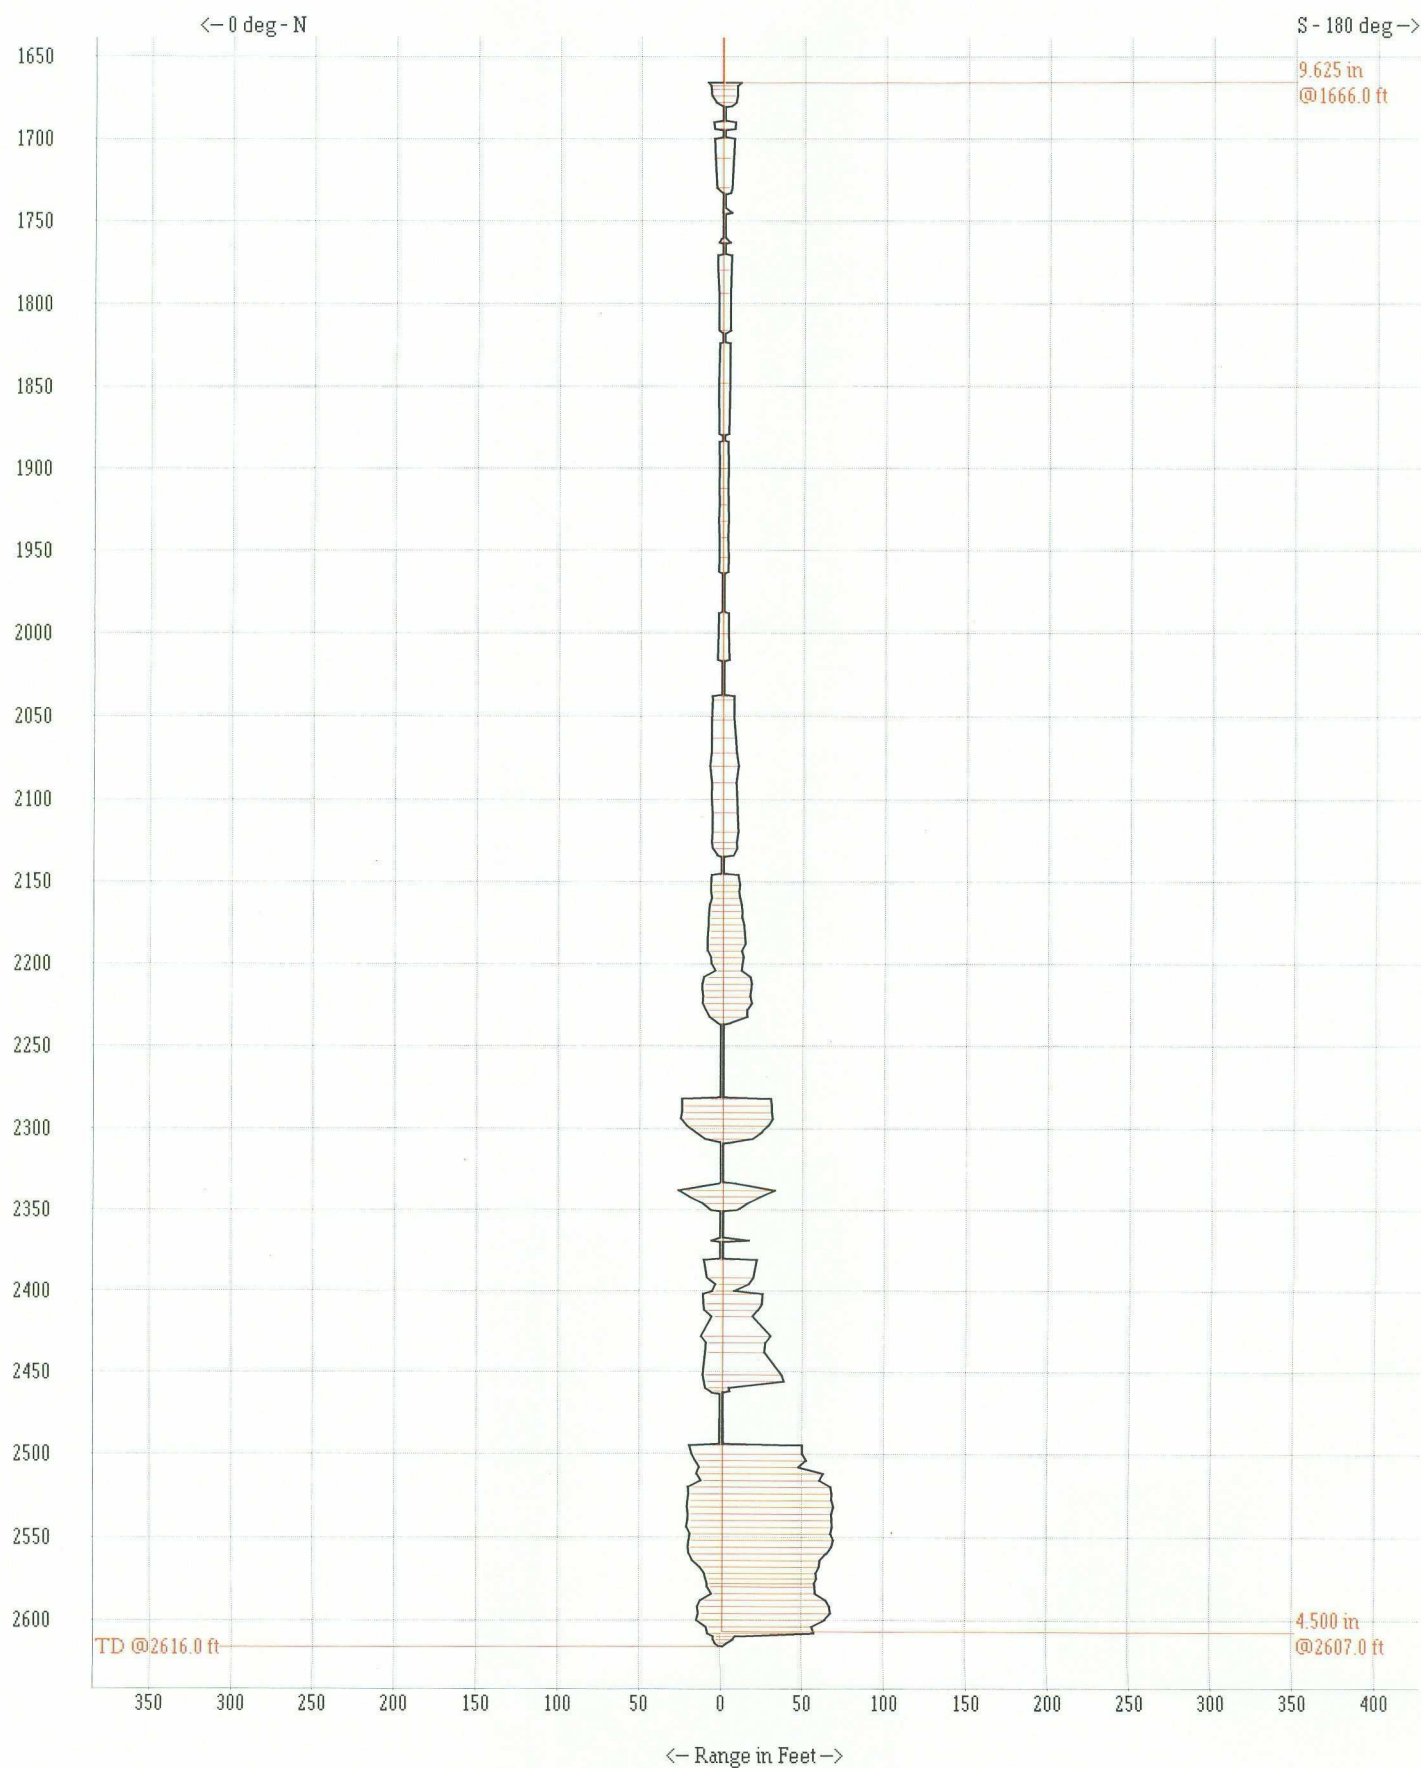

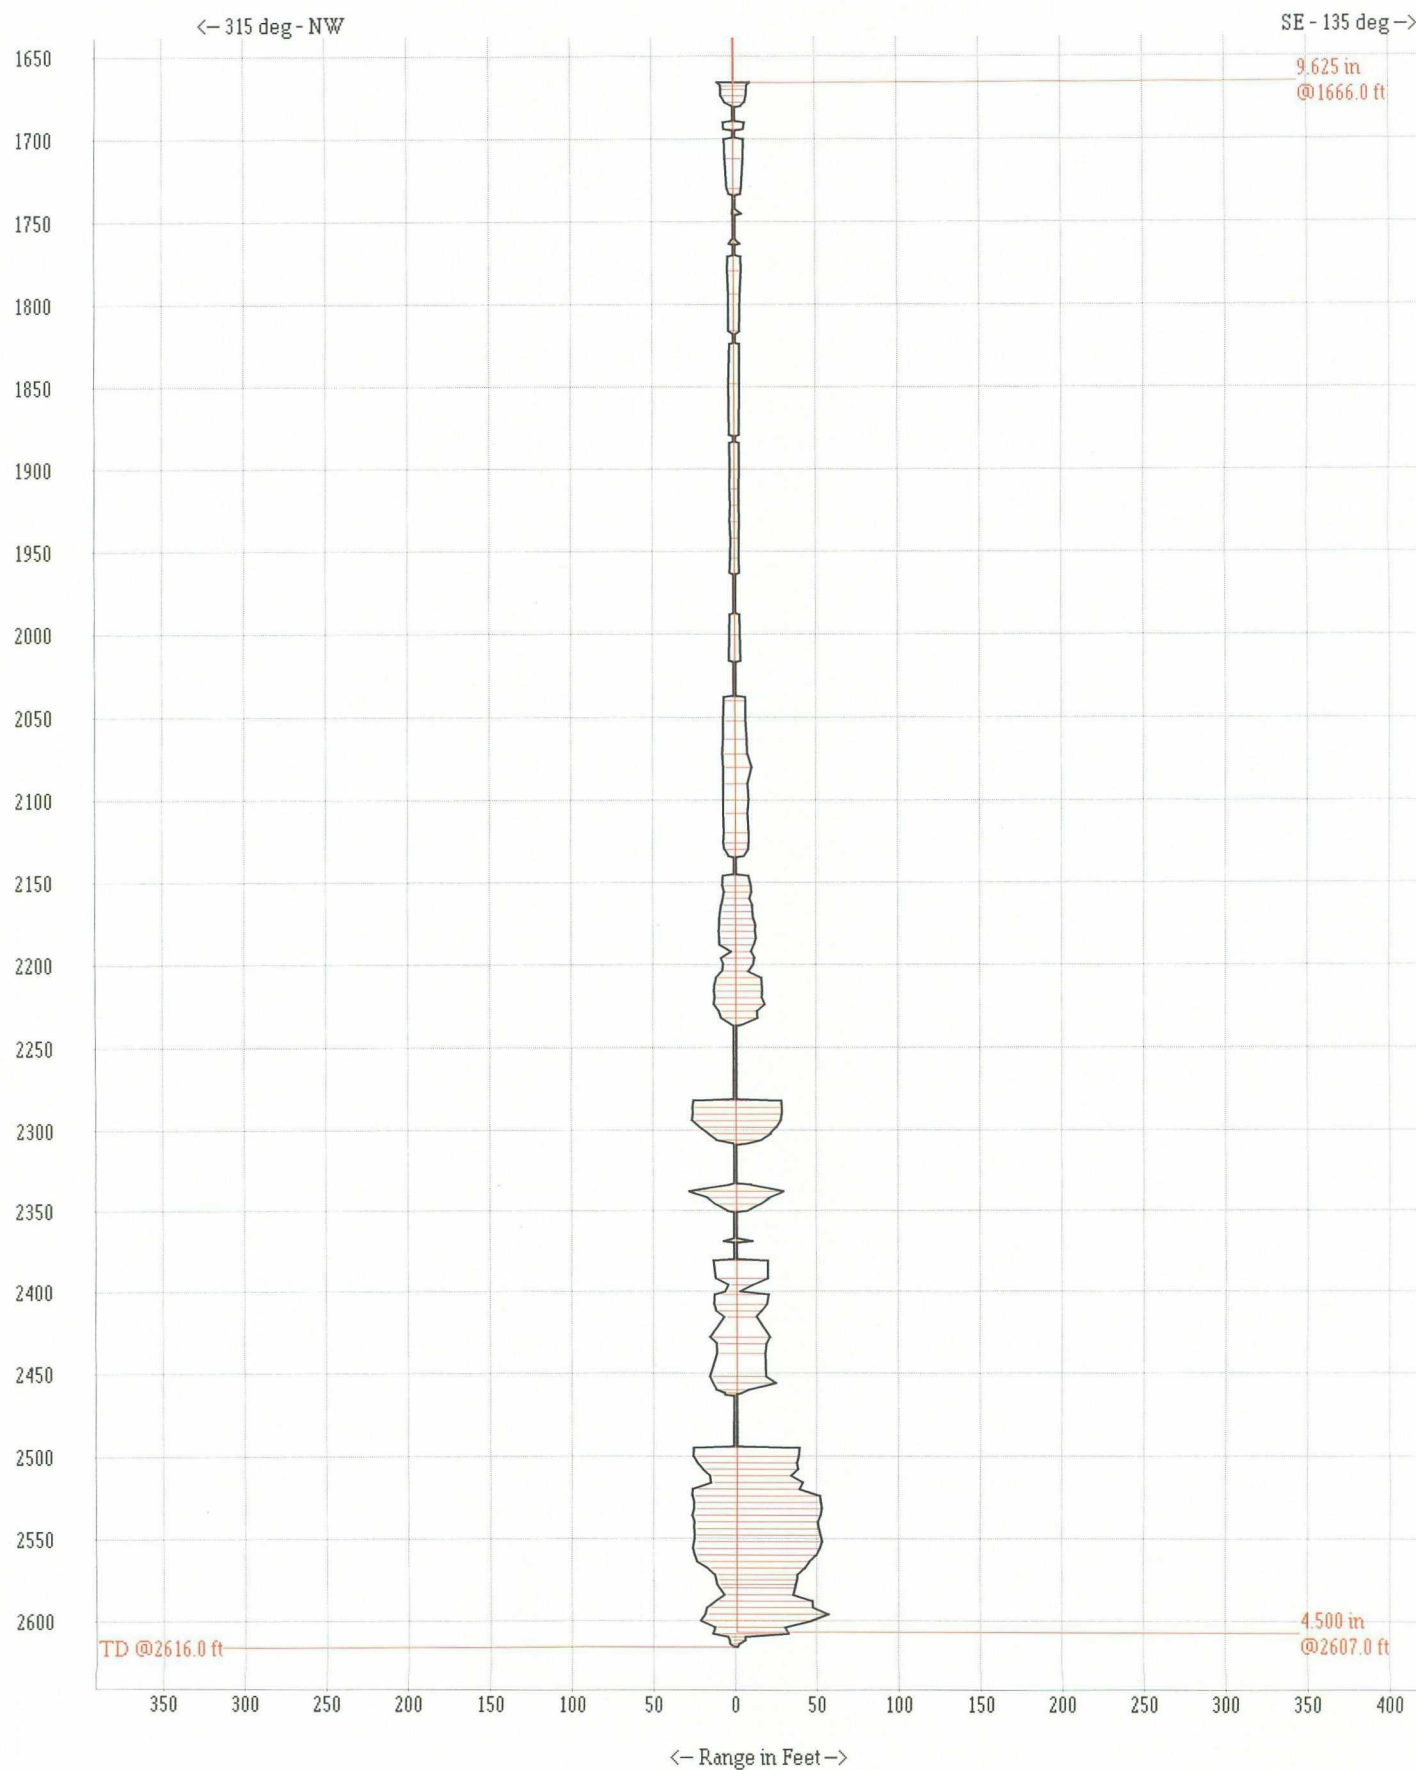

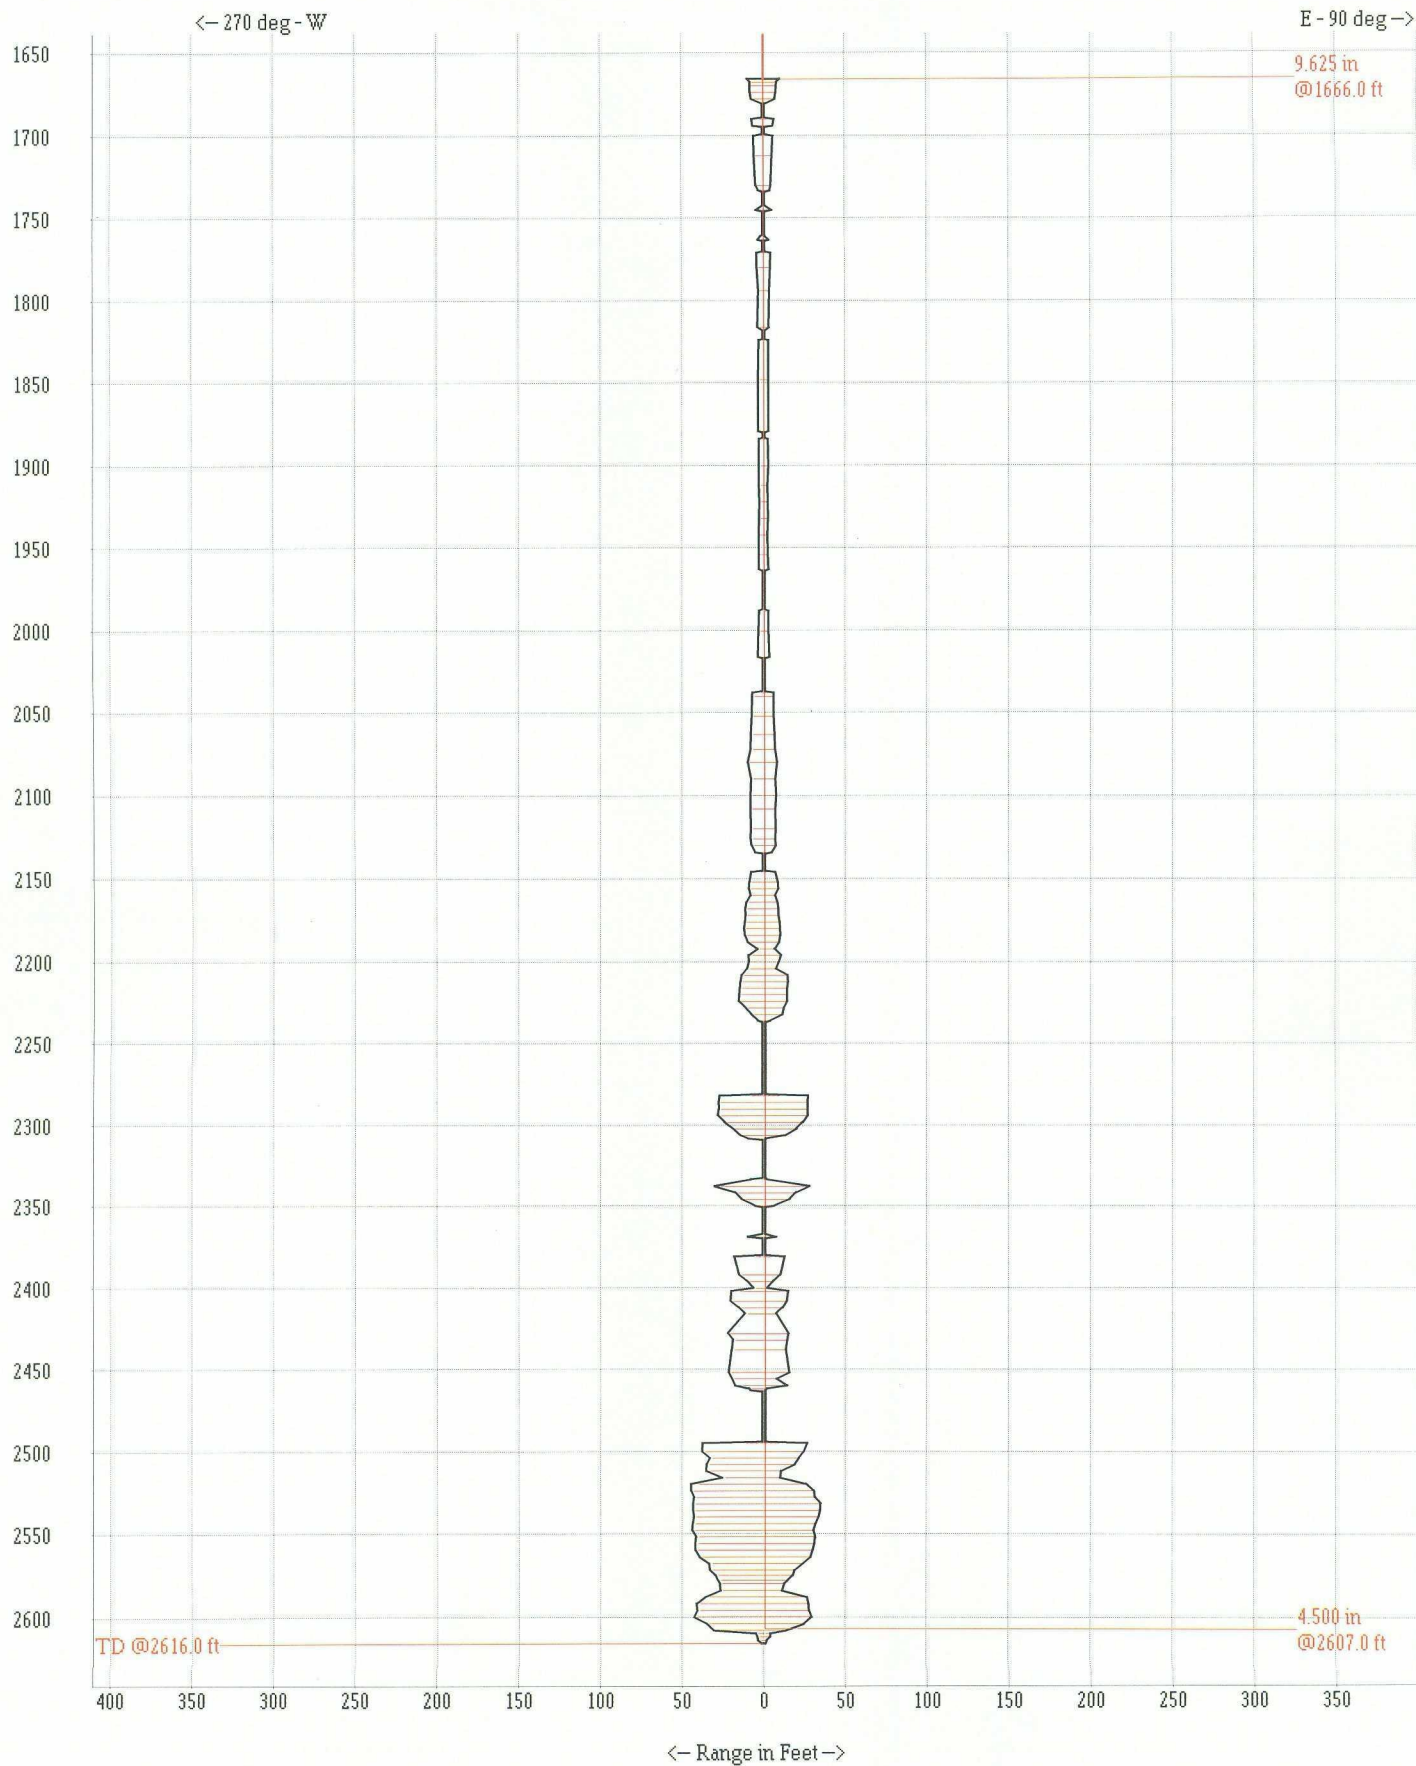


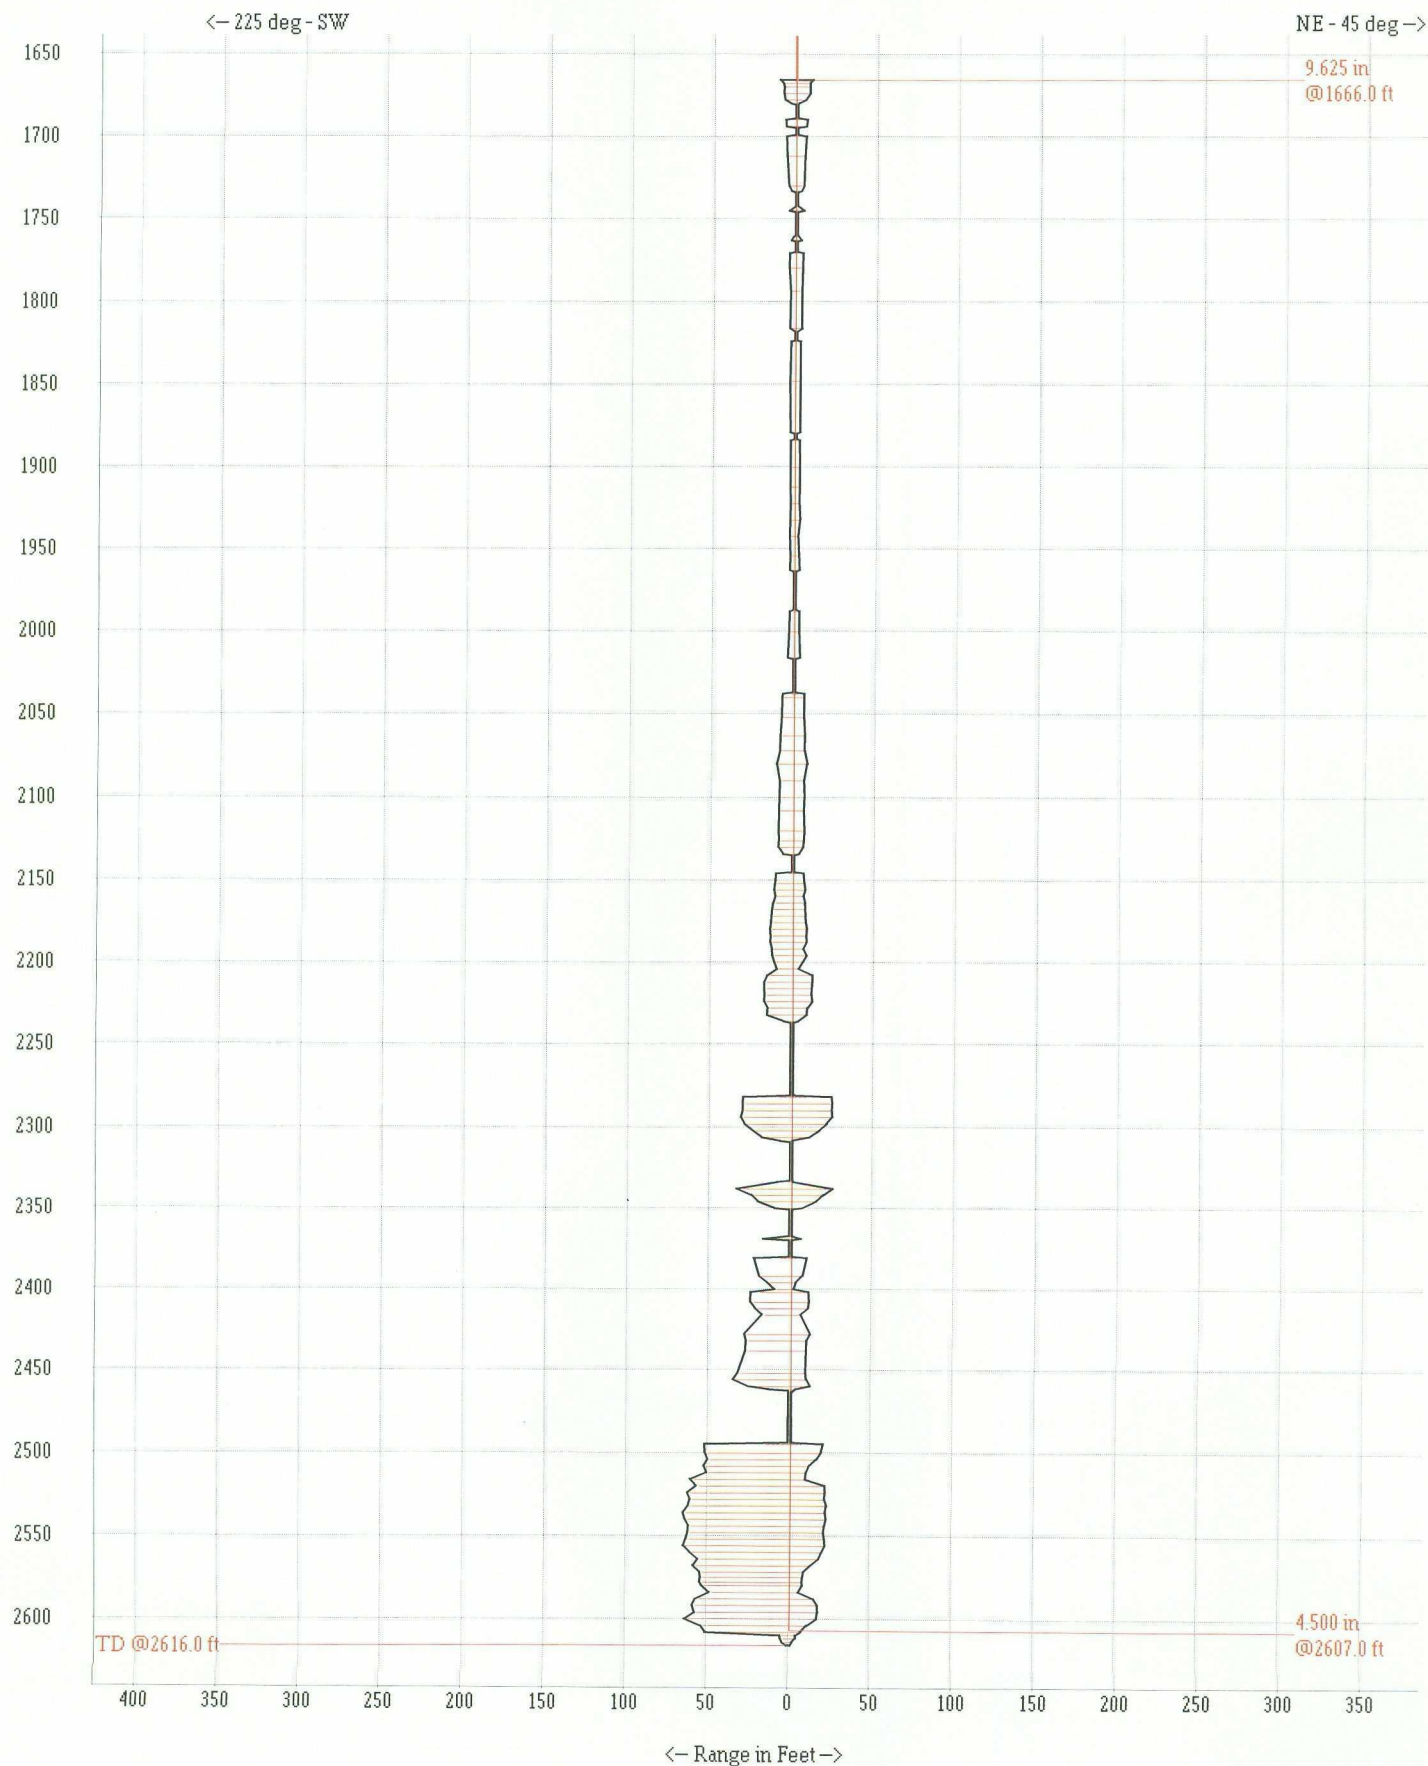

WESTERN REFINING
JAL, NM
STATE LPG WELL NO. 4
FRI, AUG 31, 2007

3D SHADE PLOT


VIEWING AZIMUTH: 45
AXIS TILT: -10 DEGS



WESTERN REFINING
JAL, NM
STATE LPG WELL NO. 4
FRI, AUG 31, 2007

3D SHADE PLOT


VIEWING AZIMUTH: 135
AXIS TILT: -10 DEGS

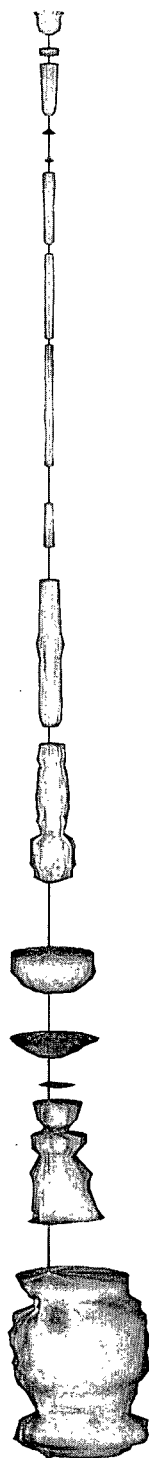

WESTERN REFINING
JAL, NM
STATE LPG WELL NO. 4
FRI, AUG 31, 2007

3D SHADE PLOT


VIEWING AZIMUTH: 225
AXIS TILT: -10 DEGS

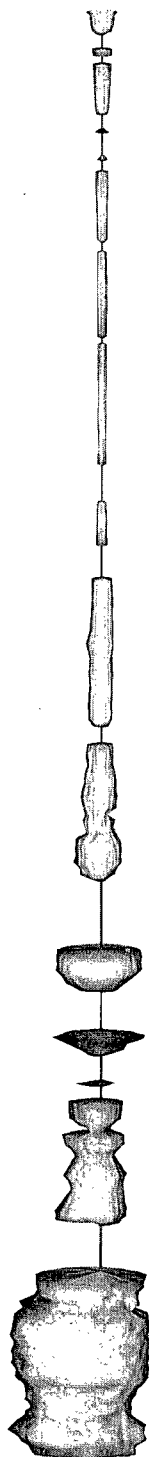

WESTERN REFINING
JAL, NM
STATE LPG WELL NO. 4
FRI, AUG 31, 2007

3D SHADE PLOT

VIEWING AZIMUTH: 315
AXIS TILT: -10 DEGS



SONARWIRE INC.
Wall Ranges versus Depth (ft.)

WESTERN REFINING
JAL, NM

STATE LPG WELL NO. 4
Fri, Aug 31, 2007

DEPTH:	1666	TILT:	0	RANGE:	10.1	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	9.8	9.9	9.9	9.7	9.8	9.8	9.7	9.7	
22.5	9.9	9.8	10.0	10.0	10.1	10.1	10.2	10.1	
45.0	10.1	10.1	10.1	10.0	10.0	10.0	10.2	10.2	
67.5	10.2	10.3	10.4	10.4	10.4	10.3	10.4	10.4	
90.0	10.4	10.5	10.5	10.4	10.4	10.4	10.4	10.4	
112.5	10.4	10.4	10.3	10.2	10.2	10.2	10.3	10.3	
135.0	10.2	10.1	10.2	10.3	10.3	10.4	10.5	10.5	
157.5	10.5	10.5	10.5	10.6	10.6	10.5	10.4	10.4	
180.0	10.5	10.6	10.6	10.5	10.6	10.3	10.1	10.3	
202.5	10.5	10.3	10.4	10.3	10.3	10.2	10.2	10.2	
225.0	10.2	10.2	10.1	10.0	10.0	10.0	10.0	10.0	
247.5	10.0	10.0	10.0	10.1	10.1	10.0	10.0	10.0	
270.0	9.8	9.7	9.7	9.8	9.8	9.9	9.9	9.9	
292.5	10.0	10.1	10.1	10.1	10.1	10.1	10.0	10.0	
315.0	10.0	10.0	10.0	9.9	10.0	9.9	10.1	10.1	
337.5	10.1	10.2	10.1	10.1	9.9	10.0	10.0	10.0	

DEPTH:	1668	TILT:	0	RANGE:	25.0	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	8.3	8.3	8.2	8.2	8.1	8.2	8.1	8.0	
22.5	8.2	8.1	8.1	8.3	8.2	8.1	8.3	8.4	
45.0	8.2	8.1	8.3	8.3	8.1	8.0	8.0	8.1	
67.5	8.2	8.1	8.0	8.1	8.1	8.2	8.3	8.3	
90.0	8.4	8.3	8.2	8.3	8.2	8.1	8.1	8.1	
112.5	8.0	8.0	8.0	8.0	8.1	8.1	8.1	8.1	
135.0	8.2	8.0	7.9	7.9	8.0	8.0	8.0	8.0	
157.5	8.0	8.0	8.0	8.0	8.1	8.1	8.2	8.2	
180.0	8.2	8.3	8.3	8.3	8.4	8.4	8.3	8.5	
202.5	8.4	8.3	8.2	8.3	8.3	8.3	8.4	8.4	
225.0	8.4	8.3	8.3	8.2	8.2	8.2	8.3	8.2	
247.5	8.2	8.1	8.0	8.1	8.2	8.1	8.0	8.1	
270.0	8.1	8.0	8.1	8.1	8.2	8.1	8.0	8.0	
292.5	8.0	8.1	8.2	8.3	8.3	8.2	8.2	8.1	
315.0	8.1	8.1	8.1	8.2	8.1	8.0	8.1	8.0	
337.5	8.0	8.0	8.1	8.1	8.1	8.1	8.2	8.2	

DEPTH: 1670	TILT: 0	RANGE: 7.9	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0 8.1	8.1	8.1	8.1	8.0	8.1	8.0	8.1
22.5 8.1	8.1	8.1	8.0	8.1	8.2	8.1	8.2
45.0 8.2	8.2	8.1	8.1	8.0	8.1	8.1	8.1
67.5 8.0	8.0	8.0	8.0	8.0	8.0	8.1	8.2
90.0 8.2	8.2	8.2	8.2	8.2	8.2	8.1	8.0
112.5 8.0	8.0	8.0	8.1	8.2	8.2	8.2	8.1
135.0 8.0	8.0	8.0	8.1	7.9	7.8	7.8	7.9
157.5 7.8	7.9	7.8	8.0	7.9	8.0	8.1	8.0
180.0 8.2	8.1	8.1	8.1	8.2	8.3	8.1	8.1
202.5 8.1	8.0	8.1	8.2	8.0	8.1	8.0	7.9
225.0 7.9	7.9	8.0	7.9	8.1	7.8	8.0	8.0
247.5 8.1	7.8	7.7	7.9	7.9	8.0	8.0	8.2
270.0 8.0	7.9	7.9	7.8	7.9	7.9	7.9	7.9
292.5 7.9	7.7	7.9	7.9	7.8	7.7	7.7	7.8
315.0 7.9	8.1	8.0	8.0	7.9	8.0	8.0	8.1
337.5 7.9	7.9	7.8	7.8	8.0	7.9	7.9	8.0

DEPTH: 1674	TILT: 0	RANGE: 7.9	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0 7.7	7.6	7.6	7.7	7.7	7.7	7.8	7.8
22.5 7.8	7.9	7.9	7.9	8.0	8.0	8.1	8.1
45.0 8.1	8.1	8.0	8.0	7.9	7.9	7.9	7.9
67.5 7.9	8.0	8.0	7.9	7.9	8.0	8.0	8.0
90.0 7.9	7.8	7.8	7.9	7.9	7.9	7.8	7.8
112.5 7.9	7.9	7.9	7.9	7.8	7.8	7.9	7.9
135.0 7.8	7.8	7.8	7.7	7.7	7.6	7.7	7.7
157.5 7.9	8.0	8.1	8.1	8.1	8.1	8.1	8.2
180.0 8.2	8.2	8.2	8.3	8.3	8.2	8.1	8.1
202.5 8.2	8.2	8.2	8.2	8.1	8.0	8.0	8.1
225.0 8.1	8.2	8.2	8.1	8.1	8.2	8.2	8.2
247.5 8.2	8.1	8.2	8.2	8.1	8.0	8.0	7.9
270.0 7.9	7.9	7.8	7.8	7.9	7.9	7.9	7.9
292.5 7.9	7.9	7.9	7.9	7.9	7.9	7.9	7.9
315.0 7.8	7.7	7.7	7.8	7.9	7.9	7.8	7.8
337.5 7.8	7.8	7.8	7.7	7.6	7.6	7.7	7.7

DEPTH: 1678	TILT: 0	RANGE: 7.1	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0 5.1	5.1	5.1	5.2	5.2	5.1	4.9	4.9
22.5 4.9	5.2	5.2	5.2	5.3	5.3	5.3	5.4
45.0 5.5	5.6	5.8	6.0	6.2	6.4	6.5	6.6
67.5 6.9	7.2	7.2	7.2	7.1	6.9	6.9	7.1
90.0 7.2	7.2	7.1	6.9	6.9	7.1	6.9	6.9
112.5 6.7	6.7	6.9	6.9	6.9	6.7	6.7	6.6
135.0 6.7	6.7	6.6	6.6	6.7	6.7	6.6	6.7
157.5 6.9	6.9	6.9	6.9	7.1	7.1	7.2	7.2
180.0 7.1	7.2	7.2	7.2	7.1	7.1	6.9	7.1
202.5 7.1	7.1	7.1	7.2	7.3	7.5	7.3	7.3
225.0 7.4	7.3	7.1	7.1	7.1	7.1	7.2	7.2
247.5 7.1	7.2	7.1	7.1	7.2	7.2	7.3	7.3
270.0 7.3	7.2	7.1	6.9	6.9	6.9	6.9	6.9
292.5 6.6	6.1	6.1	5.9	5.8	5.7	5.6	5.5
315.0 5.5	5.6	5.7	5.8	5.8	5.7	5.6	5.4
337.5 5.3	5.2	5.1	4.9	4.9	5.1	5.1	5.1

DEPTH: 1680	TILT: 0	RANGE: 4.5	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	1.5	1.3	1.2	1.3	1.4	1.4	1.4	
22.5	1.4	1.4	1.4	1.3	1.3	1.3	1.4	
45.0	1.5	1.5	1.6	1.6	1.7	1.8	1.8	
67.5	1.8	1.8	1.9	2.0	2.1	2.2	2.3	
90.0	2.6	2.8	3.2	3.4	4.1	4.4	4.4	
112.5	4.6	4.7	4.7	4.6	4.5	4.5	4.6	
135.0	4.5	4.4	4.3	4.4	4.4	4.3	4.2	
157.5	4.3	4.3	4.3	4.3	4.3	4.3	4.3	
180.0	4.4	4.4	4.4	4.4	4.3	4.3	4.1	
202.5	4.1	4.1	4.0	3.9	3.8	3.7	3.6	
225.0	3.5	3.5	3.5	3.5	3.5	3.4	3.3	
247.5	2.9	2.7	2.7	2.7	2.6	2.6	2.5	
270.0	2.2	2.1	2.1	2.0	1.9	1.8	1.7	
292.5	1.5	1.5	1.5	1.5	1.4	1.5	1.5	
315.0	1.5	1.5	1.6	1.6	1.6	1.5	1.5	
337.5	1.4	1.4	1.5	1.5	1.5	1.3	1.4	

DEPTH: 1681	TILT: 0	RANGE: 25.0	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
22.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
45.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
67.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
90.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
112.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
135.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
157.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
180.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
202.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
225.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
247.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
270.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
292.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
315.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
337.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	

DEPTH: 1689	TILT: 0	RANGE: 25.0	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
22.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
45.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
67.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
90.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
112.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
135.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
157.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
180.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
202.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
225.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
247.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
270.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
292.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
315.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
337.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	

DEPTH: 1690	TILT: 0	RANGE: 6.7	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	6.5	6.5	6.4	6.5	6.4	6.5	6.7
22.5	6.5	6.4	6.4	6.3	6.3	6.4	6.4
45.0	6.5	6.4	6.5	6.6	6.6	6.5	6.6
67.5	6.5	6.7	6.6	6.7	6.9	6.9	6.7
90.0	6.7	6.6	6.7	6.6	6.7	6.7	6.7
112.5	6.7	6.7	6.7	6.7	6.7	6.7	6.7
135.0	6.7	6.7	6.7	6.6	6.5	6.5	6.7
157.5	6.9	6.6	6.7	6.9	6.9	6.7	6.7
180.0	6.9	6.9	7.0	7.0	7.0	7.0	7.0
202.5	7.0	7.0	7.0	7.0	7.0	7.0	7.0
225.0	6.9	6.9	6.9	6.9	6.9	6.7	6.9
247.5	6.6	6.7	7.0	6.9	6.9	6.6	6.9
270.0	7.0	6.9	6.7	6.7	6.7	6.7	6.6
292.5	6.4	6.5	6.5	6.5	6.5	6.5	6.4
315.0	6.4	6.3	6.4	6.4	6.4	6.4	6.3
337.5	6.4	6.3	6.2	6.2	6.4	6.4	6.5

DEPTH: 1694	TILT: 0	RANGE: 6.4	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	6.0	5.9	6.0	6.0	5.9	5.8	5.9
22.5	6.0	6.0	6.0	6.0	6.1	6.1	6.1
45.0	6.1	6.0	5.9	5.9	5.9	5.9	5.8
67.5	5.9	5.8	5.8	5.8	6.0	6.0	6.1
90.0	6.1	6.3	6.1	6.2	6.2	6.1	6.1
112.5	6.3	6.4	6.2	6.3	6.3	6.2	6.2
135.0	6.1	6.2	6.2	6.3	6.3	6.4	6.4
157.5	6.5	6.5	6.5	6.5	6.5	6.6	6.7
180.0	6.7	6.6	6.5	6.4	6.4	6.5	6.5
202.5	6.5	6.5	6.5	6.5	6.5	6.5	6.4
225.0	6.4	6.5	6.4	6.3	6.2	6.2	6.4
247.5	6.4	6.4	6.3	6.3	6.3	6.4	6.4
270.0	6.4	6.4	6.3	6.3	6.3	6.2	6.4
292.5	6.3	6.4	6.3	6.2	6.3	6.3	6.2
315.0	6.2	6.1	6.1	5.9	5.8	5.8	6.0
337.5	6.1	6.2	6.2	6.2	6.2	6.1	6.0

DEPTH: 1695	TILT: 0	RANGE: 25.0	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
22.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
45.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
67.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
90.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
112.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
135.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
157.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
180.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
202.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
225.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
247.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
270.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
292.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
315.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
337.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6

DEPTH:	1699	TILT:	0	RANGE:	25.0	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
22.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
45.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
67.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
90.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
112.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
135.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
157.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
180.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
202.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
225.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
247.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
270.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
292.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
315.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
337.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	

DEPTH:	1700	TILT:	0	RANGE:	6.2	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	5.9	5.9	6.0	6.0	6.0	6.0	6.0	6.1	
22.5	6.1	6.1	6.1	6.0	6.0	6.0	6.1	6.1	
45.0	6.0	6.0	6.0	6.0	6.1	6.0	5.9	5.9	
67.5	5.9	5.9	5.9	5.9	5.9	5.9	5.9	5.9	
90.0	5.9	5.9	5.9	6.0	6.0	6.0	6.0	6.2	
112.5	6.1	6.0	6.1	6.3	6.0	6.1	6.1	6.1	
135.0	6.1	6.2	6.1	6.1	6.2	6.2	6.1	6.1	
157.5	6.0	6.2	6.2	6.2	6.0	6.2	6.3	6.3	
180.0	6.4	6.5	6.5	6.5	6.5	6.4	6.3	6.4	
202.5	6.3	6.3	6.4	6.3	6.4	6.3	6.3	6.3	
225.0	6.3	6.4	6.4	6.3	6.2	6.1	6.2	6.2	
247.5	6.2	6.2	6.1	6.1	6.1	6.0	6.1	6.0	
270.0	6.0	5.9	5.9	5.9	5.9	6.0	6.1	6.1	
292.5	6.0	5.9	5.9	5.9	5.9	5.9	5.8	5.8	
315.0	5.9	5.9	6.0	5.9	5.8	5.8	5.8	5.8	
337.5	5.9	6.0	5.9	5.8	5.8	5.9	5.9	5.9	

DEPTH:	1712	TILT:	0	RANGE:	5.7	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	5.5	5.4	5.5	5.5	5.4	5.3	5.3	5.3	
22.5	5.3	5.3	5.3	5.4	5.4	5.2	5.2	5.3	
45.0	5.3	5.2	5.3	5.3	5.2	5.2	5.3	5.3	
67.5	5.3	5.2	5.3	5.3	5.4	5.3	5.4	5.4	
90.0	5.4	5.5	5.4	5.5	5.6	5.6	5.5	5.5	
112.5	5.6	5.6	5.7	5.6	5.7	5.7	5.6	5.7	
135.0	5.7	5.6	5.7	5.7	5.7	5.7	5.6	5.6	
157.5	5.7	5.7	5.6	5.7	5.7	5.7	5.8	5.9	
180.0	5.8	5.7	5.8	5.9	5.8	5.8	5.9	6.0	
202.5	5.9	5.9	5.9	5.8	5.8	5.8	5.8	5.8	
225.0	5.8	5.8	5.9	5.8	5.9	5.9	5.9	5.8	
247.5	5.7	5.7	5.7	5.7	5.8	5.8	5.7	5.6	
270.0	5.6	5.6	5.6	5.6	5.7	5.7	5.7	5.6	
292.5	5.7	5.7	5.7	5.7	5.6	5.6	5.5	5.5	
315.0	5.5	5.4	5.3	5.3	5.3	5.3	5.4	5.3	
337.5	5.4	5.4	5.5	5.5	5.3	5.3	5.3	5.5	

DEPTH: 1730	TILT: 0	RANGE: 4.7	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	4.5	4.5	4.5	4.6	4.6	4.6	4.7
22.5	4.7	4.7	4.7	4.6	4.6	4.5	4.6
45.0	4.6	4.6	4.6	4.6	4.7	4.7	4.7
67.5	4.6	4.6	4.6	4.6	4.6	4.6	4.6
90.0	4.6	4.7	4.6	4.6	4.7	4.7	4.6
112.5	4.6	4.6	4.5	4.5	4.6	4.6	4.5
135.0	4.5	4.4	4.5	4.5	4.6	4.6	4.7
157.5	4.7	4.7	4.7	4.7	4.7	4.7	4.8
180.0	4.7	4.7	4.7	4.8	4.8	4.8	5.0
202.5	5.0	4.8	4.7	4.7	4.8	4.8	4.8
225.0	4.7	4.7	4.7	4.7	4.8	4.7	4.6
247.5	4.5	4.6	4.6	4.6	4.6	4.7	4.7
270.0	4.7	4.7	4.7	4.7	4.6	4.5	4.5
292.5	4.5	4.5	4.5	4.5	4.6	4.6	4.6
315.0	4.4	4.5	4.5	4.5	4.5	4.5	4.5
337.5	4.4	4.4	4.4	4.4	4.4	4.4	4.5

DEPTH: 1733	TILT: 0	RANGE: 3.8	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	1.3	1.3	1.2	1.1	0.9	0.9	0.9
22.5	0.9	0.9	0.9	1.3	1.4	1.4	3.0
45.0	3.0	3.0	3.0	3.2	3.2	3.2	3.3
67.5	3.3	3.4	3.5	3.5	3.6	3.7	3.8
90.0	3.8	3.8	4.0	3.9	4.0	4.0	4.0
112.5	3.9	3.8	3.9	3.9	3.9	3.9	4.0
135.0	4.0	4.0	4.0	4.0	4.0	4.0	3.9
157.5	3.9	3.9	3.9	3.8	3.7	3.6	3.6
180.0	3.7	3.7	3.6	3.5	3.6	3.6	3.5
202.5	3.4	3.5	3.5	3.4	3.3	3.3	3.4
225.0	3.3	3.3	3.4	3.4	3.3	3.2	3.3
247.5	3.3	3.4	3.4	3.3	3.3	3.3	3.3
270.0	3.2	3.2	3.2	3.3	3.3	3.3	3.2
292.5	3.3	3.4	3.4	3.4	3.4	3.3	3.2
315.0	3.2	3.0	2.8	2.7	2.6	2.5	1.8
337.5	1.7	1.6	1.5	1.4	1.3	1.3	1.3

DEPTH: 1734	TILT: 0	RANGE: 25.0	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
22.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
45.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
67.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
90.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
112.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
135.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
157.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
180.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
202.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
225.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
247.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
270.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
292.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
315.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
337.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6

DEPTH:	1742	TILT:	0	RANGE:	25.0	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
22.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
45.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
67.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
90.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
112.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
135.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
157.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
180.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
202.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
225.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
247.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
270.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
292.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
315.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
337.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	

DEPTH:	1745	TILT:	0	RANGE:	4.8	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	1.2	1.3	1.3	1.2	1.2	1.1	1.2	1.2	
22.5	1.2	1.2	1.3	1.4	1.2	1.3	1.4	4.6	
45.0	4.6	4.5	4.5	4.6	4.7	4.7	4.7	4.8	
67.5	4.9	4.9	5.0	5.0	4.9	4.8	4.8	4.9	
90.0	4.9	4.8	4.7	4.6	4.6	4.7	4.7	4.7	
112.5	4.7	4.7	4.7	4.7	4.6	4.5	4.5	4.6	
135.0	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.7	
157.5	4.7	4.8	4.8	4.9	4.9	4.8	4.8	4.7	
180.0	4.6	4.5	4.5	4.5	4.5	4.6	4.6	4.7	
202.5	4.7	4.7	4.7	4.8	4.8	4.7	4.7	4.6	
225.0	4.5	4.4	4.3	4.1	4.0	4.0	4.1	4.3	
247.5	4.4	4.5	4.5	4.5	4.4	4.3	4.4	4.5	
270.0	4.6	4.7	4.8	4.8	4.5	4.4	4.5	4.5	
292.5	4.6	4.7	4.8	4.6	4.6	4.5	1.2	1.3	
315.0	1.3	1.4	1.6	1.4	1.4	1.4	1.4	1.5	
337.5	1.5	1.4	1.4	1.4	1.4	1.3	1.3	1.2	

DEPTH:	1746	TILT:	0	RANGE:	25.0	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
22.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
45.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
67.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
90.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
112.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
135.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
157.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
180.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
202.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
225.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
247.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
270.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
292.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
315.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
337.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	

DEPTH: 1760	TILT: 0	RANGE: 25.0	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
22.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
45.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
67.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
90.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
112.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
135.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
157.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
180.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
202.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
225.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
247.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
270.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
292.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
315.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
337.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6

DEPTH: 1761	TILT: 0	RANGE: 25.0	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	1.9	1.8	1.7	1.6	1.6	1.6	1.5
22.5	1.5	1.5	1.5	1.5	1.5	1.5	1.4
45.0	1.4	1.4	1.4	1.4	1.3	1.3	1.3
67.5	1.3	1.3	1.2	1.2	1.1	1.1	1.1
90.0	1.1	1.1	1.1	1.1	1.1	1.1	1.1
112.5	1.1	1.1	1.1	1.1	1.1	1.1	1.1
135.0	1.1	1.1	1.1	1.1	1.1	1.1	1.1
157.5	1.1	1.1	1.1	1.1	1.1	1.2	1.2
180.0	1.3	1.4	1.4	1.5	1.6	1.7	1.7
202.5	1.8	1.9	2.0	2.1	2.2	2.1	2.1
225.0	2.0	2.0	1.9	1.9	1.9	2.0	2.0
247.5	2.0	1.9	1.8	1.8	1.7	1.8	1.9
270.0	2.0	2.0	1.9	1.9	1.9	1.9	1.9
292.5	1.8	1.8	1.8	1.8	1.8	1.8	1.8
315.0	1.7	1.7	1.8	1.8	1.9	1.9	2.0
337.5	2.0	2.0	2.1	2.1	2.1	2.0	2.0

DEPTH: 1763	TILT: 0	RANGE: 3.6	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	3.2	3.2	3.2	3.2	3.2	3.2	3.0
22.5	3.0	3.2	3.2	3.2	3.0	3.0	3.2
45.0	3.2	3.0	3.0	3.0	2.9	2.9	3.0
67.5	3.2	3.2	3.3	3.4	3.4	3.4	3.4
90.0	3.3	3.5	3.4	3.4	3.3	3.5	3.5
112.5	3.6	3.6	3.5	3.3	3.4	3.4	3.5
135.0	3.6	3.6	3.6	3.6	3.7	3.7	3.7
157.5	3.7	3.6	3.5	3.6	3.6	3.7	3.7
180.0	3.8	3.8	3.7	3.6	3.6	3.6	3.6
202.5	3.6	3.6	3.5	3.5	3.4	3.5	3.5
225.0	3.3	3.3	3.0	3.3	3.2	3.2	3.4
247.5	3.5	3.4	3.5	3.5	3.5	3.5	3.5
270.0	3.5	3.5	3.5	3.5	3.6	3.7	3.7
292.5	3.6	3.6	3.6	3.5	3.5	3.4	3.4
315.0	3.3	3.3	3.2	3.2	3.0	3.2	3.2
337.5	3.3	3.3	3.4	3.4	3.4	3.3	3.2

DEPTH: 1764	TILT: 0	RANGE: 25.0	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
22.5 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
45.0 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
67.5 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
90.0 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
112.5 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
135.0 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
157.5 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
180.0 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
202.5 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
225.0 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
247.5 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
270.0 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
292.5 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
315.0 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
337.5 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6

DEPTH: 1770	TILT: 0	RANGE: 25.0	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
22.5 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
45.0 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
67.5 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
90.0 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
112.5 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
135.0 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
157.5 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
180.0 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
202.5 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
225.0 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
247.5 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
270.0 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
292.5 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
315.0 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
337.5 0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6

DEPTH: 1771	TILT: 0	RANGE: 4.6	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0 3.9	4.0	4.1	4.1	4.1	4.0	4.2	3.9
22.5 4.2	4.0	4.1	4.0	4.1	4.1	4.2	4.2
45.0 4.2	4.2	4.2	4.3	4.3	4.3	4.2	4.3
67.5 4.3	4.4	4.1	4.3	4.3	4.1	4.2	4.3
90.0 4.4	4.4	4.1	4.3	4.2	4.3	4.1	4.2
112.5 4.3	4.1	4.1	4.2	4.3	4.2	4.1	4.4
135.0 4.3	4.3	4.3	4.3	4.4	4.3	4.4	4.4
157.5 4.6	4.7	4.7	4.7	4.5	4.4	4.7	4.8
180.0 4.5	4.7	4.2	4.3	4.5	4.5	4.5	4.3
202.5 4.3	4.2	4.1	4.0	4.1	4.3	4.1	4.0
225.0 4.1	4.2	4.0	4.1	3.9	3.9	4.1	4.0
247.5 4.0	4.1	4.0	4.0	3.9	4.0	4.1	4.2
270.0 4.2	3.9	3.9	3.9	4.0	4.0	4.1	4.1
292.5 3.9	3.9	3.8	3.9	4.0	4.0	4.0	4.0
315.0 3.9	3.8	3.8	4.1	3.9	4.0	3.9	4.0
337.5 3.9	4.1	3.8	4.0	4.0	3.8	3.9	3.9

DEPTH: 1780	TILT: 0	RANGE: 4.3	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	4.0	4.1	4.2	4.1	4.0	4.1	4.1
22.5	4.0	4.0	4.1	4.1	4.0	4.0	4.2
45.0	4.1	4.1	4.1	4.2	4.3	4.2	4.2
67.5	4.2	4.2	4.2	4.2	4.3	4.3	4.2
90.0	4.2	4.3	4.3	4.3	4.3	4.3	4.2
112.5	4.3	4.4	4.4	4.4	4.3	4.3	4.2
135.0	4.4	4.4	4.4	4.4	4.4	4.4	4.4
157.5	4.4	4.4	4.4	4.4	4.4	4.5	4.5
180.0	4.4	4.4	4.3	4.3	4.3	4.4	4.3
202.5	4.3	4.3	4.4	4.5	4.3	4.2	4.4
225.0	4.4	4.3	4.2	4.2	4.3	4.3	4.2
247.5	4.1	4.1	4.2	4.1	4.1	4.1	4.3
270.0	4.1	4.1	4.2	4.1	4.0	4.0	4.1
292.5	4.1	4.1	4.1	4.1	4.0	4.1	3.9
315.0	4.1	3.9	4.0	4.0	4.0	4.1	4.0
337.5	3.9	4.0	4.0	4.1	4.1	4.0	3.9

DEPTH: 1794	TILT: 0	RANGE: 3.8	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	3.3	3.3	3.4	3.4	3.4	3.4	3.4
22.5	3.4	3.3	3.4	3.4	3.4	3.5	3.6
45.0	3.6	3.6	3.6	3.6	3.7	3.7	3.5
67.5	3.5	3.5	3.4	3.4	3.5	3.5	3.6
90.0	3.7	3.7	3.8	3.9	3.9	3.9	3.8
112.5	3.7	3.7	3.7	3.6	3.6	3.6	3.7
135.0	3.7	3.8	3.8	3.9	3.9	3.9	3.9
157.5	3.9	3.9	3.9	3.8	3.8	3.9	4.0
180.0	4.0	4.0	3.9	3.9	3.9	3.9	3.7
202.5	3.7	3.6	3.6	3.5	3.5	3.5	3.4
225.0	3.4	3.4	3.3	3.3	3.3	3.3	3.4
247.5	3.4	3.4	3.3	3.3	3.4	3.4	3.3
270.0	3.2	3.2	3.3	3.3	3.4	3.4	3.4
292.5	3.4	3.4	3.4	3.5	3.5	3.5	3.5
315.0	3.5	3.6	3.6	3.6	3.5	3.4	3.4
337.5	3.4	3.4	3.3	3.3	3.2	3.2	3.3

DEPTH: 1816	TILT: 0	RANGE: 3.7	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	3.3	3.3	3.2	3.2	3.3	3.3	3.3
22.5	3.3	3.4	3.4	3.5	3.5	3.6	3.6
45.0	3.6	3.6	3.4	3.2	3.1	3.1	3.2
67.5	3.3	3.3	3.4	3.4	3.4	3.4	3.4
90.0	3.3	3.3	3.3	3.3	3.3	3.4	3.5
112.5	3.5	3.5	3.4	3.4	3.4	3.4	3.3
135.0	3.3	3.3	3.3	3.3	3.4	3.4	3.4
157.5	3.4	3.5	3.6	3.6	3.7	3.7	3.7
180.0	3.9	3.9	3.9	3.9	3.8	3.7	3.5
202.5	3.5	3.6	3.6	3.7	3.7	3.7	3.8
225.0	3.8	3.8	3.8	3.7	3.7	3.7	3.7
247.5	3.7	3.7	3.7	3.7	3.7	3.7	3.7
270.0	3.7	3.8	3.8	3.8	3.8	3.8	3.7
292.5	3.7	3.8	3.8	3.8	3.7	3.6	3.6
315.0	3.6	3.6	3.6	3.6	3.6	3.6	3.5
337.5	3.5	3.4	3.4	3.4	3.4	3.4	3.4

DEPTH: 1818	TILT: 0	RANGE: 25.0	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
22.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
45.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
67.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
90.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
112.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
135.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
157.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
180.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
202.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
225.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
247.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
270.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
292.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
315.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
337.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6

DEPTH: 1823	TILT: 0	RANGE: 25.0	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
22.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
45.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
67.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
90.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
112.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
135.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
157.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
180.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
202.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
225.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
247.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
270.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
292.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
315.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
337.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6

DEPTH: 1824	TILT: 0	RANGE: 3.6	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	2.5	2.4	2.5	2.6	2.6	2.7	2.8
22.5	2.9	2.9	2.9	2.7	2.7	2.7	2.7
45.0	2.7	2.7	2.7	2.7	2.7	2.7	2.7
67.5	2.8	2.8	2.9	3.0	3.0	3.2	3.2
90.0	3.2	3.2	3.2	3.2	3.2	3.2	3.2
112.5	3.2	3.2	3.2	3.0	3.0	3.2	3.3
135.0	3.3	3.3	3.3	3.4	3.4	3.4	3.5
157.5	3.5	3.5	3.6	3.7	3.7	3.7	3.8
180.0	3.8	3.8	3.7	3.6	3.5	3.5	3.5
202.5	3.5	3.4	3.4	3.3	3.2	3.2	3.2
225.0	3.0	2.9	2.9	2.8	2.8	2.9	2.9
247.5	3.0	3.0	3.0	3.0	3.0	2.9	2.9
270.0	2.8	2.8	2.8	2.7	2.6	2.7	2.7
292.5	2.7	2.7	2.7	2.7	2.8	2.9	2.9
315.0	2.9	2.8	2.7	2.7	2.6	2.4	2.4
337.5	2.4	2.5	2.5	2.6	2.7	2.7	2.6

DEPTH: 1848	TILT: 0	RANGE: 3.6	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	3.3	3.3	3.2	3.2	3.2	3.2	3.0
22.5	3.0	3.0	2.9	2.9	2.8	2.8	2.8
45.0	2.8	2.9	2.9	2.9	2.9	2.8	2.8
67.5	2.9	2.9	2.9	2.8	2.8	2.9	2.9
90.0	3.0	3.0	3.0	3.2	3.2	3.3	3.3
112.5	3.3	3.3	3.2	3.0	3.0	3.2	3.2
135.0	3.3	3.3	3.3	3.2	3.2	3.2	3.3
157.5	3.3	3.4	3.5	3.6	3.7	3.8	3.8
180.0	3.7	3.6	3.7	3.7	3.7	3.7	3.6
202.5	3.6	3.7	3.7	3.7	3.5	3.7	3.5
225.0	3.5	3.5	3.6	3.6	3.5	3.6	3.5
247.5	3.4	3.4	3.4	3.3	3.3	3.5	3.4
270.0	3.4	3.4	3.5	3.6	3.6	3.6	3.5
292.5	3.4	3.4	3.4	3.4	3.5	3.5	3.5
315.0	3.5	3.5	3.3	3.5	3.3	3.3	3.2
337.5	3.2	3.2	3.3	3.3	3.3	3.3	3.3

DEPTH: 1879	TILT: 0	RANGE: 25.0	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	2.9	3.1	3.2	3.1	2.9	2.9	2.9
22.5	2.9	2.8	2.8	2.8	2.8	2.8	2.8
45.0	2.8	2.8	2.8	2.8	2.8	2.7	2.9
67.5	2.8	2.9	3.1	3.2	3.1	3.2	3.2
90.0	3.2	3.2	3.2	3.2	3.2	3.2	3.2
112.5	3.2	3.2	3.2	3.2	3.2	3.2	3.2
135.0	3.2	3.2	3.3	3.3	3.3	3.3	3.2
157.5	3.2	3.2	3.2	3.2	3.2	3.1	3.2
180.0	3.2	3.2	3.2	3.2	3.2	3.3	3.3
202.5	3.3	3.3	3.3	3.3	3.3	3.2	3.2
225.0	3.2	3.1	3.1	3.1	3.1	3.2	3.2
247.5	3.2	3.2	3.2	3.2	3.2	3.2	3.3
270.0	3.3	3.3	3.3	3.3	3.3	3.2	3.2
292.5	3.2	3.2	3.2	3.2	3.2	3.2	3.2
315.0	3.2	3.2	3.2	3.2	3.2	3.2	3.2
337.5	3.2	3.2	3.1	3.1	2.9	3.1	3.1

DEPTH: 1880	TILT: 0	RANGE: 25.0	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
22.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
45.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
67.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
90.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
112.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
135.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
157.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
180.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
202.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
225.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
247.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
270.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
292.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
315.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
337.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6

DEPTH: 1883	TILT: 0	RANGE: 25.0	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
22.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
45.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
67.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
90.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
112.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
135.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
157.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
180.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
202.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
225.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
247.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
270.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
292.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
315.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
337.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6

DEPTH: 1884	TILT: 0	RANGE: 25.0	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	2.7	2.6	2.6	2.6	2.6	2.7	2.7
22.5	2.7	2.7	2.6	2.6	2.6	2.6	2.6
45.0	2.6	2.6	2.6	2.6	2.6	2.6	2.6
67.5	2.7	2.6	2.7	2.6	2.7	2.8	2.6
90.0	2.7	2.7	2.8	2.7	2.8	2.7	2.7
112.5	2.8	2.9	2.6	2.8	2.7	2.6	2.7
135.0	2.9	2.9	3.1	2.8	2.8	2.7	2.9
157.5	2.8	3.2	2.9	3.1	2.9	2.9	2.8
180.0	2.7	2.9	2.7	2.9	2.8	2.9	2.9
202.5	2.8	2.8	2.9	2.8	2.9	2.8	2.9
225.0	2.9	3.2	3.1	3.2	3.2	3.2	3.1
247.5	2.9	2.9	2.9	2.9	2.9	2.9	2.9
270.0	2.9	2.9	3.1	2.9	2.9	3.1	2.9
292.5	2.9	3.1	3.1	3.1	3.1	2.9	2.9
315.0	3.1	3.1	3.1	3.1	3.1	2.9	2.8
337.5	2.8	2.8	2.9	2.9	2.8	2.7	2.7

DEPTH: 1900	TILT: 0	RANGE: 25.0	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	2.6	2.9	2.7	2.8	2.7	2.5	2.8
22.5	2.8	2.9	2.9	2.8	2.8	2.8	2.7
45.0	2.7	2.7	2.7	2.8	2.8	2.8	2.9
67.5	2.9	2.8	2.8	2.8	2.8	3.1	3.1
90.0	3.1	2.9	2.9	2.9	2.9	2.8	2.8
112.5	2.8	2.7	2.7	2.8	2.8	2.7	3.1
135.0	3.2	2.9	2.9	2.8	3.1	3.1	2.9
157.5	2.9	2.9	2.9	2.9	2.9	2.9	3.1
180.0	3.1	3.1	3.1	2.9	2.9	2.9	2.8
202.5	2.8	2.8	2.9	2.9	2.8	3.1	3.1
225.0	3.1	2.9	2.8	2.8	2.7	2.9	2.8
247.5	2.8	2.7	2.7	3.1	2.9	2.8	2.9
270.0	3.1	2.9	3.2	3.1	2.7	2.9	2.7
292.5	2.8	2.8	2.7	2.7	2.8	2.8	2.6
315.0	2.7	2.6	2.7	3.2	2.8	2.7	2.9
337.5	2.8	2.8	2.8	2.7	2.6	2.6	2.6

DEPTH: 1912	TILT: 0	RANGE: 25.0	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	2.7	2.7	2.7	2.7	2.7	2.6	2.6
22.5	2.7	2.7	2.7	2.6	2.6	2.6	2.6
45.0	2.7	2.7	2.7	2.7	2.7	2.6	2.6
67.5	2.5	2.6	2.6	2.5	2.4	2.5	2.5
90.0	2.5	2.5	2.6	2.6	2.6	2.6	2.6
112.5	2.6	2.6	2.6	2.6	2.7	2.7	2.7
135.0	2.7	2.7	2.7	2.8	2.8	2.7	2.7
157.5	2.7	2.8	2.8	2.8	2.7	2.7	2.7
180.0	2.7	2.8	2.8	2.8	2.7	2.7	2.7
202.5	2.8	2.8	2.8	2.7	2.7	2.7	2.8
225.0	2.8	2.8	2.8	2.8	2.8	2.8	2.8
247.5	2.8	2.8	2.8	2.9	2.9	2.9	2.9
270.0	2.9	2.9	3.1	3.1	3.1	2.9	2.8
292.5	2.8	2.9	2.9	2.9	2.9	2.9	2.9
315.0	2.9	2.9	2.8	2.8	2.7	2.7	2.8
337.5	2.7	2.8	2.7	2.7	2.7	2.6	2.7

DEPTH: 1922	TILT: 0	RANGE: 2.9	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	2.5	2.5	2.6	2.6	2.6	2.6	2.6
22.5	2.7	2.7	2.6	2.6	2.6	2.6	2.6
45.0	2.6	2.6	2.7	2.7	2.8	2.8	2.8
67.5	2.8	2.8	2.7	2.7	2.8	2.8	2.7
90.0	2.7	2.7	2.7	2.7	2.6	2.6	2.6
112.5	2.6	2.7	2.7	2.6	2.6	2.6	2.7
135.0	2.7	2.7	2.7	2.7	2.7	2.8	2.8
157.5	2.9	2.9	2.9	2.9	2.9	3.1	3.1
180.0	3.1	3.1	3.1	2.9	2.8	2.7	2.7
202.5	2.6	2.6	2.7	2.7	2.7	2.6	2.6
225.0	2.7	2.7	2.7	2.7	2.6	2.6	2.7
247.5	2.7	2.7	2.7	2.5	2.5	2.6	2.6
270.0	2.5	2.5	2.6	2.6	2.6	2.5	2.4
292.5	2.5	2.5	2.4	2.5	2.5	2.5	2.5
315.0	2.5	2.5	2.5	2.6	2.6	2.5	2.5
337.5	2.5	2.4	2.5	2.4	2.7	2.5	2.6

DEPTH: 1932	TILT: 0	RANGE: 3.1	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	2.9	2.9	2.9	2.9	2.9	2.8	2.8
22.5	2.9	2.9	2.9	3.1	3.2	3.2	3.3
45.0	3.3	3.2	3.1	2.9	2.9	2.8	2.9
67.5	2.9	3.1	2.8	3.2	2.9	2.9	3.2
90.0	2.8	2.9	3.1	2.9	2.8	3.1	3.1
112.5	2.9	2.9	2.9	3.1	3.1	3.2	3.2
135.0	3.2	3.2	3.1	3.2	3.1	3.1	3.1
157.5	3.1	3.2	3.2	3.1	3.1	3.2	3.2
180.0	3.2	3.2	3.2	3.2	3.3	3.3	3.3
202.5	3.3	3.3	3.2	2.9	2.9	2.9	2.9
225.0	2.8	2.7	2.7	2.7	2.6	2.6	2.6
247.5	2.6	2.7	2.7	2.7	2.8	2.8	2.8
270.0	2.7	2.6	2.6	2.6	2.7	2.7	2.8
292.5	2.8	2.9	2.9	2.8	2.8	2.8	2.9
315.0	2.8	2.9	2.9	2.8	2.8	2.9	2.9
337.5	2.8	2.8	2.8	2.7	2.8	2.9	2.9

DEPTH:	1942	TILT:	0	RANGE:	25.0	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	2.5	2.5	2.5	2.4	2.4	2.3	2.3	2.5	
22.5	2.5	2.5	2.4	2.3	2.3	2.3	2.2	2.2	
45.0	2.1	2.1	2.1	2.2	2.2	2.2	2.2	2.3	
67.5	2.3	2.3	2.3	2.4	2.4	2.5	2.5	2.5	
90.0	2.5	2.5	2.5	2.5	2.5	2.5	2.6	2.6	
112.5	2.6	2.6	2.6	2.7	2.7	2.7	2.7	2.7	
135.0	2.8	2.8	2.8	2.8	2.8	2.7	2.7	2.8	
157.5	2.8	2.7	2.7	2.7	2.8	2.8	2.8	2.8	
180.0	2.8	2.8	2.8	2.9	2.9	2.9	2.9	3.1	
202.5	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	
225.0	3.2	3.2	3.2	3.1	3.1	2.9	2.9	2.9	
247.5	2.9	2.8	2.8	2.8	2.8	2.8	2.9	2.9	
270.0	2.9	2.8	2.8	2.8	2.7	2.7	2.7	2.7	
292.5	2.7	2.6	2.6	2.6	2.6	2.5	2.5	2.5	
315.0	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	
337.5	2.4	2.4	2.4	2.4	2.4	2.5	2.4	2.4	

DEPTH:	1954	TILT:	0	RANGE:	3.0	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	2.5	2.4	2.5	2.6	2.6	2.5	2.6	2.6	
22.5	2.6	2.6	2.6	2.6	2.5	2.6	2.6	2.5	
45.0	2.6	2.7	2.7	2.7	2.7	2.7	2.8	2.8	
67.5	2.8	2.8	2.8	2.7	2.6	2.6	2.7	2.7	
90.0	2.7	2.7	2.5	2.5	2.6	2.6	2.5	2.5	
112.5	2.4	2.6	2.6	2.5	2.6	2.6	2.6	2.8	
135.0	2.8	2.8	2.8	2.8	2.8	2.9	2.9	2.9	
157.5	3.1	3.1	3.1	3.1	3.1	3.1	3.2	3.2	
180.0	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	
202.5	3.1	3.1	3.1	2.9	2.9	2.8	2.8	2.7	
225.0	2.7	2.7	2.8	2.8	2.7	2.6	2.5	2.7	
247.5	2.6	2.6	2.6	2.7	2.6	2.7	2.7	2.7	
270.0	2.8	2.8	2.9	2.9	2.9	3.1	2.9	2.8	
292.5	2.7	2.6	2.6	2.6	2.6	2.6	2.6	2.6	
315.0	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	
337.5	2.6	2.6	2.6	2.7	2.7	2.6	2.5	2.4	

DEPTH:	1963	TILT:	0	RANGE:	25.0	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	2.7	2.7	2.8	2.8	2.7	2.7	2.8	2.8	
22.5	2.8	2.9	2.9	2.9	3.1	3.1	3.1	2.9	
45.0	2.9	2.8	2.9	2.9	2.9	2.9	2.9	2.9	
67.5	2.9	2.9	2.9	2.9	2.9	2.9	3.1	3.1	
90.0	3.1	3.1	3.1	3.1	2.9	2.9	3.1	3.1	
112.5	3.1	3.1	2.9	2.9	3.1	3.1	2.9	3.1	
135.0	3.1	3.1	2.9	2.8	2.8	2.9	2.9	2.9	
157.5	2.9	2.9	2.8	2.8	2.9	2.9	2.9	2.9	
180.0	3.1	3.1	3.1	3.1	2.9	2.9	3.1	3.1	
202.5	3.1	3.1	3.2	3.2	3.2	3.2	3.1	3.1	
225.0	2.9	2.9	2.9	2.8	2.8	2.9	2.9	3.1	
247.5	3.1	3.1	3.1	3.1	3.1	3.1	2.9	2.9	
270.0	2.9	2.9	2.9	2.9	2.9	2.9	2.8	2.8	
292.5	2.7	2.7	2.6	2.6	2.7	2.7	2.7	2.8	
315.0	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.7	
337.5	2.7	2.8	2.6	2.6	2.7	2.6	2.6	2.5	

DEPTH: 1964	TILT: 0	RANGE: 25.0	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
22.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
45.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
67.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
90.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
112.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
135.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
157.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
180.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
202.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
225.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
247.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
270.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
292.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
315.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
337.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6

DEPTH: 1987	TILT: 0	RANGE: 25.0	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
22.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
45.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
67.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
90.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
112.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
135.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
157.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
180.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
202.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
225.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
247.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
270.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
292.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
315.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
337.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6

DEPTH: 1988	TILT: 0	RANGE: 3.2	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	2.7	2.8	2.8	2.8	2.8	2.7	2.7
22.5	2.7	2.8	2.9	3.1	3.1	3.1	3.2
45.0	3.2	3.2	3.2	3.2	3.1	3.1	2.9
67.5	2.9	2.9	3.1	3.1	3.1	3.3	3.1
90.0	3.2	3.1	3.2	3.2	3.2	3.2	3.2
112.5	3.1	3.1	3.1	3.2	3.2	3.3	3.3
135.0	3.3	3.2	3.2	3.3	3.3	3.4	3.4
157.5	3.4	3.4	3.3	3.2	3.3	3.3	3.4
180.0	3.4	3.4	3.4	3.3	3.3	3.3	3.3
202.5	3.2	3.2	3.1	3.1	3.1	3.1	2.9
225.0	2.8	2.8	2.8	2.8	2.8	2.7	2.6
247.5	2.6	2.7	2.7	2.7	2.7	2.7	2.7
270.0	2.7	2.6	2.6	2.7	2.7	2.8	2.8
292.5	2.8	2.8	2.7	2.7	2.7	2.8	2.8
315.0	2.8	2.8	2.8	2.8	2.8	2.7	2.7
337.5	2.7	2.7	2.7	2.6	2.6	2.6	2.6

DEPTH:	2000	TILT:	0	RANGE:	3.3	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	
22.5	3.1	2.9	2.9	3.1	3.1	3.1	3.1	3.1	
45.0	2.9	3.1	3.1	2.9	2.9	3.1	3.1	3.1	
67.5	3.1	2.9	2.9	3.1	3.1	3.1	2.9	2.9	
90.0	3.1	3.2	3.3	3.3	3.3	3.3	3.4	3.4	
112.5	3.4	3.3	3.3	3.3	3.3	3.3	3.3	3.3	
135.0	3.4	3.4	3.5	3.5	3.5	3.4	3.3	3.4	
157.5	3.4	3.4	3.5	3.5	3.5	3.5	3.5	3.5	
180.0	3.4	3.4	3.4	3.4	3.4	3.4	3.3	3.3	
202.5	3.3	3.3	3.2	3.2	3.2	3.2	3.1	3.1	
225.0	3.2	3.2	3.2	2.9	3.1	3.1	3.1	3.1	
247.5	3.1	3.2	3.2	3.2	3.3	3.3	3.3	3.3	
270.0	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	
292.5	3.2	3.3	3.3	3.3	3.3	3.4	3.4	3.4	
315.0	3.3	3.2	3.2	3.2	3.2	3.1	3.1	3.1	
337.5	2.9	2.9	2.9	3.1	3.1	3.1	3.1	3.1	

DEPTH:	2016	TILT:	0	RANGE:	25.0	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	3.5	3.5	3.5	3.6	3.6	3.5	3.6	3.7	
22.5	3.8	3.6	3.6	3.6	3.8	3.6	3.6	3.6	
45.0	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	
67.5	3.6	3.7	3.7	3.6	3.7	3.6	3.5	3.7	
90.0	3.7	3.8	3.8	3.7	3.7	3.7	3.7	3.9	
112.5	4.0	3.9	3.8	3.8	3.9	3.8	3.9	3.9	
135.0	3.8	3.9	3.9	3.9	3.8	3.8	3.9	3.9	
157.5	3.9	3.9	3.9	3.9	3.8	3.8	3.8	3.9	
180.0	3.8	4.0	4.0	3.8	3.9	3.9	3.7	3.8	
202.5	3.9	3.8	3.7	3.7	3.7	3.8	3.8	3.8	
225.0	3.9	3.7	4.0	3.9	3.8	3.9	3.9	4.0	
247.5	4.0	3.7	3.6	3.7	3.6	3.6	3.6	3.6	
270.0	3.5	3.6	3.5	3.5	3.6	3.7	3.7	3.7	
292.5	3.7	3.7	3.7	3.7	3.7	3.6	3.4	3.4	
315.0	3.4	3.4	3.5	3.4	3.5	3.5	3.5	3.5	
337.5	3.5	3.6	3.6	3.4	3.5	3.4	3.4	3.4	

DEPTH:	2017	TILT:	0	RANGE:	25.0	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
22.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
45.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
67.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
90.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
112.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
135.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
157.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
180.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
202.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
225.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
247.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
270.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
292.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
315.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
337.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	

DEPTH: 2037	TILT: 0	RANGE: 25.0	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
22.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
45.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
67.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
90.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
112.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
135.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
157.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
180.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
202.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
225.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
247.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
270.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
292.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6
315.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6
337.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6

DEPTH: 2038	TILT: 0	RANGE: 25.0	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	6.5	6.6	6.4	6.3	6.4	6.4	6.3
22.5	6.4	6.4	6.4	6.4	6.3	6.3	6.3
45.0	6.3	6.5	6.5	6.5	6.5	6.5	6.5
67.5	6.4	6.3	6.2	6.1	6.2	6.2	6.3
90.0	6.3	6.4	6.3	6.4	6.4	6.5	6.5
112.5	6.5	6.6	6.6	6.4	6.4	6.4	6.5
135.0	6.5	6.4	6.4	6.5	6.5	6.5	6.6
157.5	6.6	6.7	6.7	6.8	6.8	6.8	7.0
180.0	7.1	7.2	7.2	7.2	7.1	7.1	7.1
202.5	7.1	7.2	7.2	7.1	7.1	7.0	6.8
225.0	6.8	6.8	6.8	6.7	6.7	6.8	6.8
247.5	6.8	6.8	6.8	7.0	7.0	6.7	6.7
270.0	6.8	6.8	6.8	6.7	6.7	6.8	6.7
292.5	6.7	6.6	6.7	6.7	6.7	6.8	6.8
315.0	6.7	6.5	6.4	6.7	6.6	6.5	6.5
337.5	6.5	6.5	6.6	6.5	6.6	6.6	6.5

DEPTH: 2040	TILT: 0	RANGE: 25.0	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	6.3	6.3	6.3	6.3	6.3	6.3	6.3
22.5	6.3	6.3	6.2	6.4	6.3	6.2	6.2
45.0	6.3	6.4	6.2	6.3	6.4	6.1	6.2
67.5	6.3	6.4	6.2	6.2	6.3	6.2	6.4
90.0	6.2	6.3	6.4	6.3	6.4	6.4	6.5
112.5	6.5	6.5	6.6	6.5	6.5	6.6	6.6
135.0	6.7	6.7	6.6	6.6	6.7	6.8	6.6
157.5	6.6	6.6	6.6	6.6	6.7	6.8	6.8
180.0	7.0	7.0	7.0	7.0	6.8	7.0	7.0
202.5	7.0	6.8	7.0	7.1	6.8	7.0	7.1
225.0	7.1	7.0	7.0	6.8	7.0	7.0	7.1
247.5	7.1	7.1	7.2	7.2	7.1	7.0	7.0
270.0	7.0	7.0	7.0	7.0	6.8	6.8	6.8
292.5	6.8	6.7	6.7	6.7	6.6	6.7	6.7
315.0	6.6	6.7	6.6	6.7	7.0	6.6	6.6
337.5	6.6	6.6	6.4	6.4	6.4	6.4	6.4

DEPTH: 2052	TILT: 0	RANGE: 25.0	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	7.1	7.2	7.2	7.1	6.8	6.7	6.7	6.5
22.5	6.5	6.6	6.6	6.5	6.4	6.6	6.5	6.4
45.0	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4
67.5	6.4	6.5	6.5	6.6	6.5	6.3	6.4	6.4
90.0	6.3	6.4	6.4	6.5	6.4	6.5	6.4	6.5
112.5	6.6	6.6	6.6	6.5	6.6	6.7	6.7	6.7
135.0	6.7	6.7	6.7	6.6	6.8	7.0	6.7	6.6
157.5	6.8	7.0	7.0	6.8	6.8	7.0	7.1	7.0
180.0	7.1	7.2	7.2	7.2	7.2	7.3	7.4	7.5
202.5	7.5	7.5	7.5	7.3	7.4	7.4	7.3	7.5
225.0	7.4	7.5	7.5	7.4	7.6	7.4	7.3	7.4
247.5	7.4	7.5	7.5	7.4	7.4	7.4	7.3	7.2
270.0	7.3	7.3	7.4	7.2	7.3	7.3	7.3	7.2
292.5	7.3	7.3	7.4	7.3	7.3	7.3	7.3	7.3
315.0	7.2	7.3	7.4	7.3	7.3	7.5	7.3	7.4
337.5	7.4	7.3	7.2	7.2	7.2	6.8	6.8	7.1

DEPTH: 2063	TILT: 0	RANGE: 7.7	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	6.8	6.8	6.8	6.8	6.8	6.8	6.8	6.8
22.5	6.8	6.8	6.8	6.8	6.6	6.8	6.8	6.8
45.0	6.8	6.8	6.8	6.8	6.8	6.8	6.8	6.8
67.5	6.8	6.8	6.8	6.8	6.8	6.8	6.8	6.8
90.0	6.8	6.8	6.9	7.0	6.9	7.0	7.2	7.2
112.5	7.4	7.3	7.2	7.2	7.3	7.3	7.3	7.4
135.0	7.5	7.5	7.5	7.6	7.6	7.6	7.7	7.7
157.5	7.7	7.7	7.7	7.8	7.7	7.8	7.9	7.9
180.0	7.9	8.0	8.0	8.0	8.0	8.1	8.1	8.1
202.5	8.0	8.1	8.0	7.9	8.0	8.1	8.1	8.0
225.0	8.1	7.9	8.0	8.0	8.0	7.7	7.8	7.8
247.5	7.8	7.8	7.7	7.6	7.6	7.7	7.8	8.0
270.0	7.8	7.7	7.7	7.8	7.9	7.7	7.7	7.6
292.5	7.7	7.6	7.5	7.3	7.4	7.2	7.2	7.2
315.0	7.2	7.3	7.3	7.4	7.2	7.2	7.2	7.2
337.5	7.3	7.4	7.0	7.0	6.9	6.9	7.0	6.8

DEPTH: 2072	TILT: 0	RANGE: 8.2	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	6.9	7.0	7.0	7.0	6.9	6.8	6.8	6.8
22.5	6.7	6.7	6.7	6.8	6.8	6.9	6.9	6.8
45.0	6.7	6.7	6.8	6.8	6.8	6.7	6.7	6.8
67.5	6.9	6.9	6.9	6.9	6.8	6.8	6.9	7.0
90.0	7.0	6.9	6.9	7.0	7.1	7.0	6.9	7.0
112.5	7.1	7.1	7.3	7.3	7.4	7.5	7.5	7.6
135.0	7.8	7.9	8.0	8.0	8.0	8.1	8.2	8.3
157.5	8.4	8.4	8.4	8.4	8.5	8.6	8.6	8.4
180.0	8.5	8.6	8.5	8.6	8.4	8.6	8.6	8.6
202.5	8.4	8.5	8.4	8.4	8.3	8.4	8.4	8.4
225.0	8.2	8.2	8.2	8.2	8.2	8.3	8.2	8.2
247.5	8.1	8.2	8.1	8.1	8.0	8.0	8.0	8.0
270.0	7.9	7.9	7.8	7.9	8.0	8.0	7.8	7.8
292.5	7.7	7.8	7.8	7.7	7.6	7.5	7.7	7.6
315.0	7.6	7.5	7.4	7.1	7.1	7.3	7.3	7.3
337.5	7.1	7.0	7.0	7.1	7.1	7.0	6.9	6.9

DEPTH: 2080	TILT: 0	RANGE: 10.1	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	7.8	7.9	8.1	8.2	8.3	8.5	8.6	8.7
22.5	8.7	8.7	8.6	8.5	8.6	8.7	8.7	8.5
45.0	8.5	8.3	8.3	8.5	8.5	8.4	8.4	8.7
67.5	8.6	8.5	8.3	8.3	8.4	8.3	8.5	8.4
90.0	8.4	8.5	8.5	8.6	8.5	8.7	8.6	9.0
112.5	9.0	9.3	9.7	10.2	10.5	10.3	10.3	10.4
135.0	10.4	10.3	10.1	9.7	9.8	9.8	9.7	9.7
157.5	9.8	10.1	10.1	9.9	9.9	9.9	9.9	9.7
180.0	9.9	10.1	9.9	9.9	10.2	10.1	10.1	10.1
202.5	10.2	10.4	10.5	10.5	10.5	10.4	10.2	10.3
225.0	10.3	10.1	10.4	10.2	10.5	10.3	10.3	10.5
247.5	10.5	10.3	10.6	10.3	10.3	10.4	10.5	10.3
270.0	9.7	8.6	8.4	8.3	8.2	8.0	7.8	7.7
292.5	7.6	7.6	7.7	7.7	7.3	7.3	7.3	7.2
315.0	7.0	7.0	7.0	6.8	7.0	7.0	7.0	7.0
337.5	6.8	7.0	7.2	7.2	7.2	7.4	7.5	7.5

DEPTH: 2090	TILT: 0	RANGE: 8.1	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	6.6	6.7	6.6	6.6	6.7	6.7	6.7	6.7
22.5	6.7	6.8	6.8	6.7	6.7	6.7	6.7	6.7
45.0	6.6	6.6	6.6	6.6	6.7	6.6	6.7	6.7
67.5	6.7	6.8	6.9	6.9	6.9	6.9	6.9	7.1
90.0	7.1	7.2	7.2	7.2	7.2	7.2	7.1	7.2
112.5	7.3	7.6	7.7	7.8	7.9	7.9	7.9	7.8
135.0	7.9	8.0	7.9	8.0	7.9	7.9	8.0	8.4
157.5	8.4	8.3	8.1	8.3	8.3	8.3	8.3	8.2
180.0	8.3	8.3	8.4	8.4	8.4	8.5	8.5	8.5
202.5	8.5	8.5	8.4	8.4	8.3	8.3	8.3	8.2
225.0	8.3	8.2	8.2	8.1	8.1	8.0	8.1	8.2
247.5	8.2	8.1	8.0	8.0	7.9	7.8	7.6	7.6
270.0	7.6	7.5	7.4	7.5	7.4	7.3	7.3	7.4
292.5	7.3	7.3	7.3	7.2	7.2	7.1	7.1	7.1
315.0	7.1	7.1	7.1	6.8	6.9	6.9	6.9	6.8
337.5	6.9	6.8	6.6	6.6	6.6	6.6	6.7	6.6

DEPTH: 2100	TILT: 0	RANGE: 8.4	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	6.8	6.8	7.0	7.1	7.1	7.2	7.1	7.1
22.5	7.3	7.2	7.3	7.2	7.2	7.0	7.0	7.0
45.0	7.1	7.0	7.0	7.2	7.2	7.2	7.3	7.4
67.5	7.3	7.4	7.5	7.6	7.6	7.7	7.6	7.6
90.0	7.7	7.7	7.7	7.8	7.8	7.9	8.0	8.0
112.5	8.0	7.9	7.9	8.1	8.3	8.6	8.6	8.8
135.0	8.8	8.8	8.6	8.5	8.8	8.8	8.8	8.8
157.5	8.8	8.8	8.8	8.8	8.8	8.8	8.8	8.9
180.0	8.9	8.9	8.9	8.9	8.8	8.8	8.9	8.9
202.5	8.9	8.6	8.8	8.8	8.5	8.4	8.6	8.5
225.0	8.4	8.3	8.4	8.3	8.3	8.3	8.2	8.3
247.5	8.2	8.2	8.4	8.2	8.1	8.1	8.1	8.1
270.0	8.1	8.0	7.9	7.8	7.7	7.7	7.8	7.8
292.5	7.8	7.6	7.4	7.4	7.4	7.5	7.3	7.2
315.0	7.2	7.2	7.1	7.2	7.1	7.1	7.1	7.1
337.5	7.0	7.1	7.0	7.1	7.0	6.7	6.7	7.0

DEPTH:	2108	TILT:	0	RANGE:	8.5	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	6.4	6.4	6.4	6.4	6.4	6.4	6.5	6.3	
22.5	6.4	6.4	6.5	6.5	6.5	6.6	6.6	6.6	
45.0	6.6	6.6	6.7	6.7	6.7	6.7	6.6	6.8	
67.5	6.8	7.0	7.1	7.2	7.2	7.2	7.2	7.2	
90.0	7.3	7.4	7.3	7.4	7.5	7.5	7.6	7.7	
112.5	7.7	7.8	7.9	8.0	7.9	7.9	7.9	7.9	
135.0	8.0	8.2	8.3	8.4	8.4	8.4	8.5	8.5	
157.5	8.5	8.5	8.5	8.6	8.7	8.9	9.0	9.0	
180.0	9.0	8.9	8.9	8.9	8.9	8.9	8.7	8.9	
202.5	8.9	8.7	8.7	8.9	8.9	8.9	8.9	8.7	
225.0	8.6	8.5	8.4	8.5	8.5	8.5	8.4	8.4	
247.5	8.3	8.4	8.3	8.3	8.2	8.1	8.1	8.1	
270.0	8.1	8.0	7.9	7.9	7.9	7.9	7.9	7.8	
292.5	7.7	7.6	7.6	7.5	7.4	7.4	7.3	7.2	
315.0	7.1	7.1	7.1	7.0	6.8	6.7	6.6	6.5	
337.5	6.5	6.4	6.4	6.4	6.4	6.4	6.4	6.4	

DEPTH:	2120	TILT:	0	RANGE:	9.2	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	6.4	6.4	6.4	6.4	6.5	6.4	6.4	6.4	
22.5	6.4	6.5	6.6	6.5	6.6	6.7	6.7	6.7	
45.0	6.8	6.8	6.8	6.8	7.0	7.0	7.0	7.0	
67.5	7.0	7.2	7.2	7.3	7.5	7.5	7.4	7.4	
90.0	7.5	7.4	7.6	7.7	7.9	7.9	8.1	7.9	
112.5	8.1	8.2	8.3	8.3	8.3	8.3	8.4	8.4	
135.0	8.6	8.7	8.9	8.9	9.2	9.3	9.4	9.4	
157.5	9.3	9.4	9.4	9.4	9.6	9.6	9.7	9.7	
180.0	9.7	9.7	9.7	9.7	9.7	9.6	9.5	9.5	
202.5	9.4	9.4	9.3	9.2	9.2	9.1	9.1	8.9	
225.0	8.9	8.9	8.6	8.5	8.4	8.3	8.2	8.0	
247.5	7.9	7.9	8.0	8.0	8.0	7.9	7.8	7.8	
270.0	7.8	7.7	7.6	7.5	7.3	7.3	7.3	7.3	
292.5	7.3	7.0	7.0	6.7	6.7	6.8	6.8	6.7	
315.0	6.6	6.6	6.6	6.6	6.6	6.5	6.4	6.4	
337.5	6.3	6.2	6.0	6.1	6.2	6.3	6.2	6.3	

DEPTH:	2126	TILT:	0	RANGE:	8.9	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	6.6	6.5	6.5	6.5	6.5	6.5	6.4	6.4	
22.5	6.4	6.4	6.4	6.4	6.3	6.4	6.6	6.6	
45.0	6.7	6.6	6.7	6.7	6.7	6.8	6.9	6.9	
67.5	6.9	6.8	6.9	6.8	6.8	6.8	6.8	7.1	
90.0	7.2	7.5	7.5	7.7	7.7	7.7	7.7	7.9	
112.5	7.8	7.9	8.1	8.2	8.3	8.5	8.5	8.9	
135.0	8.8	8.8	8.9	8.9	8.9	9.1	8.9	9.1	
157.5	8.9	8.9	9.1	9.1	9.1	9.4	8.9	8.9	
180.0	8.8	8.9	8.9	9.1	9.1	8.9	8.8	8.9	
202.5	8.9	8.8	8.8	8.9	8.8	8.9	8.6	8.8	
225.0	8.6	8.5	8.4	8.5	8.4	8.3	8.2	8.2	
247.5	8.2	8.0	8.0	8.1	8.0	8.0	8.0	8.0	
270.0	8.0	7.9	7.9	7.8	7.7	7.6	7.6	7.6	
292.5	7.5	7.4	7.2	7.2	7.1	6.8	6.8	6.8	
315.0	6.9	6.9	6.9	6.9	6.8	6.7	6.6	6.5	
337.5	6.5	6.6	6.7	6.7	6.7	6.6	6.5	6.5	

DEPTH: 2130	TILT: 0		RANGE: 8.5		VOS: 6039			
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	6.1	6.0	5.9	6.0	6.2	6.1	6.1	
22.5	6.1	6.1	6.0	6.1	6.0	6.1	6.0	
45.0	6.2	6.0	6.1	6.2	6.2	6.2	6.3	
67.5	6.3	6.4	6.5	6.7	6.8	7.0	7.2	
90.0	7.4	7.5	7.6	7.7	7.7	7.9	8.0	
112.5	8.0	8.1	8.2	8.4	8.3	8.1	8.2	
135.0	8.4	8.6	8.6	8.5	8.9	8.9	8.9	
157.5	8.9	8.9	8.7	8.7	8.7	8.6	8.7	
180.0	8.9	8.9	8.9	9.0	9.0	9.0	9.0	
202.5	8.9	8.9	9.0	9.0	9.0	8.9	8.9	
225.0	9.0	8.6	8.5	8.4	8.3	8.1	7.9	
247.5	7.7	7.7	7.8	7.6	7.8	7.6	7.6	
270.0	7.4	7.2	7.3	7.2	7.2	7.0	7.0	
292.5	7.3	7.0	6.7	6.5	6.6	6.6	6.4	
315.0	6.4	6.6	6.5	6.1	6.1	6.1	6.2	
337.5	6.2	6.2	6.1	6.1	6.2	6.1	6.3	

DEPTH: 2134	TILT: 0		RANGE: 6.4		VOS: 6039			
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	3.2	3.0	3.0	3.0	3.0	3.2	3.2	
22.5	3.3	3.3	3.4	3.4	3.5	3.5	3.6	
45.0	3.7	3.8	4.0	4.1	4.1	4.4	4.4	
67.5	4.5	4.6	4.7	4.8	4.8	4.9	4.9	
90.0	4.9	4.9	5.0	5.0	5.2	5.2	5.2	
112.5	5.2	5.3	5.3	5.4	5.5	5.6	5.6	
135.0	5.6	5.6	5.7	5.8	5.9	6.0	6.0	
157.5	6.0	6.0	6.0	6.1	6.2	6.3	6.5	
180.0	6.6	6.7	6.7	6.7	6.6	6.6	6.6	
202.5	6.6	6.5	6.4	6.4	6.3	6.3	6.1	
225.0	6.1	6.1	6.0	6.0	5.9	5.9	5.8	
247.5	5.8	5.8	5.7	5.7	5.7	5.6	5.4	
270.0	5.3	5.3	5.3	5.3	5.3	5.2	4.8	
292.5	4.7	4.6	4.5	4.4	4.4	4.3	4.1	
315.0	4.0	4.0	4.0	4.0	4.0	3.9	3.7	
337.5	3.7	3.6	3.5	3.5	3.4	3.4	3.3	

DEPTH: 2135	TILT: 0		RANGE: 25.0		VOS: 6039			
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
22.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
45.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
67.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
90.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
112.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
135.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
157.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
180.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
202.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
225.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
247.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
270.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
292.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
315.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
337.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	

DEPTH:	2145	TILT:	0	RANGE:	25.0	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
22.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
45.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
67.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
90.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
112.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
135.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
157.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
180.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
202.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
225.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
247.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
270.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
292.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
315.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
337.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	

DEPTH:	2146	TILT:	0	RANGE:	9.9	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	6.8	6.8	6.7	6.5	6.5	6.5	6.3	6.2	
22.5	6.2	6.3	6.3	6.3	6.3	6.3	6.3	6.5	
45.0	6.5	6.7	6.7	6.5	6.5	6.7	6.7	6.7	
67.5	6.5	6.3	6.3	6.5	6.5	6.7	6.8	6.8	
90.0	7.0	7.0	7.0	7.0	7.0	7.1	7.1	7.1	
112.5	7.1	7.2	7.2	7.4	7.5	7.7	7.8	8.1	
135.0	8.4	9.3	9.4	9.6	9.7	9.4	9.4	9.7	
157.5	9.7	9.9	9.9	10.1	9.9	9.7	9.6	9.6	
180.0	9.7	9.7	9.4	9.3	9.4	9.6	9.7	9.7	
202.5	10.1	10.3	10.3	10.3	10.5	10.2	10.2	10.2	
225.0	10.3	10.5	10.5	10.2	9.9	9.9	9.7	9.3	
247.5	9.0	8.8	8.7	8.5	8.4	8.1	8.0	7.8	
270.0	7.7	7.8	8.0	8.1	8.1	8.0	7.8	7.5	
292.5	7.4	7.4	7.4	7.4	7.2	7.2	7.2	7.2	
315.0	7.2	7.1	7.0	7.0	6.8	6.8	7.0	7.0	
337.5	7.0	7.1	7.1	7.1	7.1	7.0	6.8	6.8	

DEPTH:	2152	TILT:	0	RANGE:	35.0	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	7.1	6.9	6.9	6.9	7.1	7.2	7.4	7.4	
22.5	7.2	7.1	7.1	7.2	7.4	7.4	7.2	7.2	
45.0	7.1	7.2	7.4	7.5	7.5	7.7	7.7	7.7	
67.5	7.8	8.0	8.1	8.3	8.3	8.4	8.6	8.7	
90.0	8.7	8.9	8.9	8.9	8.9	9.0	9.1	9.3	
112.5	9.4	9.6	9.9	9.9	9.9	9.7	9.7	9.7	
135.0	9.9	10.0	10.2	10.3	10.5	10.5	10.3	10.5	
157.5	10.5	10.6	10.6	10.6	10.8	10.9	10.9	10.9	
180.0	10.9	10.9	10.8	10.8	10.8	10.6	10.8	10.8	
202.5	10.6	10.9	10.6	10.8	10.8	10.9	10.8	11.2	
225.0	10.9	10.9	10.8	10.8	10.6	10.5	10.3	10.2	
247.5	10.2	10.2	10.0	9.9	9.6	9.4	9.3	9.1	
270.0	8.9	8.7	8.6	8.4	8.3	8.1	8.0	8.1	
292.5	8.1	8.1	7.8	7.8	7.7	7.5	7.5	7.7	
315.0	7.8	7.7	7.7	7.7	7.7	7.5	7.4	7.4	
337.5	7.2	7.2	7.2	7.4	7.4	7.2	7.1	7.1	

DEPTH: 2156	TILT: 0	RANGE: 35.0	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0 7.1	7.1	7.1	6.9	6.8	6.9	7.1	7.2
22.5 7.4	7.5	7.5	7.4	7.2	7.2	7.4	7.5
45.0 7.7	8.0	8.1	8.3	8.4	8.4	8.6	8.6
67.5 8.6	8.4	8.4	8.4	8.6	8.9	8.9	8.9
90.0 9.0	9.0	9.0	9.1	9.3	9.3	9.3	9.1
112.5 9.3	9.3	9.6	9.7	9.9	10.0	10.2	10.3
135.0 10.3	10.2	10.0	10.0	10.2	10.3	10.3	10.3
157.5 10.5	10.5	10.5	10.3	10.3	10.3	10.5	10.5
180.0 10.3	10.2	10.0	10.0	10.2	10.3	10.3	10.3
202.5 10.3	10.5	10.6	10.8	10.9	11.1	11.4	11.4
225.0 11.4	11.4	11.2	11.1	11.1	10.8	10.5	10.2
247.5 10.0	9.9	9.7	9.4	9.3	9.1	9.1	9.1
270.0 9.1	9.0	8.7	8.6	8.4	8.3	8.3	8.3
292.5 8.3	8.1	8.0	7.7	7.5	7.4	7.2	7.1
315.0 6.8	6.6	6.5	6.5	6.6	6.6	6.6	6.8
337.5 6.8	6.9	6.9	6.9	6.9	6.9	7.1	7.1

DEPTH: 2160	TILT: 0	RANGE: 10.2	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0 6.5	6.3	6.3	6.2	6.2	6.2	6.2	6.3
22.5 6.5	6.6	6.6	6.6	6.6	6.6	6.6	6.6
45.0 6.6	6.6	6.5	6.5	6.5	6.6	6.6	6.6
67.5 6.6	6.8	6.8	6.8	6.8	6.8	6.8	6.9
90.0 6.9	7.1	7.1	7.2	7.4	7.4	7.5	7.7
112.5 7.8	8.0	8.1	8.3	8.4	8.6	8.7	8.9
135.0 9.0	9.2	9.3	9.5	9.6	9.7	9.7	9.7
157.5 9.9	9.9	10.0	10.3	10.5	10.6	10.8	10.8
180.0 10.8	10.6	10.5	10.5	10.6	10.8	10.8	10.6
202.5 10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.6
225.0 10.5	10.5	10.5	10.3	10.2	10.0	9.9	9.7
247.5 9.5	9.3	9.2	8.9	8.7	8.6	8.4	8.3
270.0 8.1	8.0	8.1	8.1	8.3	8.3	8.1	8.0
292.5 7.8	7.7	7.8	8.0	8.0	8.0	7.7	7.5
315.0 7.5	7.5	7.4	7.2	7.2	7.2	7.1	7.1
337.5 6.9	6.8	6.8	6.6	6.5	6.5	6.5	6.5

DEPTH: 2164	TILT: 0	RANGE: 35.0	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0 8.0	7.8	7.8	7.8	7.8	7.7	7.5	7.5
22.5 7.5	7.7	7.7	7.7	7.5	7.4	7.4	7.4
45.0 7.5	7.5	7.7	7.7	7.7	7.7	7.7	7.5
67.5 7.5	7.5	7.7	7.8	8.0	8.0	8.1	8.3
90.0 8.4	8.6	8.7	8.9	8.9	9.1	9.3	9.4
112.5 9.6	9.9	10.0	10.2	10.3	10.6	10.6	10.6
135.0 10.6	10.6	10.6	10.8	10.9	11.1	11.2	11.4
157.5 11.5	11.7	11.8	12.0	12.0	12.0	12.0	11.8
180.0 11.8	11.8	11.7	11.7	11.7	11.7	11.8	11.8
202.5 11.8	12.0	12.0	12.1	12.1	12.1	12.1	12.0
225.0 12.0	12.0	11.8	11.8	11.8	11.7	11.5	11.5
247.5 11.4	11.4	11.2	11.2	11.1	10.9	10.8	10.6
270.0 10.5	10.3	10.2	10.0	10.0	9.9	9.9	9.7
292.5 9.6	9.3	9.1	9.1	9.1	9.0	8.9	8.6
315.0 8.4	8.3	8.3	8.4	8.6	8.6	8.6	8.4
337.5 8.4	8.4	8.3	8.1	8.1	8.1	8.1	8.0

DEPTH: 2168	TILT: 0	RANGE: 35.0	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0 8.1	8.1	8.1	8.0	8.0	7.8	7.8	7.7	
22.5 7.7	7.7	7.7	7.7	7.5	7.5	7.7	7.7	
45.0 7.8	7.8	8.0	8.0	8.1	8.1	8.1	8.1	
67.5 8.3	8.4	8.4	8.6	8.6	8.7	8.9	8.9	
90.0 9.0	9.0	9.1	9.3	9.4	9.6	9.7	9.7	
112.5 9.9	10.0	10.0	10.2	10.3	10.5	10.6	10.8	
135.0 10.9	11.1	11.2	11.2	11.5	11.7	11.8	12.0	
157.5 12.0	12.0	12.1	12.2	12.4	12.2	12.2	12.4	
180.0 12.4	12.4	12.5	12.5	12.5	12.4	12.4	12.5	
202.5 12.7	12.5	12.5	12.4	12.4	12.4	12.5	12.4	
225.0 12.5	12.5	12.4	12.4	12.1	12.0	12.1	11.8	
247.5 11.8	11.7	11.7	11.7	11.5	11.5	11.4	11.4	
270.0 11.4	11.4	11.1	10.9	10.8	10.6	10.5	10.5	
292.5 10.3	10.2	10.0	9.9	9.7	9.7	9.6	9.4	
315.0 9.1	9.0	9.0	9.0	9.0	9.0	8.9	8.7	
337.5 8.4	8.3	8.3	8.4	8.3	8.3	8.3	8.3	

DEPTH: 2172	TILT: 0	RANGE: 35.0	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0 8.4	8.3	8.3	8.1	8.0	8.0	7.8	7.8	
22.5 7.8	8.0	8.0	8.0	8.0	8.1	8.1	8.1	
45.0 8.0	7.8	7.8	8.0	8.0	8.0	8.1	8.1	
67.5 8.3	8.3	8.4	8.4	8.6	8.6	8.7	8.9	
90.0 9.0	9.1	9.3	9.4	9.6	9.7	9.9	9.9	
112.5 10.0	10.0	10.3	10.5	10.6	10.8	10.9	11.1	
135.0 11.2	11.4	11.5	11.7	11.7	11.7	11.7	11.8	
157.5 11.8	12.0	12.0	12.1	12.2	12.2	12.2	12.2	
180.0 12.2	12.4	12.5	12.7	13.0	13.0	12.8	12.8	
202.5 12.8	13.0	13.0	13.0	13.0	13.0	13.0	13.0	
225.0 12.8	12.8	12.8	12.8	12.7	12.5	12.4	12.4	
247.5 12.2	12.2	12.1	12.0	11.8	11.7	11.5	11.4	
270.0 11.2	11.1	10.9	10.8	10.8	10.8	10.8	10.6	
292.5 10.6	10.5	10.5	10.3	10.2	10.0	9.7	9.7	
315.0 9.6	9.6	9.4	9.3	9.1	9.0	8.7	8.7	
337.5 8.6	8.4	8.4	8.4	8.4	8.4	8.4	8.4	

DEPTH: 2176	TILT: 0	RANGE: 13.0	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0 8.4	8.4	8.2	8.1	8.2	8.2	8.2	8.1	
22.5 8.2	8.2	8.2	8.4	8.4	8.6	8.4	8.6	
45.0 8.2	8.4	8.4	8.4	8.4	8.6	8.7	8.8	
67.5 9.0	9.2	9.3	9.3	9.3	9.3	9.4	9.6	
90.0 9.7	9.9	9.9	10.0	10.3	10.6	10.8	11.2	
112.5 11.4	11.5	11.6	11.8	12.1	12.4	12.4	12.5	
135.0 12.7	12.9	12.9	13.0	13.0	13.1	13.1	13.3	
157.5 13.3	13.6	13.6	13.5	13.6	13.3	13.3	13.5	
180.0 13.5	13.5	13.6	13.7	13.7	13.6	13.3	13.3	
202.5 13.5	13.6	13.5	13.5	13.1	13.3	13.6	13.5	
225.0 13.1	12.9	12.9	12.9	12.7	12.7	12.7	12.7	
247.5 12.5	12.4	12.2	12.1	12.0	11.8	11.8	11.8	
270.0 11.5	11.2	11.1	10.9	10.8	10.8	10.6	10.5	
292.5 10.5	10.3	10.0	9.9	9.7	9.6	9.6	9.6	
315.0 9.6	9.3	9.2	9.2	9.2	9.2	8.8	8.8	
337.5 8.8	8.8	8.7	8.6	8.4	8.4	8.4	8.2	

DEPTH:	2180	TILT:	0	RANGE:	13.4	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	8.7	8.7	8.8	8.7	8.7	8.5	8.7	8.5	
22.5	8.7	8.7	8.7	8.5	8.5	8.5	8.7	8.8	
45.0	8.8	8.8	8.8	9.2	9.3	9.5	9.6	9.5	
67.5	9.3	9.5	9.6	9.7	9.6	9.5	9.6	9.9	
90.0	9.9	9.9	10.0	10.2	10.6	10.6	10.8	10.8	
112.5	10.9	10.9	10.9	11.0	11.2	11.4	11.5	11.9	
135.0	12.6	12.7	13.1	13.4	13.7	13.7	13.6	13.9	
157.5	13.7	13.6	13.9	14.0	14.0	14.2	14.0	14.0	
180.0	13.9	13.9	13.9	13.9	13.7	13.9	13.9	13.9	
202.5	14.0	13.9	13.9	13.9	13.7	13.7	13.7	13.7	
225.0	13.7	13.7	13.6	13.4	13.6	13.7	13.7	13.6	
247.5	13.3	12.9	12.9	12.7	12.6	12.6	12.2	11.9	
270.0	12.1	11.9	12.1	11.5	11.5	11.5	11.5	11.5	
292.5	11.0	11.0	10.8	10.9	10.8	10.6	10.3	10.2	
315.0	10.0	9.9	9.9	9.7	9.6	9.5	9.5	9.3	
337.5	9.5	9.3	9.3	9.0	9.0	8.8	8.8	8.8	

DEPTH:	2184	TILT:	0	RANGE:	13.4	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	9.0	9.0	9.0	9.0	8.8	8.7	8.5	8.4	
22.5	8.3	8.3	8.3	8.4	8.5	8.5	8.5	8.5	
45.0	8.5	8.7	8.7	8.7	8.8	8.8	8.8	9.0	
67.5	9.0	9.2	9.2	9.2	9.3	9.5	9.7	9.9	
90.0	10.0	10.2	10.3	10.5	10.6	10.8	11.0	11.2	
112.5	11.4	11.5	11.7	11.8	12.2	12.6	12.7	12.9	
135.0	13.0	13.1	13.3	13.4	13.6	13.7	13.7	13.9	
157.5	13.9	14.0	14.0	14.0	13.9	14.0	14.0	14.0	
180.0	14.2	14.2	14.2	14.0	14.0	14.0	14.0	14.2	
202.5	14.2	14.0	13.9	13.7	13.6	13.6	13.4	13.4	
225.0	13.3	13.3	13.1	13.0	12.9	12.9	12.7	12.6	
247.5	12.4	12.2	12.1	11.9	11.8	11.8	11.8	11.7	
270.0	11.5	11.4	11.4	11.4	11.0	10.9	10.8	10.6	
292.5	10.5	10.3	10.2	10.2	10.0	9.9	9.7	9.7	
315.0	9.6	9.3	9.2	9.0	9.0	9.0	8.8	8.7	
337.5	8.7	8.7	8.7	8.7	8.8	8.8	8.8	8.8	

DEPTH:	2188	TILT:	0	RANGE:	13.8	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	9.1	8.8	8.8	8.8	8.8	8.7	8.7	8.8	
22.5	8.7	8.7	8.8	8.7	8.4	8.7	8.7	8.7	
45.0	8.7	8.7	8.8	8.8	8.8	8.8	8.8	9.1	
67.5	9.1	9.3	9.3	9.3	9.3	9.3	9.3	9.3	
90.0	9.3	9.3	9.1	9.1	8.8	9.1	9.1	9.1	
112.5	9.1	8.8	9.9	10.3	11.0	11.2	11.2	11.4	
135.0	11.6	11.6	11.6	11.6	11.8	12.2	12.2	12.7	
157.5	12.7	12.7	13.5	13.5	13.7	14.1	14.1	14.4	
180.0	14.4	14.5	13.9	13.9	14.1	13.5	13.3	13.7	
202.5	13.5	13.5	13.3	13.3	13.5	13.9	13.7	13.5	
225.0	13.5	13.5	13.7	13.5	13.1	12.7	12.2	11.8	
247.5	11.4	11.2	10.8	10.5	10.5	10.5	10.5	10.3	
270.0	10.1	9.9	9.7	9.5	9.5	9.5	9.7	9.5	
292.5	9.5	9.9	9.9	9.9	9.9	9.9	9.7	9.7	
315.0	9.7	9.7	10.1	9.9	10.1	9.9	9.9	9.9	
337.5	9.7	9.5	9.5	9.5	9.3	9.1	9.1	9.5	

DEPTH: 2192	TILT: 0	RANGE: 50.0	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	9.1	8.9	8.6	8.6	9.3	9.1	9.1	
22.5	9.1	8.6	8.6	8.4	8.0	7.2	7.0	7.2
45.0	6.5	7.0	6.5	6.5	6.5	6.5	6.3	6.3
67.5	6.3	6.5	6.3	6.3	6.3	6.7	6.3	6.5
90.0	6.5	8.4	8.6	8.9	8.9	8.6	8.6	8.9
112.5	8.9	9.3	9.5	9.7	9.1	9.7	10.1	9.9
135.0	9.9	9.9	10.1	10.1	10.5	11.0	11.2	11.6
157.5	11.6	11.6	11.8	12.0	12.0	12.0	11.8	11.8
180.0	12.0	12.2	12.2	12.2	12.0	11.8	11.8	11.8
202.5	12.0	12.0	11.8	12.0	12.2	12.4	12.6	12.9
225.0	12.6	11.6	11.2	11.0	10.1	6.5	6.5	6.5
247.5	6.7	6.7	7.0	7.2	7.2	6.7	6.3	6.1
270.0	4.0	4.0	4.0	3.8	3.6	3.6	3.4	3.4
292.5	3.4	3.4	3.2	3.0	3.0	2.7	2.5	2.5
315.0	2.5	2.5	2.7	2.7	2.7	3.0	3.0	3.0
337.5	3.2	3.4	3.6	3.2	9.5	9.3	9.3	9.3

DEPTH: 2196	TILT: 0	RANGE: 12.8	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	7.0	7.2	7.4	7.4	7.6	7.8	7.8	
22.5	7.8	7.8	7.8	7.6	7.8	8.0	8.2	8.6
45.0	8.6	8.9	8.4	8.9	8.6	9.1	9.1	9.5
67.5	9.3	9.7	9.7	9.9	10.1	10.3	10.5	10.5
90.0	10.5	10.7	11.0	11.0	11.2	11.2	11.4	11.6
112.5	11.8	11.8	12.0	12.3	12.3	12.3	12.0	12.0
135.0	12.0	12.0	12.3	12.3	12.4	12.6	12.8	12.8
157.5	12.8	13.1	13.3	13.3	13.3	13.1	12.8	13.1
180.0	13.3	13.5	13.5	13.5	13.3	13.1	12.8	12.6
202.5	12.4	12.3	12.3	12.3	12.3	12.4	12.4	12.3
225.0	12.3	12.3	12.0	12.0	12.0	11.8	11.4	11.2
247.5	11.0	10.7	10.5	10.5	10.3	10.1	9.9	9.7
270.0	9.5	9.3	9.3	9.3	9.3	9.5	9.5	9.1
292.5	9.1	9.1	9.3	9.1	9.1	8.9	8.9	8.9
315.0	8.9	8.6	8.4	8.4	8.0	8.0	7.8	7.8
337.5	7.8	7.6	7.2	7.0	6.7	6.7	6.7	7.0

DEPTH: 2200	TILT: 0	RANGE: 50.0	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	6.7	6.7	6.7	6.5	6.5	6.5	6.5	
22.5	6.5	6.5	6.7	6.5	6.3	6.3	6.3	6.3
45.0	6.3	6.1	6.1	6.1	6.1	5.9	5.9	6.1
67.5	6.1	6.5	6.1	6.5	7.0	7.6	8.2	8.9
90.0	9.3	9.3	9.5	9.5	9.5	9.5	9.7	9.7
112.5	9.7	9.9	9.9	10.1	10.5	10.5	10.8	11.2
135.0	11.4	11.4	11.2	11.4	11.4	11.4	11.4	11.4
157.5	11.4	11.6	11.4	12.6	12.9	12.9	12.6	12.4
180.0	12.6	12.6	12.2	12.2	12.0	11.6	11.6	11.4
202.5	11.4	11.4	11.4	11.6	11.6	11.4	11.4	11.2
225.0	11.2	11.2	11.4	11.2	11.0	11.0	11.0	11.0
247.5	10.8	10.8	10.8	10.5	10.1	9.9	9.7	9.5
270.0	9.1	8.9	8.6	8.4	8.2	8.0	7.8	8.0
292.5	8.2	8.2	8.2	8.2	8.0	7.8	7.6	7.6
315.0	7.4	7.4	7.4	7.4	7.4	7.0	6.7	7.0
337.5	6.7	6.7	6.5	6.5	6.5	6.5	6.5	6.7

DEPTH: 2204	TILT: 0	RANGE: 50.0	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0 4.4	4.2	4.0	4.0	4.2	4.2	4.2	4.4
22.5 4.4	4.2	4.0	4.0	4.2	4.2	4.0	3.8
45.0 3.8	4.0	4.2	4.4	4.6	4.8	5.3	5.5
67.5 5.7	5.9	6.1	6.3	6.7	7.0	7.2	7.4
90.0 7.4	7.4	7.2	7.2	7.0	6.7	6.7	7.0
112.5 7.0	7.2	7.4	7.6	7.8	8.0	8.2	8.2
135.0 8.0	7.8	7.6	7.8	8.0	8.0	8.2	8.4
157.5 9.3	9.7	11.4	11.8	11.6	11.6	11.8	11.8
180.0 12.0	12.4	12.2	11.8	12.0	11.8	11.6	10.3
202.5 9.3	9.5	9.9	9.5	9.3	9.5	9.7	9.7
225.0 9.7	9.7	9.7	9.7	9.7	10.1	10.3	10.3
247.5 10.3	10.3	10.3	10.1	9.9	9.9	10.1	10.3
270.0 10.3	10.1	9.9	9.9	10.1	10.1	9.9	9.9
292.5 9.5	9.5	9.7	9.3	9.1	9.5	9.5	9.1
315.0 7.8	8.0	8.0	8.2	7.8	8.2	7.6	7.6
337.5 7.6	7.8	7.8	7.4	7.4	4.8	4.8	4.6

DEPTH: 2208	TILT: 0	RANGE: 16.6	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0 11.2	11.0	11.2	11.2	11.4	11.8	11.4	11.4
22.5 11.6	11.4	11.8	11.8	11.8	11.8	11.8	12.0
45.0 12.5	12.5	12.3	12.3	12.0	12.0	12.3	12.3
67.5 12.5	12.7	12.7	12.9	13.5	13.7	14.1	14.4
90.0 14.6	14.8	14.8	14.6	14.4	14.6	14.8	15.0
112.5 15.2	15.6	15.8	16.0	16.2	16.0	15.8	15.8
135.0 16.2	16.7	16.7	16.9	16.9	16.9	16.7	16.5
157.5 16.9	16.9	17.3	17.3	16.9	17.1	17.1	17.3
180.0 17.3	17.3	17.5	17.5	17.1	16.9	16.7	16.9
202.5 17.1	17.1	16.9	16.5	16.0	15.6	15.4	15.2
225.0 15.4	15.6	15.8	15.6	15.2	14.8	14.4	14.4
247.5 14.1	13.7	13.9	13.9	13.7	13.5	13.5	13.5
270.0 13.5	13.5	13.3	13.1	13.1	13.1	13.5	12.7
292.5 12.9	12.5	12.0	12.5	12.0	11.4	11.6	11.8
315.0 11.6	11.6	11.4	11.6	11.8	11.6	11.6	11.4
337.5 11.4	11.4	11.2	11.4	11.4	11.2	11.0	11.2

DEPTH: 2212	TILT: 0	RANGE: 17.4	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0 12.3	11.8	11.8	12.0	12.0	11.8	11.8	12.0
22.5 12.0	12.0	12.4	12.3	12.3	12.3	12.4	12.4
45.0 12.4	12.3	12.6	12.4	12.4	12.8	12.8	13.1
67.5 13.1	13.1	13.3	13.5	13.7	13.9	14.1	14.5
90.0 14.8	14.8	14.8	15.0	15.2	15.4	15.6	15.8
112.5 15.8	16.2	16.4	16.4	16.4	16.7	16.7	16.7
135.0 16.7	16.9	17.1	17.3	17.5	17.5	17.5	17.5
157.5 17.5	17.5	17.7	17.7	17.9	17.9	17.9	17.9
180.0 18.4	17.9	17.9	18.1	18.1	18.1	17.9	17.9
202.5 17.9	18.1	17.9	17.9	17.9	17.7	17.1	17.1
225.0 17.1	16.9	16.7	16.7	16.7	16.7	16.4	16.0
247.5 16.0	16.0	15.8	15.6	15.4	14.8	14.8	14.5
270.0 14.3	14.5	14.5	14.5	14.3	13.9	13.5	13.3
292.5 13.3	13.5	13.5	13.3	13.1	13.1	13.1	13.1
315.0 12.6	12.8	12.6	12.6	12.4	12.0	12.3	12.3
337.5 12.0	12.0	12.0	12.3	12.0	12.0	12.3	12.3

DEPTH: 2216	TILT: 0	RANGE: 17.0	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	12.2	11.8	12.0	11.8	12.0	12.0	12.0	11.8
22.5	12.0	11.8	11.8	11.8	11.8	11.8	11.8	12.0
45.0	12.0	12.2	12.2	12.4	12.4	12.6	12.6	12.6
67.5	12.8	12.8	13.1	13.3	13.5	13.7	13.9	13.9
90.0	14.1	14.3	14.6	15.0	15.0	15.0	15.2	15.2
112.5	15.2	15.4	15.6	15.8	16.0	16.2	16.6	16.6
135.0	16.9	17.1	17.3	17.5	17.5	17.3	17.5	17.9
157.5	17.7	17.9	17.9	17.9	17.9	17.7	17.7	17.7
180.0	17.9	17.9	17.9	17.9	17.9	17.7	17.7	17.5
202.5	17.3	17.1	17.1	17.1	17.1	17.1	17.1	17.1
225.0	17.1	17.1	17.1	17.1	17.1	16.9	16.9	16.2
247.5	16.2	16.2	16.2	15.8	15.8	15.8	15.4	15.2
270.0	14.8	14.8	14.3	14.3	14.1	14.1	13.7	13.5
292.5	13.3	13.3	13.5	13.3	13.5	13.5	13.3	12.8
315.0	12.8	12.8	13.1	12.6	12.4	12.2	12.4	12.2
337.5	12.4	12.6	12.4	12.4	12.2	12.2	12.2	12.0

DEPTH: 2220	TILT: 0	RANGE: 16.6	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	11.6	11.6	11.6	11.6	11.4	11.4	11.4	11.4
22.5	11.2	11.6	11.8	11.8	11.6	11.8	12.0	11.8
45.0	11.8	12.0	12.3	12.5	12.5	12.7	12.5	12.7
67.5	12.9	13.1	13.3	13.1	13.5	13.5	13.7	13.7
90.0	14.1	14.4	14.6	14.8	14.8	14.8	15.0	15.2
112.5	15.2	15.8	15.8	15.6	15.8	16.0	16.2	16.5
135.0	16.7	16.7	17.1	17.1	16.9	17.3	17.3	17.3
157.5	16.9	17.1	17.1	17.5	17.5	17.3	17.3	17.5
180.0	17.3	17.3	17.3	17.5	17.5	17.3	17.3	16.9
202.5	16.9	17.1	17.3	17.3	17.1	16.9	17.1	17.3
225.0	16.9	16.2	16.7	16.7	16.5	15.8	16.2	16.0
247.5	15.8	16.0	16.0	15.4	15.4	15.4	15.2	14.8
270.0	15.0	14.8	14.6	14.8	14.4	14.4	14.1	13.9
292.5	13.7	13.5	13.5	13.1	13.1	13.1	12.9	12.5
315.0	12.5	12.3	12.3	12.3	12.3	12.0	12.0	11.8
337.5	11.8	11.8	11.8	11.6	11.4	11.4	11.6	11.6

DEPTH: 2224	TILT: 0	RANGE: 17.8	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	12.0	11.8	11.8	12.0	12.0	11.8	11.8	12.0
22.5	12.0	12.2	12.0	12.2	12.5	12.6	12.8	12.5
45.0	12.5	12.8	12.5	12.6	12.8	13.1	13.3	13.5
67.5	13.7	13.7	13.5	13.3	13.5	13.7	13.9	14.1
90.0	14.3	14.3	14.3	15.2	16.0	16.7	17.0	17.0
112.5	16.9	16.9	16.7	16.7	17.0	17.3	18.0	18.1
135.0	18.3	18.3	18.3	18.1	18.1	18.3	18.1	18.1
157.5	18.0	18.1	18.1	18.1	18.3	18.6	18.0	18.0
180.0	18.3	18.3	18.6	18.6	18.3	18.8	18.6	18.6
202.5	18.8	18.6	18.8	18.6	18.1	18.1	17.7	17.3
225.0	17.0	17.0	17.0	16.4	16.9	16.9	16.4	16.4
247.5	16.2	16.0	15.4	15.4	15.2	15.2	14.9	15.2
270.0	15.4	15.4	15.2	14.9	14.6	14.6	14.7	13.7
292.5	13.5	13.5	13.5	13.3	13.1	13.1	13.3	12.8
315.0	13.1	12.6	12.5	12.0	12.2	12.0	11.8	12.2
337.5	11.8	12.0	11.8	11.8	11.8	11.6	12.0	12.0

DEPTH: 2228	TILT: 0	RANGE: 15.2	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	10.1	9.9	9.9	9.7	9.7	9.5	9.7	9.7
22.5	9.7	9.9	9.7	9.7	9.5	9.5	9.5	9.5
45.0	9.5	9.5	9.7	9.9	10.1	10.3	10.3	10.5
67.5	10.8	11.0	11.2	11.2	11.4	11.8	11.8	12.3
90.0	12.3	12.4	12.4	12.4	12.4	12.4	12.4	12.3
112.5	12.0	12.3	12.4	12.6	12.8	13.1	13.3	13.7
135.0	13.7	13.5	13.1	12.8	13.3	13.5	14.1	14.8
157.5	15.2	15.4	15.6	16.0	16.0	16.0	15.8	15.8
180.0	15.6	15.4	15.4	15.4	15.6	15.8	16.0	16.0
202.5	16.0	15.8	15.6	15.6	15.8	15.8	15.6	15.4
225.0	15.0	15.0	15.0	14.8	14.6	14.3	14.1	13.9
247.5	13.5	13.3	13.1	12.6	12.4	12.3	12.0	11.6
270.0	11.4	11.2	11.0	10.5	10.3	10.1	9.9	9.9
292.5	10.1	10.3	10.3	10.3	10.1	9.9	9.9	10.1
315.0	10.3	10.3	10.1	9.7	9.5	9.5	9.7	9.9
337.5	10.1	9.9	9.7	9.5	9.7	9.7	9.9	10.1

DEPTH: 2232	TILT: 0	RANGE: 15.8	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	7.8	7.6	7.8	7.8	7.6	7.4	7.6	7.8
22.5	7.8	8.0	8.2	8.5	8.7	8.9	8.9	8.9
45.0	8.9	8.7	8.5	8.2	8.5	8.7	9.5	10.1
67.5	10.7	11.2	11.4	11.6	12.0	12.0	12.0	11.6
90.0	11.4	11.2	11.0	11.0	11.2	11.4	11.8	12.5
112.5	12.5	12.3	12.7	12.9	13.1	13.3	13.7	13.9
135.0	13.9	13.9	14.1	14.1	13.9	13.9	13.9	13.9
157.5	13.9	14.1	14.1	14.1	14.3	14.3	15.2	15.2
180.0	15.6	15.8	16.0	16.0	16.0	16.3	15.8	16.0
202.5	16.7	16.5	16.5	16.0	15.8	15.8	15.8	15.8
225.0	15.4	14.5	14.3	13.7	12.9	12.7	11.8	11.6
247.5	11.2	11.0	10.7	10.3	9.5	8.9	8.0	7.8
270.0	7.6	7.8	7.6	7.6	8.0	8.0	8.2	8.5
292.5	8.5	8.5	8.5	8.5	8.7	8.9	8.9	8.9
315.0	8.7	8.5	8.2	8.2	8.0	8.0	8.0	8.0
337.5	7.8	7.6	7.4	7.6	7.6	7.8	8.0	8.0

DEPTH: 2236	TILT: 0	RANGE: 5.2	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	2.7	2.7	3.0	3.0	3.0	3.0	3.0	3.8
22.5	3.8	3.6	3.4	3.4	3.4	3.6	3.6	3.6
45.0	3.6	3.6	4.2	4.0	4.0	3.8	3.4	3.8
67.5	4.2	4.2	4.0	3.8	4.0	4.4	4.4	4.2
90.0	3.6	4.2	3.8	4.2	4.2	4.0	4.2	4.2
112.5	4.2	4.4	4.4	4.2	4.2	4.4	4.6	4.6
135.0	4.8	4.8	4.6	4.4	4.2	4.2	4.4	4.4
157.5	4.6	4.6	4.8	4.8	4.8	4.6	4.8	4.8
180.0	4.8	5.1	5.3	5.3	5.5	5.5	5.5	5.3
202.5	5.1	5.1	5.1	5.1	5.1	5.1	4.8	4.8
225.0	4.8	4.8	4.8	4.6	4.6	4.6	4.6	4.6
247.5	4.6	4.6	4.4	4.4	4.2	4.2	4.0	3.8
270.0	3.6	3.4	3.4	3.2	3.0	2.7	2.5	2.3
292.5	2.3	2.3	2.5	2.5	2.5	2.5	2.5	2.3
315.0	2.3	2.3	2.3	2.7	2.3	2.7	2.7	2.7
337.5	2.5	2.7	2.5	3.0	2.7	2.7	2.5	2.7

DEPTH: 2237	TILT: 0		RANGE: 50.0		VOS: 6039			
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
22.5	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
45.0	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
67.5	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
90.0	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
112.5	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
135.0	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
157.5	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
180.0	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
202.5	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
225.0	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
247.5	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
270.0	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
292.5	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
315.0	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
337.5	0.8	0.8	0.8	0.8	0.8	0.8	0.8	

DEPTH: 2281	TILT: 0		RANGE: 50.0		VOS: 6039			
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
22.5	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
45.0	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
67.5	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
90.0	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
112.5	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
135.0	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
157.5	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
180.0	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
202.5	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
225.0	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
247.5	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
270.0	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
292.5	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
315.0	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
337.5	0.8	0.8	0.8	0.8	0.8	0.8	0.8	

DEPTH: 2282	TILT: 0		RANGE: 29.0		VOS: 6039			
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	24.5	24.5	24.2	24.5	24.5	24.5	24.7	
22.5	24.8	24.8	24.7	24.5	24.8	24.7	24.7	
45.0	24.7	24.7	24.7	24.7	24.7	24.7	24.8	
67.5	24.8	25.1	25.1	25.7	25.9	26.3	26.5	
90.0	27.0	27.0	27.1	27.4	27.4	27.1	27.1	
112.5	27.6	27.9	27.6	27.6	27.9	29.3	29.3	
135.0	28.5	28.9	28.9	29.1	29.1	29.5	30.0	
157.5	30.0	30.1	30.3	30.3	30.3	30.3	30.6	
180.0	30.3	30.6	30.3	30.3	30.1	30.3	30.3	
202.5	30.1	30.3	30.1	29.7	30.1	29.7	29.7	
225.0	29.5	29.5	29.1	28.9	28.6	28.6	28.6	
247.5	28.6	28.5	28.0	27.9	27.9	27.9	27.9	
270.0	27.1	26.8	27.0	27.0	26.5	26.3	26.3	
292.5	26.2	26.2	26.2	26.2	25.9	25.9	25.7	
315.0	25.6	24.8	24.8	25.1	24.8	24.7	24.7	
337.5	24.7	24.2	24.5	24.7	24.5	24.5	24.5	

DEPTH: 2286	TILT: 0	RANGE: 29.6	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	24.4	24.2	24.2	24.2	24.1	24.2	24.2	
22.5	24.2	24.4	24.2	24.7	24.4	24.7	24.7	25.1
45.0	25.1	25.1	25.1	25.3	25.3	25.4	25.9	26.2
67.5	26.3	26.3	26.3	26.3	26.6	26.8	26.8	26.8
90.0	26.9	26.8	26.9	26.9	27.4	27.2	27.4	27.6
112.5	28.1	28.1	28.1	28.2	28.2	28.1	28.4	28.7
135.0	28.9	29.3	29.6	29.7	29.7	29.9	29.9	30.2
157.5	30.3	30.3	29.9	29.9	30.2	30.8	30.6	30.6
180.0	30.9	30.9	30.9	31.2	31.2	30.6	30.6	30.6
202.5	30.6	30.3	30.2	30.2	29.9	29.7	29.7	29.7
225.0	29.6	29.6	29.3	29.3	28.9	28.7	28.9	28.7
247.5	28.4	28.4	28.2	28.4	28.2	28.1	27.8	28.1
270.0	27.6	26.9	27.2	26.9	27.2	26.9	26.8	26.6
292.5	26.6	26.6	26.9	26.8	26.8	26.3	26.2	26.6
315.0	26.2	25.4	25.9	25.9	25.7	25.4	25.4	25.1
337.5	25.1	25.3	25.3	24.8	24.8	24.4	24.2	24.2

DEPTH: 2290	TILT: 0	RANGE: 29.6	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	24.4	24.4	24.4	24.2	24.4	24.7	24.4	24.2
22.5	24.7	24.7	24.7	24.7	24.7	24.7	24.7	24.8
45.0	24.8	24.8	25.1	25.1	25.3	25.3	25.3	25.3
67.5	25.4	25.7	25.7	25.9	26.2	26.2	26.6	26.9
90.0	26.9	27.2	27.2	27.4	26.9	27.2	27.4	27.6
112.5	27.6	28.1	28.4	27.8	28.2	28.4	28.4	28.7
135.0	28.9	29.1	29.3	29.6	29.6	29.6	29.6	29.7
157.5	29.9	30.2	30.3	30.6	30.8	30.8	30.6	30.8
180.0	30.9	31.2	30.9	30.9	30.8	30.9	30.8	30.8
202.5	30.3	30.3	29.9	29.7	29.9	29.9	29.7	29.6
225.0	29.7	29.3	29.6	29.6	29.3	28.9	28.9	28.7
247.5	28.4	28.7	28.4	28.4	27.6	28.1	27.6	27.4
270.0	27.4	27.2	26.9	26.9	27.2	27.2	26.8	26.6
292.5	26.6	26.6	26.3	26.3	26.2	25.9	25.9	25.9
315.0	25.9	25.7	25.3	25.3	25.1	25.3	25.1	24.7
337.5	24.4	24.4	24.4	24.4	24.2	24.2	24.2	24.2

DEPTH: 2294	TILT: 0	RANGE: 29.8	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	25.1	24.9	24.9	24.6	24.6	24.6	24.6	24.6
22.5	24.5	24.5	24.6	24.9	24.9	25.1	25.3	25.1
45.0	25.1	25.3	25.3	25.3	25.5	25.3	25.1	25.3
67.5	25.8	25.9	25.9	26.1	26.4	26.4	26.4	26.5
90.0	26.8	27.0	27.1	27.1	27.4	27.4	27.4	27.1
112.5	27.0	27.1	27.0	27.1	27.7	27.4	27.4	27.7
135.0	28.0	28.3	29.0	29.5	30.4	30.2	30.5	30.5
157.5	30.8	30.8	31.2	31.0	30.8	31.0	31.2	31.4
180.0	31.4	31.4	31.4	31.4	31.4	31.4	31.4	31.4
202.5	31.4	31.4	31.2	31.2	31.2	31.2	30.8	30.8
225.0	30.8	30.5	30.4	30.2	29.9	29.9	29.7	29.7
247.5	29.5	29.3	29.5	29.3	29.3	29.5	28.9	28.4
270.0	28.3	27.8	27.8	27.7	27.8	27.7	27.4	27.1
292.5	27.0	27.0	27.0	26.8	26.5	26.4	26.5	26.4
315.0	26.4	26.1	25.9	25.8	25.8	25.8	25.8	25.8
337.5	25.5	25.5	25.1	25.1	25.3	25.3	24.9	25.1

DEPTH: 2298	TILT: 0	RANGE: 28.3	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0 21.6	21.3	21.2	21.2	21.3	21.1	21.2	20.8	
22.5 21.2	21.1	21.1	21.2	21.2	21.3	21.6	21.6	
45.0 21.6	21.2	21.2	21.3	21.6	21.7	21.8	21.9	
67.5 22.2	22.3	22.4	23.0	23.1	23.5	23.6	23.7	
90.0 23.9	24.2	24.2	24.1	23.9	23.9	24.1	24.2	
112.5 24.2	24.2	24.2	24.5	24.9	24.9	25.4	25.5	
135.0 25.4	25.3	25.5	25.9	26.0	26.7	26.8	27.0	
157.5 27.4	27.6	27.8	28.0	28.4	28.4	29.2	29.0	
180.0 28.6	28.7	29.0	29.8	29.5	28.5	28.1	28.4	
202.5 28.4	28.7	28.7	29.1	29.2	29.1	28.7	28.6	
225.0 28.5	28.4	28.1	28.0	27.6	27.0	26.7	26.1	
247.5 26.4	26.0	25.6	24.7	24.3	24.3	24.3	24.2	
270.0 24.1	23.7	23.6	23.5	23.5	23.5	23.3	23.0	
292.5 22.8	22.4	22.4	21.9	21.8	21.9	21.9	21.7	
315.0 21.6	21.8	22.2	21.7	21.7	21.7	21.7	21.6	
337.5 21.6	21.3	21.3	21.6	21.6	21.7	21.6	21.6	

DEPTH: 2302	TILT: 0	RANGE: 23.5	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0 16.1	16.4	16.0	16.3	16.0	16.3	16.1	16.1	
22.5 16.1	16.3	16.4	16.6	16.6	16.6	16.7	16.8	
45.0 17.0	17.3	17.3	17.4	17.4	17.6	18.3	19.2	
67.5 18.9	19.4	19.1	19.1	18.9	19.1	19.4	20.0	
90.0 20.0	20.0	20.1	20.0	20.1	20.3	20.0	20.3	
112.5 20.3	20.5	20.6	20.6	20.5	20.6	20.9	21.1	
135.0 21.8	22.4	22.8	23.0	23.4	23.9	24.3	24.8	
157.5 24.8	24.6	24.5	24.3	24.3	24.3	24.2	24.3	
180.0 24.5	24.5	24.5	24.3	24.2	24.5	24.6	24.8	
202.5 24.8	24.5	24.5	23.7	23.9	23.3	23.3	23.4	
225.0 23.3	23.1	23.0	22.4	22.0	21.8	21.5	21.2	
247.5 21.1	20.8	20.6	20.3	20.3	20.1	19.8	19.4	
270.0 19.1	18.9	18.2	18.2	18.0	17.9	17.7	17.4	
292.5 17.3	17.4	17.4	17.3	17.1	17.0	16.8	16.7	
315.0 16.6	16.4	16.1	16.0	16.0	16.0	16.1	16.4	
337.5 16.3	16.0	16.1	15.7	15.8	16.0	16.3	15.5	

DEPTH: 2306	TILT: 0	RANGE: 18.6	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0 10.4	10.5	10.5	10.4	10.1	10.1	10.4	10.4	
22.5 10.5	10.5	10.5	10.1	10.4	10.4	11.0	11.0	
45.0 11.0	11.0	11.0	10.8	10.5	10.8	11.0	11.1	
67.5 11.4	11.6	11.8	12.0	12.4	12.6	12.9	13.0	
90.0 13.3	13.5	13.9	13.9	13.7	13.5	13.7	13.9	
112.5 14.1	14.4	14.5	14.8	15.0	15.4	15.6	15.8	
135.0 16.0	15.8	15.6	15.6	15.8	16.3	16.4	16.6	
157.5 16.9	17.0	17.5	17.7	17.9	18.4	18.5	18.8	
180.0 19.2	19.4	19.0	19.2	19.4	19.6	19.6	19.4	
202.5 19.2	19.0	18.8	18.4	18.4	18.5	18.5	18.4	
225.0 17.9	17.7	17.5	17.5	17.0	16.9	16.9	16.9	
247.5 16.9	16.4	16.0	15.8	15.4	15.2	15.0	14.8	
270.0 14.5	14.1	13.9	13.7	13.5	13.0	12.6	12.4	
292.5 12.4	12.2	12.0	11.8	11.8	11.4	11.4	11.4	
315.0 11.4	11.1	11.0	10.8	10.8	10.8	10.4	10.5	
337.5 10.4	10.1	10.4	10.5	10.4	10.4	10.4	10.4	

DEPTH: 2308	TILT: 0	RANGE: 50.0	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
22.5	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
45.0	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
67.5	0.8	0.8	0.8	0.8	0.8	0.8	0.8	1.1
90.0	1.3	1.3	1.5	1.7	2.1	2.3	2.7	3.0
112.5	3.4	3.6	8.6	8.4	8.0	8.0	7.6	7.4
135.0	7.4	7.2	7.0	7.0	6.7	6.7	6.7	6.7
157.5	7.0	7.2	7.4	7.4	7.2	7.0	7.2	7.2
180.0	7.2	7.4	7.6	7.6	7.2	7.2	7.2	7.2
202.5	7.0	7.2	7.2	7.2	7.2	7.2	6.5	7.0
225.0	7.0	7.2	7.4	7.8	8.0	8.2	8.4	8.4
247.5	8.2	8.0	8.0	8.0	8.2	8.9	9.1	9.3
270.0	9.5	9.5	9.5	9.3	8.4	2.7	2.7	2.5
292.5	2.3	2.3	2.3	2.1	1.9	1.9	1.7	1.7
315.0	1.5	1.3	1.3	1.3	1.3	1.3	1.3	1.1
337.5	1.1	1.1	1.1	1.1	0.8	0.8	0.8	0.8

DEPTH: 2309	TILT: 0	RANGE: 50.0	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
22.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
45.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
67.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
90.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
112.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
135.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
157.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
180.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
202.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
225.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
247.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
270.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
292.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
315.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
337.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	

DEPTH: 2333	TILT: 0	RANGE: 50.0	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
22.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
45.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
67.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
90.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
112.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
135.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
157.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
180.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
202.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
225.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
247.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
270.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
292.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
315.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	
337.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	

DEPTH:	2334	TILT:	0	RANGE:	9.2	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	1.9	1.7	1.7	1.7	1.7	1.7	1.7	1.5	
22.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	
45.0	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	
67.5	1.5	1.5	1.5	1.5	1.5	1.5	1.9	2.1	
90.0	2.3	2.5	2.7	3.0	3.4	3.6	3.8	4.0	
112.5	4.2	4.4	7.0	8.4	8.9	9.1	9.3	9.5	
135.0	9.7	9.7	9.7	9.5	9.3	9.1	9.1	9.1	
157.5	9.1	9.1	8.9	8.9	8.6	8.6	8.6	8.6	
180.0	8.6	8.4	8.2	8.2	8.2	8.2	8.4	8.6	
202.5	8.6	8.9	8.9	8.9	8.6	8.4	8.2	8.4	
225.0	8.4	8.6	8.9	9.1	9.1	9.3	9.3	9.3	
247.5	9.3	9.1	8.9	8.9	8.9	8.6	8.4	8.2	
270.0	7.8	7.4	7.2	7.0	6.5	6.3	6.1	5.7	
292.5	5.5	5.3	4.9	4.6	4.4	4.2	4.0	3.8	
315.0	3.6	3.1	3.0	2.7	2.5	2.3	2.3	2.3	
337.5	2.3	2.3	2.1	2.1	2.1	2.1	1.9	1.9	

DEPTH:	2338	TILT:	0	RANGE:	32.6	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	26.5	26.1	26.0	26.0	26.0	26.0	26.0	26.0	
22.5	26.0	26.0	26.0	26.0	26.0	25.7	25.6	25.3	
45.0	25.6	25.7	26.0	26.0	25.6	25.6	25.7	26.1	
67.5	26.5	26.9	27.6	27.9	28.3	28.4	28.4	28.3	
90.0	27.9	27.9	27.3	27.3	27.6	27.3	27.2	26.9	
112.5	26.8	26.8	27.2	27.3	27.6	27.9	28.7	29.3	
135.0	29.7	31.2	32.0	31.9	31.9	31.6	31.2	31.0	
157.5	31.2	31.5	31.6	31.9	32.0	32.0	32.8	32.8	
180.0	32.8	32.7	33.1	33.1	33.5	33.7	33.7	33.9	
202.5	34.3	34.2	33.2	32.7	32.8	33.1	33.2	33.2	
225.0	33.1	32.7	32.3	31.6	31.2	31.0	30.8	30.4	
247.5	30.1	30.0	29.7	29.5	29.5	29.7	30.0	30.0	
270.0	30.1	30.1	30.0	29.7	29.5	29.3	29.1	28.9	
292.5	28.7	28.9	28.9	28.7	28.4	28.3	28.3	28.3	
315.0	28.0	28.3	28.3	28.0	27.9	27.6	26.9	26.8	
337.5	26.5	26.1	26.0	26.0	26.1	26.4	26.5	26.8	

DEPTH:	2342	TILT:	0	RANGE:	23.5	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	20.0	20.1	20.0	19.8	19.7	19.5	19.4	19.1	
22.5	19.4	19.2	19.2	19.4	19.4	19.5	19.7	19.8	
45.0	20.0	20.5	20.6	20.9	21.2	21.7	22.1	22.0	
67.5	21.8	21.8	21.5	21.4	21.1	20.8	20.1	20.0	
90.0	19.8	19.5	19.4	19.2	19.1	18.9	18.9	18.9	
112.5	18.9	19.2	19.4	19.4	19.2	19.1	19.2	19.4	
135.0	21.1	21.4	21.5	21.7	22.0	22.1	22.2	22.5	
157.5	22.7	23.0	23.1	23.3	23.6	24.0	24.2	24.2	
180.0	24.0	23.9	24.0	24.2	24.5	24.6	24.8	24.8	
202.5	24.6	24.5	24.6	24.8	24.8	24.5	24.3	24.2	
225.0	23.9	21.2	20.6	19.2	19.1	18.9	18.8	18.6	
247.5	18.5	18.2	18.0	17.9	17.9	18.0	17.9	17.7	
270.0	17.6	17.6	17.7	17.6	17.4	17.3	17.4	17.6	
292.5	17.7	17.9	17.9	17.7	17.6	17.4	17.6	17.6	
315.0	17.4	17.6	17.7	17.9	18.0	18.2	18.8	18.9	
337.5	19.4	19.7	20.0	20.0	19.8	19.7	19.7	19.8	

DEPTH: 2346	TILT: 0	RANGE: 19.0	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	12.0	12.1	12.4	12.7	12.8	13.3	14.6
22.5	15.2	15.5	15.6	15.8	15.6	15.5	15.5
45.0	15.6	15.8	15.6	15.5	15.2	15.1	15.2
67.5	15.3	15.6	15.8	15.8	15.6	15.5	15.6
90.0	15.8	15.6	15.5	15.6	15.8	16.0	16.1
112.5	15.8	15.8	16.0	16.0	15.8	15.6	15.5
135.0	15.6	15.5	15.3	15.2	15.1	15.2	15.1
157.5	14.8	14.8	15.1	15.3	15.5	15.6	15.8
180.0	16.2	16.5	16.7	17.6	17.9	18.0	18.9
202.5	19.2	19.2	19.3	19.7	19.8	19.9	20.1
225.0	20.1	12.7	12.8	13.0	13.2	13.0	12.8
247.5	12.5	12.7	12.8	13.0	13.2	13.3	13.4
270.0	13.7	14.0	14.2	14.3	15.1	16.1	16.0
292.5	16.0	15.8	15.6	15.5	14.6	14.3	13.3
315.0	12.5	12.3	12.0	11.8	11.6	11.6	11.8
337.5	11.6	12.0	11.6	11.6	11.8	11.6	11.8

DEPTH: 2350	TILT: 0	RANGE: 9.5	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	6.7	6.8	7.0	7.0	7.0	6.8	7.0
22.5	7.0	7.0	6.8	6.7	6.7	6.8	7.0
45.0	7.0	6.7	6.7	6.6	6.8	7.0	7.2
67.5	7.4	7.4	7.4	7.0	6.6	6.1	5.9
90.0	6.0	6.0	5.9	5.6	5.5	5.4	6.0
112.5	6.0	6.0	5.9	5.9	6.0	6.3	7.0
135.0	7.9	8.4	8.4	8.4	8.4	8.5	8.7
157.5	8.8	9.0	9.0	9.0	9.0	9.0	9.4
180.0	9.5	9.6	9.6	9.6	9.7	9.8	10.0
202.5	9.8	9.8	9.7	9.6	9.5	9.4	9.8
225.0	9.7	9.6	6.3	5.4	5.3	4.5	4.5
247.5	4.5	4.7	5.0	5.0	5.0	4.8	5.0
270.0	5.3	5.0	5.0	5.0	5.0	4.8	4.7
292.5	4.8	4.8	5.0	5.0	5.2	5.2	5.0
315.0	5.0	5.0	5.2	5.4	5.5	5.8	6.0
337.5	6.3	6.3	6.3	6.3	6.3	6.3	6.4

DEPTH: 2351	TILT: 0	RANGE: 35.0	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
22.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7
45.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
67.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7
90.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
112.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7
135.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
157.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7
180.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
202.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7
225.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
247.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7
270.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
292.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7
315.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
337.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7

DEPTH: 2367	TILT: 0	RANGE: 35.0	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
22.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7
45.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
67.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7
90.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
112.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7
135.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
157.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7
180.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
202.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7
225.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
247.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7
270.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
292.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7
315.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
337.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7

DEPTH: 2369	TILT: 0	RANGE: 16.8	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	6.2	6.0	6.0	5.7	6.0	5.9	5.9
22.5	5.9	5.9	6.2	6.0	6.2	6.4	6.4
45.0	6.4	6.4	6.7	6.8	6.9	7.1	7.2
67.5	7.4	7.1	7.1	7.2	7.2	7.4	7.4
90.0	7.6	7.9	8.4	8.7	9.0	8.8	9.0
112.5	8.8	8.8	8.8	8.8	9.4	9.8	10.2
135.0	10.6	11.0	11.2	13.3	13.3	16.3	16.8
157.5	17.1	17.0	16.7	16.6	16.3	16.3	16.6
180.0	16.8	16.8	16.7	16.7	17.0	17.1	17.3
202.5	17.6	17.4	17.4	17.6	17.6	17.7	17.4
225.0	16.7	16.6	16.3	15.5	15.2	14.9	13.7
247.5	13.0	12.2	11.7	11.4	11.0	10.5	9.8
270.0	9.8	9.8	9.4	9.3	9.4	9.4	9.4
292.5	9.3	9.3	9.4	9.3	8.7	8.4	8.0
315.0	7.4	7.1	6.9	6.9	6.8	6.7	6.8
337.5	6.7	6.7	6.5	6.5	6.4	6.4	6.0

DEPTH: 2370	TILT: 0	RANGE: 35.0	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
22.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7
45.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
67.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7
90.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
112.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7
135.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
157.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7
180.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
202.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7
225.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
247.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7
270.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
292.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7
315.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
337.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7

DEPTH: 2380	TILT: 0		RANGE: 35.0		VOS: 6039			
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7	
22.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7	
45.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7	
67.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7	
90.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7	
112.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7	
135.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7	
157.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7	
180.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7	
202.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7	
225.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7	
247.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7	
270.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7	
292.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7	
315.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7	
337.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7	

DEPTH: 2381	TILT: 0		RANGE: 21.6		VOS: 6039			
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	10.7	10.5	10.6	10.4	10.2	10.2	10.2	
22.5	9.9	10.0	10.0	9.9	10.0	10.2	10.2	
45.0	10.2	10.6	10.5	10.6	10.7	11.1	11.1	
67.5	11.4	11.4	11.8	11.8	12.4	12.4	12.6	
90.0	12.7	13.1	13.3	13.7	13.9	14.2	14.5	
112.5	15.0	16.1	16.2	16.8	17.1	17.7	18.6	
135.0	20.2	20.6	21.1	21.4	21.6	21.6	21.8	
157.5	21.6	21.6	21.6	21.8	22.0	22.0	21.8	
180.0	22.0	22.1	22.3	22.6	22.6	22.7	22.6	
202.5	22.6	22.6	22.7	22.7	22.6	22.5	22.3	
225.0	22.3	22.1	22.0	21.6	21.6	21.4	20.6	
247.5	19.9	19.7	19.6	19.5	19.2	18.7	18.6	
270.0	18.3	17.7	17.4	17.3	17.0	16.8	16.1	
292.5	15.2	15.0	14.7	14.6	14.3	14.0	13.9	
315.0	13.5	13.0	12.6	11.8	11.8	11.8	11.8	
337.5	11.6	11.6	11.6	11.4	11.4	11.2	11.1	

DEPTH: 2392	TILT: 0		RANGE: 20.0		VOS: 6039			
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	8.9	8.9	8.5	8.4	8.3	8.1	8.1	
22.5	8.3	8.3	8.1	7.9	7.8	7.8	7.8	
45.0	7.5	7.7	7.8	7.8	7.9	7.9	8.3	
67.5	8.4	8.4	8.4	8.7	8.7	9.1	9.0	
90.0	10.0	10.0	10.0	10.3	10.5	10.6	11.1	
112.5	13.0	14.3	16.1	16.1	17.9	19.5	19.7	
135.0	20.1	20.5	20.8	20.9	21.1	21.1	20.7	
157.5	20.7	20.5	20.3	20.5	20.5	20.2	20.1	
180.0	19.7	19.5	19.3	19.3	19.3	19.7	19.7	
202.5	19.1	19.1	19.1	19.1	18.9	18.7	18.7	
225.0	19.1	19.1	18.6	18.6	18.5	18.0	17.9	
247.5	17.4	17.1	16.8	16.5	16.4	16.2	15.6	
270.0	15.2	15.2	15.4	15.4	15.0	14.8	14.6	
292.5	13.8	13.6	13.4	13.2	13.2	13.2	13.0	
315.0	12.2	10.6	10.3	10.0	9.7	9.6	9.4	
337.5	9.3	9.4	9.6	9.6	9.6	9.4	9.3	

DEPTH:	2396	TILT:	0	RANGE:	16.1	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	
22.5	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.5	
45.0	3.5	3.5	3.7	3.8	3.8	3.8	3.8	3.8	
67.5	4.0	4.3	4.4	5.2	5.2	5.3	5.4	5.6	
90.0	5.8	6.0	6.5	7.2	7.2	7.4	7.4	7.5	
112.5	7.8	8.3	8.4	8.6	8.7	9.0	9.3	10.5	
135.0	10.9	12.4	13.6	13.9	14.2	14.3	14.6	15.6	
157.5	15.8	16.1	16.2	16.2	16.0	16.0	16.2	16.5	
180.0	16.6	16.8	17.0	17.0	16.8	16.6	16.2	16.1	
202.5	15.8	15.6	15.5	15.4	15.2	15.1	14.9	14.7	
225.0	14.2	14.0	13.9	13.7	13.7	13.9	13.5	13.1	
247.5	12.8	12.4	12.1	12.0	11.8	11.2	11.1	10.8	
270.0	10.5	10.2	9.9	9.2	9.0	8.1	7.9	6.8	
292.5	6.7	6.3	6.0	5.4	5.3	5.2	4.9	4.6	
315.0	4.3	4.1	4.0	4.0	4.1	4.1	4.1	3.8	
337.5	3.8	4.0	3.8	3.8	3.8	3.8	3.8	4.0	

DEPTH:	2400	TILT:	0	RANGE:	12.8	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	5.9	5.7	5.7	5.7	5.5	5.5	5.3	5.1	
22.5	4.6	2.3	2.3	2.1	2.3	2.1	2.5	2.5	
45.0	2.1	2.1	1.9	1.9	2.1	2.1	2.1	2.1	
67.5	1.9	1.9	2.1	2.1	2.1	2.1	2.1	2.3	
90.0	2.3	2.3	2.3	2.5	2.5	2.5	2.5	2.5	
112.5	2.5	2.3	2.3	2.3	2.3	2.5	2.5	2.8	
135.0	3.0	3.2	3.2	3.3	3.6	3.8	3.8	3.8	
157.5	3.8	4.2	4.2	4.4	4.4	4.4	5.1	4.6	
180.0	7.8	7.8	8.2	12.6	13.1	13.5	13.5	13.3	
202.5	13.1	13.1	12.8	12.6	12.4	12.3	11.4	10.5	
225.0	9.7	9.3	9.1	8.9	8.2	8.0	7.8	7.4	
247.5	7.2	6.7	6.7	6.5	6.5	6.5	6.5	6.5	
270.0	6.5	6.5	6.5	6.5	6.5	6.7	6.7	6.7	
292.5	6.7	6.7	6.5	6.5	6.5	6.5	6.7	6.7	
315.0	6.5	6.7	6.5	6.5	6.5	6.3	6.3	6.1	
337.5	6.1	6.1	6.3	6.3	6.5	6.3	6.3	5.9	

DEPTH:	2402	TILT:	0	RANGE:	26.0	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	11.2	11.0	11.0	11.0	11.2	11.2	11.0	10.7	
22.5	10.7	11.0	11.2	11.0	11.0	11.0	11.0	11.0	
45.0	11.2	11.4	11.2	11.2	11.4	11.2	11.6	11.6	
67.5	12.1	13.5	13.5	13.7	13.9	13.9	14.1	14.6	
90.0	15.1	15.6	15.6	15.8	16.0	16.4	16.9	17.3	
112.5	17.7	18.3	18.7	19.0	19.2	19.8	20.3	20.3	
135.0	20.6	21.3	23.4	24.2	24.7	25.9	26.5	27.0	
157.5	27.2	27.4	27.0	26.5	25.9	25.8	25.5	25.5	
180.0	25.5	25.5	25.5	25.8	25.8	25.5	25.5	25.8	
202.5	25.8	25.5	25.3	25.5	25.3	25.5	25.5	24.9	
225.0	24.2	24.0	23.8	23.4	23.1	23.1	22.8	22.1	
247.5	21.7	21.5	21.1	20.8	20.4	20.3	20.3	20.1	
270.0	19.8	19.6	19.4	19.2	18.3	17.3	16.9	16.4	
292.5	15.8	14.8	14.4	13.9	13.7	13.5	13.3	13.0	
315.0	12.8	12.6	12.4	12.3	11.8	11.6	11.4	11.2	
337.5	11.2	11.2	11.2	11.2	11.2	11.0	11.0	11.0	

DEPTH:	2408	TILT:	0	RANGE:	24.8	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	11.0	11.0	11.0	11.0	10.8	10.8	11.0	11.2	
22.5	11.0	11.0	11.0	11.2	11.2	11.2	11.2	11.4	
45.0	11.6	11.6	11.4	11.6	11.8	11.8	12.2	12.2	
67.5	12.2	12.2	12.7	12.9	13.1	13.3	13.5	13.7	
90.0	14.1	14.3	14.5	15.2	15.8	16.4	16.8	16.8	
112.5	16.8	17.0	17.3	17.7	18.3	18.5	18.7	19.1	
135.0	19.7	20.3	21.1	22.4	24.0	24.5	24.9	25.1	
157.5	25.1	26.1	25.7	24.9	25.3	25.3	24.9	24.7	
180.0	24.9	25.1	24.9	25.3	24.7	24.7	24.3	24.3	
202.5	24.7	25.1	24.9	25.1	24.9	24.9	25.1	24.5	
225.0	24.3	24.5	24.3	24.0	23.8	23.2	23.2	23.0	
247.5	22.8	22.2	21.7	21.3	21.1	20.7	20.7	20.7	
270.0	20.3	18.9	18.5	18.3	18.3	18.1	17.5	17.0	
292.5	16.4	15.8	15.2	14.7	14.5	13.9	13.7	13.3	
315.0	13.1	12.9	12.4	12.4	12.0	12.0	12.0	12.0	
337.5	11.8	11.6	11.4	11.6	11.4	11.4	11.2	11.0	

DEPTH:	2412	TILT:	0	RANGE:	21.4	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	10.4	10.6	10.6	10.4	10.1	10.4	10.6	10.7	
22.5	10.6	10.7	11.0	10.7	10.7	10.7	10.7	11.0	
45.0	11.0	11.2	11.4	11.2	11.2	11.2	11.2	11.2	
67.5	11.0	11.0	11.2	11.0	10.7	10.7	11.2	11.2	
90.0	11.6	12.0	12.4	12.6	12.9	13.3	13.3	13.7	
112.5	13.9	14.2	14.5	14.8	15.0	15.2	15.4	15.6	
135.0	16.4	16.9	17.0	17.7	18.1	19.4	20.2	20.7	
157.5	21.1	21.5	21.7	22.1	22.4	22.4	22.4	22.4	
180.0	22.6	22.4	22.4	22.4	22.1	21.7	21.3	20.8	
202.5	20.8	21.1	21.1	21.3	21.1	21.3	21.1	21.3	
225.0	21.5	21.7	21.5	21.5	20.8	20.2	19.4	18.3	
247.5	18.1	17.7	17.7	17.0	16.9	16.7	16.1	15.8	
270.0	15.4	15.0	14.3	14.2	13.5	13.7	13.3	13.1	
292.5	12.9	13.1	13.1	12.9	12.3	12.4	12.3	12.3	
315.0	12.0	11.8	11.2	11.0	10.7	11.0	10.7	10.6	
337.5	10.6	10.7	10.6	10.6	10.6	10.6	10.6	10.6	

DEPTH:	2416	TILT:	0	RANGE:	18.4	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	5.9	5.9	6.1	6.1	6.1	5.9	6.1	6.1	
22.5	5.9	6.1	5.7	6.1	6.1	6.1	6.1	6.1	
45.0	6.4	6.1	6.4	6.4	6.4	6.1	6.4	6.5	
67.5	6.7	6.7	7.0	7.1	7.1	7.4	7.6	7.6	
90.0	7.6	7.8	8.2	8.6	8.6	8.8	9.5	9.5	
112.5	9.9	10.1	10.3	10.5	10.8	11.4	12.0	12.3	
135.0	13.1	13.9	13.9	14.1	15.2	16.2	17.1	17.7	
157.5	18.1	18.8	19.4	19.0	18.8	19.0	19.0	19.2	
180.0	19.4	19.4	19.2	19.0	18.8	19.0	19.2	19.4	
202.5	19.4	19.4	19.0	18.5	18.3	18.1	17.7	17.5	
225.0	17.1	16.8	16.7	16.7	16.2	16.1	15.8	15.4	
247.5	15.2	15.2	14.6	14.3	13.3	12.6	12.4	12.3	
270.0	11.6	11.4	11.2	10.9	10.5	10.1	9.3	8.8	
292.5	9.1	8.0	8.2	7.8	7.6	7.1	7.1	7.1	
315.0	7.1	7.0	6.7	6.7	6.7	6.4	6.4	6.4	
337.5	6.1	5.9	6.1	5.9	5.9	5.9	6.1	5.7	

DEPTH:	2428	TILT:	0	RANGE:	29.2	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	12.7	12.7	12.4	12.4	12.2	12.4	12.4	12.4	
22.5	12.4	12.4	12.4	12.2	12.2	12.4	12.4	12.4	
45.0	12.4	12.7	12.7	12.9	13.0	13.3	13.3	13.5	
67.5	13.7	13.7	13.9	14.2	14.3	14.5	14.8	15.0	
90.0	15.1	15.6	16.0	16.2	16.6	17.1	17.2	18.3	
112.5	19.2	19.4	19.8	19.8	20.1	20.4	20.7	21.0	
135.0	21.3	21.9	22.4	22.8	23.1	23.9	24.0	24.5	
157.5	25.5	26.6	27.8	28.7	29.9	30.1	30.5	30.4	
180.0	30.4	30.4	30.4	30.5	30.5	30.8	30.8	30.8	
202.5	30.8	30.5	30.4	29.5	29.5	29.3	28.3	27.8	
225.0	27.8	27.4	26.9	26.9	26.8	26.3	26.1	26.0	
247.5	25.7	25.1	24.9	24.5	23.6	22.8	22.4	22.1	
270.0	21.9	21.5	20.4	20.2	20.1	19.6	18.9	18.7	
292.5	18.6	18.0	17.7	17.2	17.1	16.6	16.5	16.2	
315.0	15.7	15.6	15.4	15.0	14.8	14.5	14.3	14.2	
337.5	13.9	13.5	13.3	13.3	13.0	12.9	12.9	12.9	

DEPTH:	2432	TILT:	0	RANGE:	26.4	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	9.5	9.7	9.7	9.7	9.7	9.9	9.7	9.7	
22.5	9.7	9.7	9.9	9.9	9.7	9.9	10.1	10.4	
45.0	10.4	10.4	10.6	10.9	11.1	11.1	11.1	11.1	
67.5	11.4	11.8	12.0	12.7	12.8	13.0	13.5	13.9	
90.0	14.4	14.8	15.1	15.4	15.6	16.3	16.8	17.0	
112.5	17.3	17.5	17.7	17.9	18.1	18.4	18.6	18.7	
135.0	19.4	20.0	20.3	20.5	20.7	21.5	21.9	22.2	
157.5	22.4	23.2	24.3	25.1	25.3	25.7	26.9	27.2	
180.0	27.4	27.6	27.8	27.8	27.4	27.4	27.6	27.8	
202.5	27.6	27.4	27.4	27.4	27.6	27.8	27.6	27.2	
225.0	26.9	26.6	26.4	25.7	25.7	25.5	25.3	25.1	
247.5	24.1	23.2	22.7	21.7	20.7	20.3	20.0	19.4	
270.0	18.9	18.7	17.9	17.5	16.7	16.5	16.5	16.7	
292.5	16.8	16.3	15.6	14.9	14.4	13.9	13.2	12.7	
315.0	11.6	11.4	11.6	11.1	10.9	10.6	10.1	10.4	
337.5	10.1	9.9	10.4	10.4	9.9	9.7	9.7	9.7	

DEPTH:	2438	TILT:	0	RANGE:	26.8	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	9.9	9.7	9.7	9.7	10.2	9.7	9.7	9.7	
22.5	9.9	9.9	9.9	9.7	9.7	9.7	9.9	9.9	
45.0	10.2	10.2	10.2	10.3	10.5	10.5	10.7	11.2	
67.5	11.4	11.2	11.8	11.4	11.6	11.8	12.2	12.9	
90.0	13.5	14.1	14.4	14.6	14.8	15.1	15.4	15.6	
112.5	16.1	16.3	16.4	16.6	17.7	18.0	18.1	18.3	
135.0	18.5	18.8	18.8	19.0	19.8	20.0	20.5	20.7	
157.5	20.9	21.3	21.7	22.4	23.4	23.9	24.9	26.1	
180.0	26.6	27.2	27.6	27.8	28.3	28.3	28.0	27.8	
202.5	27.6	27.4	27.2	27.2	27.4	27.4	27.2	27.0	
225.0	27.0	25.8	25.5	25.1	24.9	24.6	23.9	23.2	
247.5	22.7	22.6	21.9	21.3	21.0	20.7	20.2	19.8	
270.0	19.6	19.4	19.2	18.1	18.0	17.5	15.8	15.4	
292.5	14.9	14.6	12.9	12.7	12.4	12.2	12.0	11.6	
315.0	11.4	11.2	11.2	11.4	11.4	11.6	11.6	11.4	
337.5	11.0	10.7	10.3	10.2	9.9	9.9	10.2	10.5	

DEPTH: 2452	TILT: 0	RANGE: 36.0	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	11.4	10.9	10.9	10.8	10.5	10.3	10.3	9.7
22.5	10.2	9.9	9.9	9.9	9.9	9.9	9.9	9.9
45.0	9.7	9.7	9.9	9.9	9.9	10.5	11.2	11.5
67.5	12.3	12.6	13.0	13.4	13.5	14.1	14.6	15.2
90.0	15.6	16.1	16.4	17.1	17.3	17.4	17.9	18.1
112.5	18.4	18.5	18.5	18.4	18.1	18.4	18.5	18.8
135.0	19.0	19.4	19.9	21.5	21.7	23.4	23.8	24.0
157.5	24.3	33.7	33.7	34.0	34.7	35.4	36.3	36.4
180.0	37.2	37.3	37.5	37.9	37.9	37.8	37.5	36.7
202.5	35.7	34.6	33.5	33.1	32.5	32.3	32.0	32.0
225.0	32.0	31.6	31.3	30.5	30.3	30.3	29.6	27.8
247.5	27.5	27.0	26.1	24.7	24.0	23.8	23.2	22.6
270.0	21.5	21.2	20.2	20.0	19.6	19.0	18.4	17.8
292.5	17.8	17.4	17.3	17.1	17.1	17.1	16.4	16.2
315.0	15.8	12.9	13.0	12.9	12.9	13.0	12.6	12.4
337.5	12.6	12.4	12.6	12.4	12.6	12.6	12.0	12.0

DEPTH: 2456	TILT: 0	RANGE: 37.7	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	10.7	11.0	10.5	10.7	10.5	10.2	10.4	9.9
22.5	9.9	9.9	10.2	10.2	10.2	10.4	10.4	10.2
45.0	10.2	9.7	5.9	5.9	6.1	5.9	5.9	5.9
67.5	6.1	6.5	6.4	6.4	6.1	6.5	7.2	7.6
90.0	7.8	7.8	8.0	8.4	8.9	9.2	9.9	10.2
112.5	10.4	11.3	21.7	22.1	22.6	22.8	23.4	24.2
135.0	24.8	26.9	27.2	27.9	28.2	28.5	29.3	29.9
157.5	30.1	31.2	32.0	33.4	35.8	36.6	38.4	38.4
180.0	38.5	38.9	39.2	39.2	39.7	39.8	39.7	39.3
202.5	39.3	39.0	38.4	37.1	36.6	36.0	35.4	35.0
225.0	34.7	34.4	33.8	33.1	32.7	32.2	29.8	24.1
247.5	22.8	22.6	22.0	21.5	21.3	21.0	20.7	19.8
270.0	19.6	19.1	19.1	19.4	19.4	19.0	18.8	17.8
292.5	17.5	17.4	17.0	16.9	16.4	16.4	16.4	15.5
315.0	14.2	14.2	14.2	14.2	13.9	13.2	12.4	11.8
337.5	11.6	11.3	11.3	11.1	11.3	11.3	11.0	11.0

DEPTH: 2460	TILT: 0	RANGE: 25.4	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	10.0	10.4	10.7	10.7	10.9	10.7	10.6	10.6
22.5	10.7	10.6	10.9	10.9	11.3	11.6	12.0	12.2
45.0	12.4	12.8	13.7	13.9	13.5	13.7	13.9	13.9
67.5	13.9	14.1	14.3	14.6	14.8	14.8	14.8	14.6
90.0	14.3	14.1	14.1	13.7	13.3	13.1	12.8	12.6
112.5	12.4	12.2	11.8	11.8	12.0	11.3	9.7	8.9
135.0	8.2	7.0	5.0	5.0	5.2	4.8	4.8	5.0
157.5	5.0	4.8	4.8	4.8	4.8	5.0	5.0	4.8
180.0	4.8	5.0	5.2	5.0	5.2	5.2	5.2	5.2
202.5	5.2	5.2	5.5	5.5	5.5	5.5	5.5	26.8
225.0	25.7	25.5	24.6	23.9	23.2	22.4	21.9	21.7
247.5	20.2	19.4	18.9	18.7	18.7	18.7	18.1	17.9
270.0	17.5	16.9	16.1	15.6	14.8	14.3	14.1	13.9
292.5	13.7	13.9	13.9	13.5	13.3	13.1	12.8	12.6
315.0	11.8	11.6	11.3	10.9	10.9	11.3	11.1	10.7
337.5	11.1	10.9	10.2	10.2	10.4	10.4	10.2	10.0

DEPTH: 2462	TILT: 0	RANGE: 13.2	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0 7.0	7.2	7.6	8.0	8.0	8.6	8.6	8.9	
22.5 9.1	4.2	4.2	4.0	4.0	3.8	3.8	3.6	
45.0 3.6	3.4	3.2	3.2	3.0	2.7	2.7	2.5	
67.5 2.5	2.5	2.5	2.5	2.5	2.5	2.3	2.3	
90.0 2.1	1.9	1.9	1.9	1.9	1.9	1.9	1.9	
112.5 1.9	2.1	2.3	2.5	3.0	3.6	3.8	3.6	
135.0 3.6	3.8	3.8	3.8	3.8	3.6	4.0	4.0	
157.5 3.8	4.0	4.0	4.2	4.5	4.6	4.8	5.3	
180.0 5.3	5.3	5.3	5.3	5.3	5.5	5.5	5.7	
202.5 5.9	6.3	6.5	6.7	7.2	9.1	13.9	13.5	
225.0 13.1	13.1	12.9	12.4	12.0	11.6	11.4	10.7	
247.5 10.7	11.0	10.5	10.4	10.1	9.9	9.7	9.5	
270.0 9.3	8.9	8.4	8.0	7.8	7.6	7.4	7.4	
292.5 7.4	7.4	7.4	7.2	7.0	6.7	6.7	6.7	
315.0 6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.5	
337.5 6.5	6.5	7.0	7.2	7.0	7.2	7.6	7.2	

DEPTH: 2463	TILT: 0	RANGE: 8.6	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0 5.5	5.7	5.9	5.9	5.7	5.5	4.9	4.4	
22.5 4.0	3.8	3.6	3.2	2.9	2.9	2.9	2.8	
45.0 2.5	2.5	2.3	2.3	2.1	2.1	1.9	1.9	
67.5 1.7	1.5	1.5	1.3	1.3	1.1	0.8	0.8	
90.0 0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
112.5 0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
135.0 0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
157.5 0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
180.0 0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
202.5 0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
225.0 0.8	0.8	0.8	0.8	0.8	1.1	1.3	1.5	
247.5 1.7	1.9	2.1	2.9	9.1	8.8	8.7	8.4	
270.0 8.2	8.2	8.0	8.0	8.0	7.8	7.6	7.2	
292.5 7.0	6.5	6.3	6.1	5.9	5.9	6.1	6.3	
315.0 6.5	6.5	6.3	6.1	5.9	5.9	6.1	6.3	
337.5 6.5	6.5	6.5	6.3	6.1	5.5	5.5	5.5	

DEPTH: 2464	TILT: 0	RANGE: 50.0	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0 0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
22.5 0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
45.0 0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
67.5 0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
90.0 0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
112.5 0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
135.0 0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
157.5 0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
180.0 0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
202.5 0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
225.0 0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
247.5 0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
270.0 0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
292.5 0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
315.0 0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	
337.5 0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	

DEPTH: 2494	TILT: 0	RANGE: 75.0	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0 0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
22.5 0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
45.0 0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
67.5 0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
90.0 0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
112.5 0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
135.0 0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
157.5 0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
180.0 0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
202.5 0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
225.0 0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
247.5 0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
270.0 0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
292.5 0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
315.0 0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
337.5 0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9

DEPTH: 2495	TILT: 0	RANGE: 50.4	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0 19.5	19.5	19.5	18.7	18.7	18.9	19.3	19.3
22.5 19.3	19.3	19.3	18.9	19.3	19.5	20.0	20.2
45.0 20.6	20.8	21.2	21.5	22.1	22.5	22.7	23.4
67.5 23.8	24.4	24.6	25.1	25.3	25.7	25.9	26.3
90.0 26.6	27.2	28.7	29.3	30.0	30.4	31.0	31.7
112.5 32.3	32.9	33.8	35.1	35.7	37.4	38.0	38.7
135.0 39.5	40.2	41.4	42.9	43.3	44.0	44.2	44.6
157.5 46.1	46.7	47.2	47.4	47.8	48.4	48.7	49.7
180.0 49.9	52.3	52.5	52.9	52.9	52.9	52.9	52.9
202.5 52.9	53.1	53.1	52.9	52.9	52.9	52.9	52.3
225.0 51.8	51.0	50.4	49.1	47.2	46.7	46.1	45.3
247.5 44.8	44.2	43.6	42.9	41.6	40.2	38.7	38.0
270.0 37.4	37.0	36.8	36.1	35.7	34.4	33.8	33.1
292.5 32.5	31.9	31.7	31.2	30.0	28.0	27.4	26.6
315.0 25.7	24.6	24.6	24.0	23.8	22.7	21.9	21.2
337.5 20.6	20.6	20.0	19.5	19.5	20.0	20.0	20.0

DEPTH: 2500	TILT: 0	RANGE: 50.4	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0 18.1	18.1	17.6	18.1	18.1	18.1	17.6	17.6
22.5 18.1	17.6	17.6	17.6	18.1	18.7	19.3	19.3
45.0 19.3	19.5	20.2	20.0	20.2	20.2	20.2	20.6
67.5 20.6	20.8	21.2	21.5	22.1	22.7	22.7	23.8
90.0 24.4	25.3	26.3	27.4	28.7	29.3	30.0	30.6
112.5 31.0	31.9	33.1	34.2	35.1	35.7	36.8	38.0
135.0 38.9	40.6	40.6	41.0	41.4	41.6	42.9	44.0
157.5 44.8	46.5	47.2	47.4	47.8	48.7	49.1	49.7
180.0 49.9	50.4	50.6	51.2	51.8	52.3	53.1	53.1
202.5 53.1	53.1	53.1	53.1	52.9	52.5	52.5	51.8
225.0 51.6	51.0	49.7	45.3	44.8	44.6	42.9	42.7
247.5 42.1	41.4	41.0	40.6	39.9	39.5	39.3	38.2
270.0 37.6	36.3	35.1	32.5	32.5	32.3	31.2	31.2
292.5 30.6	30.0	29.3	28.5	28.5	27.4	27.0	26.6
315.0 25.9	24.6	24.4	24.0	23.8	23.2	22.1	21.5
337.5 20.8	20.0	18.9	18.3	18.3	18.3	18.1	17.6

DEPTH: 2504	TILT: 0	RANGE: 51.0	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	16.1	15.9	15.9	15.9	15.9	16.1	16.4	
22.5	16.1	16.1	16.4	16.8	16.8	17.0	16.8	
45.0	16.8	16.8	17.0	17.0	17.0	17.6	18.7	
67.5	18.7	18.7	18.9	18.7	18.9	19.4	20.7	
90.0	21.3	21.7	22.2	23.0	24.7	26.2	31.8	
112.5	32.9	33.6	33.8	34.4	35.1	35.5	36.8	
135.0	37.9	38.5	39.6	41.1	41.5	42.6	43.9	
157.5	45.0	45.8	46.3	46.9	48.0	49.7	51.8	
180.0	52.3	52.5	52.9	52.9	53.1	52.9	52.9	
202.5	53.1	53.4	53.8	53.1	52.9	53.1	51.0	
225.0	49.9	48.6	43.9	43.2	43.0	41.7	40.2	
247.5	38.5	38.3	38.3	38.3	37.9	37.0	32.9	
270.0	32.9	32.3	31.4	30.8	29.5	29.0	29.0	
292.5	29.7	29.0	29.5	29.0	28.2	25.4	24.3	
315.0	23.5	22.2	20.9	20.0	20.0	18.7	17.4	
337.5	16.8	16.4	16.4	16.1	16.4	15.9	15.9	

DEPTH: 2508	TILT: 0	RANGE: 51.0	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	13.6	14.0	13.6	13.3	13.3	14.0	12.9	
22.5	13.3	12.9	12.7	12.3	12.7	12.7	12.3	
45.0	12.3	11.6	12.3	13.6	14.2	14.6	14.6	
67.5	15.3	15.3	15.3	15.5	15.5	16.8	17.6	
90.0	18.7	20.0	20.0	20.7	20.9	21.3	21.3	
112.5	21.5	21.5	22.2	23.0	27.5	33.1	36.4	
135.0	38.5	39.6	42.2	42.6	43.9	44.5	45.6	
157.5	45.8	45.8	45.6	45.2	46.3	46.5	47.5	
180.0	47.8	48.6	50.6	51.2	52.5	52.5	52.5	
202.5	52.5	53.1	53.4	53.8	53.8	53.4	52.9	
225.0	52.5	49.1	48.0	46.5	43.9	43.7	40.9	
247.5	37.9	37.9	37.9	37.9	38.3	38.5	36.8	
270.0	34.9	33.6	30.8	29.5	29.0	28.8	25.4	
292.5	25.0	24.7	24.1	23.7	22.4	21.7	21.3	
315.0	20.2	20.2	20.0	18.9	18.9	18.3	18.1	
337.5	16.8	15.9	15.9	14.0	13.6	14.0	13.3	

DEPTH: 2512	TILT: 0	RANGE: 60.6	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	15.1	15.1	15.1	15.1	15.1	14.8	12.0	
22.5	11.5	11.5	11.8	11.0	10.7	10.2	10.5	
45.0	10.5	9.7	9.5	9.2	8.9	8.9	9.2	
67.5	9.5	9.7	10.2	9.7	10.5	10.5	10.5	
90.0	10.7	11.0	11.5	12.0	13.3	13.3	19.7	
112.5	19.7	19.7	19.4	32.5	31.9	32.5	33.0	
135.0	34.2	35.5	36.0	36.3	54.4	55.4	56.2	
157.5	56.7	57.5	58.0	58.8	59.5	61.3	62.6	
180.0	62.9	63.4	63.6	63.6	63.9	63.9	63.6	
202.5	63.6	63.4	62.9	62.9	61.6	59.5	50.8	
225.0	50.6	49.3	48.8	46.3	45.7	44.0	42.7	
247.5	42.4	40.9	39.9	38.3	38.3	38.8	38.1	
270.0	35.0	33.5	31.9	30.2	27.6	25.0	24.0	
292.5	23.0	21.5	21.0	19.9	18.7	17.1	16.4	
315.0	15.8	15.1	14.8	14.8	15.1	15.6	15.8	
337.5	15.8	15.6	15.6	15.6	15.6	14.6	14.8	

DEPTH: 2516	TILT: 0	RANGE: 58.5	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0 12.6	12.3	11.3	10.9	10.9	10.1	9.4	9.4	
22.5 9.4	9.1	9.1	9.4	9.4	9.9	9.9	9.9	
45.0 9.9	9.9	9.9	10.1	9.4	9.9	9.9	9.9	
67.5 9.9	10.1	10.4	10.9	11.1	11.1	11.1	10.9	
90.0 10.1	9.9	9.9	10.1	10.4	10.9	18.3	19.0	
112.5 19.0	19.0	19.0	19.0	39.0	39.0	39.0	40.7	
135.0 41.4	50.1	50.1	50.1	50.6	52.5	52.8	53.0	
157.5 54.5	55.3	55.3	57.2	58.0	59.2	59.7	60.2	
180.0 60.4	60.9	61.4	61.7	61.7	61.7	61.7	61.4	
202.5 60.9	60.7	60.4	60.4	60.7	60.9	60.9	60.9	
225.0 60.7	60.4	60.4	60.4	59.2	59.0	58.2	57.5	
247.5 57.0	39.2	39.0	37.2	36.0	27.9	26.9	25.9	
270.0 25.4	24.9	24.4	24.4	24.4	23.9	23.7	22.7	
292.5 22.2	21.7	19.0	18.0	17.8	17.0	16.0	15.5	
315.0 15.3	15.3	15.3	15.5	15.5	15.5	15.3	14.6	
337.5 14.6	14.6	14.6	14.3	13.8	13.6	13.3	12.6	

DEPTH: 2520	TILT: 0	RANGE: 64.2	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0 20.3	20.6	20.9	20.3	20.3	20.3	20.0	19.5	
22.5 20.0	20.0	20.3	20.6	20.9	21.1	21.1	21.4	
45.0 21.9	22.5	22.7	22.7	24.1	24.1	24.4	24.1	
67.5 24.6	24.9	25.2	24.9	24.9	25.2	25.2	25.2	
90.0 26.0	26.0	26.8	27.6	27.9	27.9	32.5	32.8	
112.5 34.4	35.5	37.4	37.4	37.4	37.6	37.4	38.2	
135.0 39.3	40.1	41.4	41.7	56.9	58.5	58.5	58.8	
157.5 60.1	61.5	62.8	64.5	65.5	67.2	67.4	67.7	
180.0 67.4	67.4	67.4	67.4	67.4	67.4	67.2	66.6	
202.5 66.6	66.3	66.1	65.8	65.5	62.6	58.5	58.0	
225.0 57.1	56.9	58.2	58.0	58.0	57.7	56.9	55.2	
247.5 50.6	50.9	50.9	50.9	50.4	49.6	48.5	46.3	
270.0 44.4	39.8	39.3	39.0	37.6	36.3	34.7	33.9	
292.5 33.3	32.8	32.0	30.9	30.1	27.1	26.8	26.8	
315.0 26.5	26.3	25.7	25.2	24.6	24.6	24.1	22.7	
337.5 21.9	21.9	22.5	21.4	21.1	20.9	20.9	20.6	

DEPTH: 2524	TILT: 0	RANGE: 64.8	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0 19.9	19.7	19.7	19.4	19.7	19.9	19.9	19.9	
22.5 19.9	19.9	20.2	21.3	21.6	21.6	21.6	22.1	
45.0 22.1	22.4	23.0	23.0	23.5	24.6	24.6	25.4	
67.5 25.4	26.0	26.5	27.6	27.9	28.1	29.0	30.3	
90.0 30.6	31.4	33.9	34.7	36.1	36.9	38.0	38.5	
112.5 39.4	41.8	43.4	44.5	46.7	47.5	50.0	50.8	
135.0 51.9	53.6	53.8	54.9	57.7	58.8	59.6	60.9	
157.5 62.3	63.9	64.8	65.6	66.7	67.8	67.8	68.0	
180.0 68.0	68.3	68.0	68.0	68.0	68.0	68.0	68.0	
202.5 67.5	67.5	66.1	66.4	64.8	63.9	63.9	63.1	
225.0 62.3	61.5	60.7	58.8	58.5	58.2	57.9	57.7	
247.5 56.3	54.9	53.8	51.9	50.3	46.7	45.6	45.6	
270.0 44.5	44.0	39.9	38.3	36.3	34.2	34.2	33.9	
292.5 33.3	32.8	32.8	32.0	31.4	30.6	29.8	28.7	
315.0 26.8	26.0	25.7	25.7	24.9	24.0	23.0	22.4	
337.5 21.9	21.9	21.3	20.5	20.2	20.2	20.2	20.2	

DEPTH:	2528	TILT:	0	RANGE:	65.1	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	20.6	20.6	20.6	20.3	20.6	20.3	20.3	20.3	
22.5	20.3	20.0	20.3	20.0	20.3	20.3	20.6	21.1	
45.0	21.7	21.7	22.2	22.5	23.1	23.3	23.6	24.7	
67.5	25.3	25.3	25.8	26.9	27.2	29.4	29.7	29.9	
90.0	31.3	31.6	33.2	34.9	36.0	37.1	37.9	39.3	
112.5	40.4	42.0	43.7	45.6	47.2	48.6	49.4	50.8	
135.0	52.4	53.8	54.6	56.6	57.7	58.5	59.0	61.2	
157.5	62.9	64.0	64.8	66.4	66.4	67.0	67.3	67.8	
180.0	67.8	68.4	68.4	68.4	68.6	68.6	68.6	68.4	
202.5	68.4	67.3	66.4	66.2	65.4	64.5	63.2	61.0	
225.0	60.7	58.8	58.5	58.2	57.7	56.6	54.1	53.5	
247.5	53.5	52.4	51.3	49.2	48.3	47.8	45.3	44.2	
270.0	42.8	41.7	41.2	39.0	37.9	37.1	36.0	35.4	
292.5	35.4	33.5	33.0	31.9	31.3	29.9	28.6	26.4	
315.0	25.5	25.5	25.3	25.0	23.6	23.3	23.3	22.5	
337.5	22.5	21.4	21.4	21.1	21.4	20.9	20.6	20.6	

DEPTH:	2532	TILT:	0	RANGE:	65.7	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	20.8	19.9	20.2	19.9	20.2	20.2	20.5	20.5	
22.5	20.2	20.2	20.5	20.5	21.1	21.6	22.4	22.7	
45.0	23.0	23.8	24.1	24.9	26.3	26.3	26.3	27.4	
67.5	29.1	29.1	29.4	30.5	31.3	32.7	33.0	34.9	
90.0	34.9	34.9	35.5	35.5	35.2	35.7	36.6	36.6	
112.5	39.3	40.4	45.4	46.3	47.1	48.2	49.0	50.4	
135.0	53.2	54.0	55.7	57.3	58.5	59.6	60.1	61.8	
157.5	64.3	65.1	67.0	67.3	67.3	67.9	67.9	68.7	
180.0	69.0	69.0	69.0	69.0	68.7	68.7	69.0	69.3	
202.5	67.0	66.2	66.2	66.2	65.7	65.7	64.6	63.4	
225.0	61.8	61.2	60.1	59.6	58.7	57.3	56.2	55.7	
247.5	53.7	52.9	52.6	51.0	49.0	47.4	46.3	43.8	
270.0	43.2	42.7	40.4	38.2	37.4	35.7	35.2	33.5	
292.5	32.1	30.8	29.9	29.6	29.1	27.1	26.3	26.0	
315.0	25.5	24.9	24.7	24.4	24.4	23.0	22.7	22.4	
337.5	21.9	21.1	20.8	20.8	20.5	20.8	20.2	20.2	

DEPTH:	2536	TILT:	0	RANGE:	65.1	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	20.3	20.6	20.3	20.3	20.0	20.0	20.0	20.0	
22.5	20.0	20.0	20.3	20.0	20.6	20.6	20.9	21.4	
45.0	22.2	23.1	23.6	24.4	24.7	25.5	25.8	27.2	
67.5	27.7	28.6	29.1	29.7	31.0	31.9	33.2	33.8	
90.0	34.6	34.6	35.7	36.8	37.9	39.3	40.1	41.7	
112.5	42.8	43.9	44.2	45.9	47.2	48.3	49.4	50.2	
135.0	52.2	52.4	54.1	54.9	56.6	57.7	58.8	59.9	
157.5	62.1	62.3	63.7	64.3	65.4	66.2	67.3	67.3	
180.0	67.8	68.4	68.6	68.6	68.6	68.6	68.6	68.6	
202.5	68.6	68.4	68.1	67.8	67.3	67.3	67.0	66.4	
225.0	65.1	64.5	64.0	63.2	62.3	61.0	60.1	58.8	
247.5	56.8	55.5	54.1	52.7	50.8	48.3	48.1	47.5	
270.0	43.4	41.5	38.7	38.7	37.9	37.1	36.0	35.1	
292.5	34.0	32.7	31.3	29.7	28.8	28.6	27.7	26.9	
315.0	26.6	26.4	25.5	25.0	24.7	24.2	23.1	23.1	
337.5	22.2	21.4	21.1	20.9	20.9	20.9	20.6	20.6	

DEPTH: 2540	TILT: 0	RANGE: 65.1	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	20.6	20.9	20.9	20.6	20.9	21.1	21.1	
22.5	20.9	20.6	20.6	20.9	21.4	21.4	21.7	22.5
45.0	22.8	23.1	23.6	24.4	24.7	24.7	25.3	25.5
67.5	26.4	27.2	28.6	29.1	30.5	31.0	31.9	33.0
90.0	33.5	34.6	35.4	36.8	37.1	37.9	39.0	40.1
112.5	41.5	42.3	43.7	45.9	45.9	47.2	47.8	49.4
135.0	50.5	52.2	53.8	54.9	56.6	57.9	59.6	60.7
157.5	61.2	63.2	64.3	65.1	65.9	66.7	67.0	67.8
180.0	68.1	68.4	68.4	68.4	68.4	68.4	68.6	68.6
202.5	68.1	68.1	67.8	67.8	67.0	67.0	65.4	64.8
225.0	63.7	62.6	61.2	60.1	58.8	57.7	56.8	55.5
247.5	54.1	53.3	52.2	50.5	47.2	47.5	46.4	45.0
270.0	42.8	41.2	40.1	39.3	38.2	36.8	35.4	35.1
292.5	34.0	34.0	33.0	31.0	29.9	28.6	27.2	25.8
315.0	25.3	25.0	24.7	24.2	23.3	22.8	22.8	22.2
337.5	22.2	21.7	21.4	21.4	21.4	21.4	21.1	20.9

DEPTH: 2544	TILT: 0	RANGE: 65.3	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	21.2	20.7	20.1	19.9	19.9	20.1	19.9	20.1
22.5	20.1	20.1	20.1	20.1	20.7	21.5	21.8	21.8
45.0	21.8	22.9	23.7	23.4	23.4	24.3	24.3	25.1
67.5	25.6	26.2	26.2	26.5	27.0	27.3	28.1	29.5
90.0	31.7	32.5	33.9	34.7	36.7	38.9	39.2	40.5
112.5	41.6	42.7	44.4	45.2	46.0	47.1	48.5	49.6
135.0	51.0	52.9	55.1	56.0	57.9	58.5	61.5	62.0
157.5	62.6	63.7	65.1	65.9	65.3	66.2	66.7	67.3
180.0	68.4	68.9	68.9	68.7	68.9	68.9	68.4	68.4
202.5	67.6	67.3	67.3	66.4	65.9	64.8	63.1	62.6
225.0	61.5	60.4	59.6	59.3	58.5	57.9	56.8	56.0
247.5	53.8	53.2	51.6	49.9	48.8	47.4	45.5	44.7
270.0	43.6	42.5	40.5	39.2	36.9	36.1	35.0	34.5
292.5	33.1	32.3	31.4	30.3	29.2	28.1	26.2	26.2
315.0	25.6	25.1	25.1	24.5	23.2	22.3	22.1	21.8
337.5	21.8	21.5	21.5	21.5	21.2	20.7	21.2	21.2

DEPTH: 2548	TILT: 0	RANGE: 65.3	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	19.0	19.0	19.0	19.6	19.3	19.0	19.6	19.0
22.5	19.0	19.0	19.6	19.6	19.6	19.9	20.1	20.7
45.0	21.2	21.5	21.8	21.8	22.1	22.3	23.4	24.0
67.5	24.5	25.1	25.4	25.4	26.5	28.1	28.7	29.8
90.0	30.3	32.5	32.8	33.9	35.8	36.1	36.9	38.3
112.5	39.2	40.8	42.7	44.7	45.8	47.1	50.7	51.3
135.0	52.1	54.6	54.6	55.4	56.5	57.9	59.6	60.1
157.5	62.3	63.1	64.0	64.5	65.1	65.1	65.3	66.4
180.0	67.3	68.4	68.4	68.7	68.9	68.9	68.9	68.7
202.5	68.1	68.1	67.3	66.4	65.3	65.9	64.8	64.0
225.0	61.8	61.5	60.9	59.8	58.7	58.2	57.3	56.2
247.5	55.4	53.2	51.6	50.7	48.8	47.1	46.6	44.7
270.0	43.8	42.2	40.8	40.0	38.6	36.9	35.0	33.9
292.5	32.5	31.7	29.5	28.7	28.4	27.8	27.3	25.9
315.0	25.1	24.3	24.0	24.0	23.7	23.2	22.3	21.8
337.5	21.2	21.2	20.7	20.7	20.1	19.9	19.6	19.3

DEPTH:	Bearing	2552	TILT:	0	RANGE:	65.7	VOS:	6039
0.0	0.0	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9
22.5	19.7	19.7	19.7	19.7	19.7	19.9	19.7	19.7
45.0	19.9	19.9	19.9	19.9	20.5	20.5	21.6	21.6
67.5	21.9	21.9	21.9	22.4	23.0	24.1	24.1	24.7
90.0	26.3	26.3	26.3	26.9	26.9	27.4	28.8	29.4
112.5	31.6	31.6	33.8	34.1	36.3	36.6	38.0	40.4
135.0	42.4	42.4	43.2	43.8	44.0	46.8	49.0	49.6
157.5	53.2	53.2	55.4	56.0	57.6	58.5	60.7	60.7
180.0	61.2	61.2	63.2	63.4	65.1	65.7	67.3	68.4
202.5	69.0	69.0	69.0	69.0	69.0	69.3	69.3	68.7
225.0	67.6	67.6	67.6	67.6	67.3	67.0	66.5	65.7
247.5	62.9	62.9	62.1	59.8	58.5	57.6	56.2	55.1
270.0	53.7	53.7	52.6	51.0	50.4	47.7	46.8	44.6
292.5	41.6	41.6	39.9	38.2	37.7	36.3	36.0	35.2
315.0	33.2	33.2	32.7	31.0	29.4	28.5	28.3	27.4
337.5	25.5	25.5	24.7	24.1	23.8	23.8	23.0	21.9
	21.1	21.1	20.8	21.1	21.1	20.5	19.9	19.9

DEPTH:	Bearing	2556	TILT:	0	RANGE:	65.1	VOS:	6039
0.0	0.0	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9
22.5	20.3	20.3	19.5	19.5	20.0	20.0	20.0	20.0
45.0	20.0	20.0	20.3	20.3	20.3	21.1	20.9	20.9
67.5	22.2	22.2	22.2	22.2	22.5	22.5	23.1	23.1
90.0	24.2	24.2	24.4	24.7	26.6	27.5	27.7	27.7
112.5	31.0	31.0	31.3	31.9	32.1	33.8	35.1	35.1
135.0	38.7	38.7	40.1	41.5	43.1	45.6	47.2	47.2
157.5	51.6	51.6	52.7	54.9	55.5	56.0	56.3	56.3
180.0	59.0	59.0	59.9	61.2	61.8	64.0	65.1	65.1
202.5	67.8	67.8	67.8	68.1	68.4	68.4	68.1	68.1
225.0	68.4	68.4	68.1	68.1	67.8	67.0	66.2	66.2
247.5	64.5	64.5	62.9	62.6	60.1	57.9	56.6	55.5
270.0	51.6	51.6	50.5	49.4	47.5	47.2	45.9	43.9
292.5	42.0	42.0	41.2	40.1	39.0	37.6	37.3	36.2
315.0	33.2	33.2	32.1	31.0	29.7	28.8	28.3	27.5
337.5	26.4	26.4	25.3	25.3	24.7	24.4	23.6	22.8
	21.1	21.1	21.4	21.1	21.1	20.9	20.9	20.3

DEPTH:	Bearing	2560	TILT:	0	RANGE:	61.8	VOS:	6039
0.0	0.0	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9
22.5	19.5	19.5	19.3	19.3	19.3	19.3	19.3	19.3
45.0	19.0	19.0	19.3	19.5	19.3	19.8	19.5	19.5
67.5	20.3	20.3	20.6	20.6	21.6	22.2	22.7	23.2
90.0	23.5	23.5	24.0	25.5	26.3	26.8	27.1	28.1
112.5	30.0	30.0	31.3	32.8	33.6	34.4	35.2	35.4
135.0	37.5	37.5	40.1	42.0	44.3	44.6	46.9	47.7
157.5	49.8	49.8	52.4	53.7	55.0	56.0	56.8	58.6
180.0	60.5	60.5	60.7	61.8	63.1	63.6	63.9	64.1
202.5	64.9	64.9	64.9	64.9	64.9	64.6	63.6	62.5
225.0	65.2	65.2	65.2	65.2	64.9	64.6	63.6	62.5
247.5	60.7	60.7	59.7	59.4	58.1	56.8	56.0	54.7
270.0	52.4	52.4	51.9	50.8	50.0	47.7	46.4	44.8
292.5	42.0	42.0	41.4	40.4	38.6	36.0	35.2	34.7
315.0	32.6	32.6	31.0	29.2	27.9	27.9	27.1	26.6
337.5	25.3	25.3	24.8	24.8	23.7	23.2	21.9	21.9
	21.6	21.6	21.6	21.6	21.1	20.6	19.8	19.8

DEPTH: 2564	TILT: 0	RANGE: 58.8	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	17.6	17.6	17.6	17.4	17.4	17.1	17.1	
22.5	17.1	17.1	17.1	17.4	17.6	17.6	18.1	17.6
45.0	18.4	19.1	19.1	19.1	19.6	19.8	20.6	21.6
67.5	22.6	23.1	24.1	24.1	25.0	26.0	26.5	27.8
90.0	28.5	29.5	30.0	31.0	32.0	33.2	33.0	33.5
112.5	34.7	36.5	37.7	38.2	40.2	40.9	42.4	42.9
135.0	45.1	46.4	47.4	49.1	50.1	50.6	51.8	53.8
157.5	54.8	55.3	56.3	56.5	57.8	58.8	59.3	60.5
180.0	61.0	62.0	62.0	62.0	61.7	62.0	61.7	62.0
202.5	61.7	61.7	61.0	60.0	58.8	58.3	56.5	56.3
225.0	55.5	54.3	53.8	53.6	53.6	52.6	51.8	50.1
247.5	48.6	49.1	47.1	46.1	44.9	44.4	42.7	41.2
270.0	39.4	38.2	36.9	35.5	34.7	33.5	32.5	31.0
292.5	29.8	29.5	28.3	27.5	26.8	26.5	26.0	25.0
315.0	23.8	23.1	22.1	21.1	20.8	20.6	20.3	20.3
337.5	19.8	19.3	19.1	18.4	18.1	18.1	18.1	18.1

DEPTH: 2568	TILT: 0	RANGE: 58.2	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	13.0	13.3	13.3	13.0	13.0	12.8	13.0	13.0
22.5	12.8	12.8	13.0	13.3	13.3	13.3	13.5	13.5
45.0	13.5	14.0	14.0	14.5	15.2	15.5	15.7	15.7
67.5	16.5	17.2	17.9	18.7	19.4	20.1	21.1	21.6
90.0	23.8	24.3	25.3	25.5	26.3	27.0	27.5	29.7
112.5	31.4	31.9	34.1	35.1	35.8	37.1	38.8	40.3
135.0	42.5	43.9	45.7	47.9	48.6	50.6	51.3	52.5
157.5	53.0	54.0	56.0	56.2	56.7	56.7	57.2	58.4
180.0	60.4	60.6	61.4	60.6	60.6	60.4	60.2	59.7
202.5	59.7	59.7	59.7	59.7	59.4	59.2	58.9	59.2
225.0	58.4	57.5	56.2	55.0	52.3	50.1	48.4	46.9
247.5	45.7	44.2	42.5	40.8	39.8	36.6	35.8	34.1
270.0	33.6	32.9	30.9	29.7	28.5	27.0	25.5	25.0
292.5	24.3	24.1	21.9	20.9	20.1	18.9	18.7	17.9
315.0	17.4	17.2	16.5	15.5	15.2	14.5	15.0	14.2
337.5	14.0	14.0	13.5	13.5	13.5	13.0	13.3	13.0

DEPTH: 2572	TILT: 0	RANGE: 57.0	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	10.3	9.9	9.4	9.4	9.4	9.1	8.9	9.1
22.5	9.1	9.1	9.1	9.1	9.9	9.9	9.4	9.9
45.0	9.4	9.4	10.1	10.1	10.8	10.8	11.1	11.3
67.5	11.8	12.3	13.2	14.2	14.7	15.4	16.1	17.3
90.0	19.0	20.2	21.2	21.9	23.1	23.8	25.0	26.2
112.5	28.1	29.3	31.0	32.9	33.9	35.1	36.1	37.3
135.0	38.2	39.9	42.1	44.0	46.4	47.4	48.8	51.2
157.5	52.2	53.4	55.1	55.8	56.3	56.5	57.9	58.4
180.0	58.4	59.4	59.9	60.1	60.1	59.9	59.4	59.9
202.5	59.9	59.4	59.1	58.9	59.4	58.9	56.3	54.8
225.0	54.3	52.9	51.9	50.2	49.3	48.1	46.4	46.4
247.5	44.2	42.3	41.1	39.4	38.2	36.3	35.1	33.9
270.0	32.7	31.3	30.3	28.9	26.9	25.7	24.0	20.9
292.5	20.7	18.8	16.1	16.3	15.1	14.7	14.7	13.7
315.0	13.0	13.7	13.2	12.7	12.7	12.3	12.3	12.0
337.5	12.0	12.0	12.0	11.8	11.3	10.8	10.1	10.1

DEPTH: 2575	TILT: 0	RANGE: 56.1	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0 9.5	9.5	9.5	8.8	8.8	9.5	8.5	8.5
22.5 8.8	9.2	8.8	8.8	8.8	8.5	9.5	8.8
45.0 8.8	8.8	9.2	9.5	9.7	10.6	11.1	11.1
67.5 11.6	12.5	12.5	13.5	14.9	15.9	16.3	17.0
90.0 17.7	18.5	18.9	20.4	20.8	22.2	24.1	25.6
112.5 26.3	26.5	28.4	30.1	31.2	31.9	34.6	36.0
135.0 37.9	39.8	44.3	45.4	47.1	48.8	50.4	52.3
157.5 53.7	53.7	54.4	55.4	56.1	56.3	56.6	57.3
180.0 58.9	59.2	59.2	59.2	59.2	59.2	58.9	59.2
202.5 59.2	58.9	58.5	58.2	56.3	55.1	54.7	54.4
225.0 53.7	52.3	50.4	49.2	48.0	46.4	44.0	43.3
247.5 40.5	39.8	37.6	36.4	35.0	33.1	31.9	30.8
270.0 29.3	27.0	25.3	23.7	22.5	21.8	19.9	18.9
292.5 17.5	17.5	16.8	15.9	15.4	14.2	14.0	12.3
315.0 12.1	11.4	11.6	11.6	11.4	11.1	11.1	10.4
337.5 10.6	10.2	10.4	10.4	10.4	10.4	10.2	9.7

DEPTH: 2578	TILT: 0	RANGE: 55.6	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0 8.4	8.0	8.0	8.0	8.0	8.0	8.0	7.5
22.5 7.5	8.0	8.0	8.4	8.4	8.4	8.0	8.0
45.0 8.4	8.4	8.4	8.4	8.9	8.9	9.4	9.6
67.5 9.6	10.6	10.6	11.0	11.0	11.5	12.7	13.8
90.0 14.8	15.2	16.0	16.9	18.5	19.9	20.6	21.6
112.5 22.3	23.7	26.5	30.3	32.1	32.8	33.8	34.5
135.0 37.1	38.7	39.6	41.3	41.8	42.2	44.3	46.0
157.5 47.6	51.1	51.4	51.8	52.3	54.0	55.4	56.1
180.0 57.5	57.7	58.2	58.6	58.6	58.2	58.6	58.6
202.5 58.2	57.7	56.5	55.6	55.4	54.4	54.0	54.0
225.0 54.4	54.0	52.3	51.4	49.3	46.9	44.8	43.4
247.5 42.7	40.8	39.2	37.5	35.0	33.3	31.7	29.6
270.0 27.9	26.0	25.3	24.4	23.2	21.6	20.6	19.5
292.5 17.8	16.0	15.2	14.8	13.8	13.6	13.1	12.2
315.0 11.5	10.6	10.1	9.6	9.4	8.9	8.9	8.9
337.5 8.9	8.9	8.9	8.4	8.4	8.4	8.4	8.4

DEPTH: 2580	TILT: 0	RANGE: 56.0	VOS: 6039				
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7
0.0 8.5	8.5	8.0	8.0	8.0	8.0	8.0	8.0
22.5 7.6	7.6	7.6	7.6	7.6	7.6	8.0	8.0
45.0 8.5	8.5	8.5	8.5	8.7	8.7	8.7	8.7
67.5 9.7	10.2	10.6	10.6	11.3	11.8	12.3	12.3
90.0 12.8	13.0	13.9	14.6	16.1	16.8	18.9	19.8
112.5 22.0	24.1	26.2	28.6	30.7	32.1	33.8	35.0
135.0 36.6	37.6	39.7	40.4	41.8	43.0	46.1	47.3
157.5 48.4	51.0	52.2	54.8	55.3	56.5	56.9	57.4
180.0 57.9	58.1	58.6	59.1	58.6	58.6	58.1	58.1
202.5 57.9	56.9	56.0	55.8	55.3	53.9	53.2	52.7
225.0 53.2	52.2	51.0	48.4	46.8	46.1	43.9	42.5
247.5 41.8	39.2	37.1	36.4	35.9	33.8	32.1	30.0
270.0 26.9	25.3	24.6	24.1	22.4	18.9	18.2	16.8
292.5 16.5	14.6	13.9	13.0	12.8	12.3	10.6	10.2
315.0 10.2	9.7	9.2	8.7	8.7	8.7	8.5	8.5
337.5 8.7	8.5	8.5	8.5	8.5	8.5	8.5	8.7

DEPTH: 2584	TILT: 0	RANGE: 56.0	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0 5.9	5.4	5.0	5.0	5.0	6.4	5.4	5.4	
22.5 6.4	5.9	5.9	5.9	5.9	5.9	5.9	5.9	
45.0 5.9	6.4	6.4	6.9	7.1	7.6	8.5	8.7	
67.5 9.2	9.7	9.7	9.7	9.7	10.2	10.6	10.9	
90.0 11.3	12.3	12.8	13.0	13.5	13.5	13.9	16.5	
112.5 18.7	21.0	22.7	26.2	29.1	30.7	32.8	35.0	
135.0 35.4	40.2	44.2	48.9	49.9	49.9	49.9	51.0	
157.5 52.0	52.0	52.0	51.5	52.0	53.2	55.8	56.5	
180.0 58.1	58.6	59.1	59.1	58.1	58.6	58.6	57.4	
202.5 56.9	56.0	55.8	55.8	54.8	52.7	51.0	49.9	
225.0 48.4	46.8	45.1	45.1	44.7	44.2	43.9	43.0	
247.5 42.5	42.3	40.2	38.0	35.9	33.3	31.7	28.4	
270.0 26.2	24.1	20.3	20.3	18.9	16.8	13.0	12.3	
292.5 9.7	9.2	8.7	8.0	8.0	8.5	7.6	7.6	
315.0 7.1	6.9	6.4	5.9	5.9	5.9	5.4	5.4	
337.5 5.9	5.9	5.9	5.9	6.4	6.4	6.4	6.4	

DEPTH: 2588	TILT: 0	RANGE: 64.0	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0 12.7	12.7	12.7	12.7	11.9	12.1	12.7	12.1	
22.5 12.1	12.7	12.7	13.0	13.5	14.0	14.3	14.8	
45.0 15.1	15.1	15.9	17.0	17.0	17.0	17.8	18.1	
67.5 18.9	19.7	20.2	21.0	22.4	24.0	24.6	25.4	
90.0 26.4	27.0	28.3	29.1	30.0	31.3	32.4	33.2	
112.5 35.1	35.4	36.7	39.1	41.8	44.3	45.1	45.9	
135.0 47.2	48.0	50.2	49.4	51.0	51.8	51.0	51.8	
157.5 59.4	60.5	60.7	61.5	62.3	63.1	63.1	63.7	
180.0 64.5	65.8	66.1	66.7	66.7	66.7	67.2	66.7	
202.5 66.1	66.1	66.7	67.5	66.7	64.5	62.1	57.8	
225.0 56.9	54.8	53.4	52.6	51.8	49.4	45.6	44.0	
247.5 42.6	41.8	41.0	40.5	39.9	39.1	39.1	37.5	
270.0 35.9	33.2	30.5	29.1	27.5	26.4	22.7	21.9	
292.5 21.9	18.1	17.8	17.8	16.5	15.9	14.0	12.7	
315.0 12.7	12.7	12.7	12.7	12.7	13.0	13.0	12.7	
337.5 12.7	12.7	12.7	12.7	13.0	13.0	12.7	12.7	

DEPTH: 2592	TILT: 0	RANGE: 65.6	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0 14.4	14.7	14.7	15.2	15.2	15.2	15.2	15.2	
22.5 14.7	14.7	15.2	16.0	15.5	16.0	16.3	17.4	
45.0 17.7	18.3	19.1	18.3	18.3	19.4	20.7	20.7	
67.5 21.9	22.4	22.7	22.7	23.5	25.2	25.2	26.6	
90.0 27.4	27.9	29.0	30.4	30.7	32.4	34.6	36.2	
112.5 38.5	39.3	41.2	43.4	45.9	46.8	45.6	46.5	
135.0 47.6	49.8	50.6	53.7	57.8	58.9	60.9	62.0	
157.5 62.0	62.5	62.8	63.4	62.8	63.6	63.6	65.3	
180.0 66.7	67.0	67.5	67.0	67.0	68.3	69.2	69.2	
202.5 68.3	67.8	67.0	67.0	65.8	64.2	62.5	60.3	
225.0 58.9	56.2	56.4	55.6	53.1	50.9	46.8	46.5	
247.5 45.6	44.8	43.2	43.2	41.8	42.6	40.9	40.9	
270.0 41.2	39.3	37.6	36.8	36.0	35.1	32.9	31.3	
292.5 29.6	27.4	25.2	23.5	22.4	21.6	19.4	19.1	
315.0 17.7	17.4	16.3	16.3	15.5	15.2	14.7	15.5	
337.5 15.2	15.2	14.4	14.4	14.4	14.4	14.4	14.4	

DEPTH:	2596	TILT:	0	RANGE:	66.8	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	13.8	14.7	14.7	14.7	14.7	14.7	14.7	15.2	
22.5	15.5	16.9	16.9	16.9	16.9	17.8	18.6	18.0	
45.0	18.0	18.0	18.9	19.7	20.6	21.1	21.4	22.3	
67.5	23.1	23.7	23.9	24.5	24.5	25.4	26.2	26.5	
90.0	27.9	29.6	30.4	30.7	31.3	32.1	35.5	38.9	
112.5	40.0	41.4	42.5	44.8	46.8	48.5	50.2	53.5	
135.0	56.9	58.3	60.3	60.9	61.7	62.0	62.0	61.7	
157.5	61.1	61.7	61.7	62.6	63.7	64.5	65.1	65.4	
180.0	67.6	67.6	67.9	68.5	69.3	69.6	69.6	69.9	
202.5	70.4	69.9	68.7	67.1	63.7	60.9	59.5	58.3	
225.0	57.5	56.6	56.6	54.1	52.4	51.8	47.6	46.8	
247.5	46.8	45.1	44.2	43.1	42.5	42.5	42.5	41.7	
270.0	40.6	38.0	35.8	34.1	33.2	32.4	30.7	29.9	
292.5	27.3	26.2	24.5	23.7	21.4	20.6	19.4	18.9	
315.0	18.9	18.6	18.0	17.2	16.3	15.5	15.2	14.7	
337.5	14.7	14.4	14.4	14.7	14.4	14.4	14.4	13.8	

DEPTH:	2600	TILT:	0	RANGE:	66.4	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	14.8	15.1	14.8	15.7	15.1	14.8	14.8	15.1	
22.5	15.1	14.8	16.0	15.7	16.0	16.0	16.0	16.0	
45.0	17.4	18.2	18.5	18.5	19.3	19.9	20.7	22.4	
67.5	23.5	24.4	25.8	26.6	28.3	28.6	28.6	29.1	
90.0	29.4	29.1	30.2	31.6	31.9	31.9	31.9	31.9	
112.5	32.5	32.8	33.3	33.6	35.6	38.4	42.3	44.8	
135.0	46.8	51.0	52.7	53.2	54.1	54.9	55.7	56.0	
157.5	57.4	58.3	58.5	60.8	61.6	61.9	62.5	63.3	
180.0	64.1	65.8	66.9	67.8	68.6	69.2	69.7	70.0	
202.5	69.2	68.3	64.4	63.3	63.6	62.7	62.5	63.6	
225.0	63.6	61.6	59.9	57.4	55.7	54.9	52.7	51.8	
247.5	50.1	48.5	45.9	45.1	44.8	44.8	44.0	44.0	
270.0	42.6	40.6	38.9	37.5	35.0	33.3	31.6	30.8	
292.5	29.1	27.4	26.0	24.9	24.4	24.1	23.2	21.6	
315.0	21.6	21.0	20.7	19.9	19.0	17.4	16.8	16.5	
337.5	15.7	15.7	15.7	15.7	15.7	15.1	14.8	14.3	

DEPTH:	2604	TILT:	0	RANGE:	54.4	VOS:	6039		
Bearing	+ 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	9.2	9.2	8.9	8.9	9.2	9.2	9.2	9.2	
22.5	9.6	9.6	9.6	9.6	9.6	10.1	10.6	11.0	
45.0	11.5	11.7	11.7	12.6	13.5	14.0	14.7	15.6	
67.5	16.1	17.0	17.2	18.1	18.6	19.0	20.7	23.6	
90.0	24.6	24.8	25.2	25.7	25.7	25.2	25.2	25.7	
112.5	26.2	26.6	27.1	27.3	27.8	28.2	28.7	29.8	
135.0	30.3	33.3	36.7	40.2	43.8	45.7	48.4	51.4	
157.5	51.9	52.8	53.5	53.9	54.4	55.3	55.3	55.8	
180.0	56.0	56.5	56.9	57.4	57.4	56.5	56.0	55.8	
202.5	55.8	56.0	56.9	57.4	56.0	55.3	54.8	54.4	
225.0	53.5	53.2	52.8	52.3	49.8	49.3	48.4	45.7	
247.5	45.2	44.3	43.8	43.4	40.2	38.3	36.3	35.3	
270.0	34.7	31.7	30.8	27.8	21.6	21.1	19.7	19.0	
292.5	18.6	17.0	16.1	15.6	14.7	14.0	13.5	13.1	
315.0	12.6	12.2	12.2	11.0	11.5	11.0	10.6	10.6	
337.5	10.6	10.1	10.1	10.1	9.6	9.6	9.6	9.2	

DEPTH: 2608	TILT: 0	RANGE: 54.4	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0 8.0	8.0	8.0	8.0	8.0	8.0	8.5	7.6	
22.5 7.1	7.1	7.1	6.7	7.1	7.1	7.1	7.6	
45.0 7.6	8.5	8.5	9.2	9.2	9.6	9.6	9.6	
67.5 9.6	9.6	9.6	11.0	11.5	11.7	12.2	13.1	
90.0 14.0	14.2	14.7	15.6	16.1	16.1	16.5	16.5	
112.5 17.2	19.0	20.7	22.0	27.3	28.7	29.6	30.8	
135.0 32.6	34.2	37.9	39.7	40.4	43.4	44.7	45.7	
157.5 47.7	49.3	50.9	51.9	53.5	54.4	56.5	57.4	
180.0 57.4	57.4	57.4	56.9	56.5	55.8	54.8	54.4	
202.5 53.9	54.4	54.8	54.8	54.8	53.9	53.2	52.3	
225.0 50.9	50.3	48.9	48.4	47.7	47.3	46.8	47.3	
247.5 47.7	47.3	45.7	44.7	41.8	32.6	32.1	31.2	
270.0 30.3	23.6	22.0	21.1	20.7	19.5	18.6	18.1	
292.5 17.7	17.2	17.0	16.5	15.6	15.1	14.7	14.2	
315.0 14.0	13.5	13.1	12.6	11.7	11.5	11.5	10.1	
337.5 9.6	9.2	8.5	8.0	7.6	7.6	7.6	8.0	

DEPTH: 2610	TILT: 0	RANGE: 10.0	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0 4.7	5.1	5.1	5.1	5.5	5.5	5.5	5.1	
22.5 5.1	5.1	5.5	5.5	5.1	5.1	4.7	4.7	
45.0 4.7	4.7	5.1	4.7	4.7	4.2	4.2	4.7	
67.5 4.7	4.7	4.7	4.7	4.7	4.7	4.7	4.7	
90.0 4.2	4.2	4.7	4.7	4.7	4.7	4.7	4.7	
112.5 4.7	4.7	4.7	5.1	5.1	5.5	5.5	5.9	
135.0 6.3	6.8	6.8	7.2	7.2	8.0	7.6	8.0	
157.5 8.0	8.0	8.5	8.9	9.7	10.5	10.5	9.7	
180.0 9.3	8.5	7.6	6.3	4.2	5.1	4.7	4.7	
202.5 4.7	4.7	4.7	4.7	4.7	4.7	4.7	4.7	
225.0 5.1	5.1	4.7	4.7	4.7	4.7	4.7	4.7	
247.5 4.7	5.1	5.1	5.1	5.1	5.1	5.1	4.7	
270.0 4.7	4.7	5.1	5.1	5.1	4.7	4.2	4.2	
292.5 4.2	4.2	4.2	4.2	4.2	4.2	4.7	4.7	
315.0 4.7	5.1	5.1	5.1	5.1	5.1	4.7	4.7	
337.5 5.1	5.1	5.1	5.1	5.1	5.1	5.1	4.7	

DEPTH: 2612	TILT: 0	RANGE: 7.6	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0 4.7	4.7	4.7	4.7	4.7	4.2	4.2	4.2	
22.5 4.2	4.7	4.7	5.1	5.1	5.1	4.7	4.7	
45.0 4.7	4.2	4.2	4.2	4.2	4.2	4.2	4.2	
67.5 4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	
90.0 4.2	4.2	4.2	4.2	4.2	4.2	4.7	4.7	
112.5 5.1	5.1	5.1	5.1	5.5	5.5	5.9	5.9	
135.0 5.9	6.3	6.7	6.7	7.6	7.6	7.6	7.6	
157.5 7.6	7.6	8.0	8.0	8.0	8.0	8.0	7.6	
180.0 7.6	7.2	6.3	5.9	5.5	5.5	5.5	5.5	
202.5 5.5	5.5	5.5	5.1	5.1	5.1	4.7	4.7	
225.0 4.7	4.7	4.2	4.2	4.2	3.8	3.8	3.8	
247.5 3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	
270.0 3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	
292.5 3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	
315.0 3.8	3.8	3.8	3.8	3.8	3.8	3.8	4.2	
337.5 4.7	4.7	5.1	5.1	5.1	5.1	5.1	4.7	

DEPTH: 2614	TILT: 0	RANGE: 100.0	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	3.4	3.0	3.0	3.0	3.0	3.0	2.5	
22.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	
45.0	2.5	2.5	2.5	2.5	2.5	2.5	2.1	
67.5	1.7	1.7	1.7	1.7	1.7	1.7	2.1	
90.0	2.1	2.1	2.1	2.5	3.0	2.1	2.1	
112.5	2.1	2.1	2.1	2.1	2.1	2.1	2.1	
135.0	2.5	3.0	3.0	3.0	3.0	3.0	3.4	
157.5	3.4	3.8	3.8	3.8	3.8	3.8	3.8	
180.0	3.8	3.8	3.8	3.8	3.8	3.8	3.8	
202.5	3.8	3.8	3.8	3.8	3.8	3.8	3.8	
225.0	3.8	3.8	3.4	3.4	3.4	3.4	3.4	
247.5	3.4	3.4	3.4	3.4	3.4	3.4	3.4	
270.0	3.4	3.4	3.4	3.4	3.4	3.4	3.4	
292.5	3.4	3.4	3.4	3.4	3.4	3.4	3.4	
315.0	3.4	3.4	3.4	3.4	3.4	3.4	3.4	
337.5	3.4	3.4	3.4	3.4	3.4	3.4	3.4	

DEPTH: 2616	TILT: 0	RANGE: 100.0	VOS: 6039					
Bearing + 0.0	+ 2.8	+ 5.6	+ 8.4	+11.3	+14.1	+16.9	+19.7	
0.0	1.3	1.3	1.3	1.3	1.3	1.3	1.3	
22.5	1.3	1.3	1.3	1.3	1.3	1.3	1.3	
45.0	1.3	1.3	1.3	1.3	1.3	1.3	1.3	
67.5	1.3	1.3	1.3	1.3	1.3	1.3	1.3	
90.0	1.3	1.3	1.3	1.3	1.3	1.3	1.3	
112.5	1.3	1.3	1.3	1.3	1.3	1.3	1.3	
135.0	1.3	1.3	1.3	1.3	1.3	1.3	1.3	
157.5	1.3	1.3	1.3	1.3	1.3	1.3	1.3	
180.0	1.3	1.3	1.3	1.3	1.3	1.3	1.3	
202.5	1.3	1.3	1.3	1.3	1.3	1.3	1.3	
225.0	1.3	1.3	1.3	1.3	1.3	1.3	1.3	
247.5	1.3	1.3	1.3	1.3	1.3	1.3	1.3	
270.0	1.3	1.3	1.3	1.3	1.3	1.3	1.3	
292.5	1.3	1.3	1.3	1.3	1.3	1.3	1.3	
315.0	1.3	1.3	1.3	1.3	1.3	1.3	1.3	
337.5	1.3	1.3	1.3	1.3	1.3	1.3	1.3	