

**AP-078**

**Abatement Plan**

**DATE:  
2008**

RECEIVED  
2008 OCT 3 PM 1 48



USPS Delivery Confirmation  
420 87505 9101 0105 2129 7451 3319 77

October 1, 2008

Mr. Glenn von Gonten  
New Mexico Energy, Minerals, & Natural Resources  
Oil Conservation Division, Environmental Bureau  
1220 S. St. Francis Drive  
Santa Fe, New Mexico 87504

**RE: Stage 2 Abatement Plan (AP-78)  
South Four Lakes #15 Site  
T12S-R34E-Section 2, Unit Letter G  
Lea County, New Mexico**

Dear Mr. von Gonten

On behalf of Pride Energy Company, enclosed is one hard copy and one electronic copy of the Stage 2 Abatement Plan for the above-referenced site.

I look forward to working with you on this project. If you have any questions please call me at 432-638-8740 or Matt Pride at 918-524-9200.

Sincerely,

A handwritten signature in black ink, appearing to read "G. Van Deventer".

Gilbert Van Deventer, REM, PG  
Trident Environmental

cc: Matt Pride (Pride Energy Co., Tulsa, OK)  
Chris Williams (NMOCD -District 1, Hobbs, NM)

**STAGE 2 ABATEMENT PLAN (AP-78)  
SOUTH FOUR LAKES #15 SITE  
TOWNSHIP 12 SOUTH, RANGE 34 EAST, SECTION 2, UNIT G  
LEA COUNTY, NEW MEXICO**

**OCTOBER 1, 2008**

**Prepared For:**

**Pride Energy Company  
P. O. Box 701950  
Tulsa, OK 74170**



**Prepared By:**



**P. O. Box 7624  
Midland, Texas 79708**

## TABLE OF CONTENTS

1.0	EXECUTIVE SUMMARY.....	1
2.0	SITE DESCRIPTION.....	2
2.1	LOCATION.....	2
2.2	DETAILED MAP.....	2
2.3	NEARBY WELLS AND WATER SUPPLIES.....	2
2.4	SITE HISTORY.....	3
3.0	PROCEDURES – SOIL BORING AND GROUNDWATER INVESTIGATION.....	4
4.0	RESULTS.....	5
4.1	SOIL BORING DELINEATION PROGRAM.....	5
4.2	GROUNDWATER MONITORING WELL SAMPLING.....	6
5.0	CONCLUSIONS.....	7
6.0	STAGE 2 ABATEMENT PLAN.....	8
6.1	GROUNDWATER REMEDY.....	8
6.2	VADOSE ZONE REMEDY.....	9
6.2	VADOSE ZONE REMEDY.....	9

## TABLES

Table 1	SITE HISTORY.....	3
Table 2	SOIL SAMPLE CHLORIDE ANALYSES FROM BORINGS.....	5
Table 3	GROUNDWATER ANALYSES FROM BORINGS.....	6
Table 4	GROUNDWATER ANALYSES FROM MONITORING WELL MW-1.....	6

## **FIGURES**

- FIGURE 1 SITE LOCATION MAP (USGS TOPOGRAPHIC MAP)
- FIGURE 2 SITE AERIAL PHOTO MAP (2005)
- FIGURE 3 CHLORIDE CONCENTRATIONS IN VADOSE ZONE
- FIGURE 4 CHLORIDE AND TDS CONCENTRATIONS IN GROUNDWATER
- FIGURE 5 DRILLING PIT EXCAVATION AND CLOSURE DIAGRAMS

## **APPENDICES**

- APPENDIX A PHOTODOCUMENTATION
- APPENDIX B SOIL BORING LITHOLOGIC LOGS
- APPENDIX C LABORATORY ANALYTICAL REPORTS AND CHAIN-OF-CUSTODY DOCUMENTATION
- APPENDIX D MONITORING WELL SAMPLING DATA FORMS

## 1.0 EXECUTIVE SUMMARY

On May 29, 2008, Trident Environmental performed a soil boring program at the South Four Lakes #15 well site to delineate the vertical and horizontal extent of groundwater impairment caused by the former drilling pit in accordance with the Stage 1 Abatement Plan (AP-78). Groundwater samples were collected from the hollow-stem drilled borings for chloride analysis and specific conductivity measurements. Groundwater samples were also collected from monitoring well MW-1 on January 23, May 13, and June 20, 2008, for laboratory analysis.

Our findings during the soil boring program and groundwater monitoring activities are discussed below; followed by proposed recommendations.

- Based on the soil boring data obtained by Elke Environmental in January 2008 and Trident Environmental in May 2008 the chloride impact to the vadose zone is limited to within the perimeter of the former drilling pit. The greatest mass of chloride in the vadose zone was observed at the northeast corner and southwest corner of the pit.
- Based on the soil sampling data, brine from the pit migrated through the vadose zone to ground water via saturated flow during operation of the drilling pit or sometime during the drying process. The uniform decline of chloride concentrations observed from about 20 feet below grade to the water table is due to dilution of the migrating brine by less saline ground water residing within the capillary fringe. Low porosity in the indurated sandy caliche at these depths may also contribute to lower chloride measurements because it retains a smaller mass of brine relative to the more unconsolidated soils above which exhibit a higher porosity.
- Chloride and total dissolved solids (TDS) concentrations in groundwater at monitoring well MW-1, and soil borings B-1, B-3, and B-4 exceeded Water Quality Control Commission (WQCC) standards. The highest chloride (6,180 mg/L) and TDS (12,500 mg/L) levels were at MW-1 which is adjacent to the downgradient (southeast) corner of the former drilling pit. Horizontal dispersion of the chloride and TDS in groundwater does not extend beyond approximately 150 feet downgradient (southeast) of the southeast corner of the pit as evidenced by the results of boring B-2 where background chloride and TDS levels were observed in groundwater.
- One 4-inch recovery/monitoring well (RW-1) located near the center of mass of groundwater chloride, but outside of the well anchors and deadman zone, is proposed to define the vertical extent of groundwater impairment at the site.
- The proposed groundwater remedy is a short-term, demand-based pump-and-use strategy that recovers brackish groundwater from the proposed recovery well (RW-1) as water supply for drilling oil and gas wells in the area if TDS concentrations are above 3,000 mg/L in RW-1.
- The proposed drilling pit excavation closure is construction of an infiltration barrier to eliminate the migration of residual brines from the vadose zone to groundwater
- Regulated hydrocarbons are not present in groundwater or the vadose zone

## **2.0 SITE DESCRIPTION**

### **2.1 LOCATION**

The South Four Lakes #15 well site is located on State land in Township 12 South, Range 34 East, Section 2, and Unit Letter G (N 33° 18' 30.5", W 103° 28' 48.2"). To access the site:

1. Drive west on Highway 380 ten miles from the intersection of Highway 380 and Highway 206 in Tatum, New Mexico.
2. At mile marker 217 turn right, proceed through cattle guard, and continue north about 0.35 miles on the dirt lease road.
3. Turn left and proceed 0.1 mile west along south side of tank battery and then north 0.1 miles to the site (see Figure 1).

Figure 2 is a recent (2005) aerial photo showing the general area and access to the site. A photograph showing most of the site facing southeast is included on the front cover of this report.

### **2.2 DETAILED SITE MAP**

As shown in Figure 3, the current environs at the site include:

- an active gas well (API # 30-025-36882)
- an open drilling pit excavation varying from 2-ft to 6-ft deep below ground surface
- a closed deep trench burial pit containing the former contents of the drilling pit
- five soil borings (TP-1 through TP-5) that were sampled and then plugged in January 2008
- four soil borings (B-1 through B-4) that were sampled and then plugged on May 29, 2008
- One monitoring well (MW-1) located near the southeast edge of the former drilling pit.
- Four deadman anchors utilized for well work over operations

### **2.3 NEARBY WELLS AND WATER SUPPLIES**

There are no surface water bodies or water wells within 1,000 feet of the site. The nearest surface water body is a livestock watering pond fed by a windmill well (NMOSE Permit # L-0656) located approximately 0.4 miles west (see Figure 2).

The nearest water well is an out of service water supply well (NMOSE Permit # L-3005) located approximately 0.3 miles north (Figure 2).

The South Four Lakes tank battery is located approximately 400 feet south of the South Four Lakes #15 well site (see Figure 2). There are several monitoring wells and a groundwater remediation system located at the tank battery site (1R-204).

## 2.4 *SITE HISTORY*

Pertinent events that occurred at the site are listed chronologically in Table 1 below.

**Table 1: Site History**

<b>Date</b>	<b>Description</b>
November 8, 2004	Well spudded.
September 8, 2006	C-104 filed to allow for transport of product
August 24, 2007	C-144 pit closure form approved by NMOCD
December 10, 2007	Revised C-144 submitted by Elke Environmental approved by NMOCD
January 8-21, 2008	Initial soil and groundwater sampling activities performed by Elke Environmental.
January 30, 2008	C-141 release notification form submitted by Elke Environmental
February 12, 2008	NMOCD requires submission of Abatement Plan and assigns AP #78
March 27, 2008	Initial site visit conducted by Trident Environmental
April 7, 2008	Investigation and Remediation Plan (IRP) submitted to NMOCD
April 16, 2008	NMOCD verbally acknowledges IRP to satisfy Abatement Plan requirements
May 13, 2008	Groundwater sampling and monitoring event performed at site (MW-1)
May 29, 2008	Soil boring program initiated to define vertical and horizontal extent of any impairment to groundwater
June 19, 2008	Second quarter groundwater sampling and monitoring event performed at site (MW-1)
September 9, 2008	Third quarter groundwater sampling and monitoring event performed at site (MW-1)

### 3.0 PROCEDURES – SOIL BORING AND GROUNDWATER INVESTIGATION

On May 29, 2008, Trident Environmental mobilized to the site to perform soil boring activities. The drilling contractor, Atkins Engineering (Roswell NM) utilized a Mobile 58 drilling rig and a 7 ¼- inch O.D. hollow stem augers to advance four soil borings at the locations depicted in Figure 2. Photographs depicting the soil and groundwater investigation are included in Appendix A. The following procedures were performed at each boring location:

1. Lithologic descriptions of the soils encountered in each boring were recorded in a field log book.
2. Groundwater samples were collected at various depths through the augers using a trip bailer. Specific conductance (SC), pH, and temperature of these samples were measured in the field with a Hanna Combo meter (Model No. HI 98130) to determine the vertical and horizontal extent of any groundwater impairment and to provide guidance in locating additional boreholes. Because of slow recharge of groundwater through the augers, especially at shallower depths as drilling proceeded, there was not enough sample volume collected for laboratory analysis, except at the termination of each boring.
3. At the bottom of each boring, groundwater samples were obtained through the augers using the trip bailer and submitted to the laboratory analysis for SC, chloride, and total dissolved solids (TDS) analysis to correlate field measurements with laboratory measurements. Groundwater samples were submitted to XENCO Laboratories (Odessa TX).
4. In the first boring, flowing sands under lithostatic and/or hydrostatic pressure were observed below 51 feet bgs where a semi-confining sandstone/quartzite layer was encountered, therefore all subsequent borings were terminated upon reaching the sandstone/quartzite layer. Aside from the inability to collect groundwater samples below this depth, the termination of each boring at approximately 51 feet bgs was also due to concerns that we could not create enough pressure to hold down the flowing sands and drilling deeper could compromise our ability to create a proper borehole seal.
5. On June 20, 2008 and September 9, 2008, Rozanne Johnson (Arc Environmental) performed the groundwater sampling event at monitoring well MW-1.

Since regulated hydrocarbons were not detected in any groundwater samples from MW-1 or from the deep soil samples from within the former drilling pit, samples from the auger borings were not submitted for analysis of regulated hydrocarbons. In addition, there were no observations (visual or odor) of hydrocarbons during the soil boring activities.

## 4.0 RESULTS

### 4.1 SOIL BORING DELINEATION PROGRAM

The first boring (B-1) was completed approximately 100 feet downgradient of existing monitoring well MW-1, which is located near the southeast corner of the former drilling pit. Since depth discrete groundwater specific conductivity (SC) readings from this boring suggested readings above background conditions, a second boring (B-2) was installed another 75 feet downgradient where conductivity readings indicated background levels. A third (B-3) and fourth (B-4) soil boring were installed approximately 25 feet south and 25 feet east, respectively, of the former drilling pit to horizontally delineate conditions closer to the targeted source. The location of each soil boring is shown on Figures 3 and 4.

Generally, the first few feet of subsurface soils consisted of a clayey loam. Below this layer, silty clayey fine sand and fine sands with interbeds of caliche and indurated sands were encountered until a depth of approximately 25 feet where groundwater was reached. Below this depth fine sands continued to a depth of approximately 51 feet where a very hard sandstone/quartzite layer was encountered. Below the approximately 1- to 2-foot thick sandstone/quartzite layer, loose and unconsolidated fine-grained flowing sands were encountered. Groundwater was encountered at approximately 25 feet bgs. A more detailed description of each soil boring is provided on the lithologic logs in Appendix B. Laboratory analysis of chloride concentrations for each soil sample is summarized in Table 2 below, depicted on Figure 2, and shown on the individual lithologic logs in Appendix B. Field and laboratory analysis of groundwater samples from the soil boring program are summarized in Table 3 below and depicted on Figure 3.

**Table 2**  
**Soil Sample Chloride Analyses from Borings**

Boring ID	Depth (ft bgs)	Chloride Concentration (mg/kg)
B-1	5'	<5.0
	10'	2,650
	15'	86.4
	20'	38.2
	25'	30.2
B-2	5'	235
	10'	1,090
	15'	513
	20'	408
	25'	371
B-3	5'	590
	10'	2,230
	15'	230
	20'	1,730
	25'	851
B-4	5'	1,400
	10'	72.7
	15'	59.8
	20'	82.7
	25'	80.6

**Table 3**  
**Groundwater Analyses from Soil Borings**

Boring ID	Field Measured Values		Lab Analyzed Values	
	Depth (ft bgs)	SC (mS/cm)	Chloride (mg/L)	TDS (mg/L)
B-1	38	2.36	---	---
	48	3.44	1,040	2,210
	58	1.75	---	---
B-2	37	0.84	---	---
	48	0.80	56.0	418
B-3	43	10.00	---	---
	51	5.72	1,450	3,270
	52	2.26	---	---
B-4	38	9.74	---	---
	50	13.04	4,550	7,790

--- Indicates insufficient water sample volume for lab analysis

The laboratory analytical reports and chain of custody documentation for the soil and groundwater sampling are in Appendix C.

#### 4.2 GROUNDWATER MONITORING WELL SAMPLING

The recent and historic groundwater chemistry and groundwater elevation measurements at MW-1 are summarized in Table 4. The most recent chloride and TDS concentrations have decreased since the previous sampling event conducted in June. There are no indications of hydrocarbon impact to the groundwater as concentrations have been below WQCC standards and laboratory method detection limits for each constituent of BTEX. The laboratory analytical reports and chain of custody documentation for the most recent sampling event are in Appendix C. The well sampling data forms are included in Appendix D.

**Table 4**  
**Groundwater Analyses from Monitoring Well MW-1**

Sample Date	Depth to Groundwater (feet BTOC)	SC (mS/cm)	Chloride (mg/L)	TDS (mg/L)	Benzene (mg/L)	Toluene (mg/L)	Ethylbenzene (mg/L)	Xylene (mg/L)
01/23/08	29.1	---	<b>3,930</b>	---	---	---	---	---
03/13/08	26.25	12.34	<b>4,150</b>	<b>9,820</b>	<0.001	<0.002	<0.001	<0.003
06/20/08	26.46	14.05	<b>6,180</b>	<b>12,500</b>	---	---	---	---
09/09/08	26.55	13.40	<b>4,850</b>	<b>9,700</b>	<0.001	<0.001	<0.001	<0.003
WQCC Standards			250	1,000	0.01	0.75	0.75	0.62

--- Indicates sample not analyzed for this constituent.

Values in boldface type indicate concentrations exceed New Mexico Water Quality Commission (WQCC) standards.

## 5.0 CONCLUSIONS

Based on the soil boring data obtained by Elke Environmental in January 2008 (TP-1 through TP-5) and Trident Environmental in May 2008 (B-1 through B-4) the chloride impact to the vadose zone is limited to within the perimeter of the former drilling pit. The greatest chloride mass was observed at the TP-2 (northeast corner) and TP-3 (southwest corner) of the pit.

Based on the soil sampling data, brine from the pit migrated through the vadose zone to ground water via saturated flow during operation of the drilling pit or sometime during the drying process. The uniform decline of chloride concentrations observed from about 20 feet below grade to the water table is due to dilution of the migrating brine by less saline ground water residing within the capillary fringe. Low porosity in the indurated sandy caliche at these depths may also contribute to lower chloride measurements because it retains a smaller mass of brine relative to the more unconsolidated soils above which exhibit a higher porosity. The soil borings partially penetrated a very hard sandstone/quartzite layer at 51-feet bgs. This well-cemented horizon creates a permeability barrier between the uppermost portion of the Ogallala Aquifer and the lower section of the aquifer which is also reflected by the decreased SC levels below this layer (Table 3).

Chloride and TDS concentrations in groundwater at monitoring well MW-1, and soil borings B-1, B-3, and B-4 exceeded WQCC standards. The highest chloride (6,180 mg/L) and TDS (12,500 mg/L) levels were at MW-1 which is expected due to its immediately downgradient location with respect to the former drilling pit. Horizontal dispersion of the chloride and TDS in groundwater does not exceed beyond approximately 150 feet downgradient (southeast) of the southeast corner of the pit as evidenced by the results of boring B-2 where background chloride and TDS levels were observed in groundwater.

As cited by Fetter (*Applied Hydrogeology*, 2<sup>nd</sup> Edition, Table 4.5, p. 80) and Freeze and Cherry (*Groundwater*, 1<sup>st</sup> Edition, Table 2.3, p. 29) hydraulic conductivity values at the site would likely range from approximately  $10^{-3}$  to  $10^{-2}$  cm/sec (3 to 30 ft/day) based on the lithologic description of the upper portion of the Ogallala Formation (fine to medium sand and caliche) which was penetrated by the soil borings. With a porosity of 0.25 and hydraulic gradient of 0.002 ft/ft that would correspond to an estimated average linear groundwater velocity ranging from approximately 0.024 to 0.24 ft/day (9 to 90 ft/year) according Darcy's Law. Assuming the center of chloride mass has traveled approximately 150 ft downgradient from the former drilling pit since November 2004 (well spudding) that would correspond to a linear velocity of about 40 ft/yr.

## 6.0 STAGE 2 ABATEMENT PLAN

Data collected to date indicates chloride/TDS-impaired groundwater exists beneath the site and chloride concentrations above 1,000 mg/kg exist in the vadose zone below the former drilling pit. The suspected source of the chloride in the vadose zone and groundwater at the site is the former drilling pit. The following remedies to the groundwater and vadose zone are proposed:

### 6.1 GROUNDWATER REMEDY

Pride Energy proposes to perform the following corrective actions for groundwater remedy:

1. Conduct one additional quarterly groundwater sampling event
2. Evaluate the groundwater monitoring and sampling data and in April 2009 provide an annual report to NMOCD with additional recommendations.
3. After NMOCD approval of the Stage 1 and 2 Abatement Plan:
  - a. Use mud rotary drilling and install RW-1 approximately 20 feet south of MW-1 (outside of the deadman zone) to further define the vertical magnitude of groundwater impairment and to serve as a supply well for the proposed pump-and-use remedy. The depth of this well will not go beyond 100 ft bgs (expected base of Ogallala Fm.) and will terminate when field conditions (specific conductivity readings) indicate declining chloride levels with depth.
  - b. Perform an aquifer test on RW-1 or use pump test data from comparable wells in the vicinity to provide data that will assist in creating a better estimate the rate of natural groundwater restoration and the rate of contaminant migration
  - c. Implement an on-demand, pump-and-use groundwater restoration program in which the proposed recovery well provides water for nearby oil and gas drilling operations if TDS concentrations are above 3,000 mg/L in RW-1. Pride will provide additional details regarding the pump-and-use strategy after completion and testing of RW-1.
4. In April of 2010, provide an annual groundwater monitoring report to NMOCD that evaluate the data from the proposed drilling of RW-1, pumping and groundwater sampling program and propose recommendations for:
  - a. a natural restoration/monitoring groundwater remedy or
  - b. continuation of a pump-and-use groundwater restoration strategy

## **6.2 VADOSE ZONE REMEDY**

Pride Energy proposes to perform the following corrective actions for the vadose zone:

1. Expand the existing pit excavation as necessary to create a 3-foot wide area where subsurface impact of pit leakage does not exist (Figure 5, Step 1).
2. Use the material from the pit expansion or deepen the excavation as necessary to create a sloping surface on the bottom of the excavation as shown in Figure 5 (Step 2).
3. Over the sloping surface place sheets of 20-mil reinforced liner material that meet NMOCD specifications for pit liners. These shingles are laid to shed any infiltrated water from the pit area to native soil and to prevent any upward migration of chloride into the root zone.
4. Backfill the excavation with clean material, beginning with caliche and/or sand and finishing the top of the backfill with about 6-inches of soil that is capable of supporting native vegetation.
5. The new surface grade is a 3-5% slope that drains to a “ponding area”. The final grade of the surface over the former pit should blend with the surroundings as much as possible. Figure 5 (Step 3), which shows a 5% slope that resembles a large “pitchers mound”, is one example of a final surface that allows for drainage of storm water away from the former drilling pit.
6. Seed the reclaimed pit with a mixture approved by the State Land Office and monitor for growth.


## **6.3 SCHEDULE OF ACTIVITIES**

Pride Energy will perform one additional groundwater monitoring and sampling event at MW-1 to complete a full year of quarterly monitoring at the site. Groundwater samples will be submitted to the laboratory for the following analyses:


- ◆ Chloride (EPA Method SM4500B – formerly 325.1)
- ◆ TDS (EPA Method SM2540C – formerly Method 160.1)

Upon OCD approval of the proposed abatement activities, Pride will commence the proposed work elements.

FIGURES

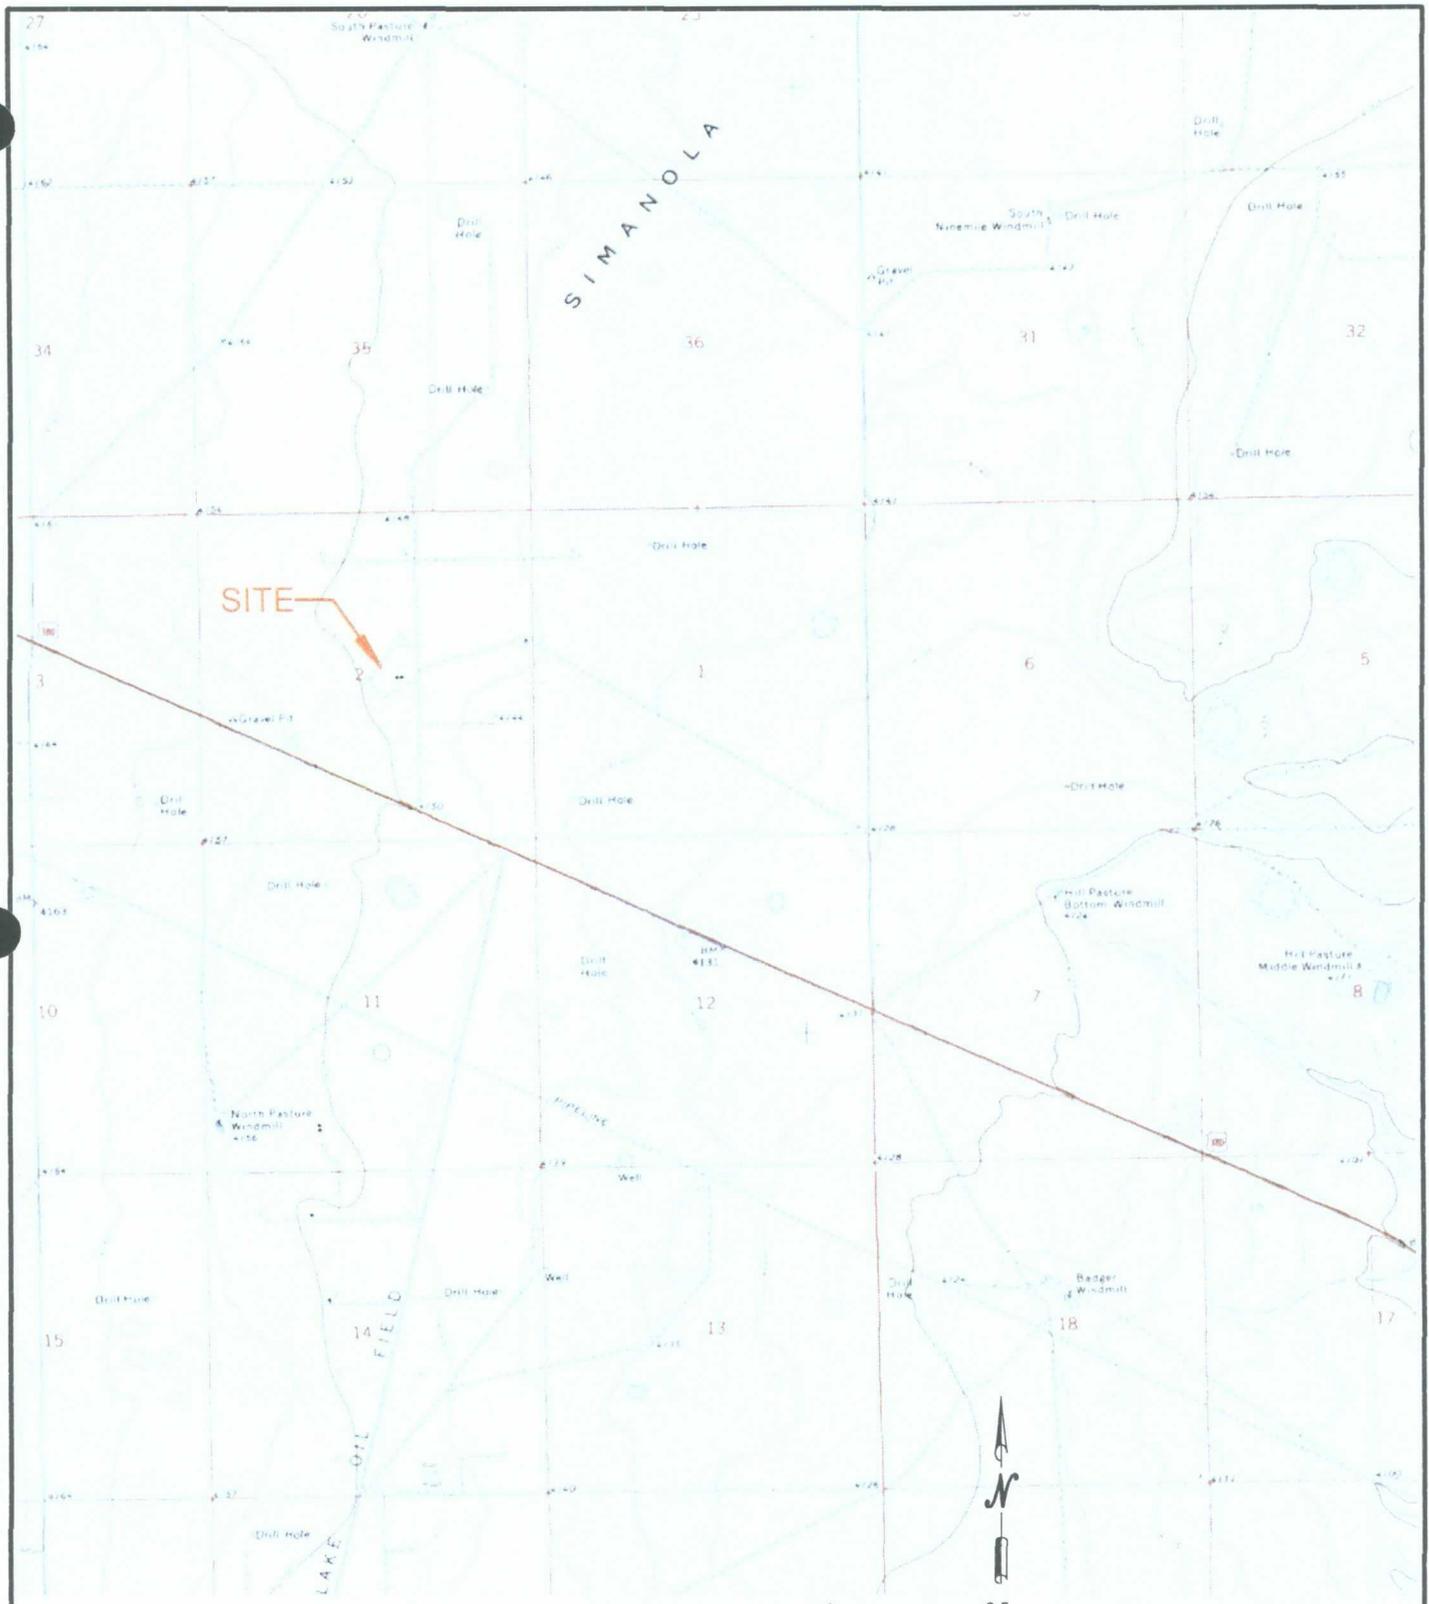

USGS Simanola Valley, NM  
7.5" Topographic Quadrangle (1970)



Pride Energy Company  
South Four Lakes #15  
T12S - R34E - Section 2 Unit G  
Lea County, New Mexico

FIGURE 1  
SITE LOCATION MAP






Pride Energy Company  
 South Four Lakes #15  
 T12S - R34E - Section 2 Unit G  
 Lea County, New Mexico

FIGURE 2  
 SITE AERIAL PHOTO MAP (2005)

# Legend

- TP3 Test Point Location  
Sampled by Elke Env (Jan-08)
  - ⊕ MW-1 Existing Monitoring Well
  - B-1 Soil Boring Location  
Sampled by Trident Env (May-08)
- Chloride Concentrations  
in mg/kg at specified  
depths (feet bgs)
- ▲ Dead man (Buried Anchor) Location

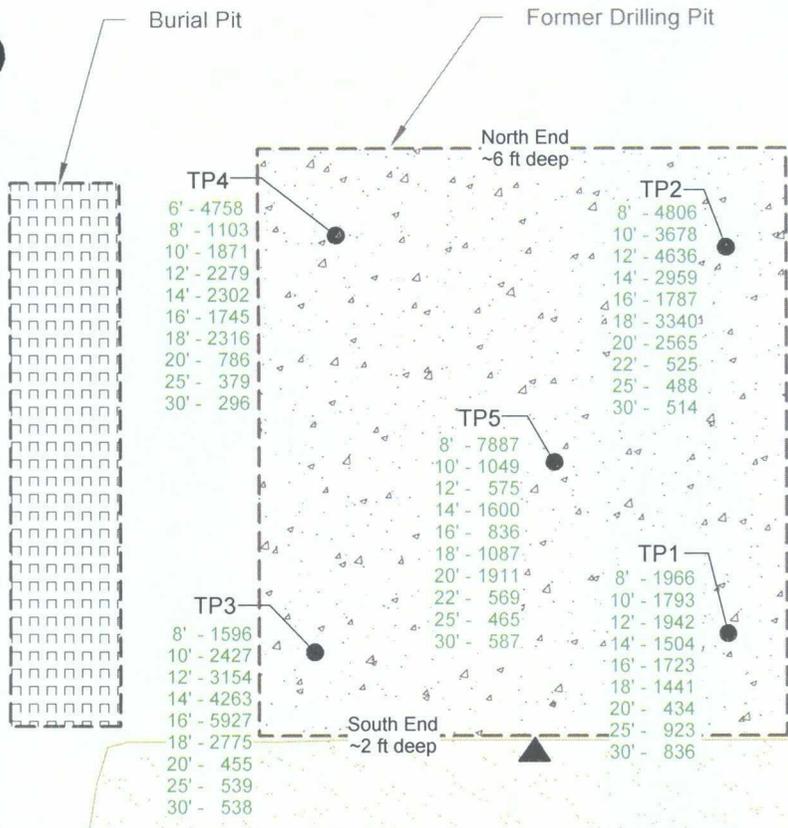

Wellhead

Outline of Well Pad

South Four Lakes Tank Battery



Pride Energy Company  
South Four Lakes #15  
T12S - R34E - Section 2 - Unit G  
Lea County, New Mexico

Figure 3  
Chloride Concentrations  
in Vadose Zone

# Legend

Test Point Location  
Sampled by Elke Env (Jan-08)

MW-1

Existing Monitoring Well

B-1

Soil Boring Location

05/29/08  
CI 1040  
TDS 2210

Sample Date  
Chloride/TDS concentration  
in milligrams per liter (mg/L)

Dead man (Buried Anchor) Location

B-4

05/29/08  
CI 4550  
TDS 7790

MW-1

06/20/08  
CI 6180  
TDS 12500

B-3

05/29/08  
CI 1450  
TDS 3270

Wellhead

B-1

05/29/08  
CI 1040  
TDS 2210

B-2

05/29/08  
CI 56.0  
TDS 418



0      Feet      50  
  
Approximate Scale



Outline of  
Well Pad

South Four Lakes  
Tank Battery




Pride Energy Company  
South Four Lakes #15  
T12S - R34E - Section 2 - Unit G  
Lea County, New Mexico

Figure 4  
Choride and TDS  
Concentrations  
in Groundwater

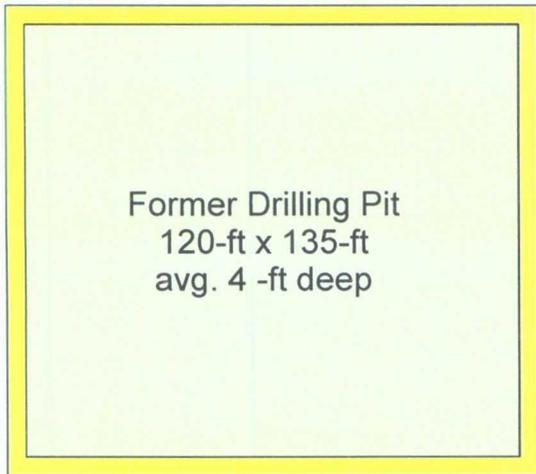


STEP 1

- Excavate as required to create 3-foot clean zone around chloride impact
- Reserve all topsoil and clean caliche

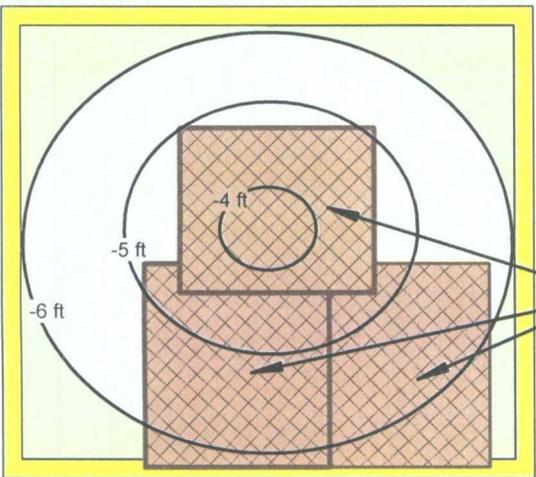

STEP 2

- Create sloping surface at bottom of excavation
- Center of sloping surface should be 3 to 4 feet below grade
- Place 20-mil liner "shingles" over prepared surface
- Shingles drain to un-impacted caliche

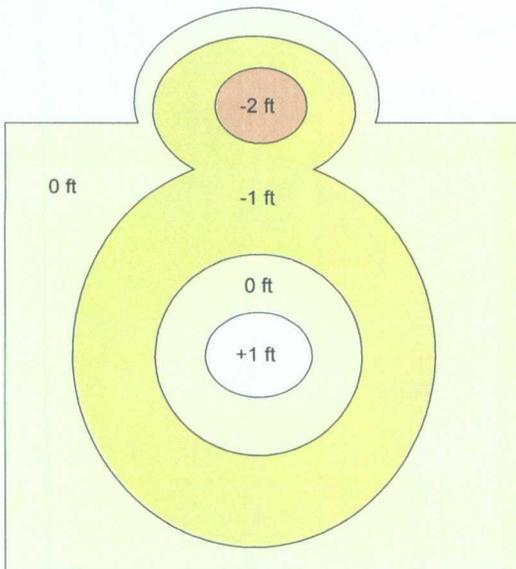

STEP 3

- Excavate ponding area(s)
- Backfill excavation with clean caliche and sand over liner - retain slope
- Place about 6-inches of topsoil over clean caliche/sand - retain slope
- Grade to allow excess runoff to ponding area
- Re-seed with native species or a mix approved by the State Land Office




Pride Energy Company  
 South Four Lakes #15  
 T12S - R34E - Section 2 - Unit G  
 Lea County, New Mexico


Figure 5  
 Drilling Pit Ecvation  
 and Closure Diagrams

APPENDIX A


PHOTODOCUMENTATION

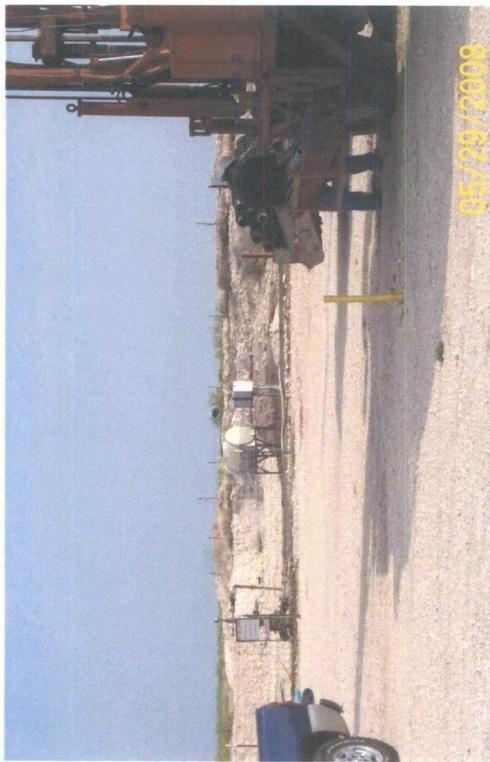


View facing northwest showing drilling activities at soil boring B-1. Wellhead and drilling pit shown at left-center.

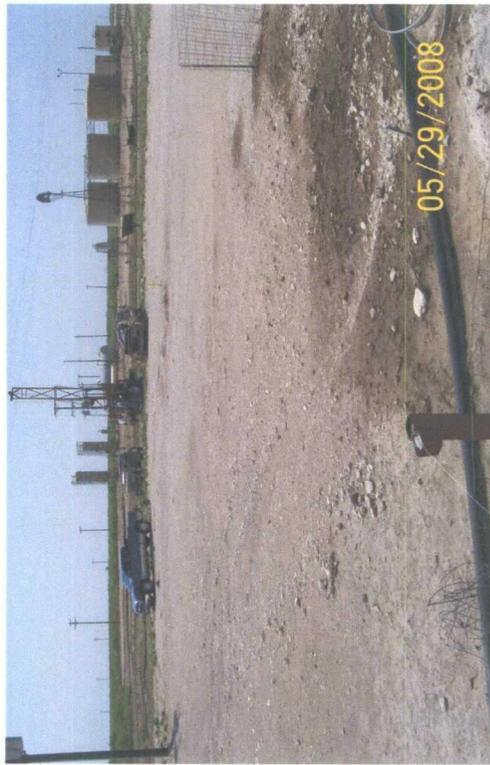

View facing southeast showing drilling at boring B-2 (background). MW-1 is shown in foreground and S. Four Lakes Tank Battery is in far background.

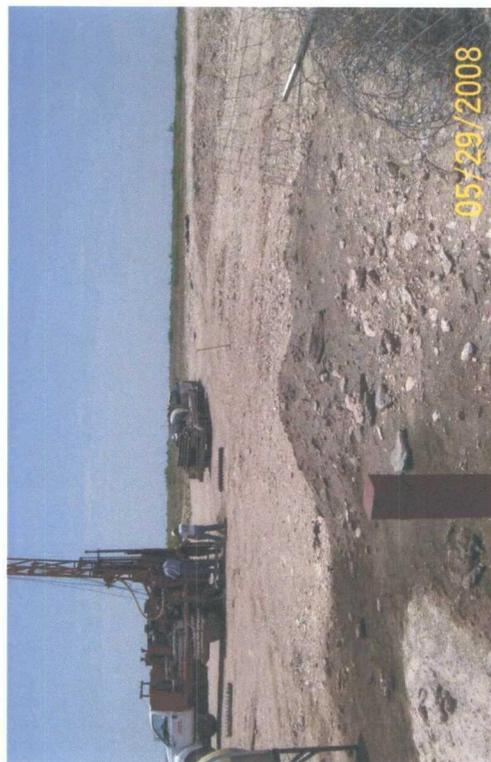


View facing west showing drilling/sampling at soil boring B-3 located about 25 south of drilling pit. Monitoring well MW-1 is shown in foreground.

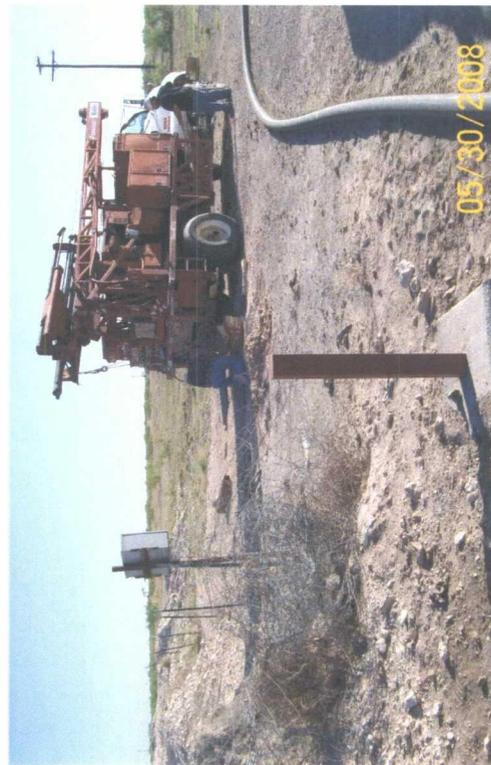


View facing north showing drilling rig at soil boring B-4 (~ 25 ft east of drilling pit. Monitoring well MW-1 is shown in foreground.



Retrieving trip bailer from hollow-stem augers.

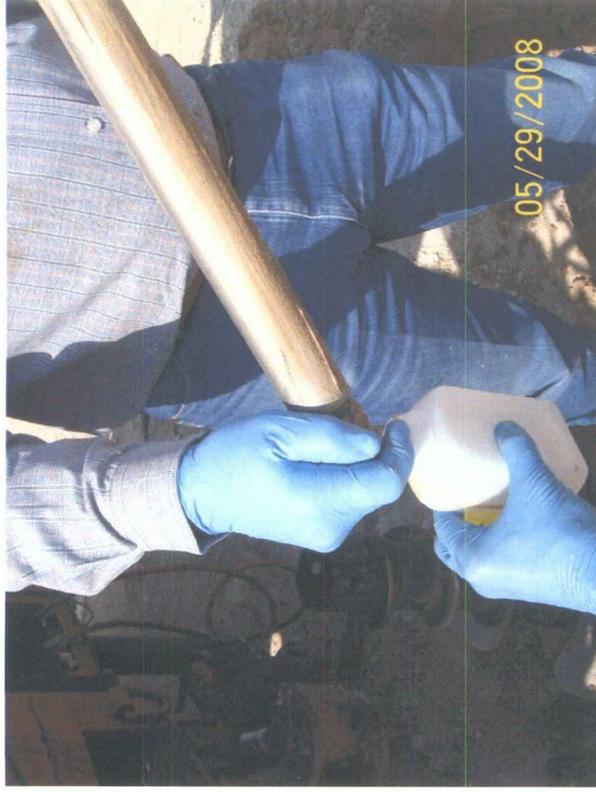

Collection of groundwater water samples from trip bailer.

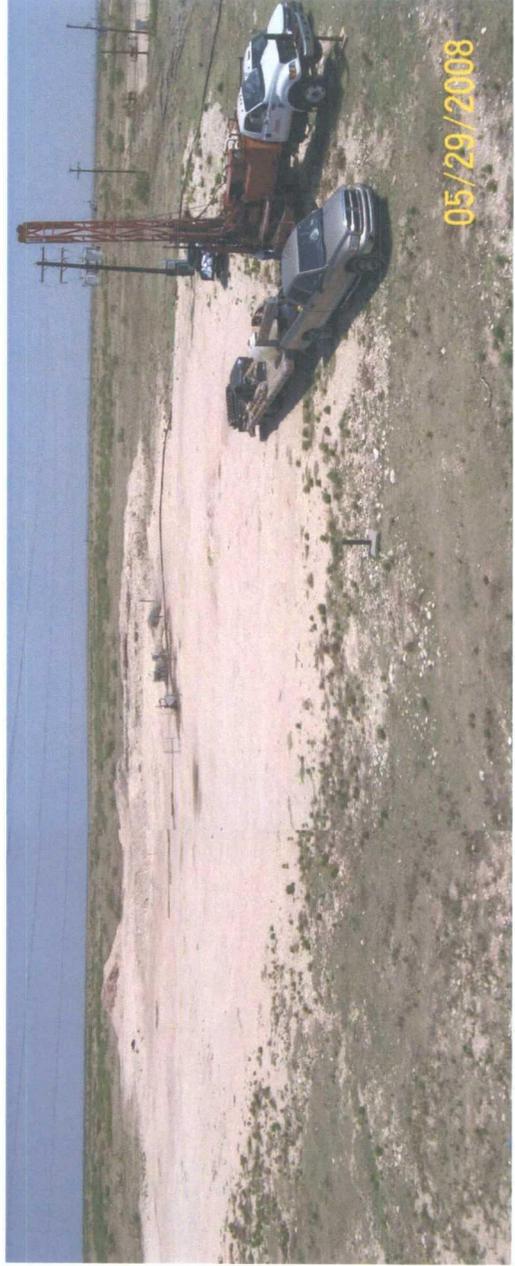

Panoramic view of site facing northwest showing drilling activities at soil boring B-2. Wellhead and drilling pit in background.

APPENDIX B

SOIL BORING LITHOLOGIC LOGS



LITHOLOGIC LOG AND MONITORING WELL CONSTRUCTION DIAGRAM

MONITORING WELL NO.: B-1 TOTAL DEPTH: 58 Feet bgs  
 SITE NAME: South Four Lakes #15 CLIENT: Pride Energy Company  
 CONTRACTOR: Atkins Engineering COUNTY: Lea  
 DRILLING METHOD: Hollow-Stem auger (7.25" dia.) STATE: New Mexico  
 START DATE: May 29, 2008 LOCATION: T12S - R34E - Section 2 - Unit Letter G  
 COMPLETION DATE: May 29, 2008 FIELD REP.: Gil Van Deventer  
 COMMENTS: Located ~100-ft southeast of monitoring well MW-1 and southeast corner of drilling pit.  
Latitude 33° 18' 30.7" North and Longitude 103° 28' 47.4" West

	Sample Depth	Time	Type	Chloride (mg/kg)	SC (mS/cm)	USCS	LITHOLOGIC DESCRIPTION: LITHOLOGY, COLOR, GRAIN SIZE, SORTING, ROUNDING, CONSOLIDATION
		0740				CAL	Caliche well pad
						SC	Brown clayey loam
	5	0745	Cuttings	< 5			Silty fine sand and caliche; grayish orange (10YR 7/4) and very pale orange (10YR 8/2). Slightly damp from 7 ft to 16 ft
	10	0750	Cuttings	2650		SM/CAL	Silty fine sand and caliche; grayish orange (10YR 7/4) and very pale orange (10YR 8/2).
	15	0755	Cuttings	86.4			Silty fine sand and caliche; grayish orange (10YR 7/4) and very pale orange (10YR 8/2).
							Hard caliche layer at 16 ft; dry
	20	0802	Cuttings	38.2		CAL/SM	Very fine sandy caliche(calified); very pale orange (10YR 8/2); dry; very hard
	25	0811	Cuttings	30.2			Fine to medium-grained sand; grayish orange (10YR 7/4); subrounded; moderately well sorted; moist
	30						Fine-grained sand; grayish orange (10YR 7/4); subrounded; moderately sorted; wet
	35						Fine-grained sand; grayish orange (10YR 7/4); subrounded; moderately sorted; wet
		0840	Water		2.36	SW	
	40						Fine-grained sand; grayish orange (10YR 7/4); subrounded; moderately sorted; wet
	45						Fine-grained sand; grayish orange (10YR 7/4); subrounded; moderately sorted; wet
		0900	Water		3.44		Lab Chloride = 1040 mg/L; Lab TDS = 2210 mg/L
	50						Fine-grained sand; grayish orange (10YR 7/4); subrounded; moderately sorted; wet
	55					SS/QZ	Very hard sandstone with quartzite.
		0855	Water		1.75		Could not collect enough water sample for lab analysis. Flowing sand backfilled to 51 ft in boring. Bottom of boring at 58 ft below ground surface.
	60						

LITHOLOGIC LOG AND MONITORING WELL CONSTRUCTION DIAGRAM



MONITORING WELL NO.: B-2 TOTAL DEPTH: 51 Feet bgs  
 SITE NAME: South Four Lakes #15 CLIENT: Pride Energy Company  
 CONTRACTOR: Atkins Engineering COUNTY: Lea  
 DRILLING METHOD: Hollow-Stem auger (7.25" dia.) STATE: New Mexico  
 START DATE: May 29, 2008 LOCATION: T12S - R34E - Section 2 - Unit Letter G  
 COMPLETION DATE: May 29, 2008 FIELD REP.: Gil Van Deventer  
 COMMENTS: Located ~175-ft southeast of monitoring well MW-1 and southeast corner of drilling pit.  
Latitude 33° 18' 30.3" North and Longitude 103° 28' 46.8" West

Sample Depth	Time	Type	Chloride (mg/kg)	SC (mS/cm)	USCS	LITHOLOGIC DESCRIPTION:
						LITHOLOGY, COLOR, GRAIN SIZE, SORTING, ROUNDING, CONSOLIDATION
					CAL	Caliche well pad
5	1050	Cuttings	235		SC	Dark brown clayey loam
10	1055	Cuttings	1090		SC/CAL	Light brown (5YR 6/4) silty clayey very fine sand and caliche, dry
15	1100	Cuttings	513			Tan silty clayey very fine sand and caliche, dry
20	1110	Cuttings	408		CAL/SM	Fine-grained sand, grayish orange (10YR 7/4), with streaks of caliche/sandstone, dry
25	1115	Cuttings	371			Fine-grained sand, grayish orange (10YR 7/4), damp
30	1120					Fine-grained sand, grayish orange (10YR 7/4), subrounded; moderately well sorted; wet
35				0.84	SW	Fine-grained sand, light yellowish brown (10YR 6/4), subrounded, moderately well sorted; wet
40		Water				Fine-grained sand, light yellowish brown (10YR 6/4), subrounded, moderately well sorted; wet
45						Fine-grained sand, light yellowish brown (10YR 6/4), subrounded, moderately well sorted; wet
50		Water		0.80		Lab Chloride = 56 mg/L; Lab TDS = 418 mg/L Fine-grained sand, light yellowish brown (10YR 6/4), subrounded, moderately well sorted; wet
					SS/QZ	Very hard sandstone with quartzite. Bottom of boring at 51 ft below ground surface.
55						
60						

3/8 Bentonite Hole Plug

Backfill

← 7.25" →



LITHOLOGIC LOG AND MONITORING WELL CONSTRUCTION DIAGRAM

MONITORING WELL NO.: B-3 TOTAL DEPTH: 52 Feet bgs  
 SITE NAME: South Four Lakes #15 CLIENT: Pride Energy Company  
 CONTRACTOR: Atkins Engineering COUNTY: Lea  
 DRILLING METHOD: Hollow-Stem auger (7.25" dia.) STATE: New Mexico  
 START DATE: May 29, 2008 LOCATION: T12S - R34E - Section 2 - Unit Letter G  
 COMPLETION DATE: May 29, 2008 FIELD REP.: Gil Van Deventer  
 COMMENTS: Located ~73-ft west of wellhead and ~25 ft south of south edge of drilling pit.  
Latitude 33° 18' 31.2" North and Longitude 103° 28' 48.9" West

Sample Depth	Time	Type	Chloride (mg/kg)	SC (mS/cm)	USCS	LITHOLOGIC DESCRIPTION:
						LITHOLOGY, COLOR, GRAIN SIZE, SORTING, ROUNDING, CONSOLIDATION
					CAL	Caliche well pad
5	1300	Cuttings	590		SC	Dark brown clayey loam
10	1308	Cuttings	2230		SC/CAL	Light brown silty clayey very fine-grained sand, dry
15	1314	Cuttings	230			Tan silty clayey very fine-grained sand, dry
20	1322	Cuttings	1730		SM/CAL	Light tan fine-grained sand and caliche; hard streaks, dry
25	1325	Cuttings	851			Fine-grained sand, grayish orange (10YR 7/4), moderately sorted, subangular grains, damp
30	1330					Fine-grained sand, grayish orange (10YR 7/4), moderately sorted, subangular grains, wet
35	1335				SW	Fine-grained sand, light yellowish brown (10YR 6/4), moderately sorted, subangular grains, wet
40						Fine-grained sand, light yellowish brown (10YR 6/4), moderately sorted, subangular grains, wet
45	1345	Water		10.00		Fine-grained sand, light yellowish brown (10YR 6/4), moderately sorted, subangular grains, wet
50		Water		5.72		Fine-grained sand, light yellowish brown (10YR 6/4), moderately sorted, subangular grains, wet Lab Chloride = 1450 mg/L; Lab TDS = 3270 mg/L
		Water		2.26	SS/QZ	Very hard sandstone with quartzite. Had trouble getting sample due to flowing sand.
						Bottom of boring at 52 ft below ground surface.
55						
60						

3/8 Bentonite Hole Plug

Backfill

← 7.25" →

LITHOLOGIC LOG AND MONITORING WELL CONSTRUCTION DIAGRAM



MONITORING WELL NO.: B-4 TOTAL DEPTH: 50 Feet bgs  
 SITE NAME: South Four Lakes #15 CLIENT: Pride Energy Company  
 CONTRACTOR: Atkins Engineering COUNTY: Lea  
 DRILLING METHOD: Hollow-Stem auger (7.25" dia.) STATE: New Mexico  
 START DATE: May 29, 2008 LOCATION: T12S - R34E - Section 2 - Unit Letter G  
 COMPLETION DATE: May 29, 2008 FIELD REP.: Gil Van Deventer  
 COMMENTS: Located ~35-ft north-northeast of monitoring well MW-1 and ~25 ft east of east edge of drilling Latitude 33° 18' 31.1" North and Longitude 103° 28' 47.9" West

Sample Depth	Time	Type	Chloride (mg/kg)	SC (mS/cm)	USCS	LITHOLOGIC DESCRIPTION:
						LITHOLOGY, COLOR, GRAIN SIZE, SORTING, ROUNDING, CONSOLIDATION
						CAL Caliche well pad
						SC Dark brown clayey loam
						Caliche and very fine sand, very pale orange (10YR 8/2), dry
5	1533	Cuttings	1400		CAL/SM	
10	1538	Cuttings	72.7		SC/CAL	Silty clayey very fine-grained sand and caliche, grayish orange (10YR 7/4), dry
15	1541	Cuttings	59.8		SM/CAL	Silty fine-grained sand and caliche, grayish orange (10YR 7/4), dry
20	1650	Cuttings	82.7		SS/CAL	Fine-grained sandstone and caliche, very hard
25	1700	Cuttings	80.6			Silty fine-grained sand and caliche, grayish orange (10YR 7/4), dry
30	1703					Fine-grained sand, grayish orange (10YR 7/4), moderately sorted, subangular grains, damp
35						Fine-grained sand, light yellowish brown (10YR 6/4), moderately sorted, subangular grains, wet
40	1710	Water		9.7	SW	Fine-grained sand, light yellowish brown (10YR 6/4), moderately sorted, subangular grains, wet
45						Fine-grained sand, light yellowish brown (10YR 6/4), moderately sorted, subangular grains, wet
50	1722	Water		13.04		Lab Chloride = 4550 mg/L; Lab TDS = 7790 mg/L
55						Bottom of boring at 50 ft below ground surface.
60						

3/8 Bentonite Hole Plug

Backfill

← 7.25" →

APPENDIX C

LABORATORY ANALYTICAL REPORTS  
AND  
CHAIN-OF-CUSTODY DOCUMENTATION

# **Analytical Report 304935**

**for**

**Pride Energy Company**

**Project Manager: Matt Pride**

**Pride Energy Company**

**South Four Lakes #15**

**03-JUN-08**



**12600 West I-20 East Odessa, Texas 79765**


**Texas certification numbers:  
Houston, TX T104704215**

**Florida certification numbers:  
Houston, TX E871002 - Miami, FL E86678 - Tampa, FL E86675  
Norcross(Atlanta), GA E87429**

**South Carolina certification numbers:  
Norcross(Atlanta), GA 98015**

**North Carolina certification numbers:  
Norcross(Atlanta), GA 483**

**Houston - Dallas - San Antonio - Austin - Tampa - Miami - Latin America  
Midland - Corpus Christi - Atlanta**



03-JUN-08

Project Manager: **Matt Pride**  
**Pride Energy Company**  
P.O. Box 701950

Tulsa, OK 74170

Reference: XENCO Report No: **304935**  
**Pride Energy Company**  
Project Address: T12S-R34E, Section 2, Unit Letter G

**Matt Pride:**

We are reporting to you the results of the analyses performed on the samples received under the project name referenced above and identified with the XENCO Report Number 304935. All results being reported under this Report Number apply to the samples analyzed and properly identified with a Laboratory ID number. Subcontracted analyses are identified in this report with either the NELAC certification number of the subcontract lab in the analyst ID field, or the complete subcontracted report attached to this report.

Unless otherwise noted in a Case Narrative, all data reported in this Analytical Report are in compliance with NELAC standards. Estimation of data uncertainty for this report is found in the quality control section of this report unless otherwise noted. Should insufficient sample be provided to the laboratory to meet the method and NELAC Matrix Duplicate and Matrix Spike requirements, then the data will be analyzed, evaluated and reported using all other available quality control measures.

The validity and integrity of this report will remain intact as long as it is accompanied by this letter and reproduced in full, unless written approval is granted by XENCO Laboratories. This report will be filed for at least 5 years in our archives after which time it will be destroyed without further notice, unless otherwise arranged with you. The samples received, and described as recorded in Report No. 304935 will be filed for 60 days, and after that time they will be properly disposed without further notice, unless otherwise arranged with you. We reserve the right to return to you any unused samples, extracts or solutions related to them if we consider so necessary (e.g., samples identified as hazardous waste, sample sizes exceeding analytical standard practices, controlled substances under regulated protocols, etc).

We thank you for selecting XENCO Laboratories to serve your analytical needs. If you have any questions concerning this report, please feel free to contact us at any time.

Respectfully,

A handwritten signature in black ink, appearing to read "Brent Barron, II".

**Brent Barron, II**

Odessa Laboratory Manager

*Recipient of the Prestigious Small Business Administration Award of Excellence in 1994.*

*Certified and approved by numerous States and Agencies.*

*A Small Business and Minority Status Company that delivers SERVICE and QUALITY*

Houston - Dallas - San Antonio - Austin - Tampa - Miami - Atlanta - Corpus Christi - Latin America



**Sample Cross Reference 304935**



**Pride Energy Company, Tulsa, OK**

Pride Energy Company

Sample Id	Matrix	Date Collected	Sample Depth	Lab Sample Id
B-1 (5')	S	May-29-08 07:45		304935-001
B-1 (10')	S	May-29-08 07:50		304935-002
B-1 (15')	S	May-29-08 07:55		304935-003
B-1 (20')	S	May-29-08 08:02		304935-004
B-1 (25')	S	May-29-08 08:11		304935-005
B-2 (5')	S	May-29-08 10:50		304935-006
B-2 (10')	S	May-29-08 10:53		304935-007
B-2 (15')	S	May-29-08 11:00		304935-008
B-2 (20')	S	May-29-08 11:10		304935-009
B-2 (25')	S	May-29-08 11:15		304935-010
B-3 (5')	S	May-29-08 13:00		304935-011
B-3 (10')	S	May-29-08 13:08		304935-012
B-3 (15')	S	May-29-08 13:14		304935-013
B-3 (20')	S	May-29-08 13:22		304935-014
B-3 (25')	S	May-29-08 13:25		304935-015
B-4 (5')	S	May-29-08 15:33		304935-016
B-4 (10')	S	May-29-08 15:38		304935-017
B-4 (15')	S	May-29-08 15:41		304935-018
B-4 (20')	S	May-29-08 16:50		304935-019
B-4 (25')	S	May-29-08 17:00		304935-020



# Certificate of Analysis Summary 304935

## Pride Energy Company, Tulsa, OK

**Project Id:** South Four Lakes #15  
**Contact:** Matt Pride

**Project Location:** T12S-R34E, Section 2, Unit Letter G

**Date Received in Lab:** Sat May-31-08 01:05 pm

**Report Date:** 03-JUN-08

**Project Manager:** Brent Barron, II

<i>Lab Id:</i>	<i>Field Id:</i>	<i>Depth:</i>	<i>Matrix:</i>	<i>Sampled:</i>	<i>Extracted:</i>	<i>Analyzed:</i>	<i>Units/RL:</i>
304935-001	B-1 (5')		SOIL	May-29-08 07:45		Jun-03-08 12:45	mg/kg RL 5.00
304935-002	B-1 (10')		SOIL	May-29-08 07:50		Jun-03-08 12:45	mg/kg RL 2650 25.0
304935-003	B-1 (15')		SOIL	May-29-08 07:55		Jun-03-08 12:45	mg/kg RL 86.4 25.0
304935-004	B-1 (20')		SOIL	May-29-08 08:02		Jun-03-08 12:45	mg/kg RL 38.2 25.0
304935-005	B-1 (25')		SOIL	May-29-08 08:11		Jun-03-08 12:45	mg/kg RL 30.2 25.0
304935-006	B-2 (5')		SOIL	May-29-08 10:50		Jun-03-08 12:45	mg/kg RL 235 25.0
<b>Analysis Requested</b>							
<b>Inorganic Anions by EPA 300</b>							
Chloride							

This analytical report, and the entire data package, it represents, has been made for your exclusive and confidential use. The interpretations and results expressed throughout this analytical report represent the best judgment of XENCO Laboratories. XENCO Laboratories assumes no responsibility and makes no warranty, to the end use of the data hereby presented. Our liability is limited to the amount invoiced for this work order unless otherwise agreed to in writing.

Since 1990 Houston - Dallas - San Antonio - Austin - Tampa - Miami - Latin America - Atlanta - Corpus Christi

**Brent Barron**  
 Odessa Laboratory Director



# Certificate of Analysis Summary 304935

## Pride Energy Company, Tulsa, OK

Project Id: South Four Lakes #15  
 Contact: Matt Pride

Date Received in Lab: Sat May-31-08 01:05 pm  
 Report Date: 03-JUN-08

Project Location: T12S-R34E, Section 2, Unit Letter G

Project Manager: Brent Barron, II

Analysis Requested	Lab Id:	Field Id:	Depth:	Matrix:	Sampled:	304935-007	304935-008	304935-009	304935-010	304935-011	304935-012
<b>Inorganic Anions by EPA 300</b>						B-2 (10') SOIL May-29-08 10:53	B-2 (15') SOIL May-29-08 11:00	B-2 (20') SOIL May-29-08 11:10	B-2 (25') SOIL May-29-08 11:15	B-3 (5') SOIL May-29-08 13:00	B-3 (10') SOIL May-29-08 13:08
						Jun-03-08 12:45 mg/kg RL 1090 50.0	Jun-03-08 12:45 mg/kg RL 513 25.0	Jun-03-08 12:45 mg/kg RL 408 25.0	Jun-03-08 12:45 mg/kg RL 371 50.0	Jun-03-08 12:45 mg/kg RL 590 50.0	Jun-03-08 12:45 mg/kg RL 2230 50.0
						Units/RL:					
						Chloride					

This analytical report, and the entire data package it represents, has been made for your exclusive and confidential use. The interpretations and results expressed throughout this analytical report represent the best judgment of XENCO Laboratories. XENCO Laboratories assumes no responsibility, and makes no warranty to the end use of the data hereby presented. Our liability is limited to the amount invoiced for this work order unless otherwise agreed to in writing.

Since 1990 Houston - Dallas - San Antonio - Austin - Tampa - Miami - Latin America - Atlanta - Corpus Christi



Brent Barron  
 Odessa Laboratory Director



# Certificate of Analysis Summary 304935

## Pride Energy Company, Tulsa, OK

Project Id: South Four Lakes #15  
 Contact: Matt Pride

Project Location: T12S-R34E, Section 2, Unit Letter G

Date Received in Lab: Sat May-31-08 01:05 pm

Report Date: 03-JUN-08

Project Manager: Brent Barron, II

Analysis Requested	Lab Id:	Field Id:	Depth:	Matrix:	Sampled:	304935-014	304935-015	304935-016	304935-017	304935-018						
Inorganic Anions by EPA 300		B-3 (15')	SOIL	May-29-08 13:14	May-29-08 13:22	May-29-08 13:25	May-29-08 15:33	May-29-08 15:38	May-29-08 15:41							
		Jun-03-08 12:45														
Chloride	Units/RL:	mg/kg	RL	230	25.0	25.0	1730	50.0	851	25.0	1400	25.0	72.7	25.0	59.8	25.0

This analytical report, and the entire data package it represents, has been made for your exclusive and confidential use. The interpretations and results expressed throughout this analytical report represent the best judgment of XENCO Laboratories. XENCO Laboratories assumes no responsibility and makes no warranty to the end use of the data hereby presented. Our liability is limited to the amount invoiced for this work order unless otherwise agreed to in writing.

Since 1990 Houston - Dallas - San Antonio - Austin - Tampa - Miami - Latin America - Atlanta - Corpus Christi

Brent Barron  
 Odessa Laboratory Director



# Certificate of Analysis Summary 304935

## Pride Energy Company, Tulsa, OK

Project Id: South Four Lakes #15  
 Contact: Matt Pride

Project Location: T12S-R34E, Section 2, Unit Letter G

Date Received in Lab: Sat May-31-08 01:05 pm

Report Date: 03-JUN-08

Project Manager: Brent Barron, II

<i>Analysis Requested</i>	<i>Lab Id:</i>	<i>Field Id:</i>	<i>Depth:</i>	<i>Matrix:</i>	<i>Sampled:</i>	<i>Extracted:</i>	<i>Analyzed:</i>	<i>Units/RL:</i>
<b>Inorganic Anions by EPA 300</b>	304935-019	B-4 (20')		SOIL	May-29-08 16:50		Jun-03-08 12:45	mg/kg RL 25.0
	304935-020	B-4 (25')		SOIL	May-29-08 17:00		Jun-03-08 12:45	mg/kg RL 25.0
Chloride								

This analytical report, and the entire data package it represents, has been made for your exclusive and confidential use. The interpretations and results expressed throughout this analytical report represent the best judgment of XENCO Laboratories. XENCO Laboratories assumes no responsibility and makes no warranty, to the end use of the data hereby presented. Our liability is limited to the amount invoiced for this work order unless otherwise agreed to in writing.

Since 1990 Houston - Dallas - San Antonio - Austin - Tampa - Miami - Latin America - Atlanta - Corpus Christi

Brent Barron  
 Odessa Laboratory Director



# Flagging Criteria

- X** In our quality control review of the data a QC deficiency was observed and flagged as noted. MS/MSD recoveries were found to be outside of the laboratory control limits due to possible matrix /chemical interference, or a concentration of target analyte high enough to effect the recovery of the spike concentration. This condition could also effect the relative percent difference in the MS/MSD.
  - B** A target analyte or common laboratory contaminant was identified in the method blank. Its presence indicates possible field or laboratory contamination.
  - D** The sample(s) were diluted due to targets detected over the highest point of the calibration curve, or due to matrix interference. Dilution factors are included in the final results. The result is from a diluted sample.
  - E** The data exceeds the upper calibration limit; therefore, the concentration is reported as estimated.
  - F** RPD exceeded lab control limits.
  - J** The target analyte was positively identified below the MQL(PQL) and above the SQL(MDL).
  - U** Analyte was not detected.
  - L** The LCS data for this analytical batch was reported below the laboratory control limits for this analyte. The department supervisor and QA Director reviewed data. The samples were either reanalyzed or flagged as estimated concentrations.
  - H** The LCS data for this analytical batch was reported above the laboratory control limits. Supporting QC Data were reviewed by the Department Supervisor and QA Director. Data were determined to be valid for reporting.
  - K** Sample analyzed outside of recommended hold time.
- \* Outside XENCO'S scope of NELAC Accreditation

*Recipient of the Prestigious Small Business Administration Award of Excellence in 1994.  
 Certified and approved by numerous States and Agencies.  
 A Small Business and Minority Status Company that delivers SERVICE and QUALITY  
 Houston - Dallas - San Antonio - Austin - Tampa - Miami - Atlanta - Corpus Christi - Latin America*

11381 Meadowglen Lane Suite L Houston, Tx 77082-2647	Phone	Fax
9701 Harry Hines Blvd , Dallas, TX 75220	(281) 589-0692	(281) 589-0695
5332 Blackberry Drive, Suite 104, San Antonio, TX 78238	(214) 902 0300	(214) 351-9139
2505 N. Falkenburg Rd., Tampa, FL 33619	(210) 509-3334	(210) 509-3335
5757 NW 158th St, Miami Lakes, FL 33014	(813) 620-2000	(813) 620-2033
6017 Financial Dr., Norcross, GA 30071	(305) 823-8500	(305) 823-8555
	(770) 449-8800	(770) 449-5477



# Blank Spike Recovery



Project Name: Pride Energy Company

Work Order #: 304935

Project ID: South Four Lakes #15

Lab Batch #: 724237

Sample: 724237-1-BKS

Matrix: Solid

Date Analyzed: 06/03/2008

Date Prepared: 06/03/2008

Analyst: LATCOR

Reporting Units: mg/kg

Batch #: 1

## BLANK/BLANK SPIKE RECOVERY STUDY

Inorganic Anions by EPA 300 Analytes	Blank Result [A]	Spike Added [B]	Blank Spike Result [C]	Blank Spike %R [D]	Control Limits %R	Flags
Chloride	ND	10.0	9.91	99	75-125	

Blank Spike Recovery [D] = 100\*[C]/[B]

All results are based on MDL and validated for QC purposes.



# Form 3 - MS Recoveries



Project Name: Pride Energy Company

Work Order #: 304935

Lab Batch #: 724237

Date Analyzed: 06/03/2008

Date Prepared: 06/03/2008

Project ID: South Four Lakes #15

Analyst: LATCOR

QC- Sample ID: 304935-001 S

Batch #: 1

Matrix: Soil

Reporting Units: mg/kg

### MATRIX / MATRIX SPIKE RECOVERY STUDY

Inorganic Anions by EPA 300  Analytes	Parent Sample Result [A]	Spike Added [B]	Spiked Sample Result [C]	%R [D]	Control Limits %R	Flag
	Chloride	ND	100	87.7	88	75-125

Matrix Spike Percent Recovery [D] = 100\*(C-A)/B  
 Relative Percent Difference [E] = 200\*(C-A)/(C+B)  
 All Results are based on MDL and Validated for QC Purposes



# Sample Duplicate Recovery



Project Name: Pride Energy Company

Work Order #: 304935

Lab Batch #: 724237

Project ID: South Four Lakes #15

Date Analyzed: 06/03/2008

Date Prepared: 06/03/2008

Analyst: LATCOR

QC- Sample ID: 304935-001 D

Batch #: 1

Matrix: Soil

Reporting Units: mg/kg

SAMPLE / SAMPLE DUPLICATE RECOVERY					
Inorganic Anions by EPA 300	Parent Sample Result [A]	Sample Duplicate Result [B]	RPD	Control Limits %RPD	Flag
Analyte					
Chloride	ND	ND	NC	20	

Spike Relative Difference RPD  $200 * |(B-A)/(B+A)|$

All Results are based on MDL and validated for QC purposes.

**XENCO Laboratories / Environmental Lab of Texas**

176981 West 140 East  
Oklahoma, Texas 73165

Phone: 432-493-1800  
Fax: 432-493-1713

**CHAIN OF CUSTODY RECORD AND ANALYSIS RECORDS**

Company Name: Pride Energy Company  
 Direct Invoice To: Matt Pride  
 Billing Address: P. O. Box 710950  
 City, State, Zip Code: Tulsa, OK 74170-1950  
 Telephone No: 918-524-9200  
 Fax No: 918-524-9292  
 Email Report to: mattp@pride-energy.com  
 Sampler: Gil Van Deventer

Company Name: Pride Energy Company  
 Project #: South Four Leases #15  
 Project Location: T125-R34E, Section 2, Unit Letter G  
 COC #: V125-053108-1

LAB # (SEE PAGE ONE)	FIELD CODE	Date	Time	Received by:	Date	Time	Received by:	Date	Time	Analysis For		N
										TCF	TOTAL	
1	B-1 (5)	05/29/08	0745	1	X							
2	B-1 (10)	05/29/08	0750	1	X							
3	B-1 (15)	05/29/08	0755	1	X							
4	B-1 (20)	05/29/08	0802	1	X							
5	B-1 (25)	05/29/08	0811	1	X							
6	B-2 (5)	05/29/08	1050	1	X							
7	B-2 (10)	05/29/08	1053	1	X							
8	B-2 (15)	05/29/08	1100	1	X							
9	B-2 (20)	05/29/08	1110	1	X							
10	B-2 (25)	05/29/08	1115	1	X							

Special Instructions: Email results to: gil@trident-environmental.com and mattp@pride-energy.com

Prepared by: [Signature] Date: 5/29/08 Time: 1:00 PM  
 Received by: [Signature] Date: 5/31/08 Time: 4:40

Sample Comments: 7C  
 Laboratory Comments: 130506



**Environmental Lab of Texas**  
Variance/ Corrective Action Report- Sample Log-In

Client: Pride Energy Company  
 Date/ Time: 5/31/08 14:18  
 Lab ID #: 304935  
 Initials: JG

**Sample Receipt Checklist**

				Client Initials
#1 Temperature of container/ cooler?	(Yes)	No	7 <sup>h</sup> °C	
#2 Shipping container in good condition?	(Yes)	No		
#3 Custody Seals intact on shipping container/ cooler?	(Yes)	No	Not Present	
#4 Custody Seals intact on sample bottles/ container?	(Yes)	No	Not Present	
#5 Chain of Custody present?	(Yes)	No		
#6 Sample instructions complete of Chain of Custody?	(Yes)	No		
#7 Chain of Custody signed when relinquished/ received?	(Yes)	No		
#8 Chain of Custody agrees with sample label(s)?	(Yes)	No	ID written on Cont / Lid	
#9 Container label(s) legible and intact?	(Yes)	No	Not Applicable	
#10 Sample matrix/ properties agree with Chain of Custody?	(Yes)	No		
#11 Containers supplied by ELOT?	(Yes)	No		
#12 Samples in proper container/ bottle?	(Yes)	No	See Below	
#13 Samples properly preserved?	(Yes)	No	See Below	
#14 Sample bottles intact?	(Yes)	No		
#15 Preservations documented on Chain of Custody?	(Yes)	No		
#16 Containers documented on Chain of Custody?	(Yes)	No		
#17 Sufficient sample amount for indicated test(s)?	(Yes)	No	See Below	
#18 All samples received within sufficient hold time?	(Yes)	No	See Below	
#19 Subcontract of sample(s)?	Yes	No	Not Applicable	
#20 VOC samples have zero headspace?	Yes	No	Not Applicable	

**Variance Documentation**

Contact: \_\_\_\_\_ Contacted by: \_\_\_\_\_ Date/ Time: \_\_\_\_\_

Regarding: \_\_\_\_\_

Corrective Action Taken: \_\_\_\_\_

- Check all that Apply:
- See attached e-mail/ fax
  - Client understands and would like to proceed with analysis
  - Cooling process had begun shortly after sampling event

# Analytical Report 304938

for


## Pride Energy Company

Project Manager: Matt Pride

Pride Energy Company

South Four Lakes #15

05-JUN-08



12600 West I-20 East Odessa, Texas 79765

Texas certification numbers:  
Houston, TX T104704215

Florida certification numbers:  
Houston, TX E871002 - Miami, FL E86678 - Tampa, FL E86675  
Norcross(Atlanta), GA E87429

South Carolina certification numbers:  
Norcross(Atlanta), GA 98015

North Carolina certification numbers:  
Norcross(Atlanta), GA 483

Houston - Dallas - San Antonio - Austin - Tampa - Miami - Latin America  
Midland - Corpus Christi - Atlanta



05-JUN-08

Project Manager: **Matt Pride**  
**Pride Energy Company**  
P.O. Box 701950

Tulsa, OK 74170

Reference: XENCO Report No: **304938**  
**Pride Energy Company**  
Project Address: T12S-R34E, Section 2, Unit Letter G

**Matt Pride:**

We are reporting to you the results of the analyses performed on the samples received under the project name referenced above and identified with the XENCO Report Number 304938. All results being reported under this Report Number apply to the samples analyzed and properly identified with a Laboratory ID number. Subcontracted analyses are identified in this report with either the NELAC certification number of the subcontract lab in the analyst ID field, or the complete subcontracted report attached to this report.

Unless otherwise noted in a Case Narrative, all data reported in this Analytical Report are in compliance with NELAC standards. Estimation of data uncertainty for this report is found in the quality control section of this report unless otherwise noted. Should insufficient sample be provided to the laboratory to meet the method and NELAC Matrix Duplicate and Matrix Spike requirements, then the data will be analyzed, evaluated and reported using all other available quality control measures.

The validity and integrity of this report will remain intact as long as it is accompanied by this letter and reproduced in full, unless written approval is granted by XENCO Laboratories. This report will be filed for at least 5 years in our archives after which time it will be destroyed without further notice, unless otherwise arranged with you. The samples received, and described as recorded in Report No. 304938 will be filed for 60 days, and after that time they will be properly disposed without further notice, unless otherwise arranged with you. We reserve the right to return to you any unused samples, extracts or solutions related to them if we consider so necessary (e.g., samples identified as hazardous waste, sample sizes exceeding analytical standard practices, controlled substances under regulated protocols, etc).

We thank you for selecting XENCO Laboratories to serve your analytical needs. If you have any questions concerning this report, please feel free to contact us at any time.

Respectfully,

**Brent Barron, II**

Odessa Laboratory Manager

*Recipient of the Prestigious Small Business Administration Award of Excellence in 1994.*

*Certified and approved by numerous States and Agencies.*

*A Small Business and Minority Status Company that delivers SERVICE and QUALITY*

Houston - Dallas - San Antonio - Austin - Tampa - Miami - Atlanta - Corpus Christi - Latin America



**Sample Cross Reference 304938**



**Pride Energy Company, Tulsa, OK**

Pride Energy Company

<b>Sample Id</b>	<b>Matrix</b>	<b>Date Collected</b>	<b>Sample Depth</b>	<b>Lab Sample Id</b>
B-1	W	May-29-08 09:00		304938-001
B-2	W	May-29-08 11:50		304938-002
B-3	W	May-29-08 15:00		304938-003
B-4	W	May-29-08 17:22		304938-004



# Certificate of Analysis Summary 304938

## Pride Energy Company, Tulsa, OK



Project Id: South Four Lakes #15  
 Contact: Matt Pride

Date Received in Lab: Sat May-31-08 01:05 pm  
 Report Date: 05-JUN-08

Project Location: T12S-R34E, Section 2, Unit Letter G

Project Manager: Brent Barron, II

Analysis Requested	Lab Id:	304938-001	304938-002	304938-003	304938-004
	Field Id:	B-1	B-2	B-3	B-4
Depth:					
Matrix:	WATER	WATER	WATER	WATER	WATER
Sampled:	May-29-08 09:00	May-29-08 11:50	May-29-08 15:00	May-29-08 17:22	May-29-08 17:22
Extracted:					
Analyzed:	Jun-02-08 10:36				
Units/RL:	mg/L RL 1040 10.0	mg/L RL 56.0 5.00	mg/L RL 1450 25.0	mg/L RL 4550 50.0	mg/L RL 4550 50.0
Extracted:					
Analyzed:	Jun-02-08 16:15				
Units/RL:	mg/L RL 2210 5.00	mg/L RL 418 5.00	mg/L RL 3270 5.00	mg/L RL 7790 5.00	mg/L RL 7790 5.00
Total dissolved solids					

This analytical report, and the entire data package it represents, has been made for your exclusive and confidential use. The interpretations and results expressed throughout this analytical report represent the best judgment of XENCO Laboratories. XENCO Laboratories assumes no responsibility and makes no warranty to the end user of the data hereby presented. Our liability is limited to the amount invoiced for this work order unless otherwise agreed to in writing.

Since 1990 Houston - Dallas - San Antonio - Austin - Tampa - Miami - Latin America - Atlanta - Corpus Christi

  
 Brent Barron  
 Odessa Laboratory Director



## Flagging Criteria

- X** In our quality control review of the data a QC deficiency was observed and flagged as noted. MS/MSD recoveries were found to be outside of the laboratory control limits due to possible matrix /chemical interference, or a concentration of target analyte high enough to effect the recovery of the spike concentration. This condition could also effect the relative percent difference in the MS/MSD.
- B** A target analyte or common laboratory contaminant was identified in the method blank. Its presence indicates possible field or laboratory contamination.
- D** The sample(s) were diluted due to targets detected over the highest point of the calibration curve, or due to matrix interference. Dilution factors are included in the final results. The result is from a diluted sample.
- E** The data exceeds the upper calibration limit; therefore, the concentration is reported as estimated.
- F** RPD exceeded lab control limits.
- J** The target analyte was positively identified below the MQL(PQL) and above the SQL(MDL).
- U** Analyte was not detected.
- L** The LCS data for this analytical batch was reported below the laboratory control limits for this analyte. The department supervisor and QA Director reviewed data. The samples were either reanalyzed or flagged as estimated concentrations.
- H** The LCS data for this analytical batch was reported above the laboratory control limits. Supporting QC Data were reviewed by the Department Supervisor and QA Director. Data were determined to be valid for reporting.
- K** Sample analyzed outside of recommended hold time.

\* Outside XENCO'S scope of NELAC Accreditation

*Recipient of the Prestigious Small Business Administration Award of Excellence in 1994.*

*Certified and approved by numerous States and Agencies.*

*A Small Business and Minority Status Company that delivers SERVICE and QUALITY*

Houston - Dallas - San Antonio - Austin - Tampa - Miami - Atlanta - Corpus Christi - Latin America

11381 Meadowglen Lane Suite L Houston, Tx 77082-2647  
 9701 Harry Hines Blvd , Dallas, TX 75220  
 5332 Blackberry Drive, Suite 104, San Antonio, TX 78238  
 2505 N. Falkenburg Rd., Tampa, FL 33619  
 5757 NW 158th St, Miami Lakes, FL 33014  
 6017 Financial Dr., Norcross, GA 30071

Phone	Fax
(281) 589-0692	(281) 589-0695
(214) 902 0300	(214) 351-9139
(210) 509-3334	(210) 509-3335
(813) 620-2000	(813) 620-2033
(305) 823-8500	(305) 823-8555
(770) 449-8800	(770) 449-5477



# Blank Spike Recovery



Project Name: Pride Energy Company

Work Order #: 304938

Project ID: South Four Lakes #15

Lab Batch #: 724230

Sample: 724230-1-BKS

Matrix: Water

Date Analyzed: 06/02/2008

Date Prepared: 06/02/2008

Analyst: LATCOR

Reporting Units: mg/L

Batch #: 1

## BLANK/BLANK SPIKE RECOVERY STUDY

Inorganic Anions by EPA 300 Analytes	Blank Result [A]	Spike Added [B]	Blank Spike Result [C]	Blank Spike %R [D]	Control Limits %R	Flags
Chloride	ND	10.0	10.1	101	85-115	

Blank Spike Recovery [D] = 100\*[C]/[B]

All results are based on MDL and validated for QC purposes.



# Form 3 - MS Recoveries



Project Name: Pride Energy Company

Work Order #: 304938  
Lab Batch #: 724230  
Date Analyzed: 06/02/2008  
QC- Sample ID: 304831-001 S  
Reporting Units: mg/L

Date Prepared: 06/02/2008  
Batch #: 1  
Matrix: Water  
Project ID: South Four Lakes #15  
Analyst: LATCOR

### MATRIX / MATRIX SPIKE RECOVERY STUDY

Inorganic Anions by EPA 300	Parent Sample Result [A]	Spike Added [B]	Spiked Sample Result [C]	%R [D]	Control Limits %R	Flag
Analytes						
Chloride	34.6	50.0	77.6	86	85-115	

Matrix Spike Percent Recovery [D] = 100\*(C-A)/B  
Relative Percent Difference [E] = 200\*(C-A)/(C+B)  
All Results are based on MDL and Validated for QC Purposes



# Sample Duplicate Recovery



Project Name: Pride Energy Company

Work Order #: 304938

Lab Batch #: 724230

Project ID: South Four Lakes #15

Date Analyzed: 06/02/2008

Date Prepared: 06/02/2008

Analyst: LATCOR

QC- Sample ID: 304831-001 D

Batch #: 1

Matrix: Water

Reporting Units: mg/L

SAMPLE / SAMPLE DUPLICATE RECOVERY					
Inorganic Anions by EPA 300	Parent Sample Result [A]	Sample Duplicate Result [B]	RPD	Control Limits %RPD	Flag
Analyte					
Chloride	34.6	23.6	38	20	F

Lab Batch #: 724353

Date Analyzed: 06/02/2008

Date Prepared: 06/02/2008

Analyst: WRU

QC- Sample ID: 304932-001 D

Batch #: 1

Matrix: Water

Reporting Units: mg/L

SAMPLE / SAMPLE DUPLICATE RECOVERY					
TDS by SM2540C	Parent Sample Result [A]	Sample Duplicate Result [B]	RPD	Control Limits %RPD	Flag
Analyte					
Total dissolved solids	384	356	8	30	

Spike Relative Difference RPD  $200 * |(B-A)/(B+A)|$   
 All Results are based on MDL and validated for QC purposes.



**Environmental Lab of Texas**  
Variance/ Corrective Action Report- Sample Log-In

Client: Pride Energy company  
 Date/ Time: 5/31/08 14:18  
 Lab ID #: 304938  
 Initials: JG

**Sample Receipt Checklist**

				Client Initials	
#1	Temperature of container/ cooler?	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	7 <sup>00</sup>	°C
#2	Shipping container in good condition?	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No		
#3	Custody Seals intact on shipping container/ cooler?	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	Not Present	
#4	Custody Seals intact on sample bottles/ container?	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	Not Present	
#5	Chain of Custody present?	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No		
#6	Sample instructions complete of Chain of Custody?	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No		
#7	Chain of Custody signed when relinquished/ received?	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No		
#8	Chain of Custody agrees with sample label(s)?	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	ID written on Cont./ Lid	
#9	Container label(s) legible and intact?	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	Not Applicable	
#10	Sample matrix/ properties agree with Chain of Custody?	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No		
#11	Containers supplied by ELOT?	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No		
#12	Samples in proper container/ bottle?	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	See Below	
#13	Samples properly preserved?	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	See Below	
#14	Sample bottles intact?	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No		
#15	Preservations documented on Chain of Custody?	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No		
#16	Containers documented on Chain of Custody?	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No		
#17	Sufficient sample amount for indicated test(s)?	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	See Below	
#18	All samples received within sufficient hold time?	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	See Below	
#19	Subcontract of sample(s)?	<input type="checkbox"/> Yes	<input type="checkbox"/> No	Not Applicable	
#20	VOC samples have zero headspace?	<input type="checkbox"/> Yes	<input type="checkbox"/> No	Not Applicable	

**Variance Documentation**

Contact: \_\_\_\_\_ Contacted by: \_\_\_\_\_ Date/ Time: \_\_\_\_\_

Regarding: \_\_\_\_\_

Corrective Action Taken: \_\_\_\_\_

- Check all that Apply:
- See attached e-mail/ fax
  - Client understands and would like to proceed with analysis
  - Cooling process had begun shortly after sampling event

# Analytical Report 306332

for


## Pride Energy Company

**Project Manager: Matt Pride**

**Pride Energy Company**

**South Four Lakes # 15**

**27-JUN-08**



**12600 West I-20 East Odessa, Texas 79765**

Texas certification numbers:

Houston, TX T104704215

Florida certification numbers:

Houston, TX E871002 - Miami, FL E86678 - Tampa, FL E86675

Norcross(Atlanta), GA E87429

South Carolina certification numbers:

Norcross(Atlanta), GA 98015

North Carolina certification numbers:

Norcross(Atlanta), GA 483

Houston - Dallas - San Antonio - Austin - Tampa - Miami - Latin America

Midland - Corpus Christi - Atlanta



27-JUN-08

Project Manager: **Matt Pride**  
**Pride Energy Company**  
P.O. Box 701950

Tulsa, OK 74170

Reference: XENCO Report No: **306332**  
**Pride Energy Company**  
Project Address: T12S-R34E, Section 2, Unit Letter G

**Matt Pride:**

We are reporting to you the results of the analyses performed on the samples received under the project name referenced above and identified with the XENCO Report Number 306332. All results being reported under this Report Number apply to the samples analyzed and properly identified with a Laboratory ID number. Subcontracted analyses are identified in this report with either the NELAC certification number of the subcontract lab in the analyst ID field, or the complete subcontracted report attached to this report.

Unless otherwise noted in a Case Narrative, all data reported in this Analytical Report are in compliance with NELAC standards. Estimation of data uncertainty for this report is found in the quality control section of this report unless otherwise noted. Should insufficient sample be provided to the laboratory to meet the method and NELAC Matrix Duplicate and Matrix Spike requirements, then the data will be analyzed, evaluated and reported using all other available quality control measures.

The validity and integrity of this report will remain intact as long as it is accompanied by this letter and reproduced in full, unless written approval is granted by XENCO Laboratories. This report will be filed for at least 5 years in our archives after which time it will be destroyed without further notice, unless otherwise arranged with you. The samples received, and described as recorded in Report No. 306332 will be filed for 60 days, and after that time they will be properly disposed without further notice, unless otherwise arranged with you. We reserve the right to return to you any unused samples, extracts or solutions related to them if we consider so necessary (e.g., samples identified as hazardous waste, sample sizes exceeding analytical standard practices, controlled substances under regulated protocols, etc).

We thank you for selecting XENCO Laboratories to serve your analytical needs. If you have any questions concerning this report, please feel free to contact us at any time.

Respectfully,

---

**Brent Barron, II**

Odessa Laboratory Manager

*Recipient of the Prestigious Small Business Administration Award of Excellence in 1994.*

*Certified and approved by numerous States and Agencies.*

*A Small Business and Minority Status Company that delivers SERVICE and QUALITY*

Houston - Dallas - San Antonio - Austin - Tampa - Miami - Atlanta - Corpus Christi - Latin America



**Sample Cross Reference 306332**



**Pride Energy Company, Tulsa, OK**  
Pride Energy Company

<b>Sample Id</b>	<b>Matrix</b>	<b>Date Collected</b>	<b>Sample Depth</b>	<b>Lab Sample Id</b>
MW-1	W	Jun-20-08 07:55		306332-001



# Certificate of Analysis Summary 306332

## Pride Energy Company, Tulsa, OK



**Project Id:** South Four Lakes # 15

**Contact:** Matt Pride

**Project Location:** T12S-R34E, Section 2, Unit Letter G

**Date Received in Lab:** Fri Jun-20-08 05:00 pm

**Report Date:** 27-JUN-08

**Project Manager:** Brent Barron, II

<i><b>Analysis Requested</b></i>	<b>Lab Id:</b> 306332-001 <b>Field Id:</b> MW-1 <b>Depth:</b> <b>Matrix:</b> WATER <b>Sampled:</b> Jun-20-08 07:55			
<b>Inorganic Anions by EPA 300</b>	<b>Extracted:</b> <b>Analyzed:</b> Jun-23-08 08:50 <b>Units/RL:</b> mg/L RL 6180 50.0			
	Chloride			
<b>TDS by SM2540C</b>	<b>Extracted:</b> <b>Analyzed:</b> Jun-23-08 16:30 <b>Units/RL:</b> mg/L RL 12500 5.00			
	Total dissolved solids			

This analytical report, and the entire data package it represents, has been made for your exclusive and confidential use. The interpretations and results expressed throughout this analytical report represent the best judgment of XENCO Laboratories. XENCO Laboratories assumes no responsibility and makes no warranty to the end user of the data hereby presented. Our liability is limited to the amount in order for this work order unless otherwise agreed to in writing.

Since 1990 Houston - Dallas - San Antonio - Austin - Tampa - Miami - Latin America - Atlanta - Corpus Christi



Brent Barron  
Odessa Laboratory Director



## Flagging Criteria

- X** In our quality control review of the data a QC deficiency was observed and flagged as noted. MS/MSD recoveries were found to be outside of the laboratory control limits due to possible matrix /chemical interference, or a concentration of target analyte high enough to effect the recovery of the spike concentration. This condition could also effect the relative percent difference in the MS/MSD.
  - B** A target analyte or common laboratory contaminant was identified in the method blank. Its presence indicates possible field or laboratory contamination.
  - D** The sample(s) were diluted due to targets detected over the highest point of the calibration curve, or due to matrix interference. Dilution factors are included in the final results. The result is from a diluted sample.
  - E** The data exceeds the upper calibration limit; therefore, the concentration is reported as estimated.
  - F** RPD exceeded lab control limits.
  - J** The target analyte was positively identified below the MQL(PQL) and above the SQL(MDL).
  - U** Analyte was not detected.
  - L** The LCS data for this analytical batch was reported below the laboratory control limits for this analyte. The department supervisor and QA Director reviewed data. The samples were either reanalyzed or flagged as estimated concentrations.
  - H** The LCS data for this analytical batch was reported above the laboratory control limits. Supporting QC Data were reviewed by the Department Supervisor and QA Director. Data were determined to be valid for reporting.
  - K** Sample analyzed outside of recommended hold time.
- \* Outside XENCO'S scope of NELAC Accreditation

*Recipient of the Prestigious Small Business Administration Award of Excellence in 1994.*

*Certified and approved by numerous States and Agencies.*

*A Small Business and Minority Status Company that delivers SERVICE and QUALITY*

Houston - Dallas - San Antonio - Austin - Tampa - Miami - Atlanta - Corpus Christi - Latin America

11381 Meadowglen Lane Suite L Houston, Tx 77082-2647  
 9701 Harry Hines Blvd , Dallas, TX 75220  
 5332 Blackberry Drive, Suite 104, San Antonio, TX 78238  
 2505 N. Falkenburg Rd., Tampa, FL 33619  
 5757 NW 158th St, Miami Lakes, FL 33014  
 6017 Financial Dr., Norcross, GA 30071

Phone	Fax
(281) 589-0692	(281) 589-0695
(214) 902 0300	(214) 351-9139
(210) 509-3334	(210) 509-3335
(813) 620-2000	(813) 620-2033
(305) 823-8500	(305) 823-8555
(770) 449-8800	(770) 449-5477



# Blank Spike Recovery



Project Name: Pride Energy Company

Work Order #: 306332

Project ID: South Four Lakes # 15

Lab Batch #: 726337

Sample: 726337-1-BKS

Matrix: Water

Date Analyzed: 06/23/2008

Date Prepared: 06/23/2008

Analyst: LATCOR

Reporting Units: mg/L

Batch #: 1

## BLANK/BLANK SPIKE RECOVERY STUDY

Inorganic Anions by EPA 300 Analytes	Blank Result [A]	Spike Added [B]	Blank Spike Result [C]	Blank Spike %R [D]	Control Limits %R	Flags
Chloride	ND	10.0	11.6	116	80-120	

Blank Spike Recovery [D] = 100\*[C]/[B]

All results are based on MDL and validated for QC purposes.



# Form 3 - MS Recoveries



Project Name: Pride Energy Company

Work Order #: 306332  
Lab Batch #: 726337  
Date Analyzed: 06/23/2008  
QC- Sample ID: 306329-001 S  
Reporting Units: mg/L

Date Prepared: 06/23/2008  
Batch #: 1  
Project ID: South Four Lakes # 15  
Analyst: LATCOR  
Matrix: Water

### MATRIX / MATRIX SPIKE RECOVERY STUDY

Inorganic Anions by EPA 300	Parent Sample Result [A]	Spike Added [B]	Spiked Sample Result [C]	%R [D]	Control Limits %R	Flag
Analytes						
Chloride	2600	500	3270	134	80-120	X

Matrix Spike Percent Recovery [D] = 100\*(C-A)/B  
Relative Percent Difference [E] = 200\*(C-A)/(C+B)  
All Results are based on MDL and Validated for QC Purposes



# Sample Duplicate Recovery



Project Name: Pride Energy Company

Work Order #: 306332

Lab Batch #: 726337

Date Analyzed: 06/23/2008

QC- Sample ID: 306329-001 D

Reporting Units: mg/L

Date Prepared: 06/23/2008

Batch #: 1

Project ID: South Four Lakes # 15

Analyst: LATCOR

Matrix: Water

SAMPLE / SAMPLE DUPLICATE RECOVERY					
Inorganic Anions by EPA 300	Parent Sample Result [A]	Sample Duplicate Result [B]	RPD	Control Limits %RPD	Flag
Analyte					
Chloride	2600	2590	20	20	

Lab Batch #: 726342

Date Analyzed: 06/23/2008

QC- Sample ID: 306329-001 D

Reporting Units: mg/L

Date Prepared: 06/23/2008

Batch #: 1

Analyst: WRU

Matrix: Water

SAMPLE / SAMPLE DUPLICATE RECOVERY					
TDS by SM2540C	Parent Sample Result [A]	Sample Duplicate Result [B]	RPD	Control Limits %RPD	Flag
Analyte					
Total dissolved solids	5700	5580	2	30	

Spike Relative Difference RPD  $200 * |(B-A)/(B+A)|$   
All Results are based on MDL and validated for QC purposes.



**Environmental Lab of Texas**  
Variance/ Corrective Action Report- Sample Log-In

Client: Fride Energy  
 Date/ Time: 6-20-08 17:00  
 Lab ID #: 306332  
 Initials: AL

**Sample Receipt Checklist**

			Client Initials
#1 Temperature of container/ cooler?	<input checked="" type="checkbox"/> Yes	No	5.0 °C
#2 Shipping container in good condition?	<input checked="" type="checkbox"/> Yes	No	
#3 Custody Seals intact on shipping container/ cooler?	<input checked="" type="checkbox"/> Yes	No	Not Present
#4 Custody Seals intact on sample bottles/ container?	<input checked="" type="checkbox"/> Yes	No	Not Present
#5 Chain of Custody present?	<input checked="" type="checkbox"/> Yes	No	
#6 Sample instructions complete of Chain of Custody?	<input checked="" type="checkbox"/> Yes	No	
#7 Chain of Custody signed when relinquished/ received?	<input checked="" type="checkbox"/> Yes	No	
#8 Chain of Custody agrees with sample label(s)?	<input checked="" type="checkbox"/> Yes	No	ID written on Cont./ Lid
#9 Container label(s) legible and intact?	<input checked="" type="checkbox"/> Yes	No	Not Applicable
#10 Sample matrix/ properties agree with Chain of Custody?	<input checked="" type="checkbox"/> Yes	No	
#11 Containers supplied by ELOT?	<input checked="" type="checkbox"/> Yes	No	
#12 Samples in proper container/ bottle?	<input checked="" type="checkbox"/> Yes	No	See Below
#13 Samples properly preserved?	<input checked="" type="checkbox"/> Yes	No	See Below
#14 Sample bottles intact?	<input checked="" type="checkbox"/> Yes	No	
#15 Preservations documented on Chain of Custody?	<input checked="" type="checkbox"/> Yes	No	
#16 Containers documented on Chain of Custody?	<input checked="" type="checkbox"/> Yes	No	
#17 Sufficient sample amount for indicated test(s)?	<input checked="" type="checkbox"/> Yes	No	See Below
#18 All samples received within sufficient hold time?	<input checked="" type="checkbox"/> Yes	No	See Below
#19 Subcontract of sample(s)?	<input checked="" type="checkbox"/> Yes	No	Not Applicable
#20 VOC samples have zero headspace?	<input checked="" type="checkbox"/> Yes	No	Not Applicable

**Variance Documentation**

Contact: \_\_\_\_\_ Contacted by: \_\_\_\_\_ Date/ Time: \_\_\_\_\_

Regarding: \_\_\_\_\_

Corrective Action Taken: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

- Check all that Apply:
- See attached e-mail/ fax
  - Client understands and would like to proceed with analysis
  - Cooling process had begun shortly after sampling event

APPENDIX D

MONITORING WELL SAMPLING DATA FORMS



WELL SAMPLING DATA FORM

CLIENT: Pride Energy Company  
 SYSTEM: South Four Lakes #15  
 SITE LOCATION: T12S R34E Sec2 Unit G

WELL ID: Monitor Well #1  
 DATE: June 20, 2008  
 SAMPLER: Rozanne Johnson

PURGING METHOD:  Hand Bailed  Pump, Type: Variable Controlled Purge Pump

SAMPLING METHOD:  Disposable Bailer  Direct from Discharge Hose  Other: \_\_\_\_\_

DISPOSAL METHOD OF PURGE WATER:  On-site Drum  Drums  SWD Disposal Facility

TOTAL DEPTH OF WELL: 49.69 Feet

DEPTH TO WATER: 26.46 Feet

HEIGHT OF WATER COLUMN: 23.23 Feet

WELL VOLUME: 3.7 Gal.

2 In. Well Diameter

15 Gallons purged prior to sampling

TIME	TEMP. °C	COND. mS/cm	pH	PHYSICAL APPEARANCE AND REMARKS
7:40	20.5	15.12	6.78	Silt and Sand
7:42	20.6	14.22	6.79	Clear
7:50	20.7	14.05	6.81	
7:55				Samples Collected with Disposable Bailer
				Chlorides/TDS (1-1000ml Plastic)

COMMENTS: Equipment decontamination consists of gloves, Alconox, and Distilled Water Rinse.

Myron Model 6P instrument used to obtain pH, conductivity, and temperature measurements.

Delivered samples to Xenco Laboratories for Chlorides and TDS analysis.

\_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_