

DATE IN 11/4/02	SUSPENSE 11/19/02	ENGINEER	LOGGED IN NW	TYPE SWD	APP NO. 211445562
--------------------	----------------------	----------	-----------------	-------------	----------------------

ABOVE THIS LINE FOR DIVISION USE ONLY

NEW MEXICO OIL CONSERVATION DIVISION
- Engineering Bureau -
1220 South St. Francis Drive, Santa Fe, NM 87505

ADMINISTRATIVE APPLICATION CHECKLIST

THIS CHECKLIST IS MANDATORY FOR ALL ADMINISTRATIVE APPLICATIONS FOR EXCEPTIONS TO DIVISION RULES AND REGULATIONS WHICH REQUIRE PROCESSING AT THE DIVISION LEVEL IN SANTA FE

Application Acronyms:

- [NSP-Non-Standard Location] [NSL-Non-Standard Proration Unit] [SD-Simultaneous Dedication]
 [DHC-Downhole Commingling] [CTB-Lease Commingling] [PLC-Pool/Lease Commingling]
 [PC-Pool Commingling] [OLS-Off-Lease Storage] [OLM-Off-Lease Measurement]
 [WFX-Waterflood Expansion] [PMX-Pressure Maintenance Expansion]
 [SWD-Salt Water Disposal] [IPI-Injection Pressure Increase]
 [EOR-Qualified Enhanced Oil Recovery Certification] [PPR-Positive Production Response]

[1] **TYPE OF APPLICATION** - Check Those Which Apply for [A]

- [A] Location - Spacing Unit - Simultaneous Dedication
 NSL NSP SD

Check One Only for [B] or [C]

- [B] Commingling - Storage - Measurement
 DHC CTB PLC PC OLS OLM
- [C] Injection - Disposal - Pressure Increase - Enhanced Oil Recovery
 WFX PMX SWD IPI EOR PPR

[D] Other: Specify _____

[2] **NOTIFICATION REQUIRED TO:** - Check Those Which Apply, or Does Not Apply

- [A] Working, Royalty or Overriding Royalty Interest Owners
- [B] Offset Operators, Leaseholders or Surface Owner
- [C] Application if One Which Requires Published Legal Notice
- [D] Notification and/or Concurrent Approval by BLM or SLO
U.S. Bureau of Land Management - Commissioner of Public Lands, State Land Office
- [E] For all of the above, Proof of Notification or Publication is Attached, and/or,
- [F] Waivers are Attached


[3] **SUBMIT ACCURATE AND COMPLETE INFORMATION REQUIRED TO PROCESS THE TYPE OF APPLICATION INDICATED ABOVE.**

[4] **CERTIFICATION:** I hereby certify that the information submitted with this application for administrative approval is **accurate** and **complete** to the best of my knowledge. I also understand that **no action** will be taken on this application until the required information and notifications are submitted to the Division.

Note: Statement must be completed by an individual with managerial and/or supervisory capacity.

Doug O'Neil

 Print or Type Name



 Signature

Engineering Manager

 Title

10/31/02

 Date

Doug.O'Neil@usa.apachecorp.com

 e-mail Address

October 30, 2002

New Mexico Oil Conservation Division
1220 South Francis St.
Santa Fe, NM 87505

Re: Administrative Applications for Salt Water Disposal
Argo No. 6
Argo No. 7

Gentlemen,

Apache Corporation would like to re-submit the attached applications for salt water disposal in the Argo No. 6 and Argo No. 7. The original application was previously denied and returned to Apache after cement tops on the NEDU 604, NEDU 610W and NEDU 705 were found to be either undocumented or insufficient to cover the permitted injection intervals as proposed in the applications. A copy of that letter notification is attached. Since that time, remedial cementing procedures have been either completed or are in progress to place sufficient cement behind the production casing in these wells to prevent upward migration of injected fluids. Apache Corporation would now like the application to be considered again for administrative approval.

In addition to the standard application requirements, several additional items are attached. Remedial work on the NEDU 610W has been completed with a copy of the C-103 attached. Procedures for remedial cementing of NEDU 604 and NEDU 705 are also attached. These remedial cementing procedures are based on several conversations and verbal approvals obtained from the Oil Conservation Division Office in Hobbs while working on NEDU 610W. Work on NEDU 604 is almost complete, and work on NEDU 705 will commence about October 31, 2002. Appropriate paperwork will be filed upon completion of the work.

Your assistance in processing this application is greatly appreciated. If you require additional information, please contact Brent Lowery (918) 491-4826.



Brent Lowery
Sr. Production Engineer
Apache Corporation



NEW MEXICO ENERGY, MINERALS and NATURAL RESOURCES DEPARTMENT

GARY E. JOHNSON

Governor

Betty Rivera

Cabinet Secretary

Lori Wrotenbery

Director

Oil Conservation Division

Date: May 22, 2002

Mr Doug O'Neil
Apache Corporation
2000 Post Oak Blvd
Suite 100
Houston, TX 77056-4400

Ref: Administrative Applications for Salt Water Disposal

This letter acknowledges the receipt of your two (2) administrative applications dated April 22, 2002, for Salt Water Disposal in the Argo No. 6 and Argo No. 7 wells located in Section 15, Township 21 South, Range 37 East, NMPM, Lea County, New Mexico. The division received your applications April 24, 2002.

Our preliminary review indicates that the information provided in the applications is very helpful but still not sufficient to process the administrative orders. The following information is necessary:

- 1) The Apache operated Argo No. 10 produces gas (and lots of water) from the same formation being permitted for injection within the ½ mile radius of review. Please notify us of your intentions concerning this situation.
- 2) Our records indicate wells with inadequate casing cement coverage over the permitted injection zone. Please provide evidence of adequate cement tops over all wells within the ½ mile area of review. The following is a list of problem wells we have currently identified:
NEDU No. 604 – top of cement 4650 by CBL in 1989.
NEDU No. 610 – top of cement 5457 by CBL in 1988.
NEDU No. 705 – undefined top of cement, needs CBL.
- 3) Please provide a well bore diagram of recently plugged and abandoned NEDU No. 608.

Since the submitted information is insufficient to review, the applications have been **Ruled Incomplete on May 22, 2002**. Please submit the above stated information by May 29th, 2002.

The Division can not proceed with your applications until the required information is submitted. Upon receipt, the Division will continue to process your applications. The additional information can be faxed (505-476-3471), or mailed to the Division. If the necessary information is not submitted, your applications will be returned to you.

If you have any questions, please contact me in Santa Fe, at 505-476-3448.

Sincerely,

A handwritten signature in cursive script, appearing to read "William V Jones Jr", with a long horizontal flourish extending to the right.

William V Jones Jr PE
Petroleum Engineer
Oil Conservation Division

APPLICATION FOR AUTHORIZATION TO INJECT

- I. PURPOSE: Secondary Recovery Pressure Maintenance Disposal Storage
Application qualifies for administrative approval? Yes No
- II. OPERATOR: Apache Corporation
ADDRESS: 6120 South Yale, Suite 1500 Tulsa, Oklahoma 74136-4224
CONTACT PARTY: Kara Coday PHONE: 918-491-4957
- III. WELL DATA: Complete the data required on the reverse side of this form for each well processed for injection
Additional sheets may be attached if necessary.
- IV. Is this an expansion of an existing project: Yes No
If yes, give the Division order number authorizing the project _____
- V. Attach a map that identifies all wells and leases within two miles of any proposed injection well with a one-half radius circle drawn around each proposed injection well. This circle identifies the wells area of review.
- VI. Attach a tabulation of data on all wells of public record within the area of review which penetrate the proposed injection zone. Such data shall include a description of each well's type, construction, date drilled, location, depth, record of completion, and a schematic of any plugged well illustrating all plugging detail.
- VII. Attach data on the proposed operation, including:
1. Proposed average and maximum daily rate and volume of fluids to be injected;
 2. Whether the system is open or closed;
 3. Proposed average and maximum injection pressure;
 4. Sources and an appropriate analysis of injection fluid and compatibility with the receiving formation if other than reinjected produced water; and
 5. If injection is for disposal purposes into a zone not productive of oil or gas at or within one mile of the proposed well, attach a chemical analysis of the disposal zone formation water (may be measured or inferred from existing literature, studies, nearby wells, etc.).
- *VIII. Attach appropriate geological data on the injection zone including appropriate lithologic detail, geologic name thickness and depth. Give the geologic name, and depth to bottom of all underground sources of drinking water (aquifers containing waters with total dissolved solids concentrations of 10,000 mg/l or less) overlaying the proposed injection zone as well as any such sources known to be immediately underlying the injection interval.
- IX. Describe the proposed stimulation program, if any.
- * X. Attach appropriate logging and test data on the well. (If well logs have been filed with the Division, they need not be resubmitted.)
- * XI. Attach a chemical analysis of fresh water from two or more fresh water wells (if available and producing) within one mile of any injection or disposal well showing location of wells and dates samples were taken.
- XII. Applicants for disposal wells must make an affirmative statement that they have examined available geologic and engineering data and find no evidence of open faults or any other hydrologic connection between the disposal zone and any underground sources of drinking water.
- XIII. Applicants must complete the "Proof of Notice" section on the reverse side of this form.
- XIV. Certification: I hereby certify that the information submitted with this application is true and correct to the best of my knowledge and belief.

NAME: Kara Coday TITLE: Sr. Engineering Technician
SIGNATURE: *Kara Coday* DATE: 10/31/2002

* If the information required under Sections VI, VIII, X, and XI above has been previously submitted, it need not be resubmitted. Please show the date and circumstance of the earlier submittal: _____

DISTRIBUTION: Original and one copy to Santa Fe with one copy to the appropriate District Office

III. WELL DATA

- A. The following well data must be submitted for each injection well covered by this application. The data must be both in tabular and schematic form and shall include:
- (1) Lease name; Well No.; Location by Section, Township, and Range; and footage location within the section.
 - (2) Each casing string used with its size, setting depth, sacks of cement used, hole size, top of cement and how such top was determined.
 - (3) A description of the tubing to be used including its size, lining material, and setting depth.
 - (4) The name, model, and setting depth of the packer used or a description of any other seal system or assembly used.

Division District Offices have supplies of Well Data Sheets which may be used or which may be used as models for this purpose. Applicants for several identical wells may submit a "typical data sheet" rather than submitting the data for each well.

- B. The following must be submitted for each injection well covered by this application. All items must be addressed for the initial well. Responses for additional wells need be shown only when when different. Information shown on schematics need not be repeated.
- (1) The name of the injection formation and, if applicable, the field or pool name.
 - (2) The injection interval and whether it is perforated or open-hole.
 - (3) State if the well was drilled for injection or, if not, the original purpose of the well.
 - (4) Give the depths of any other perforated intervals and detail on the sacks of cement or bridge plugs used to seal off such perforations.
 - (5) Give the depth to and name of the next higher and next lower oil or gas zone in the area of the well, if any.

XIV. PROOF OF NOTICE

All applicants must furnish proof that a copy of the application has been furnished, by certified or registered mail, to the owner of the surface of the land on which the well is to be located and to each leasehold operator within one-half mile of the well location.

Where an application is subject to administrative approval, a proof of publication must be submitted. Such proof shall consist of a copy of the legal advertisement which was published in the county in which the well is located. The contents of such advertisement must include:

- (1) The name, address, phone number, and contact party for the applicant;
- (2) The intended purpose of the injection well; with the exact location of single wells or the Section, Township, and Range location of multiple wells;
- (3) The formation name and depth with expected maximum injection rates and pressures; and,
- (4) A notation that interested parties must file objections or requests for hearing with the Oil Conservation Division, 2040 South Pacheco, Santa Fe, New Mexico 87505 within 15 days.

NO ACTION WILL BE TAKEN ON THE APPLICATION UNTIL PROPER PROOF OF NOTICE HAS BEEN SUBMITTED.

NOTICE: Surface owners or offset operators must file any objections or requests for hearing of administrative applications within 15 days from the date this application was mailed to them.

**ATTACHMENT FOR FORM C-108
ARGO LEASE
MISCELLANEOUS DATA**

III. WELL DATA

B. (5)	Next higher oil zone	Grayburg @ (+/-) 3735' - 3962'
	Next lower oil zone	Blinebry @ (+/-) 5500' - 6080'

VII. PROPOSED OPERATION

1.	Average Injection Rate	5000 BWPD	
	Maximum Injection Rate	10,000 BWPD	
2.	Closed Injection System		
3.	Average Injection Pressure	600 psi	
	Maximum Injection Pressure	800 psi (approximate) (will not exceed 0.2 psi/ft to top perforation)	
4.	Source Water	Grayburg	Analysis Attached

VIII. See attached Geological Data prepared by Bruce Uszynski, Sr. Staff Geologist

IX. STIMULATION PROGRAM

Acidize both wells with approximately 1500 - 2000 gals 15% HCL

X. Gamma Ray - Compensated Neutron Log for Argo No. 7 enclosed

XI. See attached location plat and analysis for Deck & Bettis fresh water wells

XII. See attached Geological Data prepared by Bruce Uszynski, Sr. Staff Geologist

SAN ANDRES GEOLOGICAL DATA

The San Andres formation has been chosen for water disposal.
The intervals chosen within the San Andres are as follows:

Proposed Injection Formation: San Andres, Top - 3990' Base - 5080'

Proposed Injection Intervals: 4100' - 4200', 4225' - 4285', 4315' - 4377', 4400' - 4430', 4484' - 4530'

The San Andres formation is overall a thick, porous dolomite exhibiting excellent porosity. In offset logs, porosities are typically in the 15 - 20 % range. These porosity zones are more than adequate to allow for the disposal of produced water. Sufficient barriers exist in the upper and lower portions of the San Andres formations to prevent vertical migration either upwards or downwards into over/underlying productive formations.

Nearest overlying productive formation: Grayburg, Top - 3735' Base - 3962'

Distance to uppermost San Andres perforation: 138'

Next lowest productive zone: Blinbry, Top - 5500' Base - 6080'

Distance from lowest San Andres perforation to top of Blinbry: 970'

The deepest known fresh water in this immediate area is the Ogallala formation at a depth of 100' - 300', ~3000' above the proposed disposal zone. This should present no hazard to the fresh water aquifers in the area.

The above information is accurate to the best of my knowledge. I have worked in the Permian Basin for the last 22 years. My credentials have been accepted by the NMOCD as an expert witness in this area.

Bruce J. Uszynski
Sr. Staff Geologist
Apache Corporation
(713) 296-6345
bruce.uszynski@usa.apachecorp.com

OPERATOR Apache Corporation LEASE Argo
 WELL NO. 6 1650' FSL & 2310' FWL K 15 21S 37E
 FOOTAGE LOCATION UNIT SECTION TOWNSHIP RANGE

Well Construction Data

Surface Casing

Size 13-3/8 Cemented with 250 sx
 TOC Surface feet determined by Circulation
 Hole Size 17-1/4

Intermediate Casing

Size 8-5/8 Cemented with 2000 sx
 TOC Surface feet determined by Circulation
 Hole Size 11

Long String

Size 5-1/2 Cemented with 500 sx
 TOC 5250 feet determined by Freeze Point
 Hole Size 7-7/8
 Total Depth 7991

Injection Interval


4000 feet to 5000 feet Perforated
 (perforated or open-hole; indicate which)

Tubing Size 2-3/8 lined with IPC set in a
 (type of internal coating)
5-1/2" Baker Lok-Set packer at 3900 feet

Other type of tubing / casing seal if applicable N/A

Other Data

1. Is this a new well drilled for injection? Yes No
 If no, for what purpose was the well originally drilled? Ellenburger Producer
2. Name of the Injection formation San Andres
3. Name of Field or Pool (if applicable) Hare; San Andres
4. Has the well ever been perforated in any other zone(s)? List all such perforated intervals and give plugging detail, i.e., sacks of cement or plug(s) used. Drinkard 6436-6555 - Squeezed w/ 150 sx / Abo 6794-7215 - Squeezed w/ 100 sx / Hare Simpson - See attachment for remedial operation Ellenburger 7790-7991 - CIBP @ 7760' w/ 35' cement
5. Give the names and depths of any over or underlying oil or gas zones (pools) in this area. See C-108 attachment

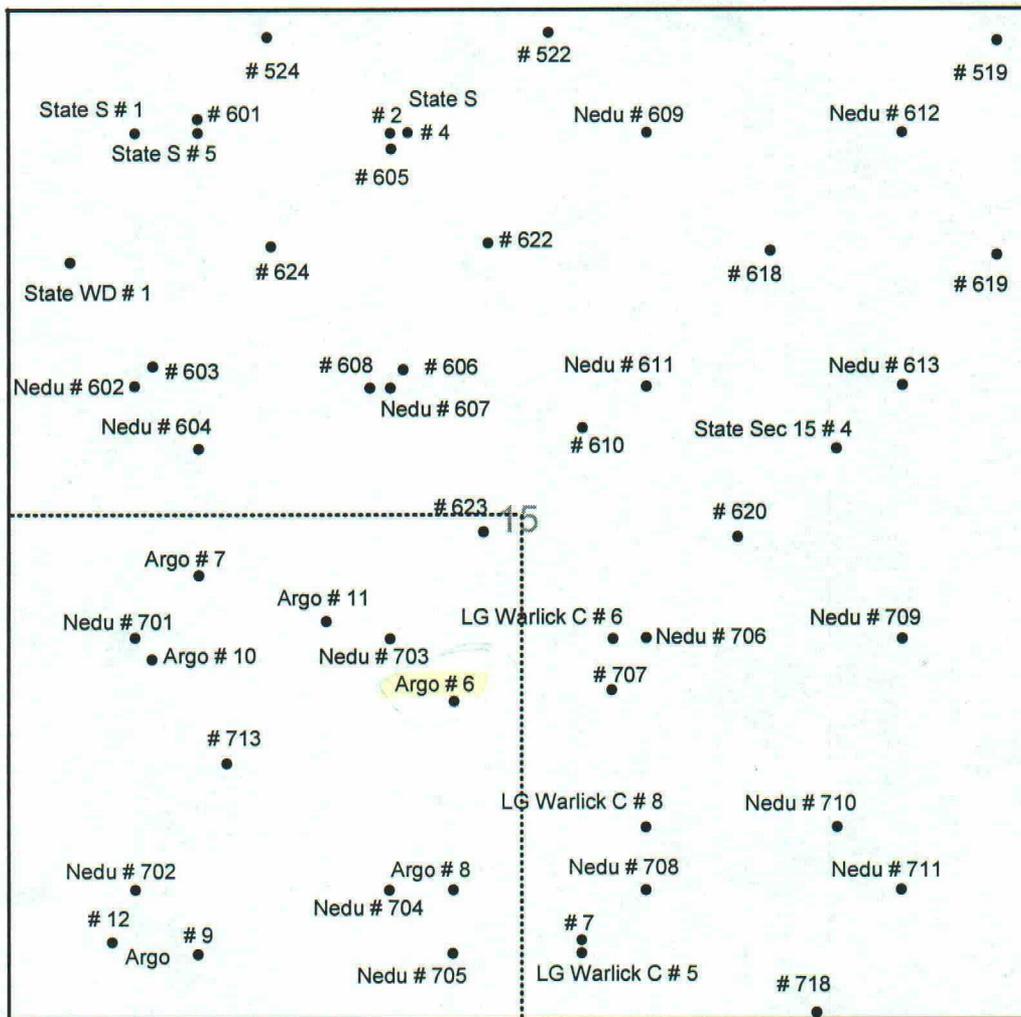

ARGO LEASE
 SW1/4 - 160 ACRES / SECTION 15
 TOWNSHIP 21S, RANGE 37E
 LEA COUNTY, NEW MEXICO

Argo # 6

API No. 30-025-06603

1650' FSL & 2310' FWL

Sec. 15, T-21S, R-37E

Remedial Operation to Convert to SWD

- 1.) Set CIBP @ 7400' w/ 35' cement cap
- 2.) Set CIBP @ 6400' w/ 35' cement cap
- 3.) Perforate 5-1/2" casing @ +/- 5200'
- 4.) Run in hole w/ Cement Retainer and set @ +/- 5175'
- 5.) Cement squeeze behind 5-1/2" casing w/ 1000 sx - Circulating to Surface
- 6.) Cap Cement Retainer w/ 2 sx cement
- 7.) Perforate San Andres between 4000' - 5000' (Perfs to be determined at time of conversion)

OPERATOR Apache Corporation LEASE Argo
 WELL NO. 7 2310' FSL & 990' FWL L 15 21S 37E
 FOOTAGE LOCATION UNIT SECTION TOWNSHIP RANGE

Well Construction Data

Surface Casing
 Size 13-3/8 Cemented with 250 sx

TOC Surface feet determined by Circulation

Hole Size 17-1/4

Intermediate Casing

Size 8-5/8 Cemented with 1900 sx

TOC Surface feet determined by Circulation

Hole Size 11

Long String

Size 5-1/2 Cemented with 779 sx

TOC 3280 feet determined by Cement Bond Log

Hole Size 7-7/8

Total Depth 8193

Injection Interval

4000 feet to 5000 feet Perforated
 (perforated or open-hole; indicate which)

Tubing Size 2-3/8 lined with IPC set in a
 (type of internal coating)
5-1/2" Baker Lok-Set packer at 3900 feet

Other type of tubing / casing seal if applicable N/A

Other Data

1. Is this a new well drilled for injection? Yes No

If no, for what purpose was the well originally drilled? Ellenburger Producer

2. Name of the Injection formation San Andres

3. Name of Field or Pool (if applicable) Hare; San Andres

4. Has the well ever been perforated in any other zone(s)? List all such perforated intervals and give plugging detail, i.e., sacks of cement or plug(s) used. Grayburg 3760-3974 - See attachment for remedial operation / Drinkard 6420-6636 - CIBP @ 6350' w/ 35' cmt / Abo 6821-7169 - CIBP @ 6700' w/ 35' cmt / Ellenburger 8016-8193 - CIBP @ 7900' w/ 35' cmt

5. Give the names and depths of any over or underlying oil or gas zones (pools) in this area. See attachment to C-108

Argo # 7


API No. 30-025-09915

2310' FSL & 990' FWL

Sec. 15, T-21S, R-37E

Remedial Operation to Convert to SWD

- 1.) Cement squeeze Grayburg perforations 3760' - 3974' w/ 500 sx
- 2.) Pressure test squeeze job
- 3.) Drill out CIBP @ 4500'
- 4.) Perforate San Andres between 4000' - 5000' (Perfs to be determined at time of conversion)

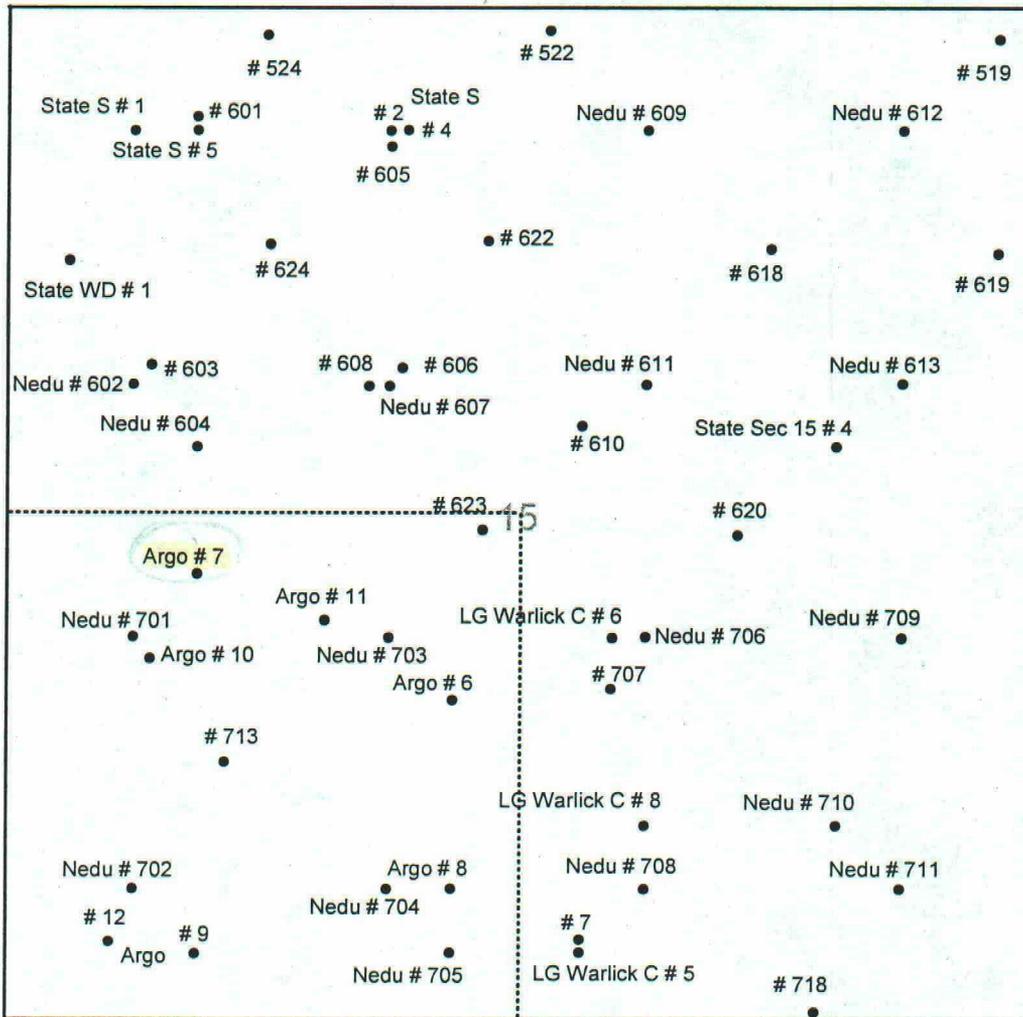



Apache
CORPORATION

ARGO LEASE
 SW1/4 - 160 ACRES / SECTION 15
 TOWNSHIP 21S, RANGE 37E
 LEA COUNTY, NEW MEXICO

Submit 3 Copies to Appropriate District Office

State of New Mexico Energy, Minerals and Natural Resources

FORM C-103 Revised March 25, 1999

DISTRICT I

1625 N. French Dr., Hobbs, NM 88240

DISTRICT II

811 South First, Artesia, NM 88210

DISTRICT III

1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV

1220 South St. Francis Dr., Santa Fe, NM 87505

OIL CONSERVATION DIVISION 1220 South St. Francis Drive Santa Fe, NM 87505

WELL API NO. 30-025-06588

5. Indicate Type of Lease [X] STATE [] FEE

6. State Oil & Gas Lease No.

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

7. Lease Name or Unit Agreement Name

Northeast Drinkard Unit

1. Type of Well: [] OIL WELL [] GAS WELL [X] OTHER Iniection

8. Well No. 610 W

2. Name of Operator Apache Corporation

9. Pool name or Wildcat Eunice N., Blinebry-Tubb-Drinkard

3. Address of Operator 6120 South Yale, Suite 1500 Tulsa, Oklahoma 74136-4224 WFX-774

4. Well Location Unit Letter G : 2210 Feet From The North Line and 2310 Feet From The West Line Section 15 Township 21S Range 37E NMPM Lea County

10. Elevation (Show whether DF, RKB, RT, GR, etc.) 3439 DF

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

SUBSEQUENT REPORT OF:

- [] Perform Remedial Work [] Plug and Abandon [] Temporarily Abandon [] Change Plans [] Pull or Alter Casing [] Other

- [X] Remedial Work [] Altering Casing [] Commence Drilling Operations [] Plug and Abandonment [] Casing Test and Cement Job [] Other

12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

9/20/2002 Test anchors-Blow down well-MIRUSU-NUBOP Take delivery of 2 7/8" N-80 workstring-Rack & tally-PU 5 1/2" Arrow Mod 'PST' rbp & Mod 'CST' pkr GIH picking up workstring-Set plug @ 5501'-Test to 1000 psi-Circ well clean-Pull up to 5132'-Leave pkr swinging

9/21/2002 Set pkr @ 5132'-Load backside & test to 500 psi-Pump down tbg into leak @ 1 bpm w/ 1000 psi No returns to surface-Reset pkr @ 5228'-Load backside-Pressure up to 500 psi-Bled off to 400 in 1 min Pump down tbg-Pressure up to 2000 psi-Csg pressure started to increase-Shut down-Bled off pressure POOH-LD pkr-PU cmt retainer-GIH to 5132'

9/22/2002 RU Schlumberger-Pump tbg capacity thru retainer-Set retainer @ 5133'-Attempt to pump down tbg Pressure up to 2000 psi-Leak off 400 psi in 1 min-Sting out of retainer-Pump down tbg to clear debris Sting back into tbg-Pressure up to 2200 psi-Leak off 400 psi in 1 min-Swab tbg capacity out of tbg FL holding @ 3000'-Pump down tbg-Pressure up to 2000 psi-Leak off 400 psi in 1 min.-Continue to swab tbg. Swab tbg dry-Pump down tbg-Pressure up to 2000 psi-Leak off 400 psi in 1 min. (continued)

I hereby certify that the information above is true and complete to the best of my knowledge and belief. SIGNATURE Kara Coday TITLE Sr. Engineering Technician DATE 10/29/2002 TYPE OR PRINT NAME Kara Coday TELEPHONE NO. 918-491-4957

(This space for State Use) APPROVED BY TITLE DATE CONDITIONS OF APPROVAL, IF ANY:

9/25/2002

Sting out of retainer-Circ above retainer for several hours-Got back LCM & rust chips-Sting into retainer
Pump through retainer @ 1 bpm @ 2000 psi-Set up squeeze for tomorrow

9/26/2002

Pump 60 bbls water through retainer ·RU Schlumberger-Flush all lines to pit
Test lines to 3500 psi-Pump 30 bbls water ahead of squeeze-Squeeze 5 1/2" csg w/ 100 sks (48 bbls)
Class 'C' cement w/ 0.2% D167-Avg rate 1.5 bpm ATP-1600 Final SIP-2800
Reversed 2 bbls cmt to pit-POOH w/ tbg-SIFWE

9/30/2002

Drill cmt from 5120' to retainer-Drill out retainer-Drill cmt to 5230'-Circ well clean

10/1/2002

Drill cmt from 5230'-5275'-Circ well clean-Test squeeze to 500 psi for 30 mins-OK-GIH to RBP-Circ sand off of plug
POOH-LD drill collars-PU retrieving-GIH-Release RBP-POOH laying down workstring

10/2/2002

GIH w/ 5 1/2" Loc-Set pkr assembly w/ on-off tool & 173 jts 2 3/8" J-55 TK99 tbg-Set pkr @ 5491.43'
w/ EOT @ 5503.47'-Displace backside w/ CRW-172 pkr fluid-Attempt to get an H-5 test while working out air
From engineering: Run bondlog to determine bond across the San Andres zone

10/3/2002

Do final H-5 test on 5 1/2-500 psi for 30 mins-OK-Release pkr-POOH w/ injection tbg-Rack & tally workstring
GIH w/ RBP & PKR-Set plug @ 5500'-Test to 1000-POOH

10/4/2002

RU Computalog-Run GR-CBL-CCL from 5495' to 3000'-Find TOC @ 5055'-RD Computalog
GIH w/ tbg-Release plug-POOH

10/7/2002

GIH w/ CIBP-Set @ 5100'-Test-RU Computalog-Perforate 5 1/2" csg @ 4100' w/ 4 jspf
GIH w/ pkr-Set @ 4024'-Pump into perfs @ 1/4 bpm @ 1800 psi-No returns to surface-POOH w/ pkr
Perforate 5 1/2" csg @ 3500'-GIH w/ pkr-Set @ 3452'-Pump into perfs @ 4 bpm @ 500 psi
w/ returns to the surface from 8 5/8"-Pump 160 bbls to clean up backside.
Reset pkr @ 3518'-Attempt to get communication between perfs pumping down 5 1/2" (500 psi)
Pump down tbg @ 1/2 bpm @ 1800 psi-No returns to surface
Pull pkr above upper perfs

10/8/2002

POOH-LD pkr-GIH w/ cmt retainer-Set @ 4055'-Pump through retainer-SDFN

10/9/2002

RU Schlumberger-Hold safety meeting-Pressure test surface to 3000 psi-Pump 50 bbls water through retainer
Load backside-Pressure to 500 psi-Establish injection rate of 0.5 bpm @ 1660 psi-Squeeze perfs in 5 1/2" csg
w/ 80 sks Class 'C' cmt mixed to 15.1 lbs/gal- Max TP-1753-Hesitated 3 times @ 15 mins each pumping last 3 bbls
ISDP-1666-Reversed 1 bbl to pit-POOH-PU retainer-GIH-Pump 1 1/2 times tbg capacity through retainer-Set @ 3452'
Load backside-Pressure to 500 psi-Established circ to surface through 8 5/8" csg-Squeeze perfs in 5 1/2" csg
w/ 100 sks Class 'C' cmt mixed to 11.8 lbs/gal-120 sks mixed to 13.0 lbs/gal-200 sks mixed to 14.8 lbs/gal
Circ 40 sks to pit-Avg rate 2.1 bpm-Avg psi-120 Left 850 psi on squeeze.-Reverse 2 bbls to pit-POOH w/tbg

10/11/2002

Drill out retainer @ 3452'-Drill out cmt to 3515'-Test squeeze to 1000 psi-Start drlg on retainer @ 4055'

10/14/2002

Drill out retainer @ 4055'-Change out bit-Drill cmt to 4082'-Circ well clean-

10/15/2002

Finish drlg cmt-Test squeeze to 500-OK-POOH
Prep to run CBL

10/16/2002

RU Computalog-Run CBL from 5100' to 2550'-Fax log to Tulsa-GIH & drill out CIBP-Start POOH laying down
workstring-SWI-SDFN

10/17/2002

Finish POOH laying down workstring-GIH w 173 jts 2 3/8" J-55 TK99 tbg-Set pkr @ 5492' w/ EOT @ 5506'

10/18/2002

Displace backside w/ CRW-172 pkr fluid-Test to 500 psi-Have a 50 psi leakoff in 30 mins


10/21/2002

RU Pro Wireline-Set 1.50" plug in 'F' nipple-Test to 1000 psi-Displace backside w/ 10 ppg pkr fluid
w/ 1 drum CRW-172 & 3 gals Xcide 302 biocide-'Bump' polymer into leak @ 500 psi-Shut down

10/22/2002

Pressure test backside @ 500 psi for 30 mins-OK-Remove plug from 'F' nipple-RDMO
Tie well to system-Put on injection

Northeast Drinkard Unit #610
 Eunice N. Blinebry-Tubb-Drinkard (22900)
 2210' FNL, 2310' FWL
 Unit G, Sec 15, T-21S, R-37E
 Lea County, New Mexico

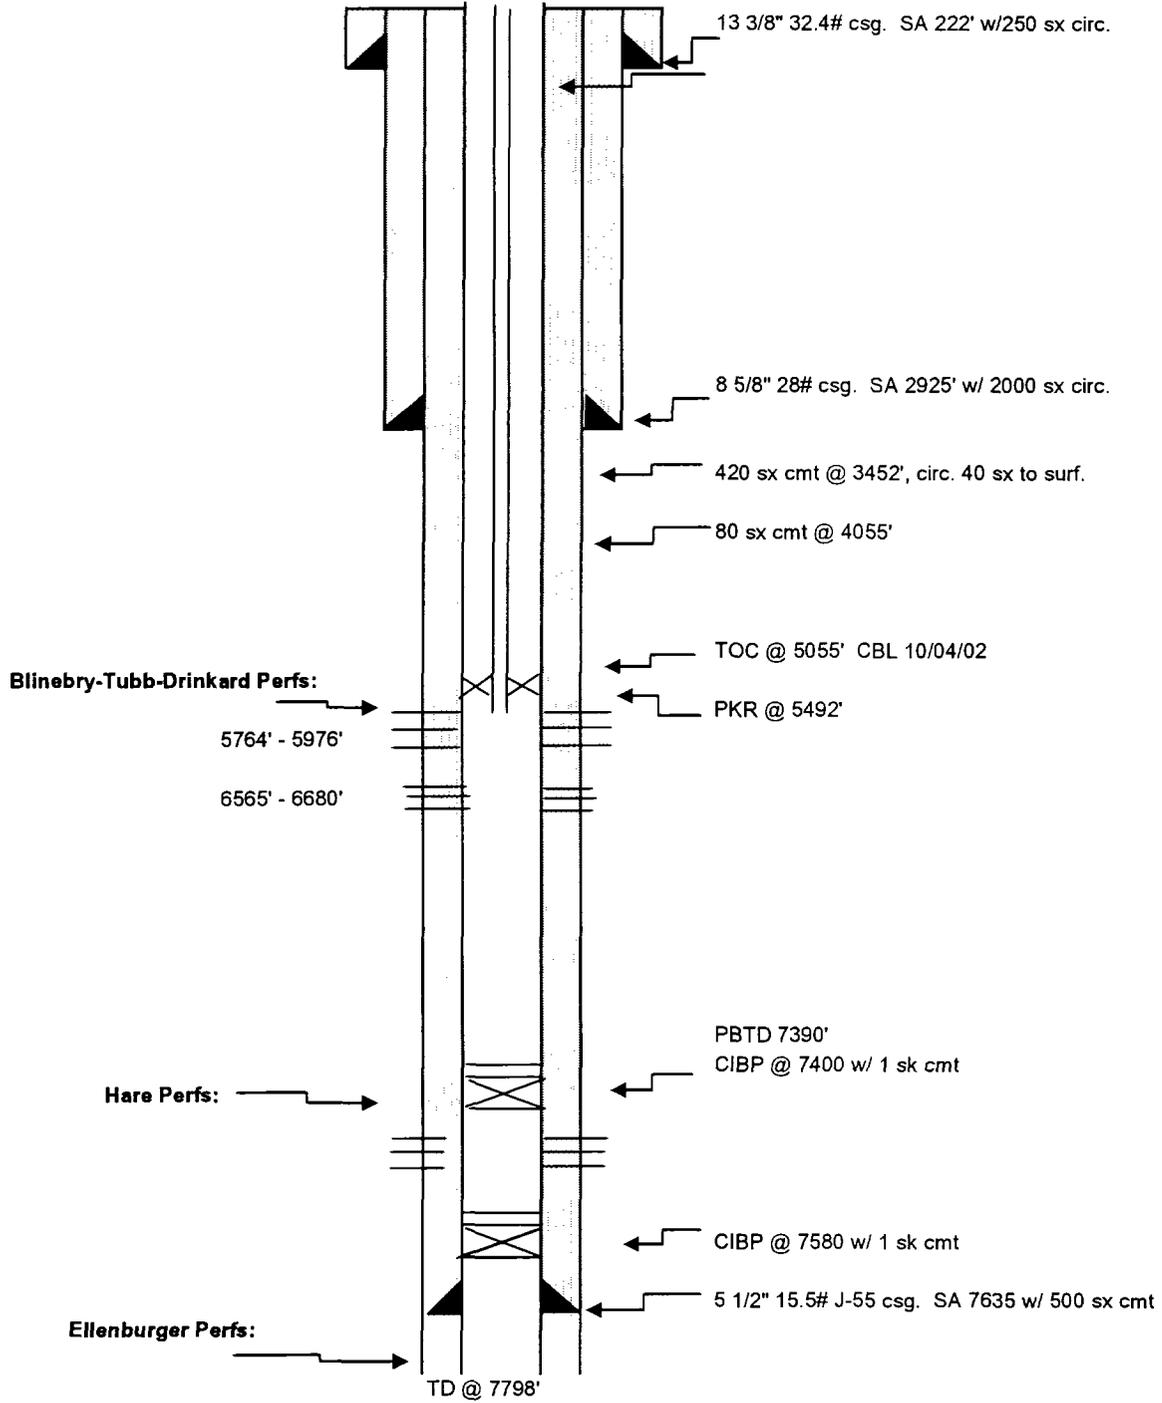

Northeast Drinkard Unit No. 604
REMEDIAL CEMENTING PROCEDURE

WELL: NEDU No. 604 API: 30-025-06591

CASING:

SURFACE: 13 3/8" set@ 334' w/ 350 sx circ.

INTERMEDIATE: 8 5/8" 24 & 32# H-40 csg set@ 2835' w/ 500 sxs. circ.

PRODUCTION: 5 1/2" 15.5 & 17 # J-55 csg set @ 8042'. w/400sx. TOC @4170' by CBL.

PBTD: 6765' w/CIBP and cmt.

PROCEDURE

1. RUPU. POH w/ production equipment.
2. RU Wireline and set CIBP at 4500'. Perforate casing at 3950' w/4 JSPF @ 90 deg. phasing. Perforate a second set of holes at 3250' w/4 JSPF @ 90 deg . phasing.
3. RIH w/ tubing and packer and set packer between squeeze holes. Establish circulation behind 5 1/2" casing between holes at 3250' and 3950'. Release packer and POH.
4. RIH w/cement retainer and set **below upper set of squeeze holes** at +/- 3280'
5. RIH w/ tubing, sting into retainer and establish circulation down tubing below retainer , behind 5 1/2" casing and back up tubing/casing annulus.
6. RU cementers and circulate 100 sx Cl "C" cement behind 5 1/2" casing, displacing cement to 3850'. Pull out of retainer and reverse circulate clean and POH.
7. RIH w/ second cement retainer and set **above upper set of squeeze holes** at +/- 3150'
8. RIH w/ tubing, sting into retainer and establish rate into upper set of squeeze holes. RU cementers and squeeze w/ 100 sx Cl "C" cement, leaving 10 sx on top of retainer and POH w/tubing.
9. RIH w/ bit and drill out cement and upper retainer past upper squeeze holes and test to 500 PSIG for 30 min. Continue drilling second retainer and continue down past lower squeeze holes. Pressure test lower set of squeeze holes to 500 psig for 30 min. POH w/bit and tubing.
10. Run CBL from 4500' to top of cement and POH.
11. RIH w/bit and tubing and drill out CIBP set at 4500'. POH w/ drill bit and tubing.
12. RIH with production equipment and place well on production.



Property No-

API 30-025-06591

****PROPOSED REMEDIAL WORK****

Lease-

Northeast Drinkard Unit

Well No. 604

Field Drinkard-Tubb-BI

Date 10/31/02


Legal Desc.-

2310' FNL & 990' FWL Sec 15 Tp 21S Rg 37E

County-

Lea

State- New Mexico

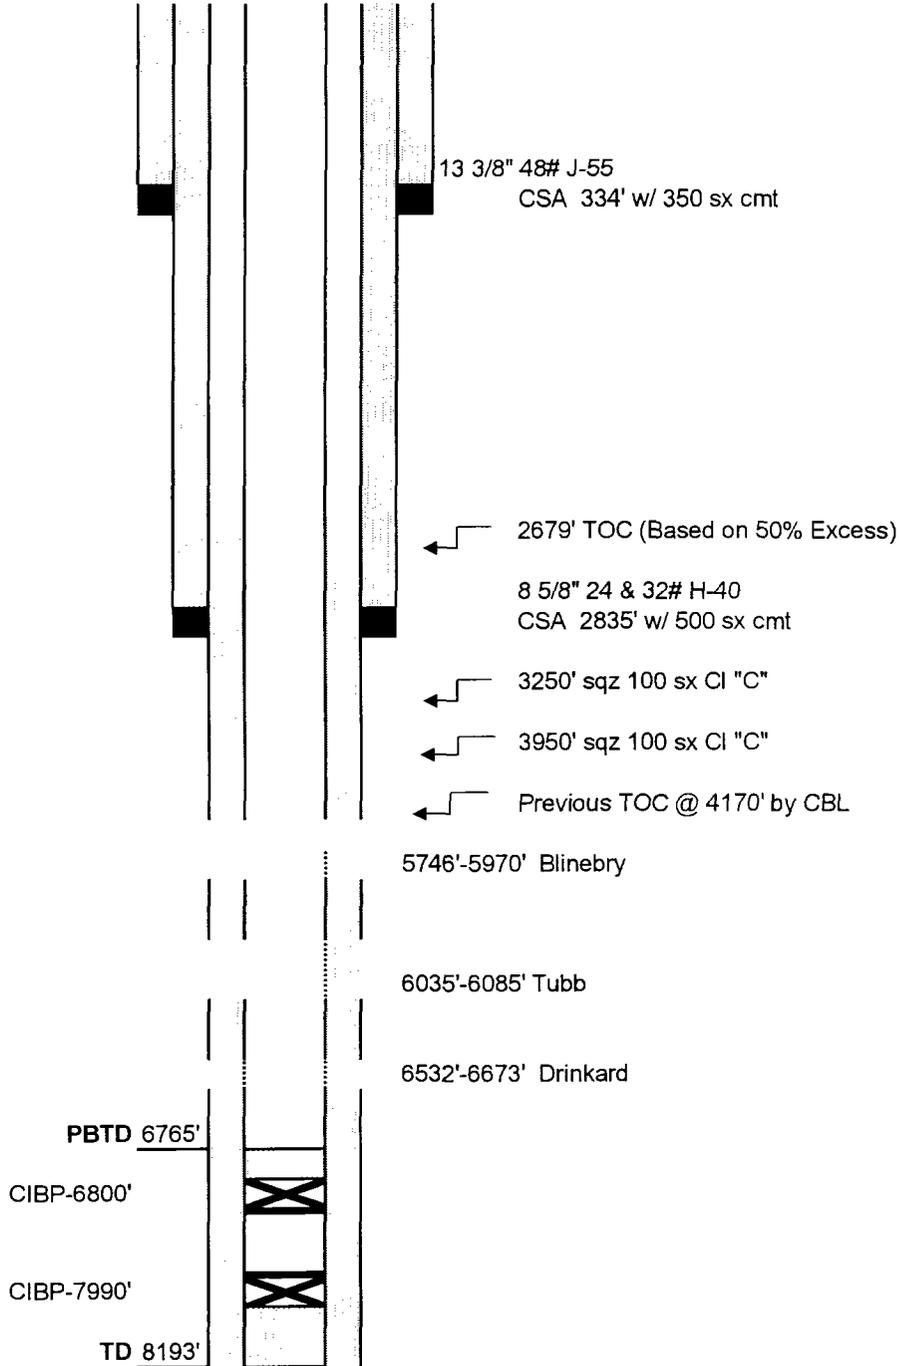

Northeast Drinkard Unit No. 705
REMEDIAL CEMENTING PROCEDURE

WELL: NEDU No. 705 API: 30-025-06602

CASING:

SURFACE: 13 3/8" set@ 225' w/ 300 sx circ.

INTERMEDIATE: 8 5/8" 32# H-40 csg set@ 2912' w/ 2000 sxs. circ.

PRODUCTION: 5 1/2" 15.5 & 17 # J-55 csg set @ 7770'. w/500sx. TOC @4372' by CBL.

PBTD: 5510' w/CIBP and 20' cmt.

PROCEDURE

1. RU Wireline and perforate casing at 4100' w/4 JSPF @ 90 deg. phasing. Perforate a second set of holes at 3550' w/4 JSPF @ 90 deg . phasing.
2. RUPU, RIH w/ tubing and packer and set packer between squeeze holes. Establish circulation behind 5 1/2" casing between holes at 3550' and 4100'. Release packer and POH.
3. RIH w/cement retainer and **set below upper set of squeeze holes** at +/- 3580'
4. RIH w/ tubing, sting into retainer and establish circulation down tubing below retainer , behind 5 1/2" casing and back up tubing/casing annulus.
5. RU cementers and circulate 100 sx Cl "C" cement behind 5 1/2" casing, displacing cement to 4000'. Pull out of retainer, reverse circulate clean and POH.
6. RIH w/ second cement retainer and **set above upper set of squeeze holes** at +/- 3500'
7. RIH w/ tubing, sting into retainer and establish rate into upper set of squeeze holes. RU cementers and squeeze w/ 100 sx Cl "C" cement, leaving 10 sx on top of retainer and POH w/tubing laying down. RD well service unit.
8. Run MIT on casing and return well to TA'd status.

Submit 3 Copies to Appropriate District

Office

DISTRICT I

1625 N. French Dr., Hobbs, NM 88240

DISTRICT II

811 South First, Artesia, NM 88210

DISTRICT III

1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV

1220 South St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Drive
Santa Fe, NM 87505

FORM C-103
Revised March 25, 1999

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-06590
1. Type of Well: <input checked="" type="checkbox"/> OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER		5. Indicate Type of Lease <input checked="" type="checkbox"/> STATE <input type="checkbox"/> FEE
2. Name of Operator Apache Corporation		6. State Oil & Gas Lease No.
3. Address of Operator 2000 Post Oak Blvd., Ste. 100, Houston, Texas 77056-4400		7. Lease Name or Unit Agreement Name Northeast Drinkard Unit
4. Well Location Unit Letter F : 1980 Feet From The North Line and 1880 Feet From The West Line Section 15 Township 21S Range 37E NMPM Lea County		8. Well No. 608
		9. Pool name or Wildcat Eunice N., Blinbry-Tubb-Drinkard
		10. Elevation (Show whether DF, RKB, RT, GR, etc.) 3441' GR

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO: <input type="checkbox"/> Perform Remedial Work <input type="checkbox"/> Plug and Abandon <input type="checkbox"/> Temporarily Abandon <input type="checkbox"/> Change Plans <input type="checkbox"/> Pull or Alter Casing <input type="checkbox"/> Other	SUBSEQUENT REPORT OF: <input type="checkbox"/> Remedial Work <input type="checkbox"/> Altering Casing <input type="checkbox"/> Commence Drilling Operations <input checked="" type="checkbox"/> Plug and Abandonment <input type="checkbox"/> Casing Test and Cement Job <input type="checkbox"/> Other
--	---

12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

10/5/2001 MIRU Fleet Cementers. Circulate well w/ 95.# mud. Run in hole w/ 4" casing gun. Tag cement on top of CIBP @ 5476'. Pull up hole to 2855' and perforate. Run in hole to 2855' and pump 25 sx cement. Wait on cement and tag @ 2798'. Pull up hole to 1300'. Spot 25 sx cement plug. Wait on cement and tag @ 1055'. Run in hole w/ 4" casing gun and perforate @ 365'. Run in hole to 385'. Break circulation. Circulate 300 sx cement to surface inside and outside casing. Install P&A marker. Clean location.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE _____ TITLE **Sr. Engineering Technician** DATE **11/5/2001**


TYPE OR PRINT NAME **Debra J. Anderson** TELEPHONE NO. **713-296-6338**

(This space for State Use)

APPROVED BY _____ TITLE _____ DATE _____


CONDITIONS OF APPROVAL, IF ANY: _____

Northeast Drinkard Unit #608
 Eunice N. Blinebry-Tubb-Drinkard (22900)
 1980' FNL & 1880' FWL
 Unit F, Sec 15, T-21S, R-37E
 Lea County, New Mexico

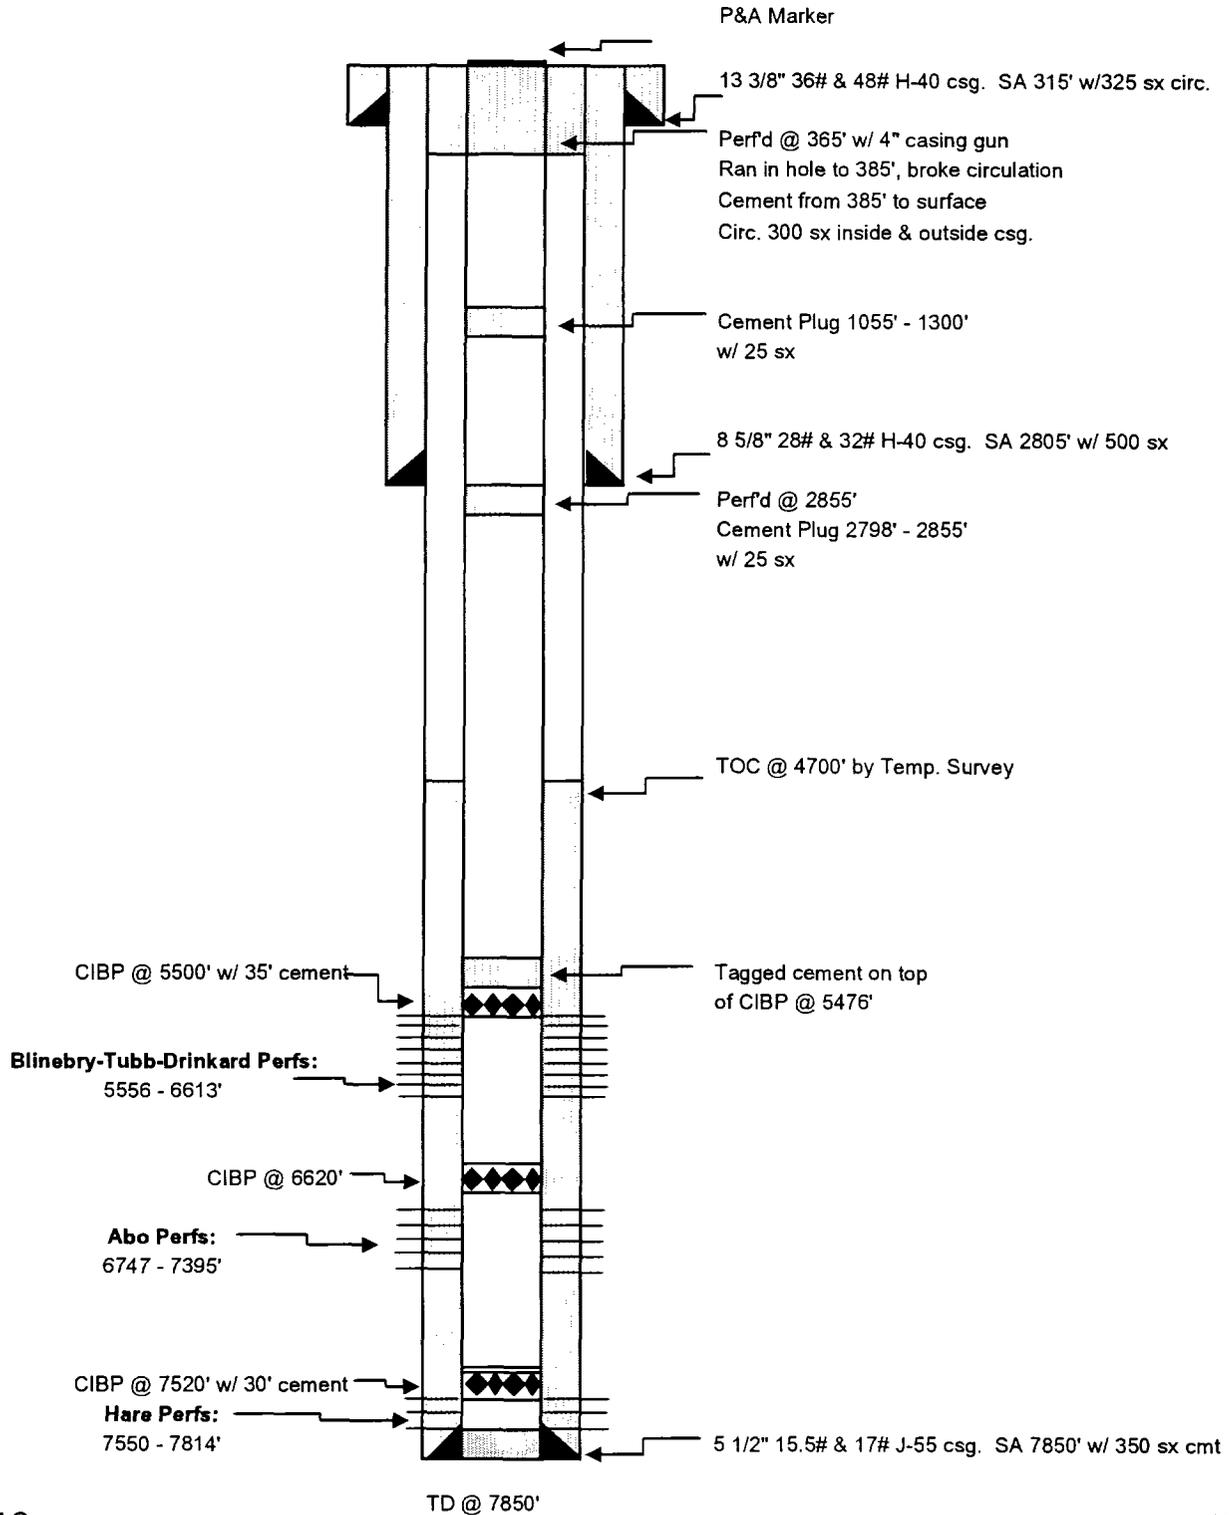

Well: Northeast Drinkard Unit # 603
 Field: Eunice N. Blinebry-Tubb-Drinkard
 Location: 3390' FNL & 760' FWL
 Unit E, Sec. 15, T21S, R37E
 Lea County, New Mexico
 API #: 30-025-09913

Current Status: P&A (11/93)

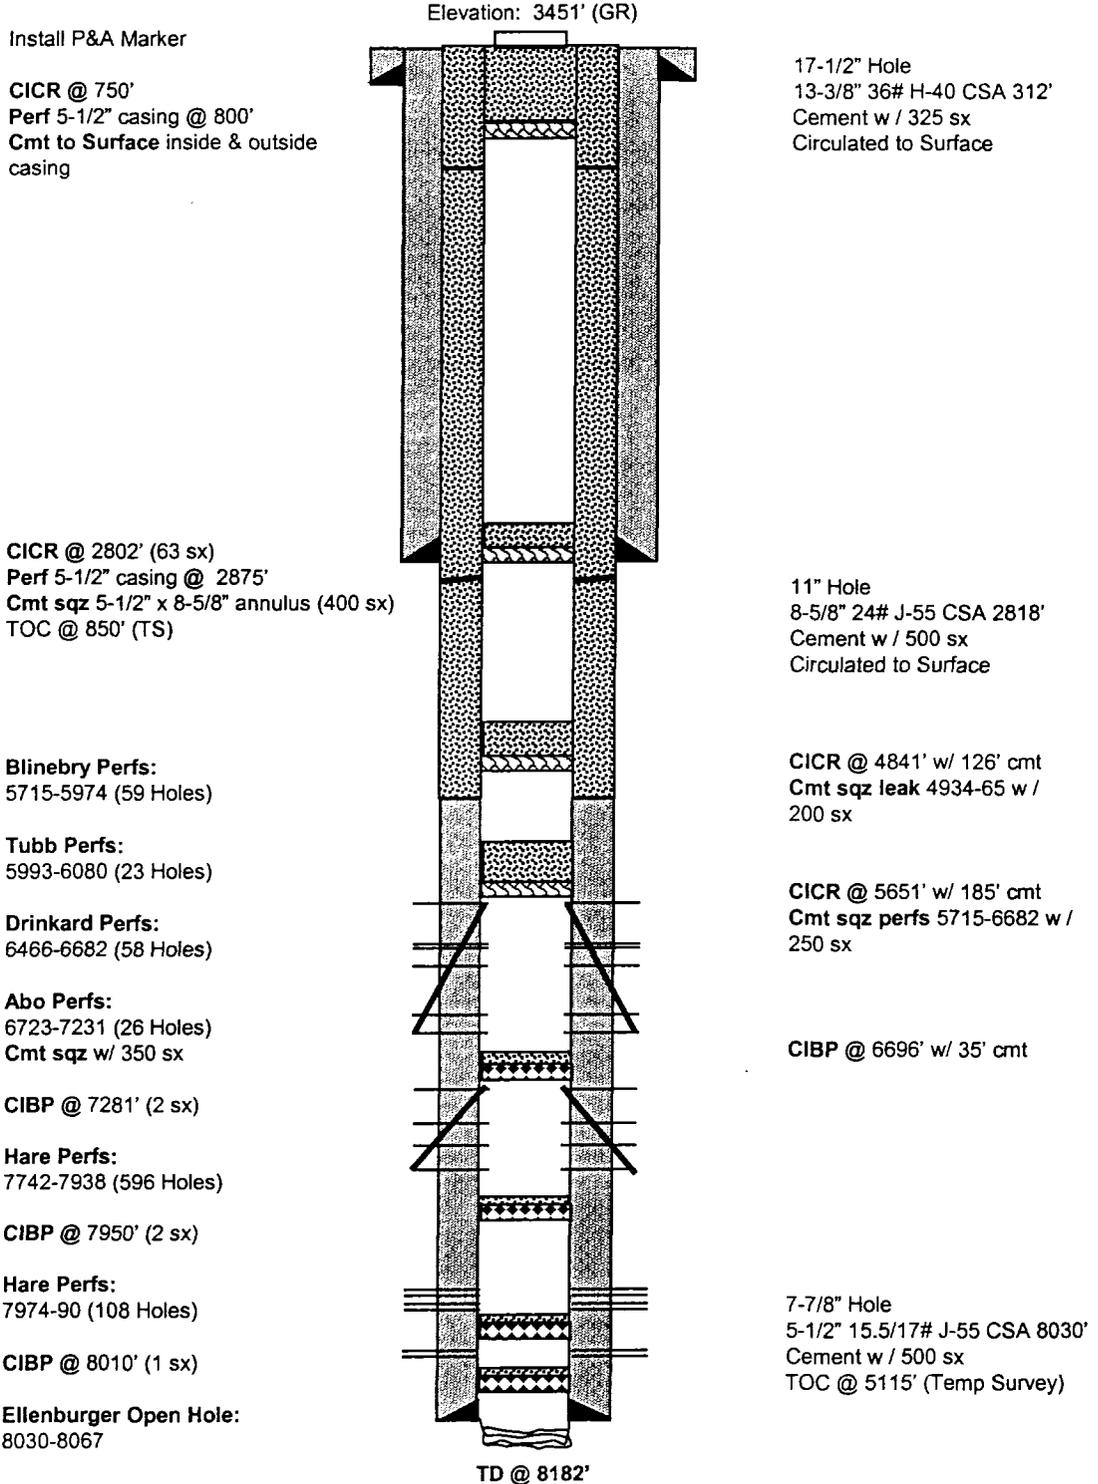

Install P&A Marker
CICR @ 750'
Perf 5-1/2" casing @ 800'
Cmt to Surface inside & outside casing

CICR @ 2802' (63 sx)
Perf 5-1/2" casing @ 2875'
Cmt sqz 5-1/2" x 8-5/8" annulus (400 sx)
TOC @ 850' (TS)

Blinebry Perfs:
 5715-5974 (59 Holes)

Tubb Perfs:
 5993-6080 (23 Holes)

Drinkard Perfs:
 6466-6682 (58 Holes)

Abo Perfs:
 6723-7231 (26 Holes)
Cmt sqz w/ 350 sx

CIBP @ 7281' (2 sx)

Hare Perfs:
 7742-7938 (596 Holes)

CIBP @ 7950' (2 sx)

Hare Perfs:
 7974-90 (108 Holes)

CIBP @ 8010' (1 sx)

Ellenburger Open Hole:
 8030-8067

17-1/2" Hole
 13-3/8" 36# H-40 CSA 312'
 Cement w / 325 sx
 Circulated to Surface

11" Hole
 8-5/8" 24# J-55 CSA 2818'
 Cement w / 500 sx
 Circulated to Surface

CICR @ 4841' w/ 126' cmt
Cmt sqz leak 4934-65 w / 200 sx

CICR @ 5651' w/ 185' cmt
Cmt sqz perfs 5715-6682 w / 250 sx

CIBP @ 6696' w/ 35' cmt

7-7/8" Hole
 5-1/2" 15.5/17# J-55 CSA 8030'
 Cement w / 500 sx
 TOC @ 5115' (Temp Survey)

TD @ 8182'

South Permian Basin Region
 10520 West I-20 East
 Odessa, TX 79762
 (915) 498-9191
 Lab Team Leader - Sheila Hernandez
 (915) 495-7240

Water Analysis Report by Baker Petrolite

Company:	APACHE CORPORATION	Sales RDT:	33102
Region:	PERMIAN BASIN	Account Manager:	MIKE EDWARDS (505) 370-9506
Area:	EUNICE, NM	Sample #:	26347
Lease/Platform:	ARGO	Analysis ID #:	20257
Entity (or well #):	7	Analysis Cost:	\$40.00
Formation:	Grayburg		
Sample Point:	WELLHEAD		

Summary	Analysis of Sample 26347 @ 75 °F					
	Anions	mg/l	meq/l	Cations	mg/l	meq/l
Sampling Date: 7/24/01	Chloride:	3638.0	102.61	Sodium:	1860.1	80.91
Analysis Date: 7/26/01	Bicarbonate:	712.0	11.67	Magnesium:	359.0	29.53
Analyst: MARILYN BRANNON	Carbonate:	0.0	0.0	Calcium:	955.0	47.65
TDS (mg/l or g/m3): 9977.2	Sulfate:	2296.0	47.8	Strontium:	17.0	0.39
Density (g/cm3, tonne/m3): 1.008	Phosphate:			Barium:	0.1	0.0
Anion/Cation Ratio: 0.9999999	Borate:			Iron:	2.0	0.07
	Silicate:			Potassium:	138.0	3.53
Carbon Dioxide:	Hydrogen Sulfide:			Aluminum:		
Oxygen:	pH at time of sampling:		6.55	Chromium:		
Comments:	pH at time of analysis:			Copper:		
	pH used in Calculation:		6.55	Lead:		
				Manganese:		
				Nickel:		

Conditions		Values Calculated at the Given Conditions - Amounts of Scale in lb/1000 bbl										
Temp	Gauge Press.	Calcite CaCO ₃		Gypsum CaSO ₄ ·2H ₂ O		Anhydrite CaSO ₄		Celestite SrSO ₄		Barite BaSO ₄		CO ₂ Press
		Index	Amount	Index	Amount	Index	Amount	Index	Amount	Index	Amount	
80	0	0.32	42.34	0.00	5.21	-0.07	0.00	-0.05	0.00	0.87	0.00	2.19
100	0	0.44	57.61	-0.01	0.00	-0.01	0.00	-0.04	0.00	0.71	0.00	2.84
120	0	0.57	73.22	-0.01	0.00	0.07	111.75	-0.02	0.00	0.59	0.00	3.55
140	0	0.70	88.49	0.00	4.16	0.17	253.34	0.01	0.35	0.49	0.00	4.29

Note 1: When assessing the severity of the scale problem, both the saturation index (SI) and amount of scale must be considered.
 Note 2: Precipitation of each scale is considered separately. Total scale will be less than the sum of the amounts of the five scales.
 Note 3: The reported CO2 pressure is actually the calculated CO2 fugacity. It is usually nearly the same as the CO2 partial pressure.

AFFIDAVIT OF PUBLICATION

State of New Mexico,
County of Lea.

I, KATHI BEARDEN

Publisher

of the Hobbs News-Sun, a newspaper published at Hobbs, New Mexico, do solemnly swear that the clipping attached hereto was published once a week in the regular and entire issue of said paper, and not a supplement thereof for a period.

of 1 weeks.

Beginning with the issue dated

February 7 2002

and ending with the issue dated

February 7 2002

Kathi Bearden

Publisher

Sworn and subscribed to before

me this 7th day of

February 2002

Jodi Benson

Notary Public.

My Commission expires
October 18, 2004
(Seal)

LEGAL NOTICE
February 7, 2002

Notice is Hereby given of the application of Apache Corporation, 2000 Post Oak Blvd., Ste. 100, Houston, TX 77056, (713) 296-6000, to the oil Conservation Division, New Mexico Energy, Minerals and Natural Resources Department, for approval of the following injection wells for the purpose of salt water disposal.

Pool Name: Hare; San Andres
Lea County, New Mexico

Lease/Unit Name: Argo
Well No. 6 (30-025-06603)
Location: 1650' FSL & 2310' FWL, Section 15, T21S, R37E, Unit K
Well No. 7 (30-025-09915)
Location: 2310' FSL & 990' FWL, Section 15, T21S, R37E, Unit L


The injection formation is the San Andres located between 4000' MD to 5000' MD below the surface of the ground. Expected maximum injection rate is 10,000 barrels per day and the expected maximum injection pressure is 800 psi. Interested parties must file objections or requests for hearing with the Oil Conservation Division, 1220 South St. Francis Drive, Santa Fe, NM 87505 within fifteen days.
#18728

This newspaper is duly qualified to publish legal notices or advertisements within the meaning of Section 3, Chapter 167, Laws of 1937, and payment of fees for said publication has been made.

02102716000 02553380
Apache Corporation
2000 Post Oak Boulevard Suite 100
Houston, TX 77056-4400

**APPLICATION TO CONVERT WELLS TO SALT WATER DISPOSAL
ARGO LEASE
SURFACE OWNERS**

The 80-acre tract that the Argo No. 6 and No. 7 wells are located on is owned by Apache Corporation



Mario Moreno
Senior Staff Landman
Apache Corporation

4-22-02

Date

**APPLICATION TO CONVERT WELLS TO SALT WATER DISPOSAL
ARGO LEASE
OFFSET OPERATORS**

Acoma Oil Corporation
6300 Ridglea Place, Suite 904
Fort Worth, Texas 76116
Cert Rcpt # 7000-2870-0000-2222-3993

ExxonMobil
P O Box 4697
Houston, Texas 77210-4697
Cert Rcpt # 7000-2870-0000-2223-4319

Arch Petroleum Incorporated
P O Box 10340
Midland, Texas 79702-9990
Cert Rcpt # 7000-2870-0000-2223-4241

John H Hendrix Corporation
Box 3040
Midland, Texas 79702
Cert Rcpt # 7000-2870-0000-2223-4326

Breck Operating Corporation
Box 4250
Midland, Texas 79702
Cert Rcpt # 7000-2870-0000-2223-4258

Lanexco Incorporated
Box 2730
Midland, Texas 79702
Cert Rcpt # 7000-2870-0000-2223-4333

Campbell & Hedrick
Box 401
Midland, Texas 79701
Cert Rcpt # 7000-2870-0000-2223-4265

Marathon Oil Company
Box 2409
Hobbs, New Mexico 88240
Cert Rcpt # 7000-2870-0000-2223-4340

ChevronTexaco
15 Smith Road
Midland, Texas 79705
Cert Rcpt # 7000-2870-0000-2223-4272

Mayne & Mertz Incorporated
Box 183
Midland, Texas 79702
Cert Rcpt # 7000-2870-0000-2223-4357

J R Cone
Box 10217
Lubbock, Texas 79408
Cert Rcpt # 7000-2870-0000-2223-4289


Stephens & Johnson Operating Company
Box 2249
Wichita Falls, Texas 76307-2249
Cert Rcpt # 7000-2870-0000-2223-4364

Conoco Incorporated
10 Desta Drive, Ste. 100W
Midland, Texas 79705
Cert Rcpt # 7000-2870-0000-2223-4296

Zia Energy Incorporated
Box 2510
Hobbs, New Mexico 88241-2510
Cert Rcpt # 7000-2870-0000-2223-4371

Eastland Oil Company
P O Box 3488
Midland, Texas 79702
Cert Rcpt # 7000-2870-0000-2223-4302

A copy of the Application to Convert Argo No. 6 and No. 7 to SWD was mailed to the Offset Operators listed above on April 22, 2002

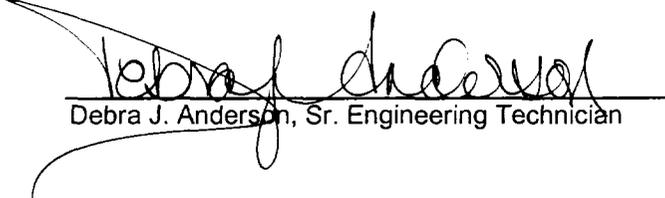
Debra J. Anderson, Sr. Engineering Technician

4-22-02
Date



April 22, 2002

Offset Operator

**Re: Application for Salt Water Disposal Wells
Argo Lease
Well No. 6 and 7
Hare; San Andres
Lea County, New Mexico**

Attached please find a copy of completed form C-108 with attachments and a plat of Apache Corporation's lease, which we have filed with the New Mexico Oil Conservation Division. The plat shows the referenced wells in relation to your offset operations.

Sincerely,

APACHE CORPORATION

A handwritten signature in black ink, appearing to read "Debra J. Anderson", written over a horizontal line.

Debra J. Anderson
Sr. Engineering Technician

Attachments

cc: State of New Mexico
Energy, Minerals & Natural Resources Dept.
Oil Conservation Division
1220 South St. Francis Drive
Santa Fe, New Mexico 87505



April 22, 2002

Offset Operator

**Re: Application for Salt Water Disposal Wells
Argo Lease
Well No. 6 and 7
Hare; San Andres
Lea County, New Mexico**

Attached please find a copy of completed form C-108 with attachments and a plat of Apache Corporation's lease, which we have filed with the New Mexico Oil Conservation Division. The plat shows the referenced wells in relation to your offset operations.

Sincerely,


APACHE CORPORATION

A handwritten signature in black ink that reads "Debra J. Anderson". The signature is written in a cursive style and is positioned over a horizontal line that extends to the left.

Debra J. Anderson
Sr. Engineering Technician

Attachments

cc: State of New Mexico
Energy, Minerals & Natural Resources Dept.
Oil Conservation Division
1220 South St. Francis Drive
Santa Fe, New Mexico 87505

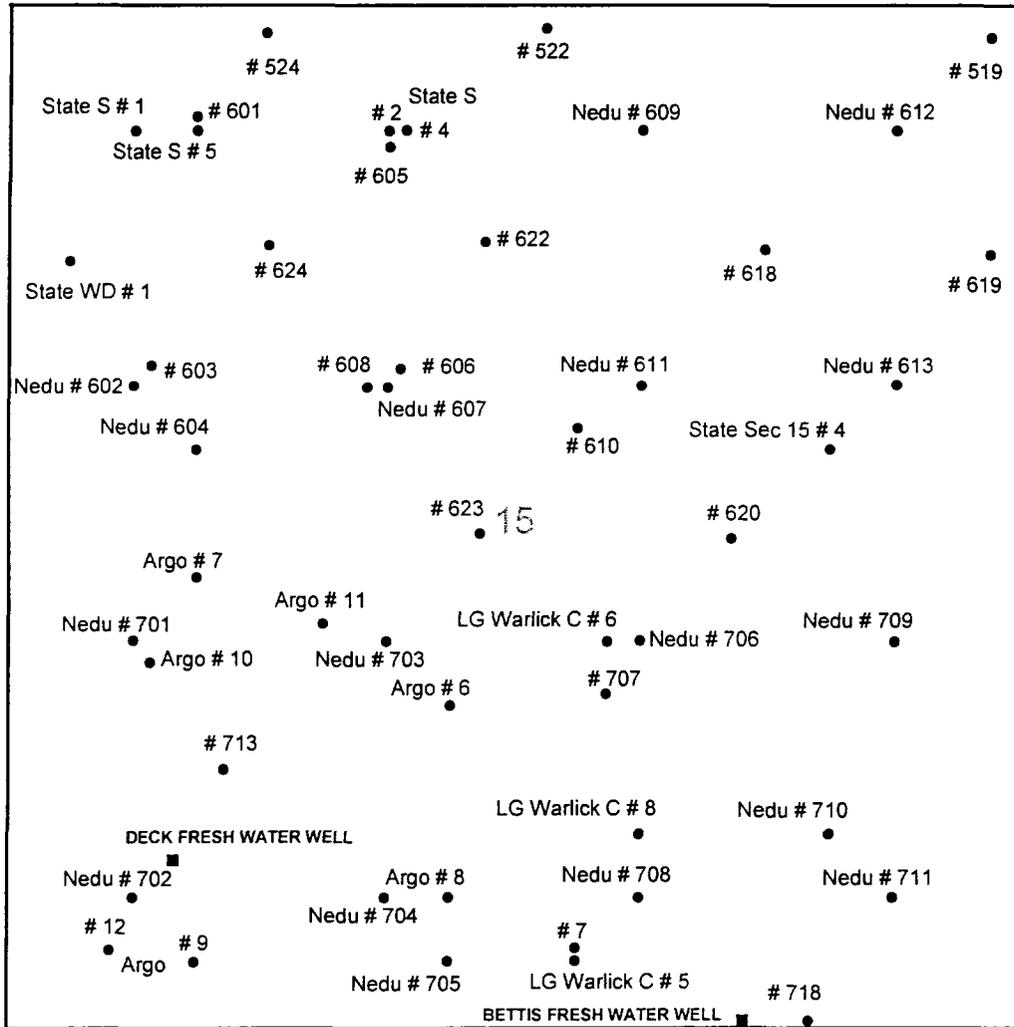



ARGO SALT WATER DISPOSAL APPLICATION
LOCATION OF TWO FRESH WATER WELLS
SECTION 15, TOWNSHIP 21S, RANGE 37E
LEA COUNTY, NEW MEXICO

ENVIRONMENTAL LAB OF TEXAS

ANALYTICAL REPORT

DAVID URBANSKI
APACHE CORPORATION
2000 POST OAK BLVD., STE. 100
HOUSTON, TX 77056

Order#: G0203056
Project:
Project Name: Eunice
Location:

Lab ID: 0203056-01
Sample ID: Deck Well

Test Parameters

Parameter	Result	Units	Dilution Factor	RL	Method	Date Analyzed	Analyst
Bicarbonate Alkalinity	168	mg/L	1	2.0	310.1	4/12/02	SB
Carbonate Alkalinity	<0.10	mg/L	1	0.10	310.1	4/12/02	SB
Chloride	354	mg/L	1	5.00	9253	4/11/02	SB
pH	7.77	pH Units	1	N/A	150.1	4/12/02	SB
Sulfate	158	mg/L	5	0.250	375.4	4/16/02	CC
Total Dissolved Solids (TDS)	1230	mg/L	1	5.0	160.1	4/17/02	SB

Lab ID: 0203056-02
Sample ID: Bettis Well

Test Parameters

Parameter	Result	Units	Dilution Factor	RL	Method	Date Analyzed	Analyst
Bicarbonate Alkalinity	170	mg/L	1	2.0	310.1	4/12/02	SB
Carbonate Alkalinity	<0.10	mg/L	1	0.10	310.1	4/12/02	SB
Chloride	833	mg/L	1	5.00	9253	4/11/02	SB
pH	7.53	pH Units	1	N/A	150.1	4/12/02	SB
Sulfate	232	mg/L	5	0.250	375.4	4/16/02	CC
Total Dissolved Solids (TDS)	2710	mg/L	1	5.0	160.1	4/17/02	SB

Approval: Raland K. Tuttle 4-17-02
 Raland K. Tuttle, Lab Director, QA Officer Date
 Celey D. Keene, Org. Tech. Director
 Jeanne McMurrey, Inorg. Tech. Director
 Sandra Biezugbe, Lab Tech.
 Sara Molina, Lab Tech.

ENVIRONMENTAL LAB OF TEXAS

QUALITY CONTROL REPORT

Test Parameters

Order#: G0203056

BLANK		LAB-ID #	Sample Concentr.	Spike Concentr.	QC Test Result	Pct (%) Recovery	RPD
WATER							
Barium-mg/L		0001267-01			<0.001		
Bicarbonate Alkalinity-mg/L		0001279-01			<2.00		
Calcium-mg/L		0001253-01			<0.010		
Carbonate Alkalinity-mg/L		0001280-01			< 0.10		
Chloride-mg/L		0001261-01			<5.00		
Iron-mg/L		0001267-01			<0.002		
Magnesium-mg/L		0001253-01			<0.001		
pH-pH Units		0001273-01			5.05		
Potassium-mg/L		0001253-01			<0.050		
Sodium-mg/L		0001253-01			<0.010		
Strontium-mg/L		0001267-01			<0.001		
Sulfate-mg/L		0001222-01			<0.05		
Total Dissolved Solids (TDS)-mg/L		0001282-01			<5.00		
CONTROL		LAB-ID #	Sample Concentr.	Spike Concentr.	QC Test Result	Pct (%) Recovery	RPD
WATER							
Barium-mg/L		0001267-02		1	1.02	102.0%	
Iron-mg/L		0001267-02		0.5	0.491	98.2%	
Strontium-mg/L		0001267-02		1	1.04	104.0%	
CONTROL DUP		LAB-ID #	Sample Concentr.	Spike Concentr.	QC Test Result	Pct (%) Recovery	RPD
WATER							
Barium-mg/L		0001267-03		1	1.02	102.0%	0.5%
Iron-mg/L		0001267-03		0.5	0.497	99.4%	1.2%
Strontium-mg/L		0001267-03		1	1.05	105.0%	1.0%
DUPLICATE		LAB-ID #	Sample Concentr.	Spike Concentr.	QC Test Result	Pct (%) Recovery	RPD
Water							
Bicarbonate Alkalinity-mg/L		0203067-01	187		188		0.5%
Calcium-mg/L		0203056-01	106		108		1.9%
Carbonate Alkalinity-mg/L		0203067-01	8		< 0.10		200.0%
Magnesium-mg/L		0203056-01	48.3		48.5		0.4%
pH-pH Units		0203067-01	7.97		7.99		0.3%
Potassium-mg/L		0203056-01	7.46		8.57		13.8%
Sodium-mg/L		0203056-01	179		184		2.8%
Sulfate-mg/L		0203056-01	158		140		12.1%
Total Dissolved Solids (TDS)-mg/L		0203056-01	1230		1200		2.5%
MS		LAB-ID #	Sample Concentr.	Spike Concentr.	QC Test Result	Pct (%) Recovery	RPD
Water							
Chloride-mg/L		0203045-01	638	1000	1630	99.2%	
MSD		LAB-ID #	Sample Concentr.	Spike Concentr.	QC Test Result	Pct (%) Recovery	RPD
Water							
Chloride-mg/L		0203045-01	638	1000	1630	99.2%	0.0%

ENVIRONMENTAL LAB OF TEXAS

QUALITY CONTROL REPORT

SRM	WATER	LAB-ID #	Sample Concentr.	Spike Concentr.	QC Test Result	Pct (%) Recovery	RPD
Barium-mg/L		0001267-04		1	1.02	102.0%	
Bicarbonate Alkalinity-mg/L		0001279-04		0.05	0.0496	99.2%	
Calcium-mg/L		0001253-04		2	2.00	100.0%	
Carbonate Alkalinity-mg/L		0001280-04		0.05	0.0496	99.2%	
Chloride-mg/L		0001261-04		5000	5050	101.0%	
Iron-mg/L		0001267-04		1	1.09	109.0%	
Magnesium-mg/L		0001253-04		2	2.01	100.5%	
pH-pH Units		0001273-04		7	7.06	100.9%	
Potassium-mg/L		0001253-04		2	2.17	108.5%	
Sodium-mg/L		0001253-04		2	2.23	111.5%	
Strontium-mg/L		0001267-04		1	1.08	108.0%	
Sulfate-mg/L		0001222-04		50	47.9	95.8%	

ENVIRONMENTAL LAB OF TEXAS

SAMPLE WORK LIST

APACHE CORPORATION
 2000 POST OAK BLVD., STE. 100
 HOUSTON, TX 77056
 713-296-7250

Order#: G0203056
 Project:
 Project Name: Eunice
 Location:

The samples listed below were submitted to Environmental Lab of Texas and were received under chain of custody. Environmental Lab of Texas makes no representation or certification as to the method of sample collection, sample identification, or transportation/handling procedures used prior to the receipt of samples by Environmental Lab of Texas.

<u>Lab ID:</u>	<u>Sample :</u>	<u>Matrix:</u>	<u>Date / Time Collected</u>	<u>Date / Time Received</u>	<u>Container</u>	<u>Preservative</u>
0203056-01	Deck Well	WATER	4/10/02 1:30	4/11/02 16:42	500 mL Plastic	none
	<u>Lab Testing:</u>	Rejected: No		Temp: 30C		
	Barium					
	Bicarbonate Alkalinity					
	Calcium					
	Carbonate Alkalinity					
	Chloride					
	Iron					
	Magnesium					
	Metals Digestion - Total					
	pH					
	Potassium					
	Sodium					
	Strontium					
	Sulfate					
	Total Dissolved Solids (TDS)					
0203056-02	Bettis Well	WATER	4/10/02 1:50	4/11/02 16:42	500 mL Plastic	none
	<u>Lab Testing:</u>	Rejected: No		Temp: 30C		
	Barium					
	Bicarbonate Alkalinity					
	Calcium					
	Carbonate Alkalinity					
	Chloride					
	Iron					
	Magnesium					
	Metals Digestion - Total					
	pH					
	Potassium					
	Sodium					
	Strontium					
	Sulfate					
	Total Dissolved Solids (TDS)					

ENVIRONMENTAL LAB OF TEXAS

ANALYTICAL REPORT

DAVID URBANSKI
 APACHE CORPORATION
 2000 POST OAK BLVD., STE. 100
 HOUSTON, TX 77056

Order#: G0203056
 Project:
 Project Name: Eunice
 Location:

Lab ID: 0203056-01
 Sample ID: Deck Well

Test Parameters

Parameter	Result	Units	Dilution Factor	RL	Method	Date		Analyst
						Prepared	Analyzed	
Barium	0.073	mg/L	1	0.001	3005/6010B	04/12/2002	4/17/02	SM
Calcium	106	mg/L	100	1.00	6010B	04/16/2002	4/17/02	SM
Iron	0.854	mg/L	1	0.002	3005/6010B	04/12/2002	4/17/02	SM
Magnesium	48.3	mg/L	10	0.010	6010B	04/16/2002	4/17/02	SM
Potassium	7.46	mg/L	10	0.500	6010B	04/16/2002	4/17/02	SM
Sodium	179	mg/L	100	1.00	6010B	04/16/2002	4/17/02	SM
Strontium	3.59	mg/L	1	0.001	3005/6010B	04/12/2002	4/17/02	SM

Lab ID: 0203056-02
 Sample ID: Bettis Well

Test Parameters

Parameter	Result	Units	Dilution Factor	RL	Method	Date		Analyst
						Prepared	Analyzed	
Barium	0.074	mg/L	1	0.001	3005/6010B	04/12/2002	4/17/02	SM
Calcium	223	mg/L	100	1.0	6010B	04/16/2002	4/17/02	SM
Iron	0.285	mg/L	1	0.002	3005/6010B	04/12/2002	4/17/02	SM
Magnesium	118	mg/L	100	0.100	6010B	04/16/2002	4/17/02	SM
Potassium	13.3	mg/L	10	0.500	6010B	04/16/2002	4/17/02	SM
Sodium	312	mg/L	100	1.00	6010B	04/16/2002	4/17/02	SM
Strontium	5.81	mg/L	1	0.001	3005/6010B	04/12/2002	4/17/02	SM

Approval: *Roland K Tuttle* 4-17-02
 Roland K. Tuttle, Lab Director, QA Officer Date
 Celey D. Keene, Org. Tech. Director
 Jeanne McMurrey, Inorg. Tech. Director
 Sandra Biezugbe, Lab Tech.
 Sara Molina, Lab Tech.

AREA OF RFVIFW / WFI I DATA

WELL NAME	API NO.	S / T / R	LOCATION	WELL TYPE	SPUD DATE	COMP DATE	TD	SURFACE CASING	INTERMEDIATE CASING	PRODUCTION CASING	HOLE LINER	DEPTH	CMT	TOC										
								HOLE	HOLE	HOLE														
								CSG	CSG	CSG														
								SET	SET	SET														
								CMT	CMT	CMT														
NEDU #601 (State S #7)	30-025-06614	15/21S/37E	660 FNL-990 FWL	O	2/25/1952	4/27/1952	8145	17-1/2	13-3/8	293	300	11	8-5/8	2990	2000			6-3/4	5-1/2	2847-8142	500	TOL		
NEDU #602 (State S #1)	30-025-09914	15/21S/37E	1980 FNL-660 FWL	O	4/11/1948	5/22/1948	6673	17-1/2	13-3/8	297	300	11	8-5/8	2799	800	7-7/8	800	7-7/8	5-1/2	6625	350	4250 (T)		
NEDU #603 (State S #4)	30-025-09913	15/21S/37E	3390 FSL-4520 FEL	P&A	2/18/1951	4/15/1951	8182	17-1/2	13-3/8	296	325	11	8-5/8	2818	500	7-7/8	500	7-7/8	5-1/2	8030	500	5115 (T)		
NEDU #604 (State S #6)	30-025-06591	15/21S/37E	2310 FNL-990 FWL	O	8/28/1951	10/24/1951	8193	17-1/2	13-3/8	324	350	11	8-5/8	2835	500	7-7/8	500	7-7/8	5-1/2	8042	400	4650 (B)		
NEDU #605 (State S #6)	30-025-06613	15/21S/37E	760 FNL-1980 FWL	WI	8/13/1951	10/10/1951	7675	17-1/2	13-3/8	295	300	11	8-5/8	2997	2000	7-7/8	500	7-7/8	5-1/2	7675	900	Surface		
NEDU #606 (State S #3)	30-025-06587	15/21S/37E	3375 FSL-3225 FEL	O	12/16/1950	2/11/1951	8034	17-1/2	13-3/8	333	350	11	8-5/8	2803	500	7-7/8	500	7-7/8	5-1/2	8032	775	3295 (T)		
Cities State S # 2 (NEDU # 607)	30-025-06585	15/21S/37E	1980 FNL-1980 FWL	O	6/2/1948	6/29/1948	6676	17-1/2	13-3/8	297	300	11	8-5/8	2791	500	7-7/8	500	7-7/8	5-1/2	6586	125	5000 (C)		
NEDU #608 (State S #5)	30-025-06590	15/21S/37E	1980 FNL-1880 FWL	O	7/10/1951	8/25/1951	7850	17-1/2	13-3/8	314	325	11	8-5/8	2805	500	7-7/8	500	7-7/8	5-1/2	7849	350	4700 (T)		
NEDU #610 (State #3)	30-025-06588	15/21S/37E	2210 FNL-2310 FEL	WI	1/10/1951	2/19/1951	7798	17-1/2	13-3/8	222	250	11	8-5/8	2925	2000	7-7/8	500	7-7/8	5-1/2	7635	693	4600 (C)		
NEDU #611 (State #1)	30-025-09912	15/21S/37E	1980 FNL-1978 FEL	WI	8/30/1948	11/1/1948	6641	17-1/2	13-3/8	229	250	11	8-5/8	2827	1500	7-7/8	500	7-7/8	5-1/2	6545	1200	Surface		
NEDU #620	30-025-34650	15/21S/37E	2515 FSL-1501 FEL	O	8/27/1999	9/28/1999	6820	12-1/4	8-5/8	1240	460									6820	1525	Surface		
NEDU #622	30-025-34649	15/21S/37E	1229 FNL-2498 FWL	O	8/16/1999	9/16/1999	6840	12-1/4	8-5/8	1265	460									6840	1675	650 (B)		
NEDU #623	30-025-34657	15/21S/37E	2540 FSL-2482 FWL	O	8/29/1999	10/1/1999	6840	12-1/4	8-5/8	1283	460									6840	1650	Surface		
NEDU #624	30-025-34887	15/21S/37E	1250 FNL-1368 FWL	O	4/17/2000	5/19/2000	6860	12-1/4	8-5/8	1213	460									6860	1400	Surface		
NEDU #701 (Argo #2)	30-025-09916	15/21S/37E	1980 FSL-660 FWL	O	10/10/1947	12/18/1947	6654	17-1/2	13-3/8	210	210	11	8-5/8	2875	800	7-7/8	500	7-7/8	5-1/2	6652	600	3223 (C)		
NEDU #702 (Argo Oil Corp #1)	30-025-09911	15/21S/37E	660 FSL-660 FWL	O	8/8/1947	9/30/1947	6646	17-1/2	13-3/8	321	220	11	8-5/8	2839	800	7-7/8	500	7-7/8	5-1/2	6529	500	3672 (C)		
NEDU #703 (Argo #3)	30-025-09918	15/21S/37E	1980 FSL-1980 FWL	WI	2/29/1948	4/17/1948	6645	17-1/2	13-3/8	208	250	11	8-5/8	2891	1500	7-7/8	500	7-7/8	5-1/2	6494	500	3637 (C)		
NEDU #704 (Argo #4)	30-025-09917	15/21S/37E	660 FSL-1980 FWL	O	5/9/1948	6/26/1948	6630	17-1/2	13-3/8	208	250	11	8-5/8	2883	1500	7-7/8	500	7-7/8	5-1/2	6560	1000	846 (C)		
NEDU #705 (Argo #5)	30-025-06602	15/21S/37E	330 FSL-2310 FWL	O	7/27/1950	9/12/1950	8091	17-1/2	13-3/8	225	300	11	8-5/8	2912	2000	7-7/8	500	7-7/8	5-1/2	7790	500	4933 (C)		
NEDU #706 (LG Warlick C #1)	30-025-06592	15/21S/37E	1980 FSL-1980 FEL	O	6/8/1948	7/31/1948	6629	17-1/2	13-3/8	299	250	11	8-5/8	2800	1500	7-7/8	500	7-7/8	5-1/2	6497	750	2311 (C)		
NEDU #707 (LG Warlick C #10)	30-025-06601	15/21S/37E	1725 FSL-2149 FEL	O	5/5/1952	6/28/1952	7670	17-1/2	13-3/8	324	250	11	8-5/8	2851	1200	7-7/8	500	7-7/8	5-1/2	7665	1155	Surface		
NEDU #708 (LG Warlick C #2)	30-025-06593	15/21S/37E	660 FSL-1980 FEL	WI	7/30/1948	9/15/1948	6634	17-1/2	13-3/8	300	250	11	8-5/8	2799	1200	7-7/8	500	7-7/8	5-1/2	6590	750	3750 (C)		
NEDU #709 (LG Warlick C #4)	30-025-06595	15/21S/37E	1980 FSL-660 FEL	WI	11/16/1948	12/30/1948	6662	17-1/2	13-3/8	306	300	11	8-5/8	2802	1500	7-7/8	500	7-7/8	5-1/2	6596	750	1250 (T)		
NEDU #710 (LG Warlick C #9)	30-025-06600	15/21S/37E	990 FSL-990 FEL	O	6/19/1951	8/24/1951	7503	17-1/2	13-3/8	371	350	11	8-5/8	2900	1400	7-7/8	500	7-7/8	5-1/2	7465	850	Surface		
NEDU #711 (LG Warlick C #3)	30-025-06594	15/21S/37E	660 FSL-660 FEL	O	9/23/1948	11/8/1948	6621	17-1/2	13-3/8	302	250	11	8-5/8	2795	1500	7-7/8	500	7-7/8	5-1/2	6595	750	2300 (C)		
NEDU #713	30-025-34888	15/21S/37E	1330 FSL-1142 FWL	O	9/25/2000	11/6/2000	6790	12-1/4	8-5/8	1245	460									6790	1525	Surface		
NEDU #717	30-025-35274	15/21S/37E	44 FSL-2415 FWL	O	4/29/2001	6/1/2001	6780	12-1/4	8-5/8	1265	460									6780	1075	150 (B)		
NEDU #718	30-025-34742	15/21S/37E	14 FSL-1098 FEL	O	9/11/2000	10/20/2000	6790	12-1/4	8-5/8	1244	460									6790	1250	Surface		
State S #1	30-025-06586	15/21S/37E	660 FNL-660 FWL	O	6/24/1948	9/3/1948	6660	17-1/2	13-3/8	293	300	11	8-5/8	2797	1200	7-7/8	500	7-7/8	5-1/2	6625	400	4339 (C)		
State S #2	30-025-06609	15/21S/37E	660 FNL-1980 FWL	G	9/6/1948	11/17/1948	6667	11	8-5/8	2603	1200									6630	500	3773 (C)		
State S #4	30-025-06611	15/21S/37E	660 FNL-2080 FWL	O	11/28/1950	1/19/1951	7896	17-1/2	13-3/8	294	300	11	8-5/8	2999	1700	7-7/8	500	7-7/8	5-1/2	7895	500	5038 (C)		
State S #5	30-025-06612	15/21S/37E	660 FNL-990 FWL	O	2/13/1951	4/23/1951	8148	17-1/2	13-3/8	294	200	11	8-5/8	2974	2000	7-7/8	500	7-7/8	5-1/2	8147	500	5290 (C)		
State WD-1	30-025-33547	15/21S/37E	1340 FNL-330 FWL	SWD	9/28/1996	10/4/1996	2200	Does not penetrate injection zone													7566	840	4933 (C)	
State #4	30-025-06589	15/21S/37E	2310 FNL-990 FEL	O	9/8/1951	10/24/1951	7615	17-1/2	13-3/8	241	250	11	8-5/8	2934	1800	7-7/8	500	7-7/8	5-1/2	7566	840	4933 (C)		
Argo #8	30-025-06604	15/21S/37E	660 FSL-2310 FWL	O	5/11/1951	6/28/1951	8002	17-1/2	13-3/8	226	300	11	8-5/8	2915	1800								2683-7800	925
Argo #9	30-025-06605	15/21S/37E	330 FSL-990 FWL	O	5/29/1951	7/18/1951	8189	17-1/2	13-3/8	225	250	11	8-5/8	2917	1200								2701-8000	925
Argo #10	30-025-06606	15/21S/37E	1880 FSL-760 FWL	G	7/19/1951	9/5/1951	8015	17-1/2	13-3/8	241	250	11	8-5/8	2906	1700	7-7/8	500	7-7/8	5-1/2	8012	875	3012 (C)		
Argo #11	30-025-06607	15/21S/37E	2080 FSL-1650 FWL	O	7/14/1951	9/25/1951	7891	17-1/2	13-3/8	228	250	11	8-5/8	2903	1950								2697-7890	800
Argo #12	30-025-06608	15/21S/37E	400 FSL-550 FWL	O	12/15/1951	2/17/1952	8035	17-1/2	13-3/8	227	254	11	8-5/8	2882	1900								2650-8033	983
LG Warlick #5	30-025-06596	15/21S/37E	330 FSL-2310 FEL	G	5/31/1950	7/17/1950	7827	17-1/2	13-3/8	298	350	12-1/4	9-5/8	2800	1300	7-7/8	500	7-7/8	5-1/2	7655	1100	1370 (C)		
LG Warlick #6	30-025-06597	15/21S/37E	1650 FSL-2140 FEL	G	10/29/1950	12/11/1950	7847	17-1/2	13-3/8	303	300	11	8-5/8	2797	1200	7-7/8	500	7-7/8	5-1/2	7700	575	4415 (C)		
LG Warlick #7	30-025-06598	15/21S/37E	405 FSL-2310 FEL	O	2/13/1951	4/16/1951	7690	17-1/2	13-3/8	305	300	11	8-5/8	2802	1300	7-7/8	500	7-7/8	5-1/2	7688	1000	1974 (C)		
LG Warlick #8	30-025-06599	15/21S/37E	1650 FSL-990 FEL	O	4/20/1951	6/16/1951	7626	17-1/2	13-3/8	308	300	11	8-5/8	2803	1300	7-7/8	500	7-7/8	5-1/2	7570	800	3000 (C)		
Harry Leonard NCT E #2	30-025-06621	16/21S/37E	1980 FNL-660 FEL	O	11/23/1947	1/23/1948	6614	17-1/2	13-3/8	301	300	12-1/4	9-5/8	2832	1300	8-3/4	7			6547	700	1937 (C)		
Harry Leonard NCT E #5	30-025-06624	16/21S/37E	2310 FNL-330 FEL	O	6/																			

AREA OF REVIEW / WELL DATA

WELL NAME	API NO.	S / T / R	LOCATION	WELL TYPE	SPUD DATE	COMP DATE	TD	SURFACE CASING			INTERMEDIATE CASING			PRODUCTION CASING			LINER								
								HOLE	CSG	SET CMT	HOLE	CSG	SET CMT	HOLE	CSG	SET CMT	HOLE	DEPTH	CMT	TOC					
State DA # 4	30-025-06619	16/21S/37E	1980 FSL-660 FEL	O	8/12/1947	9/26/1947	6644	17-1/2	13-3/8	213	200	11	8-5/8	2807	1550	7-7/8	5-1/2	6644	600	3165 (T)					
State DA # 5	30-025-06617	16/21S/37E	1980 FSL-330 FEL	O	2/14/1952	5/6/1952	8330	17-1/2	13-3/8	250	200	11	8-5/8	2820	1500	7-7/8	5-1/2	8225	500	3448 (T)					
NEDU #716	30-025-34660	22/21S/37E	61 FNL-1212 FWL	O	8/1/1999	9/2/1999	6810	12-1/4	8-5/8	1269	460					7-7/8	5-1/2	6810	1550	Surface					
NEDU #803 (Argo Oil Corp A #3)	30-025-09929	22/21S/37E	660 FNL-1980 FWL	WI	7/1/1948	8/20/1948	6628	17-1/2	13-3/8	226	250	11	8-5/8	2918	1500	7-7/8	5-1/2	6559	750	2560 (C)					
NEDU #806 (Eubank #1)	30-025-06727	22/21S/37E	660 FNL-1780 FEL	O	8/17/1948	9/23/1948	6620	17-1/2	13-3/8	317	300	12-1/4	9-5/8	2800	1262	8-3/4	7	6500	700	2850 (T)					
Argo A #6	30-025-06738	22/21S/37E	440 FNL-2200 FWL	O	5/26/1950	7/12/1950	7907	17-1/2	13-3/8	227	300	11	8-5/8	2883	2000	7-7/8	5-1/2	7770	500	4913 (C)					
Argo A #10	30-025-06742	22/21S/37E	660 FNL-1660 FWL	G	9/29/1951	12/4/1951	8130	17-1/2	13-3/8	216	250	11	8-5/8	2874	1900						6-3/4	5-1/2	2655-8058	870	TOL
Eubank #5	30-025-06731	22/21S/37E	330 FNL-2310 FEL	G	2/23/1950	4/21/1950	7756	17-1/2	13-3/8	294	300	12-1/4	9-5/8	2800	1300	8-3/4	7	7644	700	2950 (T)					
Eubank #7	30-025-06733	22/21S/37E	450 FNL-2305 FEL	O	7/23/1951	9/28/1951	7630	17-1/2	13-3/8	306	300	12-1/4	9-5/8	2799	1400	8-3/4	7	7629	625	3513 (C)					

Top of Cement Legend:
 B = Cement Bond Log
 C = Calculated
 Surface = Circulated
 T = Temperature Survey
 TOL = Top of Liner