

Case No. 14494

**VPR OPERATING  
Exhibit # 7**

**VPR OPERATING**


**EXISTING**

WELL: SFPRR #18		FIELD: SAWYER			DATE: 30 JAN 2010	
LOCATION: 660' FEL & 1980' FSL		SECTION 28, T09S-R37E				
COUNTY: LEA		STATE: NEW MEXICO			BY: J R HULING	
API # 30-025-25341		SIZE, IN	WGT, #/FT	GRADE	THREAD	DEPTH
GL: 3,971'	CASING:	8-5/8	24	H-40	ST&C	430'
KB: 3,982'	CASING:	4-1/2	10.5	J-55	ST&C	5,020'
SPUD: 9/23/76	CASING:					
TD: 5,022'	PBTD: 5,028'	TUBING:	2-3/8	4.7	J-55	EUE-8RD +/- 5,018'
		12-1/4" SURFACE HOLE DRILLED TO 430'				
		8-5/8" SURFACE CSG @ 430' CMT'd T/ Surf. W/ 300 SX CMT				
		DV Tool ; 760 SX Cemented to Surface Thru DV Tool				
BHT = 110F		<p>TOC SURFACE</p> <p>BHA: 2-3/8", 4.7#, J-55, EUE-8RD TBG, TAC, 4 JTS 2-3/8" TBG, SN, 4' PS, BULL PLUG; EOT @ +/- 5000'</p> <p>SAN ANDRES PERFS: 4934' - 5004'</p> <p>SAN ANDRES PERFS: ORIG-9000 GAL 20% HCL ACID</p> <p>4-1/2" CSG @ 5,020' CMT'd W/ 1010 SX CMT; 7-7/8" HOLE DRILLED TO 5020'; PBTD@ 5,013'</p>				

# VPR OPERATING

**PROPOSED**

WELL: SPPRR #18		FIELD: SAWYER			DATE: 30 JAN 2010	
LOCATION: 660' FEL & 1980' FSL		SECTION 28, T09S-R37E				
COUNTY: LEA		STATE: NEW MEXICO			BY: J R HULING	
API # 30-025-25341		SIZE, IN	WGT, #/FT	GRADE	THREAD	DEPTH
GL: 3,971'	CASING:	8-5/8	24	H-40	ST&C	430'
KB: 3,982'	CASING:	4-1/2	10.5	J-55	ST&C	5,020'
SPUD: 9/23/76	CASING:					
TD: 5,022'	PBTD: 5,028'	TUBING:	2-3/8	4.7	J-55	EUE-8RD +/- 4,900'

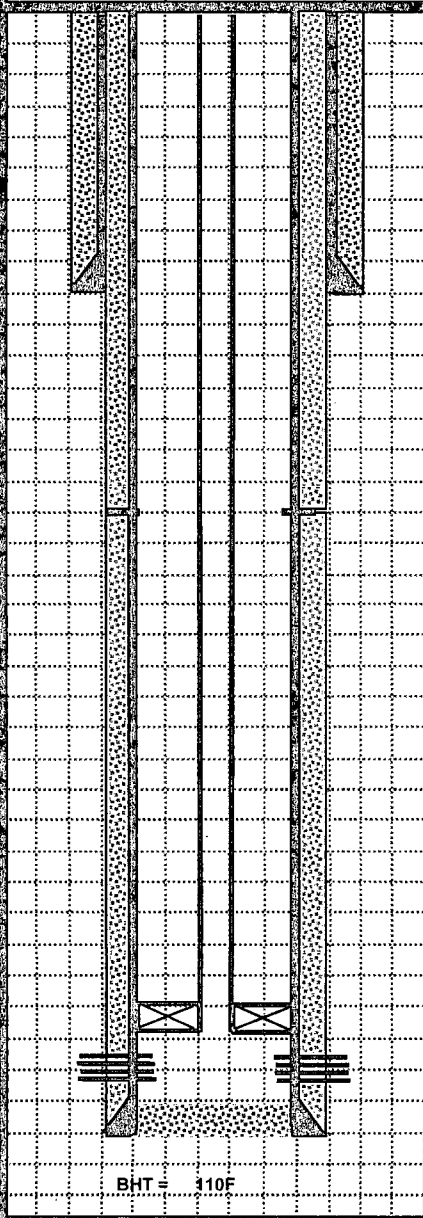

12-1/4" SURFACE HOLE DRILLED TO 430'

8-5/8" SURFACE CSG @ 430' CMT'd T/ Surf. W/ 300 SX CMT

DV Tool ; 760 SX Cemented to Surface Thru DV Tool

TOC SURFACE

PROPOSED: 2-3/8", 4.7#, J-55, EUE-8RD IPC TBG W/ COATED AD-1 PACKER @ +/- 4,900'

SAN ANDRES PERFS: 4934' - 5004'

SAN ANDRES PERFS: ORIG-9000 GAL 20% HCL ACID

4-1/2" CSG @ 5,020' CMT'd W/ 1010 SX CMT; 7-7/8" HOLE DRILLED TO 5020'; PBTD@ 5,013'

BHT = 110F