


OIL CONSERVATION COMMISSION

STATE OF NEW MEXICO

P. O. BOX 2088 - SANTA FE

87501

Casing & Cementing of Siemens & Boyd #1 Wright
F-12-10N-5E Bernalillo Co. NM.

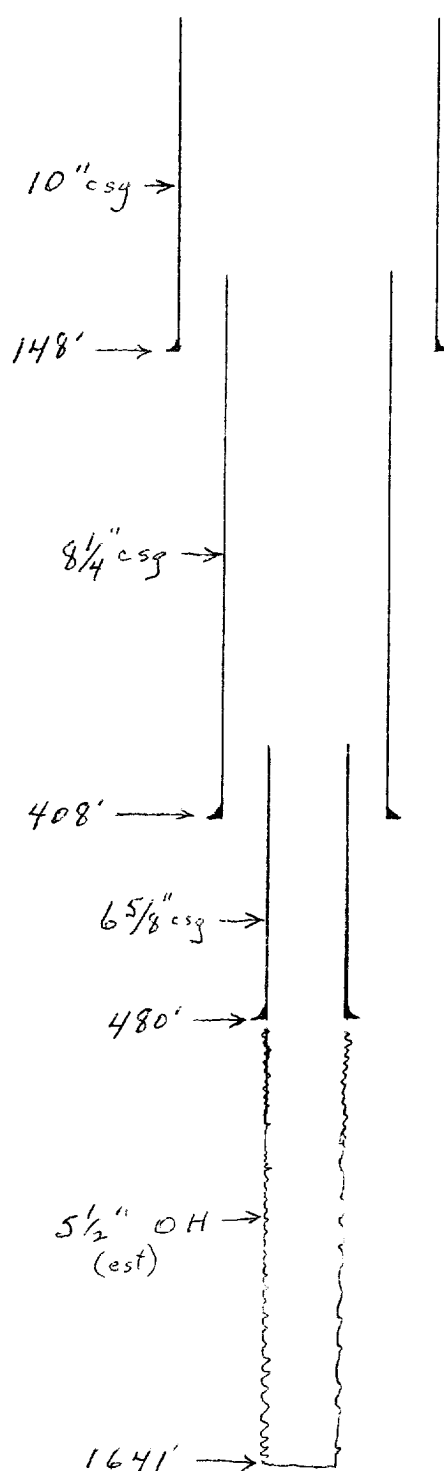

For plugging use
Class A cement or eq.

$$5 \text{ gals wtr./sack (94 lbs)} = \\ 1.14 \text{ cu. ft./sack.}$$

Capacities

$$5 \frac{1}{2} \text{ " hole: } 6.1 \text{ lin ft/cu. ft.} \\ \times 1.14 \text{ cu ft/sack} \times .66 \text{ Fillup} \\ = 4.6 \text{ lin ft/sack}$$

$$6 \frac{5}{8} \text{ " csg: } 5.3 \text{ lin ft/cu ft.} \\ \times 1.14 \text{ cu ft/sack} = 6 \text{ lin ft/sack}$$

$$8 \frac{1}{4} \text{ " csg: } 3.5 \text{ lin ft/cu. ft} \\ \times 1.14 \text{ cu ft/sack} = 4 \text{ lin ft/sack}$$

$$10 \text{ " csg: } 2.1 \text{ lin ft/cu ft.} \\ \times 1.14 \text{ cu ft/sack} = 2.4 \text{ lin ft/sack}$$