


NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	
FILE	<input checked="" type="checkbox"/>
U.S.G.S.	
LAND OFFICE	
OPERATOR	

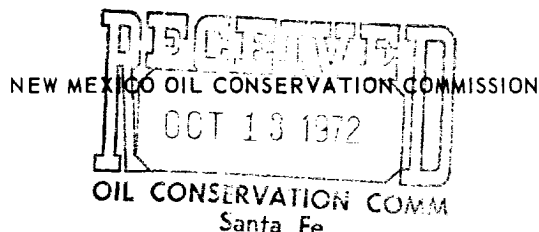

Form C-103
Supersedes Old
C-102 and C-103
Effective 1-1-65

5a. Indicate Type of Lease
State <input type="checkbox"/> Fee <input checked="" type="checkbox"/>
5. State Oil & Gas Lease No.

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER- DRY HOLE	7. Unit Agreement Name
2. Name of Operator ODESSA NATURAL CORPORATION	8. Farm or Lease Name Odessa Natural Corp. W S Ranch
3. Address of Operator P. O. Box 3908, Odessa, Texas 79760	9. Well No. 3
4. Location of Well M 342 FEET FROM THE West LINE AND 537 FEET FROM South LINE, SECTION 24 TOWNSHIP 29N RANGE 19E NMPM.	10. Field and Pool, or Willam Wildcat
15. Elevation (Show whether DF, RT, GR, etc.) GR 7271' KB 7284'	12. County Colfax

Check Appropriate Box To Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>
OTHER <input type="checkbox"/>	

SUBSEQUENT REPORT OF:

REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
COMMENCE DRILLING OPNS. <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>
CASING TEST AND CEMENT JOB <input type="checkbox"/>	
OTHER <input type="checkbox"/>	

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

OCTOBER 7, 1972 TD 5084' PBTD 0'

This well was plugged and abandoned as follows:

- (1) Cut off 7" OD casing @ 2001' and recovered casing.
- (2) Set 20 sx regular cement plug @ 1874' to 1930'
- (3) Cut off 9-5/8" OD casing @ 810' and recovered casing.
- (4) Set 50 sx regular cement plug @ 430' to 500'.
- (5) Set 60 sx regular cement plug 95' - 180' (Bottom of surface casing).
- (6) Set 5 sx regular cement plug @ surface w/4" OD x 4' high dry hole marker.

Distribution:

3/NMOCC-Santa Fe, 1/WSRanch, 1/RLH, 1/JH, 1/JJS, 1/WF

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED <u>John J. Strojsek</u> JOHN J. STROJSEK	TITLE <u>MANAGER - PRODUCTION DEPT.</u>	DATE <u>10/9/72</u>
APPROVED BY <u>Carl Wivog</u>	TITLE <u>SENIOR PETROLEUM GEOLOGIST</u>	DATE <u>7/8/74</u>
CONDITIONS OF APPROVAL, IF ANY:		