

STATE OF NEW MEXICO  
ENERGY AND MINERALS DEPARTMENT

OIL CONSERVATION DIVISION  
P. O. BOX 2088  
SANTA FE, NEW MEXICO 87501

Form C-103  
Revised 10-1-7

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	
FILE	
U.S.O.S.	
LAND OFFICE	
OPERATOR	

5a. Indicate Type of Lease  
State ☒ Fee ☐

5. State Oil & Gas Lease No.  
**L 6331**

SUNDARY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG RATS TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT -" FORM C-101 FOR SUCH PROPOSALS.)

1. OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>	7. Unit Agreement Name
2. Name of Operator <b>Public Lands Exploration Co., Inc.</b>	8. Farm or Lease Name <b>State</b>
3. Address of Operator <b>P. O. Box 29119, Dallas, Texas 75229</b>	9. Well No. <b>1</b>
4. Location of Well UNIT LETTER <b>A</b> <b>540</b> FEET FROM THE <b>North</b> LINE AND <b>560</b> FEET FROM <b>East</b> LINE, SECTION <b>15</b> TOWNSHIP <b>11N</b> RANGE <b>25E</b> NMPM.	10. Field and Pool, or Wildcat <b>Wildcat</b>
15. Elevation (Show whether DF, RT, GR, etc.) <b>4580.7' GL</b>	12. County <b>Guadalupe</b>

Check Appropriate Box To Indicate Nature of Notice, Report or Other Data  
NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐  
TEMPORARILY ABANDON ☐  
PULL OR ALTER CASING ☐  
OTHER ☐

PLUG AND ABANDON ☐  
CHANGE PLANS ☐


SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐  
COMMENCE DRILLING OPNS. ☒  
CASING TEST AND CEMENT JOBS ☒  
OTHER ☐

ALTERING CASING ☐  
PLUG AND ABANDONMENT ☐

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

Spudded a 9 7/8" hole at 1:20 PM 2-19-80. TD 31'. Ran 31' of 7" 20# casing and cemented from TD to surface with 15 sacks of neat cement containing 2% calcium chloride. Drilled 6 3/4" hole to 520' TD. Ran 510.70' of 4 1/2" 10.5# K-55 casing. Installed centralizers at 497', 455', 413' and 18'. Cemented as follows: pumped 10 bbls. of 2% KCl water and 20 bbls. of 2% KCl water containing 1 gallon of marflow. Pumped 90 sacks of class "H" cement containing 2% calcium chloride. Circulated out 5 sacks. Shut in at 2:00 AM 2-28-80. Cleaned well out to 506'. Pressure tested casing to 600 psig for 30 minutes. Casing held OK.

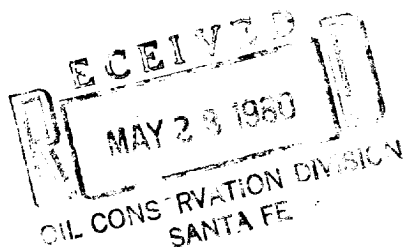

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED Charles C. Joy TITLE Agent DATE May 15, 1980

APPROVED BY Carl Ulvog TITLE Geologist DATE 5/23/80

CONDITIONS OF APPROVAL, IF ANY: