

## OIL CONSERVATION DIVISION

P. O. BOX 2088

SANTA FE, NEW MEXICO 87501

Form C-103  
Revised 10-1-78

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	
FILE	
U.S.G.S.	
LAND OFFICE	
OPERATOR	

5a. Indicate Type of Lease

State ☒Fee ☐

5. State Oil &amp; Gas Lease No.

LG5209

## SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO CEMENT OR PLUG BACK TO A DIFFERENT RESERVOIR.  
USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>	7. Unit Agreement Name
2. Name of Operator PUBLIC LANDS EXPLORATION COMPANY, INC.	8. Farm or Lease Name KAREN-STATE
3. Address of Operator 4835 LBJ FREEWAY, SUITE 635, DALLAS, TEXAS 75234	9. Well No. 1
4. Location of Well UNIT LETTER N 330 FEET FROM THE South LINE AND 2310 FEET FROM THE West LINE, SECTION 8 TOWNSHIP 11N RANGE 26E NMPM.	10. Field and Pool, or Wildcat Wildcat
11. Elevation (Show whether DF, RT, GR, etc.) 4777.0GR	12. County Guadalupe

16. Check Appropriate Box To Indicate Nature of Notice, Report or Other Data  
NOTICE OF INTENTION TO:PERFORM REMEDIAL WORK ☐  
TEMPORARILY ABANDON ☐  
PULL OR ALTER CASING ☐PLUG AND ABANDON ☐CHANGE PLANS ☐OTHER ☐


SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐COMMENCE DRILLING OPNS. ☒CASING TEST AND CEMENT JOB ☒OTHER ☐ALTERING CASING ☐PLUG AND ABANDONMENT ☐

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

Spudded 10" hole at 10:30 a.m. 8/8/80 (TD 29.5') Ran 29.5' of 8 5/8" 23# J-55 casing and cemented with 8 sacks of neat cement containing 2% calcium chloride from TD to surface. Drilled well to 866' TD with a 7 7/8" bit. Ran 868' of 4 1/2" 11.6#K-55 casing. Cemented as follows: Pumped 20 bbls of gelled 2% KCl water containing 1 gal. of marflo and followed with 20 bbls of 2% KCl water. Pumped 5 bbls of fresh water as a spacer. Pumped 160 sacks of class "H" cement containing 0.5% Halad-9 and followed with 160 sacks of class "H" cement containing 2% calcium chloride. Circulated cement.

Cored well as follows: 762'-788'; 788'-814'; 814'-840'; and 840'-868'

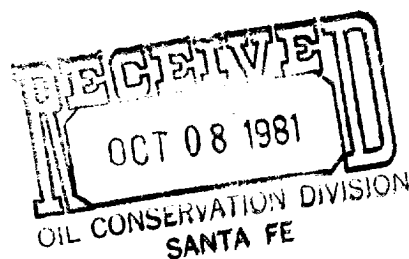

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

BY Charles C Joy TITLE Agent DATE 9/30/81APPROVED BY Carl J. [Signature] TITLE Geologist DATE 10-9-81CONDITIONS OF APPROVAL, IF ANY: 0