

OIL CONSERVATION DIVISION

P. O. BOX 2088

SANTA FE, NEW MEXICO 87501

Form C-103
Revised 10-1-78

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	
FILE	<input checked="" type="checkbox"/>
U.S.G.S.	
LAND OFFICE	
OPERATOR	

5a. Indicate Type of Lease	
State <input type="checkbox"/>	Fee <input checked="" type="checkbox"/>
5. State Oil & Gas Lease No.	

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR.
USE "APPLICATION FOR PERMIT -" (FORM C-101) FOR SUCH PROPOSALS.)

1. OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>	7. Unit Agreement Name
2. Name of Operator PUBLIC LANDS EXPLORATION COMPANY, INC.	8. Farm or Lease Name JEANNE
3. Address of Operator 4835 LBJ FREEWAY, SUITE 635, DALLAS, TEXAS 75234	9. Well No. 3
4. Location of Well UNIT LETTER C 800 FEET FROM THE North LINE AND 2310 FEET FROM THE West LINE, SECTION 17 TOWNSHIP 11N RANGE 26E NMPM.	10. Field and Pool, or Wildcat Wildcat
15. Elevation (Show whether DF, RT, GR, etc.) 4771.0' GR	12. County Guadalupe

Check Appropriate Box To Indicate Nature of Notice, Report or Other Data
NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐
TEMPORARILY ABANDON ☐
PULL OR ALTER CASING ☐
OTHER ☐

PLUG AND ABANDON ☐
CHANGE PLANS ☐
OTHER ☐

SUBSEQUENT REPORT OF:


REMEDIAL WORK ☐
COMMENCE DRILLING OPNS. ☒
CASING TEST AND CEMENT JOB ☒
OTHER ☐

ALTERING CASING ☐
PLUG AND ABANDONMENT ☐

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103.

Spudded 11" hole at 9:45 a.m. 5/19/81 (TD 27.5'). Ran 27.75' of 8 5/8" 23# J-55 casing and cemented with 7 sacks of neat cement from TD to surface. Drilled well to 875' TD with a 7 7/8" bit. Ran 844' of 4 1/2" 11.6 #J-55 casing. Centralizers installed at 830' 785', 744' and at 681'. Cemented well as follows: Pumped 40 bbls of gelled 5% KCl water containing 2 gallons of marflo and followed with 5 bbls of fresh water. Pumped 160 sacks of class "H" cement containing 0.5% Halad-9 and followed with 160 sacks of class "H" cement containing 2% calcium chloride. Circulated cement.

Cored well as follows: 700' - 727'; 727' - 753'; 753' - 778'; 778' - 805' and 805' - 830'.

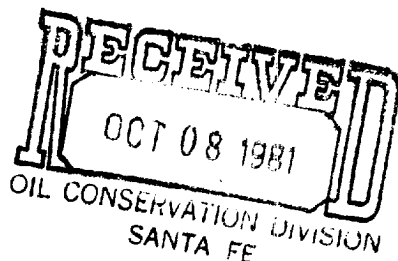

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED Charles C Joy

TITLE Agent

DATE 9/30/81

APPROVED BY Carl Miller

TITLE REGISTER

DATE 10-9-81

CONDITIONS OF APPROVAL, IF ANY: