

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	
FILE	
U.S.G.S.	
LAND OFFICE	
OPERATOR	

NEW MEXICO OIL CONSERVATION COMMISSION

Form C-103
Supersedes Old
C-102 and C-103
Effective 1-1-65

5a. Indicate Type of Lease	
State <input type="checkbox"/>	Fee <input checked="" type="checkbox"/>
5. State Oil & Gas Lease No.	
Fee	

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT -" (FORM C-101) FOR SUCH PROPOSALS.)

1. <input type="checkbox"/> OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER-		7. Unit Agreement Name
2. Name of Operator McClellan Oil Corporation		8. Farm or Lease Name Meg, Branum, Burner Fee
3. Address of Operator P.O. Drawer 730, Roswell, NM 88202		9. Well No. 1
4. Location of Well UNIT LETTER <u>F</u> <u>1970</u> FEET FROM THE <u>North</u> LINE AND <u>2090</u> FEET FROM THE <u>West</u> LINE, SECTION <u>22</u> TOWNSHIP <u>11N</u> RANGE <u>21E</u> NMPM.		10. Field and Pool, or Wildcat Wildcat
15. Elevation (Show whether DF, RT, GR, etc.) 5074' GL		12. County Guadalupe

Check Appropriate Box To Indicate Nature of Notice, Report or Other Data
NOTICE OF INTENTION TO: SUBSEQUENT REPORT OF:


PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	OTHER <input type="checkbox"/>	CASING TEST AND CEMENT JOBS <input checked="" type="checkbox"/>	

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

7/29/82: Move in Salazar Rig 13. Spud with 17-1/2" bit.

8/04/82: Drilled to 504'. Ran 504' of 13-3/8", 54.5 lb/ft casing. Cemented with 400 sx Halliburton Light Cement with 2% CaCl₂ and 200 sx Class "C" with 2% CaCl₂. Circulated 100 sx. WOC - 36 hours. Nipple up BOP's and test to 500 psi for 30 minutes.

8/06/82: Drill out with 7-7/8" bit.

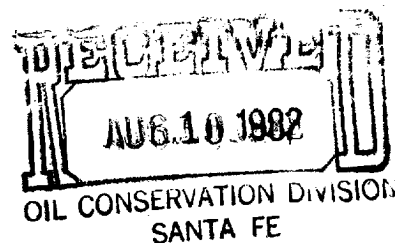

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED Paul Ragsdale TITLE Operations Manager DATE August 9, 1982

APPROVED BY Carl Williams TITLE REVISOR DATE 8-10-82

CONDITIONS OF APPROVAL, IF ANY: