


NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	
FILE	✓
U.S.G.S.	
LAND OFFICE	
OPERATOR	

NEW MEXICO OIL CONSERVATION COMMISSION

Form C-103
Supersedes Old
C-102 and C-103
Effective 1-1-85

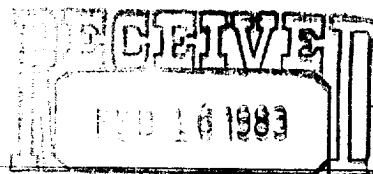

a. Indicate Type of Lease
State ☐ Fee ☒ ☐

b. State Oil & Gas Lease No.

SUNDY NOTICES AND REPORTS ON WELLS CONSERVATION DIVISION

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT TO DRILL" (FORM C-101) FOR SUCH PROPOSALS.)

1. <input type="checkbox"/> OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/> Confirmation Well		7. Unit Agreement Name
2. Name of Operator Trans Pecos Resources		8. Farm or Lease Name Latigo Ranch BLK "B"
3. Address of Operator 800 Gessner, Suite 790, Houston, Texas 77024		9. Well No. 2
4. Location of Well UNIT LETTER <u>F</u> <u>1680</u> FEET FROM THE <u>North</u> <u>1904</u> FEET FROM THE <u>West</u> <u>6</u> LINE, SECTION <u>9N</u> <u>24E</u> TOWNSHIP <u>24E</u> RANGE <u>24E</u> N.M.P.M.		10. Field and Pool, or Wildcat Nikos V
11. Elevation (Show whether D.F., R.T., G.R., etc.) 4801 G. L. 4813 R.T.		12. County Guadalupe

Check Appropriate Box To Indicate Nature of Notice, Report or Other Data
NOTICE OF INTENTION TO:

SUBSEQUENT REPORT OF:

PERFORM REMEDIAL WORK <input type="checkbox"/>	PULL AND ABANDON <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	OTHER <input type="checkbox"/>	CASING TEST AND CEMENT JOBS <input checked="" type="checkbox"/>	OTHER <input type="checkbox"/>

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

Production Casing Set @ 7210, T.D. 7241 R.T.

5½", J-55, 17# L.T. & C, R-3 Casing with Halliburton guide shoe & Float collar.

Shoe at 7210; Collar at 7169; centralizers at 7126, 7085, 6919, 6713.

Cemented with 1500 sacks of Class "C" neat cement as follows:

88 sacks top at ± 2000'
994 sacks Class "C" Neat with nitrogen foam
418 sacks TOP at ± 5500'
Plug Down with 2000# shut in for 8 hrs. released pressure at 16.40 hrs
03-03-83

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED [Signature] TITLE President DATE 2-11-83

APPROVED BY [Signature] TITLE SUPERVISOR DATE 2-16-83

CONDITIONS OF APPROVAL, IF ANY: