NO. OF COPIES RECEIVED						
DISTRIBUTION	NEV	MEXICO OIL CONSE	RVATION COMMISSION	l Form C	C-101	
\$ANTA FE	-1.,1		:		ed 1-1-65	
FILE .	 				idicate Type of Lease	
LAND OFFICE	- 			5. Ste	tate X FEE	
OPERATOR						
	AF	I#30-021-2				
APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK SALVA EE						
la. Type of Work	_			7. Un:	it Agreement Name	
b. Type of Well DRILL X		DEEPEN	PLUG B	ACK Blan	m or Lease Name	
OIL GAS X CO2 OTHER SINGLE X MULTIPLE ZONE					te KK	
2. Name of Operator					ll No.	
Amoco Production Company					Ţ	
3. Address of Cperator					10. Field and Pool, or Wildoat Und. Tubb	
P. O. Box 68 Hobbs, NM 88240					u. Iuuu TTTTTTTTTTTTTTTTT	
4. Location of Well UNIT LETTER F LOCATED 1980 FEET FROM THE North LINE						
AND 1980 FEET FROM	THE West LIN	NE OF SEC. 8	NP. 20-N RGE. 33-	-E NMPM (())		
				12. Co		
				Har	ding \\\\\\	
			9. Proposed Depth 1	OA. Fermation	20. Holoty or C.T.	
			2710	Tubb	Rotary	
21. Elevations (show whether DF,	(KT, etc.) Rlankot	& Status Flug, Bond 2	1B. Drilling Contractor	22. 4	Approx. Date Work will start	
5091 GL	- Franket	-011-1116	NA	<u></u>	12-12-80	
23. PROPOSED CASING AND CEMENT PROGRAM						
SIZE OF HOLE	SIZE OF CASING	WEIGHT DED FOOT	T SETTING DEDTIL	I CACKE OF CEA	ECT TOD	
11" or 12-1/4"	8-5/8"	WEIGHT PER FOOT	SETTING DEPTH	Circ.	ENT EST. TOP Surf.	
7-7/8"	5-1/2"	14#	27101		8-5/8" BTM 8-5/8"	
				110 000		
Propose to drill and equip well in the Tubb formation. After reaching TD, logs will be run and evaluated. Perforate and stimulate as necessary in attempting commercial production.						
MUD PROGRAM: O'-700' Native mud and fresh water 700'-TD Commercial mud and brine water with minimum properties for safe hole conditions						
BOP Program Attac	hed					
<u>Gas</u> is not dedica	ted.					
0+2-NMOCD, SF	1-Hou	1-Susp 1-	ΔΡ	PROVAL VALID	FOR 180 DAYS	
•			F	PERMIT DI DIL	6-25-81	
				UNLESS DRILL	ING UNDERWAY	
IN ABOVE SPACE DESCRIBE PR	OPOSED PROGRAM: IF	PROPOSAL IS TO DEEPEN OR	PLUG BACK, GIVE DATA ON	PRESENT PRODUCTIVE	E ZONE AND PROPOSED NEW PRODUC-	
TIVE ZONE. GIVE BLOWOUT PREVENTER PROGRAM, IF ANY. 1 hereby certify that the information above is true and complete to the best of my knowledge and belief.						
The state of the s						
Signed DOU Wa	UV)	Admin. A	nalyst 	Date	12-9-80	
(This space for S	State Use)			·		
APPROVED BY Carl Illing		TITLE SINGLES	gger kaj per da skoj ili ja ji jugi. Na na na suusek kuulus di galaga ka	DATE	12/29/80	
CONDITIONS OF APPROVAL, IF	ANY O'LL DO	MSDDWATION OF		DATE.		
WITHIN ON AND TO DE MOTIETO						

OIL CONSERVATION DIVISION

STATE OF NEW MEXICO **ENERGY AND MINERALS DEPARTMENT**

P. O. BOX 2038

SANTA FE, NEW MEXICO 87501

All distances must be from the outer houndaries of the Section ! Well No. Overalur **AMOCO** STATE OF NEW MEXICO KK 1 County Section Township Unit Letter T20N R33E **HARDING** Actual Footage Location of Well: NOR TH 1980 1980 WEST line and feet from the feet from the Dedicated Acreoue: Ground Level Elev. Producing Fermation Pool 5091 Und. Tubb Tubb 1. Outline the acrenge dedicated to the subject well by colored pencil or hachure marks on the plat below. 2. If more than one leave is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty). 3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling. etc? If answer is "yes," type of consolidation Yes If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.)_ No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Division. CERTIFICATION I hereby certify that the information contoined herein is true and complete to the best of my knowledge and belief. Admin. Analyst 1980 Amoco Production Company 12-9-80 I hereby certify that the well location shown on this plat was platted from field notes of octual surveys made by me or under my supervision, and that the same Is true and correct to the best of my NOV . 21, -1980 The formation of the first of t

- Blow-out preventers and master valve to be fluid operated and oil fittings must be in good condition, 3,000 # W.P. (6,000 p.s.i. test), minimum.
- Equipment through which bit must pass shall be as large as the inside diameter of the casing that is being drilled through.
- Nipple above blow-out preventer shall be same size as casing being drilled through.

4. Kelly cock required, 3,000# W.P. (6,000 p.s.i. test) minimum.

- OMSCO or comparable safety valve must be available on rig floor at all times with proper connection or sub, 3,000# W.P. (6,000 p.s.i. test), minimum.
- 6. Blow-out preventers and master valve while drilling intermediate hole to 6000' may be 2,000* W.P. (4,000 p.s.i. test), minimum.
- Choke assembly, beyond second valve from cross, may be positioned (Optional) outside of derrick foundation.
- Spool or cross may be climinated if connections are available in the lower part of the blow-out preventer body.
- 9. Plug valves gate valves are optional. Valves shown as 2" are minimum size.
- Casing head and casing head spool, including attached valves, to be furnished by Amoco.
- 11. Rams in preventers will be installed as follows:

When drilling, use:


Top Preventer - Drill pipe rams
Bottom Preventer - Blind rams or

master valve

When running casing, use:

Top Preventer - Casing rams Bottom Preventer - Blind rams or

master valve

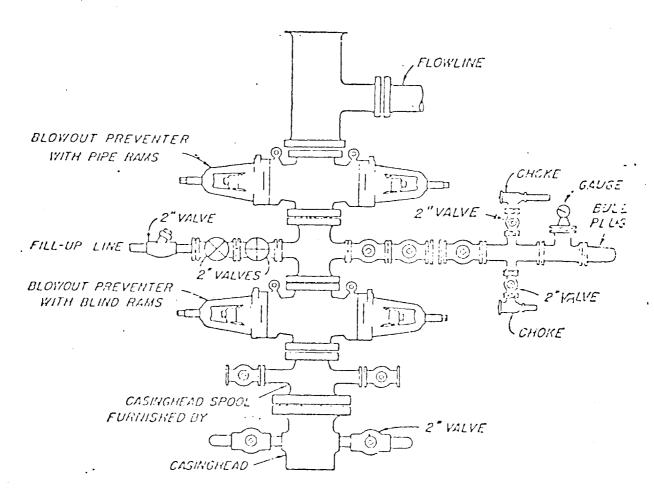

BLOWOUT PREVENTER HOOK-UP

JUNCO PRO MINONE COURS AT

EXHIBIT D-I MODIFIED

JUHE 1. 1962