NO. OF COPIES RECEIVED					•	
DISTRIBUTION	NEW	MEXICO OIL CONSE	RVATION COMMISSION	1 ;	Form C-101	
SANTA FE			Revised 1-1-6	55		
FILE				· ·	5A. Indicate	Type of Lease
U.S.G.S.						X FEE
LAND OFFICE			* · · · · · · · · · · · · · · · · · · ·		5, State Oil	& Gas Lease No.
OPERATOR						
<u> </u>	AP	I #30-021-1	10103		TITITE	
APPLICATIO	N FOR PERMIT TO	DRILL, DEEPEN,	OR PLUG BACK Á	TA FE	1144111	
la. Type of Work		<u> </u>	<del></del>		7. Unit Agre	ement Name
DRILL X	]	DEEPEN [	DI IIC D	BACK []		
b. Type of Well	-		SINGLE X MULT	, 40,	ä. Farm or L	
OIL GAS X	ZONE.	State KL				
2. Name of Operator		1			9. Well No.	
Amoco Production	Company		·		1	
3. Address of Grerator		10. Field and Pool, or Wildcat				
P. O. Box 68 H	obbs, NM 88240				Und. Tubb	
4. Location of Well UNIT LETTE	ER G LOC	1980 F	EET FROM THE North	LINE		
1000		• •		_		
AND 1980 FEET FROM	THE East LIS	E OF SEC. 18 T	wp. 20-N RGE. 33		7777777	777////////////////////////////////////
					12. County	
	444444	444444	<i>\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\</i>	<i>HHH</i>	Harding	HHHH
444444	444444	<i>HHHH</i>	9. Proposed Depth 1	9A. Formation	7//////	20. Rotary or C.T.
			2615'	Tubb	)	Rotary
21. Elevations (Show whether DF,	RT. etc.) 21A. Kind	4 Status Plua, Bond 2			22 Approx	Date Work will start
4995 GL	β Tanket	6 Status Flug. Bond 2	NA			12-12-80
23.					<u> </u>	12-12-00
	Р	ROPOSED CASING AND	CEMENT PROGRAM			
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	SACKS OF	CEMENT	EST, TOP
11" or 12-1/4"	8-5/8"	24#	700'			Surf.
7-7/8"	5-1/2"	14#	2615''			5/3" BTM 8-5/8'
				119 040	-	<u> </u>
	ŀ	1	1	1	ļ	
	-700' Native m -TD Commercia	and stimulate ud and fresh wa al mud and bri	as necessary in ter ne water with m	attempti	ing comm	ercial
	!	safe hole condi	tions			<
DOD D 1 + +	المما		ΔPPF	OVAL VALI	in for <u>人</u>	80 DAYS S-81 DERWAY
BOP Program Attac	nea		PE		6-2	5-81
Gas is not dedica	tad		Ü	NLESS DR	LLING UN	DERWAY
das 13 not dealed	icu.					
	1.1.1		· · · · · · · · · · · · · · · · · · ·			
0+2-NMOCD, SF	1-Hou	1-Susp 1-	BD			
		•				
IN ABOVE SPACE DESCRIBE PRIVE ZONE. GIVE BLOWOUT PREVENT		PROPOSAL IS TO DEEPEN OF	R PLUG BACK, GIVE DATA ON	PRESENT PROL	OUCTIVE ZONE	AND PROPOSED NEW PRODU
I hereby certify that the information	on above, is true and comp	olete to the best of my ki	ipwledge and bellef.			
B.1.	0.40	Admin A	naluct		1	2 0 00
Signed OO	204	<sub>Title</sub> Admin. A	ina i y s t		ate	2-9-80
(This space for						
	State Use)					
c a 1	State Use)	CENTURY TO T	ostation of the second of the			
APPROVED BY Carl U	State Use) lvvg	SERON TELL	ostania di Santania di Santani	D	ATE /2/	129/80
APPROVED BY Carl U  CONDITIONS OF APPROVAL, IF	lvog		ONANTO CONTRACTOR OF THE	D	ATE 12/	129/80
	long	MEERVATION CO		استاد استام استام الاستام الاس	.c.D	129/80

## NEW MEXICO OIL CONSERVATION COMMISSION WELL LOCATION AND ACREAGE DEDICATION PLAT

All distances must be from the outer boundaries of the Section

	All distances must be i	rom the outer boundaries of	OIG C	<del>* ( )                                  </del>
Operator AM OC O		STATE OF N	Well No. KL 1	
Unit Letter Section 18	Township T 20 N	Range R 33 E	HARD I NG	PE SIGN
Actual Footage Location of Well: 1980 feet from the	NORTH line and	1980	et from the	line
Ground Level Elev. Producin	g Formation IDD	Pcol Und. Tubb		Dedicated Acreage:
Outline the acreage de     If more than one lease interest and royalty).      If more than one lease dated by communitization.	dicated to the subject we	ell by colored pencil of the colored and identified to the well, ng. etc?	or hachure marks on the	ne plat below.
this form if necessary.). No allowable will be as:	the owners and tract desc signed to the well until all vise) or until a non-standar	interests have been	consolidated (by com	munitization, unitization,
	087	1980	Name Position Admin. Company	certify that the information con- rein is true and complete to the y knowledge and belief.  Analyst  Production Company  12-9-80
			shown on notes of under my is true of knowledge NOV -2	Professional Engineer Surveyor  S. NO. 5103

- 1. Blow-out preventers and master valve to be fluid operated and oil fittings must be in good condition, 3,000# W.P. (6,000 p.s.i. test), minimum.
- Equipment through which bit must pass shall be as large as the inside diameter of the casing that is being drilled through.
- Nipple above blow-out preventer shall be same size as casing being drilled through.

4. Kelly cock required, 3,000# W.P. (6,000 p.s.i. test) minimum.

- OMSCO or comparable safety valve must be available on rig floor at all times with proper connection or sub, 3,000# W.P. (6,000 p.s.i. test), minimum.
- 6. Blow-out preventers and master valve while drilling intermediate hole to 6000' may be 2,000= W.P. (4,000 p.s.i. test), minimum.
- Choke assembly, beyond second valve from cross, may be positioned (Optional) outside of derrick foundation.
- Spool or cross may be climinated if connections are available in the lower part of the blow-out preventer body.
- 9. Plug valves gate valves are optional. Valves shown as 2" are minimum size.
- Casing head and casing head spool, including attached valves, to be furnished by Amoco.
- 11. Rams in preventers will be installed as follows:

When drilling, use:


Top Preventer - Drill pipe rams Bottom Preventer - Blind rams or

master valve

When running casing, use:

Top Preventer - Casing rams Bottom Preventer - Blind rams or

master valve

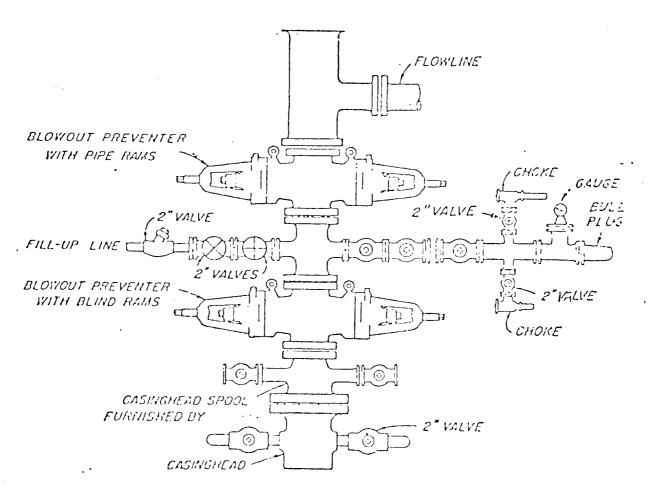

## BLOWOUT PREVENTER HOOK-UP

AMOOD PROMINENT COMMONIA

EXHIBIT D-I MODIFIED

JUNE 1. 1962