NO. OF COPIES RECEIVED	i						
DISTRIBUTION		NEW	MEXICO OIL CONSER	RVATION COMMISSI	ON	Form C-101	
SANTA FE		11.2		en	- 10 m 10	Hevised 1-1-	65 e Type of Leane
FILE				1 2 2	100 100	5A. Indicat	e Type of Lease
U.S.G.S.				ĺ	· · · · · · · · · · · · · · · · · · ·	STATE	[X]
LAND OFFICE				65 C. C.		1 5599700	6 Gun Lease No.
OPERATOR					SANTA FE	J. Sinte On	a Can Laasa No.
		,	7PI#30-021	2010		home	TTTTTTTTTT
ADDLICATI	ON EOD DE	DUIT TO	DRILL, DEEPEN, (-20/38			
AFFLICATI	UN FUR FI	ERMIT TO	DRILL, DEEPEN, C	JR PLUG BACK	 	777777	7771717777777
	~					7. Unit Agri	rement linne
DRILL []	<u>()</u>		DEEPEN .	PLU	S BACK		
	7.000			Turk [77]		1	Jeuse Name
WELL WELL /	C02	t É R		ZONE X	ZONE	State	MC
						9. Well No.	
Amoco Product	ion Compa	ny				1	
Address of Operator						10. Field a	nd Pool, or Wildcat
P. O. Box 68	Hobbs,	NM 8824	0			Und. Tubb	
Location of Well	G		ATED 1980 FE	No	rth	111111	
	124		FE	ET FROM THE	LINE		
10 1980 FEET FRO	м тне Eas	t	e of sec. 30 tv	vp. 20-N RGE. 3	3_F	((((((///////////////////////////////////////
iiiinniiiinn	THITTHE	imm		TTTTTTTTTT	3-E NMPM	12. County	<i>mittilii</i>
						Harding	
/////////////////////////////////////	+++++	+++++	/////////////////////////////////////	++++++++	77777	That a my	
++++++++++	+++++	4444	++++++	J. Proposed Depth	19A. Formutio	77/7/7/7	20, hotery or C.T.
				2760'	Tu		Rotary
Elevations (Show whether D	F. R.L. etc.)	121A. Eind	& Status Flug. Bond 21	B. Drilling Contractor	j		
5090' GL		ł	ì	in, Diffing Confector		22. Approx	. Date Work will start
		+ RISHVA	t_on_filo	NA			
		Blanke	t-on-file	NA			4-3-81
·.			t-on-file ROPOSED CASING AND	· · · · · · · · · · · · · · · · · · ·			4-3-81
		Pi	ROPOSED CASING AND	CEMENT PROGRAM	LI SACKS OF	CENEUX	
SIZE OF HOLE	SIZE OF	CASING	ROPOSED CASING AND	CEMENT PROGRAM SETTING DEPT		F CEMENT	EST. TOP
SIZE OF HOLE	SIZE OF	PI CASING /8"	ROPOSED CASING AND WEIGHT PER FOOT 24#	CEMENT PROGRAM SETTING DEPT 700'	Circ.		EST. TOP Surface
SIZE OF HOLE	SIZE OF	PI CASING /8"	ROPOSED CASING AND	CEMENT PROGRAM SETTING DEPT	Circ.		EST. TOP
SIZE OF HOLE	SIZE OF	PI CASING /8"	ROPOSED CASING AND WEIGHT PER FOOT 24#	CEMENT PROGRAM SETTING DEPT 700'	Circ.		EST. TOP Surface
Propose to dri run and evalua production.	SIZE OF 8-5 5-1 311 and eated. Per	CASING /8" /2" quip wel rforate	ROPOSED CASING AND WEIGHT PER FOOT 24# 14# l in the Tubb fand stimulate a	SETTING DEPT 700' 2760' ormation. Af	Circ. Tie bac	k to 8-5,	EST. TOP Surface /8" BTM 8-5/8"
Propose to dri run and evalua production.	SIZE OF 8-5 5-1 311 and eated. Per	CASING /8" /2" quip wel rforate	ROPOSED CASING AND WEIGHT PER FOOT 24# 14# l in the Tubb f and stimulate a mud and fresh w ial mud and bri	SETTING DEPT 700' 2760' ormation. Af a necessary integration atterner with minimum.	Circ. Tie bac ter reach n attempt um proper	k to 8-5, ing TD lo ing comme	EST. TOP Surface /8" BTM 8-5/8" Ogs will be ercial safe hole
Propose to dri run and evalua production. MUD PROGRAM:	SIZE OF 8-5 5-1 11 and eated. Per 0'-700' 00'-TD	CASING /8" /2" quip wel rforate Native Commerc	ROPOSED CASING AND WEIGHT PER FOOT 24# 14# I in the Tubb f and stimulate a mud and fresh w ial mud and bri ions OIL CON	SETTING DEPT 700' 2760' Cormation. Af a necessary in the with minimum of the second s	Circ. Tie bac ter reach n attempt um proper	k to 8-5, ing TD 10 ing commo	EST. TOP Surface /8" BTM 8-5/8" ogs will be ercial safe hole
Propose to dri run and evalua production. MUD PROGRAM: 70	SIZE OF 8-5 5-1 11 and eated. Per 0'-700' 00'-TD	CASING /8" /2" quip wel rforate Native Commerc	ROPOSED CASING AND WEIGHT PER FOOT 24# 14# I in the Tubb f and stimulate a mud and fresh w ial mud and bri ions OIL CON	SETTING DEPT 700' 2760' Cormation. Af a necessary in the with minimum of the second s	Circ. Tie bac ter reach n attempt um proper	k to 8-5, ing TD 10 ing commo	EST. TOP Surface /8" BTM 8-5/8" Ogs will be ercial safe hole
Propose to dri run and evalua production. MUD PROGRAM:	SIZE OF 8-5 5-1 11 and eated. Per 0'-700' 00'-TD	CASING /8" /2" quip wel rforate Native Commerc	ROPOSED CASING AND WEIGHT PER FOOT 24# 14# I in the Tubb f and stimulate a mud and fresh w ial mud and bri ions OIL CON	SETTING DEPT 700' 2760' Cormation. Af a necessary in the with minimum of the second s	Circ. Tie bac ter reach n attempt um proper	k to 8-5, ing TD 10 ing commo	EST. TOP Surface /8" BTM 8-5/8' ogs will be ercial safe hole
Propose to dri run and evalua production. MUD PROGRAM: 70	SIZE OF 8-5 5-1 11 and eated. Per 0'-700' 00'-TD	CASING /8" /2" quip wel rforate Native Commerc	ROPOSED CASING AND WEIGHT PER FOOT 24# 14# I in the Tubb f and stimulate a mud and fresh w ial mud and bri ions OIL CON	SETTING DEPT 700' 2760' ormation. Af a necessary integration atterner with minimum.	Circ. Tie bac ter reach n attempt um proper	k to 8-5, ing TD 10 ing commo	EST. TOP Surface /8" BTM 8-5/8" ogs will be ercial safe hole
Propose to dri run and evalua production. MUD PROGRAM: 70 BOP Program At Gas is not dec	size of 8-5 5-1, 5-1, sill and eated. Per 0'-700' 00'-TD	CASING /8" /2" quip wel rforate Native Commerc condit	ROPOSED CASING AND WEIGHT PER FOOT 24# 14# I in the Tubb f and stimulate a mud and fresh w ial mud and bri ions OIL CON WITHIN	SETTING DEPT 700' 2760' formation. Af a necessary in the with minimum SERVATION COLUMNS OF THE PROPERTY OF TH	Circ. Tie bac ter reach attempt m proper MMISSION BEGINN	k to 8-5, ing TD 10 ing comme ties for N TO BE ING OPER	EST. TOP Surface /8" BTM 8-5/8" ogs will be ercial safe hole
Propose to dri run and evalua production. MUD PROGRAM: 70	SIZE OF 8-5 5-1 11 and eated. Per 0'-700' 00'-TD	CASING /8" /2" quip wel rforate Native Commerc condit	ROPOSED CASING AND WEIGHT PER FOOT 24# 14# I in the Tubb f and stimulate a mud and fresh w ial mud and bri ions OIL CON	SETTING DEPT 700' 2760' Cormation. Af a necessary in the with minimum SERVATION COMPANY OF THE PROVAL VAL	Circ. Tie bac ter reach n attempt MMISSION BEGINN	ing TD 10 ing common ties for N TO BE	EST. TOP Surface /8" BTM 8-5/8" Ogs will be ercial safe hole
Propose to dri run and evalua production. MUD PROGRAM: 70 BOP Program At Gas is not dec	SIZE OF 8-5 5-1 11 and eated. Per 0'-700' 0'-TD ttached licated.	CASING /8" /2" quip wel rforate Native Commerc condit	ROPOSED CASING AND WEIGHT PER FOOT 24# 14# I in the Tubb f and stimulate a mud and fresh w ial mud and bri ions GIL CCN WITHIN	SETTING DEPT 700' 2760' Cormation. Af a necessary in the with minimum SERVATION CO 24 HOURS OF APPROVAL VAL PERMIT EXP	Circ. Tie bac ter reach attempt MMISSION BEGINN DID FOR / 8	k to 8-5, ing TD 10 ing comme ties for N TO BE ING OPER	EST. TOP Surface /8" BTM 8-5/8" Ogs will be ercial Safe hole NOTIFIED RATIONS
Propose to dri run and evalua production. MUD PROGRAM: 70 BOP Program At Gas is not dec	SIZE OF 8-5 5-1 11 and eated. Per 0'-700' 0'-TD ttached licated.	CASING /8" /2" quip wel rforate Native Commerc condit	ROPOSED CASING AND WEIGHT PER FOOT 24# 14# I in the Tubb f and stimulate a mud and fresh w ial mud and bri ions GIL CCN WITHIN	SETTING DEPT 700' 2760' Cormation. Af a necessary in the with minimum SERVATION CO 24 HOURS OF APPROVAL VAL PERMIT EXP	Circ. Tie bac ter reach attempt MMISSION BEGINN DID FOR / 8	k to 8-5, ing TD 10 ing comme ties for N TO BE ING OPER	EST. TOP Surface /8" BTM 8-5/8" Ogs will be ercial Safe hole NOTIFIED RATIONS
Propose to dri run and evalua production. MUD PROGRAM: 70 BOP Program At Gas is not dec 0+2-NMOCD, SF	SIZE OF 8-5 5-1 11 and edited. Per 0'-700' 0'-TD ttached licated. 1-Hou	Quip welrforate Native Commerc condit	ROPOSED CASING AND WEIGHT PER FOOT 24# 14# I in the Tubb f and stimulate a mud and fresh w ial mud and bri ions GIL CCN WITHIN	SETTING DEPT 700' 2760' Cormation. Af a necessary in the with minimum SERVATION CO 24 HOURS OF APPROVAL VALUE PERMIT EXPENDITES OF THE PERMIT EXPENDITE EXP	Circ. Tie bac ter reach attempt MMISSION BEGINN DID FOR / 8	k to 8-5, ing TD 10 ing comme ties for N TO BE ING OPER	EST. TOP Surface /8" BTM 8-5/8" Ogs will be ercial Safe hole NOTIFIED RATIONS
Propose to dri run and evalua production. MUD PROGRAM: 70 BOP Program At Gas is not dec	SIZE OF 8-5 5-1 11 and edited. Per 0'-700' 0'-TD ttached licated. 1-Hou	Quip welrforate Native Commerc condit	ROPOSED CASING AND WEIGHT PER FOOT 24# 14# I in the Tubb f and stimulate a mud and fresh w ial mud and bri ions GIL CCN WITHIN	SETTING DEPT 700' 2760' Cormation. Af a necessary in the with minimum SERVATION CO 24 HOURS OF APPROVAL VALUE PERMIT EXPENDITES OF THE PERMIT EXPENDITE EXP	Circ. Tie bac ter reach attempt MMISSION BEGINN DID FOR / 8	k to 8-5, ing TD 10 ing comme ties for N TO BE ING OPER	EST. TOP Surface /8" BTM 8-5/8" Ogs will be ercial Safe hole NOTIFIED RATIONS
Propose to dri run and evalua production. MUD PROGRAM: 70 BOP Program At Gas is not dec 0+2-NMOCD, SF	SIZE OF 8-5 5-1 11 and edited. Per 0'-700' 0'-TD ttached licated. 1-Hou	QUIP Well rforate Native Commerc condit	WEIGHT PER FOOT 24# 14# l in the Tubb f and stimulate a mud and fresh w ial mud and bri ions CIL CCN WITHIN Susp 1-BD	SETTING DEPT 700' 2760' Cormation. Af a necessary in the with minimum SERVATION CO 24 HOURS OF APPROVAL VALUE PERMIT EXPENDITES OF THE PERMIT EXPENDITE EXP	Circ. Tie bac Tie bac ter reach n attempt MMISSION BEGINN ID FOR / 8 RES / 2 -	k to 8-5, ing TD 10 ing comme ties for N TO BE ING OPER O DAYS 3-81	EST. TOP Surface /8" BTM 8-5/8" Ogs will be ercial Safe hole NOTIFIED RATIONS
Propose to dri run and evalua production. MUD PROGRAM: 70 BOP Program At Gas is not dec 0+2-NMOCD, SF	SIZE OF 8-5 5-1 11 and edited. Per 0'-700' 0'-TD tached licated. 1-Hour ROPOSED PROTER PROGRAM, I	QUIP Well rforate Native Commerc condit	WEIGHT PER FOOT 24# 14# l in the Tubb f and stimulate a mud and fresh w ial mud and bri ions Cil CCN WITHIN Susp 1-BD ROPOSAL IS TO DEEPEN OR ete to the best of my know	SETTING DEPT 700' 2760' Cormation. Af a necessary in the with minimum SERVATION CO 24 HOURS OF APPROVAL VALUE PERMIT EXPENSE DRIVERS	Circ. Tie bac Tie bac ter reach n attempt MMISSION BEGINN ID FOR / 8 RES / 2 -	k to 8-5, ing TD 10 ing comme ties for N TO BE ING OPER O DAYS 3-81	EST. TOP Surface /8" BTM 8-5/8" Ogs will be ercial Safe hole NOTIFIED RATIONS
Propose to dri run and evalua production. MUD PROGRAM: 70 BOP Program At Gas is not dec 0+2-NMOCD, SF	SIZE OF 8-5 5-1 11 and edited. Per 0'-700' 0'-TD tached licated. 1-Hour ROPOSED PROTER PROGRAM, I	Quip well representation of the condition of the conditio	ROPOSED CASING AND WEIGHT PER FOOT 24# 14# I in the Tubb f and stimulate a mud and fresh w ial mud and bri ions GIL CON WITHIN Susp 1-BD ROPOSAL IS TO DEEPEN OR ete to the best of my know Title Ad	SETTING DEPT 700' 2760' cormation. Af a necessary in the with minimum of the with min	Circ. Tie bac ter reach attempt MMISSION BEGINN ID FOR / 8	k to 8-5, ing TD 10 ing comme ties for N TO BE ING OPER O DAYS 3-81	EST. TOP Surface /8" BTM 8-5/8" Ogs will be ercial Safe hole NOTIFIED RATIONS
Propose to dri run and evalua production. MUD PROGRAM: 70 BOP Program At Gas is not dec 0+2-NMOCD, SF	SIZE OF 8-5 5-1 11 and edited. Per 0'-700' 0'-TD tached licated. 1-Hour ROPOSED PROTER PROGRAM, I	Quip well representation of the condition of the conditio	WEIGHT PER FOOT 24# 14# l in the Tubb f and stimulate a mud and fresh w ial mud and bri ions CIL CCN WITHIN Susp 1-BD	SETTING DEPT 700' 2760' cormation. Af a necessary in the with minimum of the with min	Circ. Tie bac ter reach n attempt MMISSION BEGINN ID FOR / 8 RES /0-	k to 8-5, ing TD 10 ing common ties for N TO BE ING OPER O DAYS 3-81 ERYWAYONE	EST. TOP Surface /8" BTM 8-5/8" Ogs will be ercial Safe hole NOTIFIED RATIONS AND PROPOSED NEW PRODU

NEW MEXICO OIL CONSERVATION COMMISSION LA WELL LOCATION AND ACREAGE DEDICATION PLAT

Form C-102 Supersedes C-128 Effective 1-1-65

All distances must be from the outer boundaries of the Section Well No. Operator DR C MC AMOC 0 STATE Unit Letter Section Township County G 30 T20N R33E HARDING Actual Footage Location of Well: 1980 NOR TH 1980 **EAST** feet from the line and feet from the line Ground Level Elev. Producing Formation Dedicated Acreage: 5090 Tubb Und. Tubb 160 Acres 1. Outline the acreage dedicated to the subject well by colored pencil or hachure marks on the plat below, 2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty). 3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling. etc? Yes If answer is "yes," type of consolidation If answer is "no." list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.). No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commis-CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief. Position Admin. Analyst 1380 Amoco Production Company Date 3-31-81 I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.

2001

1500

330

660

- 1. Blow-out preventers and master valve to be fluid operated and oil fittings must be in good condition, 3,000# W.P. (6,000 p.s.i. test), minimum.
- 2. Equipment through which bit must pass shall be as large as the inside diameter of the casing that is being drilled through.
- 3. Nipple above blow-out preventer shall be same size as casing being drilled through.

Kelly cock required, 3,000# W.P. (6,000 p.s.i. test) minimum.

- 5. OMSCO or comparable safety valve must be available on rig floor at all times with proper connection or sub, 3,000# W.P. (6,000 p.s.i. test), minimum.
- 6. Blow-out preventers and master valve while drilling intermediate hole to 6000' may be 2,000* W.P. (4,000 p.s.i. test), minimum.

7. Choke assembly, beyond second valve from cross, may be positioned (Optional) outside of derrick foundation.

- Spool or cross may be climinated if connections are available in the lower part of the blow-out preventer body.
- 9. Plug valves gate valves are optional. Valves shown as 2" are minimum size.
- 10. Casing head and casing head spoul, including attached valves, to be furnished by Amoco.
- Pams in preventers will be installed as follows:

When drilling, use: Top Preventer - Drill pipe rams


Bottom Preventer - Blind rams or

master valve

When running casing, use:

Top Preventer - Casing rams Bottom Preventer - Blind rars or

master valve

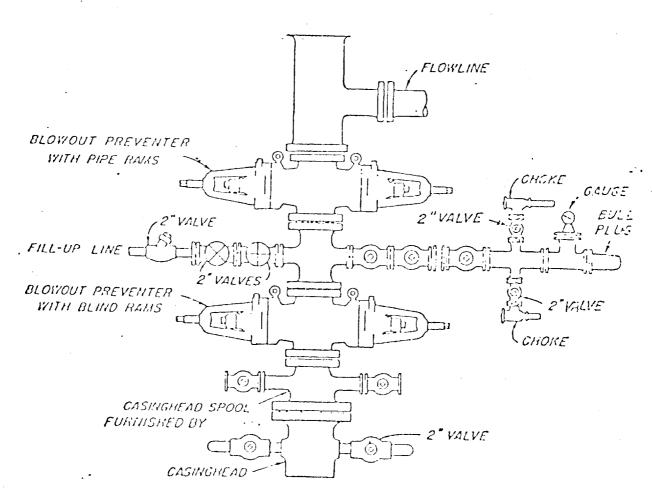

BLOWOUT PREVENTER HOOK-UP

PMOCO FROM THOMAS CAMPAGE

EXHIBIT D-I MODIFIED

JUNE 1 1962