Submit to Appropriate District Office State Lease - 6 copies Fee Lease - 5 copies

Energy, Minerals and Natural Resources Department

State of New Mexico Form C-101 Revised 1-1-89

DISTRICT I P.O. Box 1980, Hobbs, 1	NM 88240	CONSERVATION D P.O.Box 2088 Inta Fe, New Mexico 875	API NO. (assigned by OCD on New Wells) 30-02/-20244					
DISTRICT II P.O. Drawer DD, Artesia		5. Indicate Type of Lease						
DISTRICT III		6. State Oil & Gas Le	STATE FEE X					
APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK								
	ON FOR PERMIT I							
la. Type of Work	. IZ	7. Lease Name or Unit Agreement Name Bravo Dome Carbon Dioxide Gas Unit - 2033						
b. Type of Well:								
OIL GAS WELL S	OTHER CO2							
2. Name of Operator		8. Well No.						
Amoco Production Com 3. Address of operator	npany	221X						
1	Clayton N. M	9. Pool name or Wildcat Tubb						
P.O. Box 606 Clayton N. Mex. 88415 Tubb 4. Well Location								
Unit Letter G: 1980 Feet From The North Line and 1960 Feet From The East Line								
Section	22 Town	nship T20N Ran	ge R33E N	D.CDA.C. U.S	-41			
	10	many 12011 Kan	ge NOOL N	MPM Ha	rding County			
		10. Proposed Depth	11.1	Formation Tubb	12. Rotary or C.T. Rotary			
13. Elevations (Show whether DF,RT,GR,etc.) 4972.2		14. Kind & Status Plug. Bond Blanket On File N/A			rox. Date Work well start			
4972.2 Blanket On File N/A 05-01-93								
PROPOSED CASING AND CEMENT PROGRAM								
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	SACKS OF CEMEN	T EST. TOP			
12 1/4"	8 5/8" Steel	24#	700'	Circulate to Surface	Surface			
7 7/8"	4 1/2" Fiberglass	2000# psi	2392'	Circulate to Surface	Surface			
Propose to Drill & Equip well in the Tubb formation. To reach total depth, a 3 7/8" open hole will be air drilled approximately 110' below 4 1/2" casing. Mud Program: 0-700' gel-Spud Mud 700-2200' Starch/Gel 2200-2325 Air								
BOP Program Attached								
		12-31-9						
IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: IF PROPOSAL IS TO DEEPEN OR PLUG BACK, GIVE DATA ON PRESENT PRODUCTIVE ZONE AND PROPOSED NEW PRODUCTIVE ZONE, GIVE BLOWOUT PREVENTER PROGRAM, IF ANY.								
I hereby certify that the information above is true and complete to the best of my knowledge and belief.								
SIGNATURE OU	Jellins	тит	EAdministrativ	e Secretary	DATE 5/12/93			
TYPE OR PRINT NAME		Joy Filkins			TELEPHONE NO. (713) 556-3613			
(This space for State Use)								
APPROVED BY TITLE DATE 5-13-93								
CONDITIONS OF APPROVAL, I	F AND							

NEW MEXICO OIL CONSERVATION COMMISSION WELL LOCATION AND ACREAGE DEDICATION PLAT

Form C-102 Supersedes C-128 Ellective 14-65

All distances must be from the outer boundaries of the Section.

Onetator	:	Lease		Well No.
AMOCO PRODUCTIO	ON COMPANY			2033221X
Unit Latter. Section .	Township	Range	County	
G 22	T 20 N	R 33 E	HARDING	
Actual Footage Location of Wells			•	
1980 teet from the N	OR TH line and	1960 tea	et from the EAST	line
Ground Level Elev. Producing For		Pool		Dedicated Acreage:
4972.2				Acres
 Outline the acreage dedica If more than one lease is interest and royalty). If more than one lease of dated by communitization. 	dedicated to the well ifferent ownership is unitization, force-poolinawer is "yes," type of owners and tract descend to the well until all	dedicated to the well. ng. etc? of consolidation criptions which have a	ctually been consolidated (by consolidated, has been	Acres the plat below. thereof (both as to working of all owners been consoli- dated. (Use reverse side of
	,0061	1960	lained h	k Rardofrh
	,		shown on nates of under mis true knowled FEB Date Surve Registered	y certify that the well location in this plat was plotted from field focused surveys made by me or y supervision, and that the same and correct to the best of my go and belief. 8,1993 Protessional Engineer and Surveyor
			Certificate	L.S. NO. 5103

Attachment


- 1. Blow-out preventers and master valve to be fluid operated and oil fittings must be in good condition, 3,000= U.P. (5,000 p.s.), test), minimum
- 2. Equipment through which bit must pass shall be as large as the inside diameter of the casing that is being drilled through.
- 3. Nipple above blow-out preventer shall be same size as casing being drilled through.
- 4. Kelly cock required, 3.000# W.P. (6.000 p.s.i. test) minimum.
- 5. GMSCO or comparable safety valve must be available on rigithor at all times with proper connection or sub, 3,000% W.P. (6,000 p.s.i. test), min moun.
- Blow-out preventers and master valve while drilling intermediate hole to 6. 6000° may be 2,000° W.P. (4,000 p.s.), test), minimum.
- 7. Choke assembly, beyond second valve from cross, may be positioned (Optional) outside of derrick foundation.
- 8. Shoot or cross may be climinated if connections are available in the lower part of the blow-out preventer body.
- o. Plug valves gate valves are optional. Valves shown as 2" are minimum size.
- 10. Casing head and casing head spool, including attached valves, to be furnished by Amaco.
- 11. Rams in preventers will be installed as follows:

When drilling, use: When running casing, use:

Top Preventer - Drill pipe rams Top Preventer - Casing rams

Bottom Preventer - Blind rams or Bottom Preventer - Clind rars or master vaive

master valve

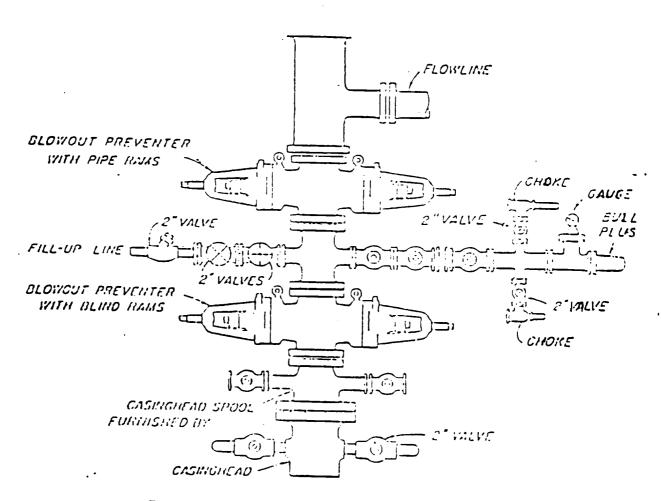

BLOWOUT PREVENTER HOOK-UP

Amoco Production Company

TIBIHKE D-I MODIFIED