Submit to Appropriate District Office State Lease - 6 copies

CONDITIONS OF APPROVAL, IF ANY:

# State of New Mexico Energy, Minerals and Natural Resources Department

Form C-101 Revised 1-1-89

State Lease - 6 copies Fee Lease - 5 copies			-				
•	OIL (	CONSERVATION D	IVISION		<del>-</del>		
DISTRICT I P.O. Box 1980, Hobbs, NM 88240 P.O.Box 2088					API NO. (assigned by OCD on New Wells)		
DISTRICT II Santa Fe, New Mexico 87504-2088					30-021-20264		
P.O. Drawer DD, Artesia, NM 88210					5. Indicate Type of Lease  STATE   FEE		
DISTRICT III					- 13		
1000 Rio Brazos Rd., Aztec, NM 87410					6. State Oil & Gas Lease No. L-5750		
APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK					L-3/30		
1a. Type of Work							
					7. Lease Name or Unit Agreement Name Bravo Dome Carbon Dioxide Gas Unit - 2133		
b. Type of Well:	RE-ENTE	R DEEPEN	PLUG BACK	Biavo Donne	3 Carbon Dio	xide Gas Unit - 2133	
OIL GAS -	7 OTHER CO2	SINGLE IS	MULTIPLE				
MEIT MEIT X	OTHER CO2	ZONE	ZONE				
2. Name of Operator				8. Well No.			
Amoco Production Com	pany				1	41G	
3. Address of operator 9. Pool r						name or Wildcat	
P.O. Box 606 Clayton N. Mex. 88415					Tubb		
4. Well Location	G . 1974 East 1	- East					
Unit Letter	- : Feet ]	From The East	Line and	Feet	From The	North Line	
Section	14 Town	.t. T.01N				·	
Section	14 Town	ship T 21N Range	e R33E	NMPM	Hardin	G County	
		10. Proposed Depth		11 5			
		240	03	11. Formation Tubb		12. Rotary or C.T.	
13. Elevations (Show whether DF,RT,GR,etc.) 14. Kind & Status Plug. Bond 15. Drilling Contracto					1	Rotary	
486		Blanket On File			16. Approx.	Date Work well start	
17.						06-15-93	
	Pi	ROPOSED CASING AN	D CEMENT PR	OGRAM			
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPT		CEMENT	ECT TOD	
12 1/4"	8 5/8" Steel	24#	700'	Circulate to Surfa		EST. TOP	
7 7/8"	4 1/2" Fiberglass	2000# psi	2308'	Circulate to Surface		Surface	
					o durideo	Surface	
Propose to Drill & Equi casing.	p well in the Tubb form	nation. To reach total depth,	a 3 7/8" open ho	ole will be air drilled	approximate	ely 95' below 4 1/2"	
Mud Program: 0-700' 700-220 2200-2	00' Starch/Gel						
BOP Program Attached	I						
		<b>1777</b> 00		on DAY	Solve Solve		
		্রেন্ <u>র</u> ভূগে	un alumaa Los drillan	12-31-93 UNDERWAY			
					DDUCTIVE ZONE	AND PROPOSED NEW	
I hereby certify that the in	formation above is true ar	nd complete to the best of my kn	owledge and belief.				
SIGNATURE SIGNATURE	- anillit	тпи	EAdmini	strative Secretary	DAT	E 5-6+93	
TYPE OR PRINT NAME		Joy Filkins			TEL	ЕРНОNE NO. (713) 556-3613	
(This space for State Use)	0/1/						

DISTRICT SUPERVISOR DATE 5-13-93

DESTRICT I

DISTRICT II

# State of New Mealto Broogy, Minerals and Natural Resources Department

Form C-183 Rankoi 1-1-89

### OIL CONSERVATION DIVISION

P.O. Ben 2088

Santa Fe, New Mexico 87504-2088

P.O. Sec 1980, Helle, NM 88249

DESTRICT III 1800 Ris Season RJ, Asiso, NM 67-418

P.O. Drame DD, Arteria, NM 86210

# WELL LOCATION AND ACREAGE DEDICATION PLAT

All distances must be from the outer boundaries of the Section. Operator AMOCO PRODUCTION COMPANY Well No. BRAVO DOME CARBON DIOXIDE GAS UNIT 1 Unit Letter Section Township 21 NORTH 33 EAST HARDING NMPM Astual Postage Location of Walk 1974 fast from the EAST 2024 line and fact from the NORTH Ground Love Blor Preducing Permetion Pel 4853.80 TUBB BRAVO DOME CARBON DIOXIDE GAS 640 I. Outline the acreage dedicated to the subject well by calcred peacil or hackure marks on the plat below. 2. If more than one lease is dedicated to the wall, settline each and identify the sweezelip thereof (both as to weeking interest and reveity). 3. If more than one losse of different ewnership is dedicated to the well, have the interests of all ewners been consulidated by communitization, unitisation, force pooling, ote? If answer is "yes," type of consolidation N. If answer is "no," list the owners and tract descriptions which have astually been consultdated. (Use reverse side of this form if necessary.) No ellowable will be accigned to the well until all interests have been consulidated thy communitization, unitination, forced-posling, or otherwise. or until a non-standard unit, eliminating such interests, has been approved by the Division. OPERATOR CERTIFICATION I hereby coviffy that the information can tained herein is true and complete to the est of my knowledge and ballof. 1974 Well No. 1 **AMOCO** 576000 SURVEYOR CERTIFICATION I hamby swelly that the stall lesseless wa on this plat was plotted from field under my reportision, and that the name is true and correct to the best of my knowledge and belief. Date Surveyer MARCH 15, 1993 eture & Seal of A. FISHER 11013 1000 1500

#### Attachment

- 1. Blow-out preventers and master valve to be fluid operated and oil fittings must be in good condition, 3,000% W.P. (5,000 p.s.). test), minimum.
- 2. Equipment through which bit must pass shall be as large as the inside diameter of the casing that is being drilled through.
- 3. Strople above blow-out preventer shall be same size as casing being drilled
- Kelly cock required, 3,000# W.P. (6,000 p.s.i. test) minimum.
- 5. OMSCO or comparable safety valve must be available on rig floor at all times with proper connection or sub, 3,000% W.P. (6,000 p.s.i. test), minimum.
- 6. Blow-out preventers and master valve while grilling intermediate hole to 6000' may be 2,000 to W.P. (4,000 p.s.i. test), minimum.
- 7. Choke assembly, beyond second valve from cross, may be positioned (Optional) outside of derrick foundation.
- 8. Spool or cross may be climinated if connections are available in the lower part of the blow-out preventer body.
- 9. Plug valves gate valves are optional. Valves shown as 2" are minimum size.
- 10. Casing head and casing head spool, including attached valves, to be furnished
- 11. Rams in preventers will be installed as follows: When arilling, use:

Top Preventer - Drill pipe rams


Bottom Preventer - Blind rams or

master valve

When running casing, use:

Top Preventer - Casing rams Bottom Preventer - Blind rans or

master valve

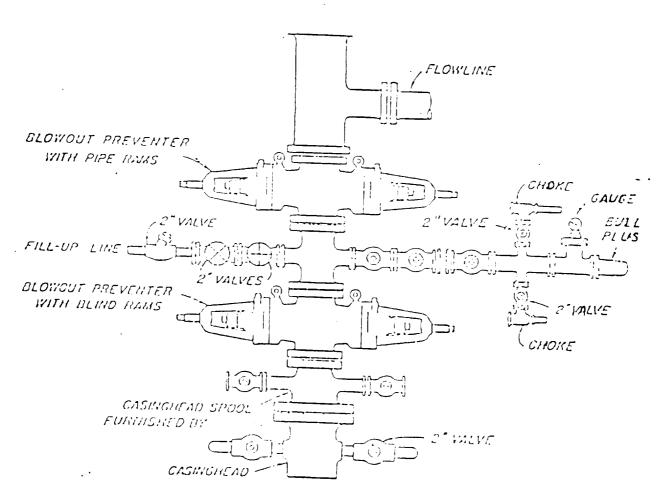

BLOWOUT PREVENTER HOOK-UP

Amoco Production Company

EXHIBIT D-1 MODIFIED