BEFORE THE NEW MEXICO OIL CONSERVATION DIVISION

APPLICATION OF VISTA DISPOSAL SOLUTIONS LLC, FOR A SALT WATER DISPOSAL WELL, IN LEA COUNTY, NEW MEXICO.

Case No.

APPLICATION FOR SALT WATER DISPOSAL

Vista Disposal Solutions LLC, by and through its undersigned attorney, applies for an order approving a salt water disposal well, and in support thereof, states:

- 1. Applicant seeks an order proposing a salt water disposal well for its Byron Federal SWD #1, (Pool Code 96769) to be drilled at a location 1,810' FSL and 271' FWL, Unit L, Section 32, Township 25 South, Range 35 East, N.M.P.M., Lea County, New Mexico.
- 2. Applicant proposes to set a packer at 5,310' feet below the surface of the earth and then inject into the Bell Canyon formation at depths between 5,330' through 6,175' open hole, as stated in the attached C-108.
 - 3. Attached hereto as Exhibit A is the C-108.
 - 4. The granting of this application will prevent waste and protect correlative rights.

WHEREFORE, Applicant requests that, after notice and hearing, the Division enter its order approving this application.

Respectfully submitted,

PADILLA LAW FIRM, P.A.

/s/ ERNEST L. PADILLA

ERNEST L. PADILLA, Attorney for Vista Disposal Solutions, LLC PO Box 2523 Santa Fe, New Mexico 87504 505-988-7577 padillalaw@qwestoffice.net STATE OF NEW MEXICO ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, New Mexico 87505 FORM C-108 Revised June 10, 2003

APPLICATION FOR AUTHORIZATION TO INJECT

I.	PURPOSE: Secondary Recovery Pressure Maintenance X Disposal Storage Application qualifies for administrative approval? X Yes No
II.	OPERATOR: Vista Disposal Solutions, LLC
	ADDRESS: 12444 NM 10th St., Building G, Suite 202-512, Yukon, OK 73099
	CONTACT PARTY Nate Alleman PHONE: 918-382-7581
III,	WELL DATA: Complete the data required on the reverse side of this form for each well proposed for injection. Additional sheets may be attached if necessary.
IV.	Is this an expansion of an existing project? Yes X No If yes, give the Division order number authorizing the project:
V.	Attach a map that identifies all wells and leases within two miles of any proposed injection well with a one-half mile radius circle drawn around each proposed injection well. This circle identifies the well's area of review.
VI.	Attach a tabulation of data on all wells of public record within the area of review which penetrate the proposed injection zone. Such data shall include a description of each well's type, construction, date drilled, location, depth, record of completion, and a schematic of any plugged well illustrating all plugging detail.
VII.	Attach data on the proposed operation, including:
	 Proposed average and maximum daily rate and volume of fluids to be injected; Whether the system is open or closed; Proposed average and maximum injection pressure; Sources and an appropriate analysis of injection fluid and compatibility with the receiving formation if other than reinjected produced water; and, If injection is for disposal purposes into a zone not productive of oil or gas at or within one mile of the proposed well, attach a chemical analysis of the disposal zone formation water (may be measured or inferred from existing literature, studies, nearby wells, etc.).
*VII	I. Attach appropriate geologic data on the injection zone including appropriate lithologic detail, geologic name, thickness, and depth. Give the geologic name, and depth to bottom of all underground sources of drinking water (aquifers containing waters with total dissolved solids concentrations of 10,000 mg/l or less) overlying the proposed injection zone as well as any such sources known to be immediately underlying the injection interval.
IX.	Describe the proposed stimulation program, if any.
*X.	Attach appropriate logging and test data on the well. (If well logs have been filed with the Division, they need not be resubmitted).
*XI.	Attach a chemical analysis of fresh water from two or more fresh water wells (if available and producing) within one mile of any injection or disposal well showing location of wells and dates samples were taken.
XII.	Applicants for disposal wells must make an affirmative statement that they have examined available geologic and engineering data and find no evidence of open faults or any other hydrologic connection between the disposal zone and any underground sources of drinking water.
XIII.	Applicants must complete the "Proof of Notice" section on the reverse side of this form.
XIV.	Certification: I hereby certify that the information submitted with this application is true and correct to the best of my knowledge and belief.
	NAME: Dan Arthur, P.E., SPEC TITLE: President/Chief Engineer
	SIGNATURE: 12/10/2019 DATE: 12/10/2019 GANALI ADDRESS: darthur@all-llc.com
XV.	E-MAIL ADDRESS: If the information required under Sections VI, V Please show the date and circumstances of the earlier submittal:

Side 2

III. WELL DATA

- A. The following well data must be submitted for each injection well covered by this application. The data must be both in tabular and schematic form and shall include:
 - (1) Lease name; Well No.; Location by Section, Township and Range; and footage location within the section.
 - (2) Each casing string used with its size, setting depth, sacks of cement used, hole size, top of cement, and how such top was determined.
 - (3) A description of the tubing to be used including its size, lining material, and setting depth.
 - (4) The name, model, and setting depth of the packer used or a description of any other seal system or assembly used.

Division District Offices have supplies of Well Data Sheets which may be used or which may be used as models for this purpose. Applicants for several identical wells may submit a "typical data sheet" rather than submitting the data for each well.

- B. The following must be submitted for each injection well covered by this application. All items must be addressed for the initial well. Responses for additional wells need be shown only when different. Information shown on schematics need not be repeated.
 - (1) The name of the injection formation and, if applicable, the field or pool name.
 - (2) The injection interval and whether it is perforated or open-hole.
 - (3) State if the well was drilled for injection or, if not, the original purpose of the well.
 - (4) Give the depths of any other perforated intervals and detail on the sacks of cement or bridge plugs used to seal off such perforations.
 - (5) Give the depth to and the name of the next higher and next lower oil or gas zone in the area of the well, if any,

XIV. PROOF OF NOTICE

All applicants must furnish proof that a copy of the application has been furnished, by certified or registered mail, to the owner of the surface of the land on which the well is to be located and to each leasehold operator within one-half mile of the well location.

Where an application is subject to administrative approval, a proof of publication must be submitted. Such proof shall consist of a copy of the legal advertisement which was published in the county in which the well is located. The contents of such advertisement must include:

- (1) The name, address, phone number, and contact party for the applicant;
- (2) The intended purpose of the injection well; with the exact location of single wells or the Section, Township, and Range location of multiple wells;
- (3) The formation name and depth with expected maximum injection rates and pressures; and,
- (4) A notation that interested parties must file objections or requests for hearing with the Oil Conservation Division, 1220 South St. Francis Dr., Santa Fe, New Mexico 87505, within 15 days.

NO ACTION WILL BE TAKEN ON THE APPLICATION UNTIL PROPER PROOF OF NOTICE HAS BEEN SUBMITTED.

NOTICE: Surface owners or offset operators must file any objections or requests for hearing of administrative applications within 15 days from the date this application was mailed to them.

Attachment 1:

- C-102
- Wellbore Diagram

Attachment 2: Area of Review Information:

- 2-mile Oil & Gas Well Map
- 2-mile Lease Map
- 2-mile Mineral Ownership Map
- 2-mile Surface Ownership Map
- 1/2-mile Well Detail List w/ Casing Information for the Penetrating Wells
- Potash Lease Map

Attachment 3: Source Water Analyses

Attachment 4: Injection Formation Water Analyses

Attachment 5: Water Well Map and Well Data

Attachment 6: No Hydrologic Connection Statement & Technical Assessment & Feasibility for Injection

Attachment 7: Public Notice Affidavit and Notice of Application Confirmations

Application for Authorization to Inject Well Name: Bryon Federal SWD #1

III - Well Data (The Wellbore Diagram is included as Attachment 1)

A.

(1) General Well Information:

Operator: Vista Disposal Solutions, LLC (OGRID No. 329051)

Lease Name & Well Number: Bryon Federal SWD #1 Location Footage Calls: 1,810' FSL & 271' FWL Legal Location: Unit Letter L, S32 T25S R35E

Ground Elevation: 3,284'

Proposed Injection Interval: 5,330' - 6,175'

County: Lea

(2) Casing Information:

Туре	Hole Size	Casing Size	Casing Weight	Setting Depth	Sacks of Cement	Estimated TOC	Method Determined
Surface	24"	20"	133.0 lb/ft	925'	940	Surface	Circulation
Intermediate 1	14-3/4"	13-3/8"	68.0 lb/ft	5,280'	1,180	Surface	Circulation
Production	12-1/4"	9-5/8"	53.5 lb/ft	6,275'	360	5,200'	CBL

(3) Tubing Information:

5.5" (20# N-80 LTC) of fiberglass-coated injection tubing with setting depth of 5,310'

(4) Packer Information: Baker Hornet or equivalent packer set at 5,310'

В.

(1) Injection Formation Name: Bell Canyon

Pool Name: SWD; BELL CANYON

Pool Code: 96769

(2) Injection Interval: Cased hole injection between 5,330′ – 6,175′

(3) Drilling Purpose: New Drill for Salt Water Disposal

(4) Other Perforated Intervals: No other perforated intervals exist.

(5) Overlying Oil and Gas Zones: No overlying oil and gas zones exist.

Underlying Oil and Gas Zones: Below are the approximate formation tons for

Underlying Oil and Gas Zones: Below are the approximate formation tops for known oil and gas producing zones in the area.

• Bone Springs (9,305')

V - Well and Lease Maps

The following maps are included in **Attachment 2**:

- 2-mile Oil & Gas Well Map
- 2-mile Lease Map
- 2-mile Mineral Ownership Map
- 2-mile Surface Owernship Map
- 1/2-mile Well Detail List w/ Casing Information for the Penetrating Wells
- Potash Lease Map

VI – AOR Well List

A list of the wells within the 1/2-mile AOR is included in **Attachment 2**.

There are five wells that penetrates the injection zone, and they have been properly cased and cemented to isolate the injection zone. The casing & cementing information for these wells is included in **Attachment 2**.

VII - Proposed Operation

- (1) Proposed Maximum Injection Rate: 25,000 bpd Proposed Average Injection Rate: 12,500 bpd
- (2) A closed system will be used.
- (3) Proposed Maximum Surface Injection Pressure: 1,066 psi (based on 0.2 psi per foot)
 Proposed Average Surface Injection Pressure: approximately 750 psi
- (4) Source Water Analysis: It is expected that the injectate will consist of produced water from production wells completed in the Wolfcamp and Bone Springs Formations. Analysis of water from these formations is included in *Attachment 3*.
- (5) Injection Formation Water Analysis: The proposed SWD will be injecting water into the Bell Canyon Formation which is a non-productive zone known to be compatible with formation water from the Wolfcamp and Bone Springs Formations. Water analyses results were selected from intervals comparable to that of the injection zone in the Bell Canyon Formation Delaware Mountain Group. Water analysis from in the area are included in Attachment 4.

VIII - Geologic Description

The proposed injection interval includes the Bell Canyon Formations from 5,330 – 6,175 feet. This formation consists of clastic sandstones, interbedded with several tight limestone members. Several thick sections of porous sandstone capable of taking water are present within the subject formation in the area.

The base of the deepest Underground Source of Drinking Water (USDW) is at a depth of approximately 900 feet. Surface casing will be set at a depth of 925 feet, which is 25 feet below the top of the Rustler Formation, which isolates the USDW. Geophysical log assessment was conducted to accurately determine the top of the Rustler Formation, and the top and the base of the Salado Formation in this area. Water well depths in the area range from approximately 50 - 270 feet below ground surface.

IX – Proposed Stimulation Program

A small cleanup acid job may be used to remove mud and drill cuttings from the formation. However, no other formation stimulation is currently planned.

X – Logging and Test Data

Geophydical logs will be submitted to the Division upon completion of the well.

XI - Fresh Groundwater Samples

Based on a review of data from the New Mexico Office of the State Engineer, there are no groundwater well located within 1-mile of the proposed SWD location; therefore, no groundwater samples were collected in association with this application.

A water well map of the area is included in Attachment 5.

XII – No Hydrologic Connection Statement & Technical Assessment & Feasibility for Injection

ALL Consulting (ALL) has examined all available public and published geologic and engineering data, and has found no evidence of open faults or any other hydrologic connection between the injection interval and overlying Underground Sources of Drinking Water (USDWs). Additionally, the casing, cementing, and completion program has been designed to further ensure that there will be no hydrologic connection, nor will it allow for migration of injectate below the proposed injection interval that could affect correlative rights issues.

Additionally, ALL Consulting has conducted an extensive technical review and geologic assessment of the alleged New Mexico Oil Conservation Division Delaware Mountain Group (DMG) saltwater disposal well impacts to production wells and drilling operations associated with the Brushy Canyon Formation. A letter from ALL's qualified geological expert not only addresses the issue of no hydrologic connection, but also states that the Bell Canyon Formation includes viable injection intervals with multiple confining zones is included in *Attachment 6*.

XIII - Proof of Notice

A Public Notice was filed with the Hobbs News - Sun newspaper and an affidavit is included in **Attachment 7**.

A copy of the application was mailed to the OCD District Office, landowner, and leasehold operators within 1-mile of the proposed SWD location. A list of the recipients, as well as delivery confirmations, are included in **Attachment 7**.

- C-102
- Wellbore Diagram

DISTRICT I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
DISTRICT II
811 S. First St., Antesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
DISTRICT III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
DISTRICT IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462


State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-102 Revised August 1, 2011 Submit one copy to appropriate District Office

☐ AMENDED REPORT


			WELL	LOCAT	ION AND	ACREAGE D.	EDICATION	PLAT			
	¹ API Numbe	ar	1	² Poo: 96769	ol Code	SWD; Bell	Canyon	³ Pool Name			
[‡] Propert	ty Code	Е	Byron Fe	ederal		perty Name		7	*Well Number		
70GRII 329051		V	ista Dispo	sal Sol	utions, LLC	erator Name			⁹ Elevation 3284'		
	¹⁰ Surface Location										
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County		
L	32	25-S	35-E		1810'	South	271	West	Lea		
			¹¹ Bott	om Hol	le Location	If Different F	rom Surface				
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County		
12 Dedicated Acres	s ¹³ Joint or	or Infill 14	Consolidation C	ode 150	rder No.						

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

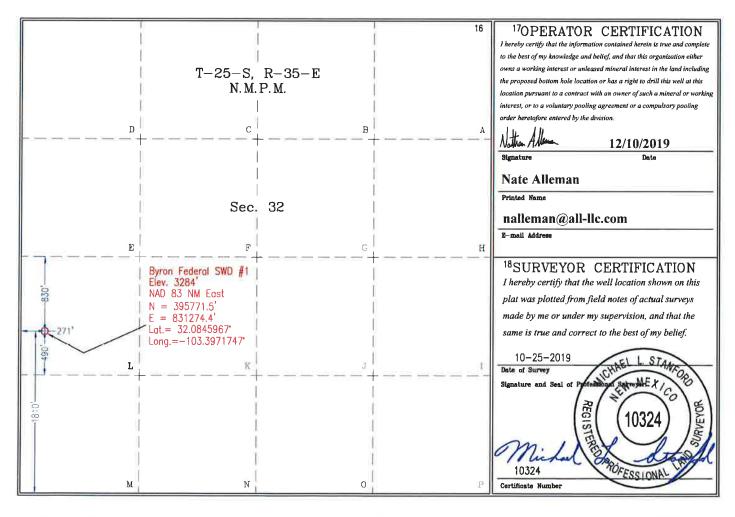

12.1 Miles W-SW of Jal , New Mexico.

File No. _____A-12933

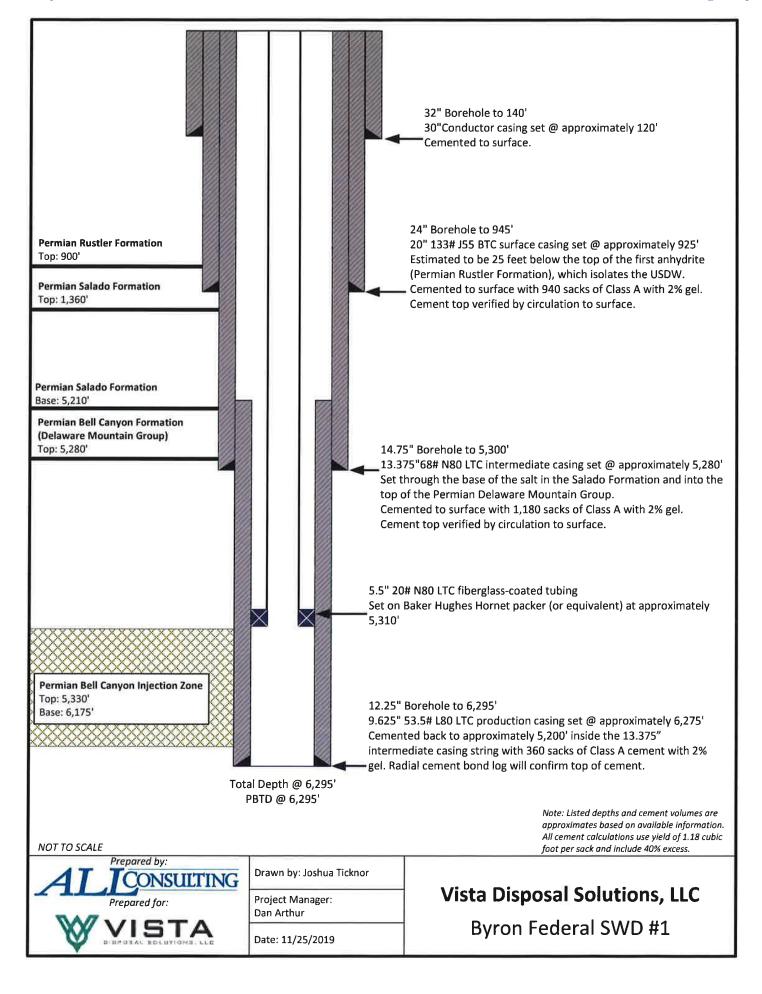

Packer Systems

HORNET Packer

Product Family No. H64682

HORNET EL Packer

Product Family No. H64683

The mechanically set HORNET[™] packer offers ease of operation with quarter-turn right to set and release. Converting it for wireline-setting applications is simple and inexpensive. The HORNET packer provides for landing in compression, tension, or neutral positions. Every component from the jay track, to the internal bypass, to the packing-element system and the upper slip assembly has been developed to ensure the HORNET's setting and releasing reliability.

The HORNET EL packer is run and set on electric line using an E-4[™] (Product Family No. H43702) with a slow-set power charge or a J setting tool (Product Family No. H41371) and a special wireline adapter kit. An L-10[™] type on/off seal nipple is run on top of the packer to connect the tubing to the packer and to house a blanking plug when the packer is used as a temporary bridge plug.

Features and Benefits

- Upper Slip Assembly:
 - Thoroughly tested across API minimum to maximum casing ID tolerances for each specified casing weight, for setting and releasing reliability
 - Slip-wicker configuration providing bidirectional-load support with solid upper cone to support highest tensile loads
 - Staged-release action eliminates high-overpull requirement
 - Minimal set-down weight required to anchor slips
- Internal Bypass Seal:
 - Durable bypass seal design provides sealing after unloading, under differential pressures
 - No O-ring sealing system
- Packing Element System:
 - Fully tested to combined ratings at the API's maximum ID tolerance

- Patented enhancements to control overboost
- High-performance, three-piece element system
- Lower Slip and Jay Assembly:
 - Slips and drag blocks tested to maximum API tolerance ID for positive set and ease of release
 - One-quarter-turn right setting and releasing action
 - Packoff of packing elements with applied tension or compression
 - Spacing in jay ensures opening of internal bypass, before slip releasing action beginsimportant to both ease of release and safety
 - Automatically returns to running position




No. H64682

No. H64683

Area of Review Information:

- 2-mile Oil & Gas Well Map
- 2-mile Lease Map
- 2-mile Mineral Ownership Map
- 2-mile Surface Ownership Map
- 1/2-mile Well Detail List w/ Casing Information for the Penetrating Wells
- Potash Lease Map

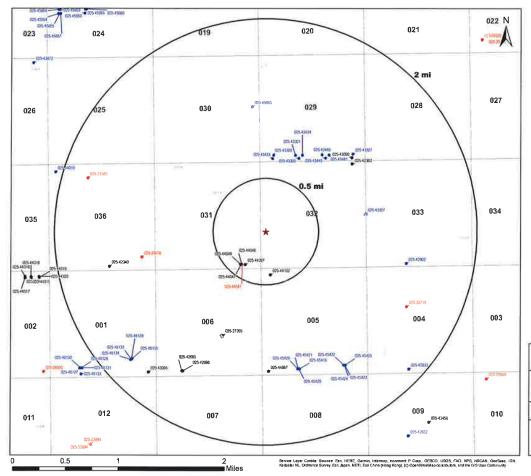



Legend


- ★ Proposed SWD
- Gas, Active (1)
- Oil, Active (20)
- Oil, New (40)
- Oil, Plugged (9)
- △ Salt Water Injection, New (1)

Source Info: NMOCD O&G Wells updated 7/30/2019 (http://www.emnrd.state.nm.us/OCD/ocdgis.html)

0&G	Wells A	rea of R	eview
	on Fede		
Proj Mgr. Den Arthur	Novembe	г 22, 2019	Mapped by: Ben Bockelmann
	sta	ALI	CONSULTING

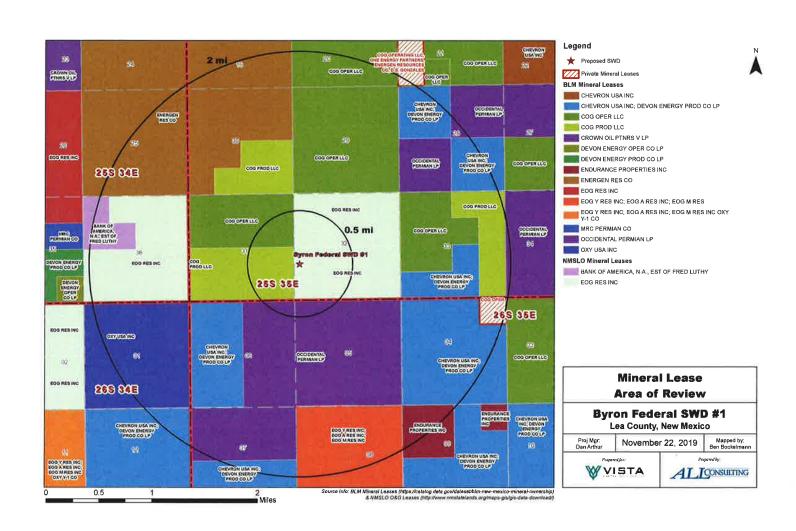


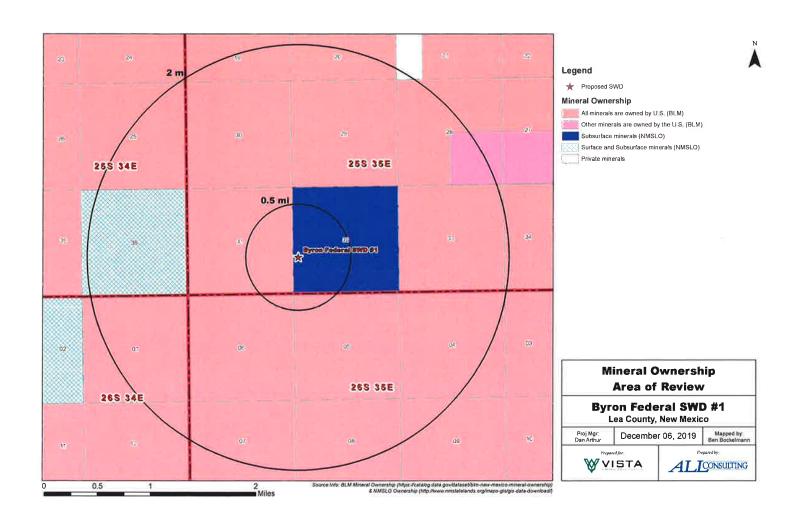

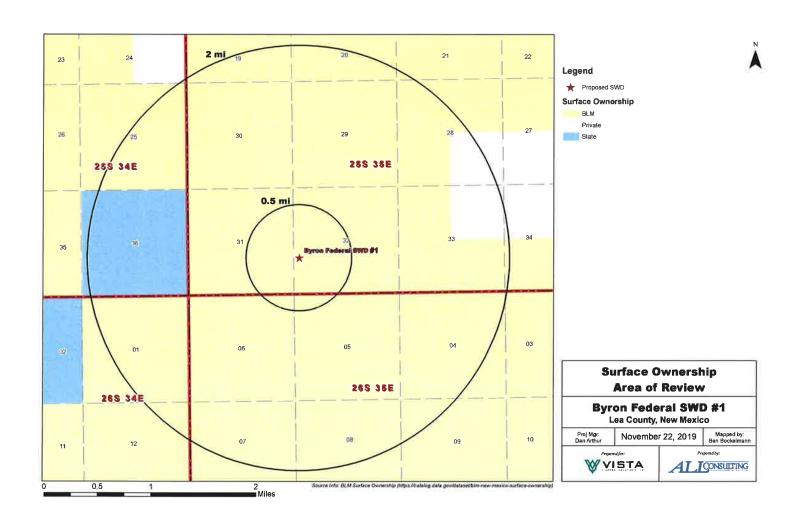

AOR Tab	ulation fo	r Byron	Federal SWD #1	(Top of Inj	ection Interva	l: 5,330')	
Well Name	API#	Well Type	Operator	Spud Date	Location (Sec., Tn., Rng.)	Total Vertical Depth (feet)	Penetrate Inj. Zone
CAVE LION 5 WA FEDERAL #005H	30-025-44102	O	MARATHON OIL PERMIAN LLC	10/31/2017	M-05-26S-35E	12636	Yes
SQUARE BILL FEDERAL COM #001H	30-025-44046	0	COG OPERATING LLC	11/30/2017	P-31-255-35E	12412	Yes
SQUARE BILL FEDERAL COM #021	30-025-44041	Plugged	COG OPERATING LLC	12/12/2017	P-31-25S-35E	1175 (Lost hole during drilling)	No
SQUARE BILL FEDERAL COM #023H	30-025-44048	o	COG OPERATING LLC	11/3/2017	O-31-255-35E	12202	Yes
SQUARE BILL FEDERAL COM #022H	30-025-44047	o	COG OPERATING LLC	11/17/2017	P-31-25S-35É	12605	Yes
SQUARE BILL FEDERAL COM #021Y	30-025-44397	0	COG OPERATING LLC	2/20/2018	P-31-25S-35E	12630	Yes

					ng the Bryon F				_				
			St	ırface Casing	RI CHANG		Intermediate Casing						
Well Name	Set Depth	Casing Size	тос	TOC Method Determined	Sks of Cement	Hole size	Set Depth	Casing Size	тос	TOC Method Determined	Sks of Cement	Hole Siz	
CAVE LION 5 WA FEDERAL #005H	1077	13 3/B	29	CBL	928	17 1/2	5450	9 5/8	29	CBL	1212	12 1/4	
SQUARE BILL FEDERAL COM #001H	1170	10 3/4	G,S,	Circulation	1094 (Class C)	13 1/2	11803	7 5/8	G,S,	Circulation	2150 (Class C), DVT @ 5367	9 7/8	
SQUARE BILL FEDERAL COM #023H	1105	10 3/4	G,S,	Circulation	850 (Class C)	13 1/2	11825	7 5/8	G,S,	Circulation	1825 (Class C), DVT @ 5376'	97/8	
SQUARE BILL FEDERAL COM #022H	1148	10 3/4	G.S.	Circulation	850 (Class C)	13 1/2	11805	7 5/8	G,S,	Circulation	1950 (Class C), DVT @ 5396	97/8	
SQUARE BILL FEDERAL COM #021Y	1155	10 3/4	G.S.	Circutation	1000 (Class C)	14 3/4	11890	7 5/8	G,S,	Circulation	1950 (Class C), DVT @ 5329	97/8	
	Plus ea	P	A HERE	LI LI	iner/	Tubing		11 20					
Well Information Continued)	Set Depth	Casing Size	тос	TOC Method Determined	Sks of Cement	Hole Size	Set Depth	Casing Size	тос	TOC Method Determined	Sks of Cement	Hole Size	
CAVE LION 5 WA FEDERAL #005H	11835	,	1032	CBL	1186	8 3/4	11,800 - 17286	4 1/2	11525	CBL	562	6 1/8	
SQUARE BILL FEDERAL COM #001H	19780 (KOP 11908')	5.5, (GS-11,299') 5 (11,299- 19,780')	G,S,	Circulation	1800 (Class C)	6 3/4	11456	27/8	N/A	N/A	N/A	N/A	
SQUARE BILL FEDERAL COM #023H	20110 {KOP 12121'}	5,5 (GS-11,285'), 5 (11,285- 20,110')	G.S.	Circulation	1565 (Class H)	6 3/4	11457	27/8	N/A	N/A	N/A	N/A	
SQUARE BILL FEDERAL COM #022H	20115 (KOP 12149')	5,5 (GS-11,319'), 5 (11,319- 20,115')	G.S.	Circulation	1600 (Class C)	6 3/4	11502	27/8	N/A	N/A	N/A	N/A	
SQUARE BILL FEDERAL COM #021Y	20025 (KOP 12099)	5.5 (GS-11,425'), 5 (11,425- 20,025')	G,S,	Circulation	1675 (Class C)	6 3/4	11587	27/8	N/A	N/A	N/A	N/A	

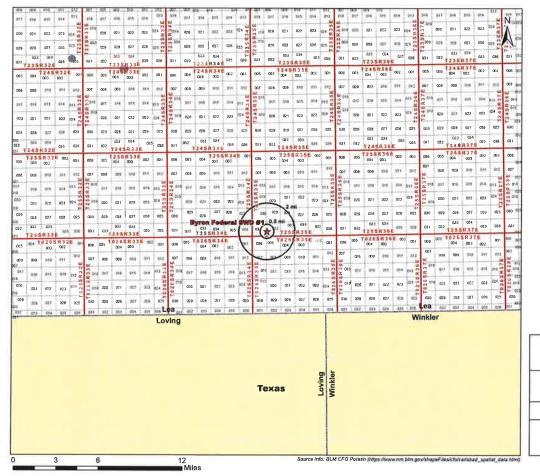

Legend

★ Proposed SWD

Ore Type - Indicated

Potash Leases Area of Review

Byron Federal SWD #1

Lea County, New Mexico
Proj Mgr.
Dea Arthur
November 25, 2019

WVISTA

Prepared by:
ALICONSULTING

Source Water Analyses



Water Analysis

Date: 23-Aug-11

2708 West County Road, Hobbs NM 88240 Phone (575) 392-5556 Fax (575) 392-7307

Company		Well Name	Draw 1+	County	State
		BD		Fee.	New Mexico
Sample Source	Swab Sa	mple	Sample #	ddy	1-265-29
Formation			Depth		
Specific Gravity	1.170		SG C	60 °F	1.172
рH	6.30		ક	ulfides	Absent
Temperature (*F)	70		Reducing .	Agents	
Cations					
Sodium (Celc)		in Mg/L	77,962	in PPM	66,520
Calcium		in Mg/L	4,000	in PPM	3,413
Magnesium		in Mg/L	1,200	in PPM	1,024
Soluable Iron (FE2)		in Mg/L	10.0	in PPM	9
Anions	····				
Chlorides		in Mg/L	130,000	in PPM	110,922
Sulfates		in Mg/L	250	in PPM	213
Bicarbonates		in Mg/L	127	in PPM	108
Total Hardness (as CaCO3)		in Mg/L	15,000	in PPM	12,799
Total Dissolved Solida (Calc)	in Mg/L	213,549	in PPM	162,209
Equivalent NaCl Concentrati	on	in Mg/L	182,868	in PPM	156,031
Scaling Tendencies					
Calcium Carbonate Index Below 800,000 Re	emote / 500,	000 - 1,000,000	Possible / Above 1	,000,000 Probable	507,520
Calcium Sulfate (Gyp) Index				ACT 10	1,000,000
	mate / 500,0	00 - 10,000,00	Possible / Above 10		
Tals Calculation is only an approxi ostment.	imation and	is only valid be	efore treatment of	a well or several	weeks after

Report #

3188

Sample Point:

WELLHEAD

Sec 22, T25,5,R28E

Bone Spring

North Permiss Basin Region P.O. Box 740 Sundown, TX 79372-0740 (808) 228-8121 Lab Team Leader - Shella Hemandaz (432) 485-7240

Water Analysis Report by Baker Petrolite

33514.1 Company: Sales RDT: PERMIAN BASIN Account Manager: TONY HERNANDEZ (575) 910-7135 Region: ARTESIA, NM Area: 534665 Sample #: PINOCHLE 'BPN' STATE COM Lease/Platform: Analysis ID #: 106795 Entity (or well #): 2 H \$90.00 Analysis Cost: Formation: UNKNOWN

Summary	Analysis of Sample 534685 @ 75 F									
Sampling Date: 03/10/11	Aniens	mg/i	meq/i	Cations	Nem	meg/				
Analysis Date: 03/18/11	Chloride:	108618.6	3001.92	Sodium;	70275.7	3056.82				
Analyst: SANDRA GOMEZ	Bicarbonate:	2135.0	34.99	Magnesium:	195.0	16.04				
The face is a second of	Carbonste:	0.0	a.	Calcium:	844.0	42.12				
TDB (mg/l or g/m3): 184911.1	Sulfale:	747.0	15.55	Strontium:	220.0	5.02				
Density (g/cm3, tenne/m3): 1.113 Anien/Cation Ratio: 1	Phosphale:		- 1	Badum:	0.8	0.01				
Amora-capon reno:	Borate:		i	Iron:	6.5	0.23				
	Silicate:		i i	Polsssium:	869.0	22.22				
	1			Aluminum:						
Carbon Dloxide: 0 50 PPM	Hydrogen Sullide:		0 PPM	Chrombum:						
Oxygen:	all at time of namelias.			Copper:						
Comments:	pH at time of sampling:		1	Lead:						
	pH at time of analysis:		ì	Manganese:	0.100	0.				
	pH used in Calculation	n:	7	Nickel:						

Cond	ltions		Values C	alculated	at the Give	n Conditi	lons - Amou	ints of Sc	ale in lb/10	00 PPI		
IAMA	Gauge Press.	•	elcite CCO ₃	Gypsum CaSO_12H ₂ 0		Anhydrite CaSO ₄		Celestite 8rSO ₄		Barile BaSO		CO ₂
Ŧ	pel	Index	Amount	Index	Amount	Index	Amount	Index	Amount	Index	Amount	pel
80	0	1.05	188.52	-1.20	0.00	-1.18	0.00	-0.11	0.00	0.58	0.29	1.72
100	0	1,10	206.06	-1.29	0.00	-1.20	0.00	-0.15	0.00	0.35	0.29	2.35
120	0	1.12	224.17	-1.38	0.00	-1.19	0.00	-0.17	0.00	0.16	0.00	3,17
140	0	1.13	243.17	-1.42	0.00	-1.18	000	-0.18	0,80	0.00	0.00	4,21

Note 2 Precipitation of each scale is considered separately. Total scale will be less than the earn of the amounts of the five sc

Note 3: The reported GO2 pressure is actually the calculated CO2 fugacity. It is usually nearly the same as the CO2 partial pressure.

Injection Formation Water Analyses

							50E 21	Inje	ction Forma	tion Water	Analysis				0.71	JANA II NO			J. Paris II.
							Vista Disp	possil Soluti	ons, LLC - D	plaware Mc	witzin Gro	op formatio		-11 11 11 11				ALC: N	
Wellname	API	Latitude	Longitude	Section	Youmship	Range	UNI	Figns	Figew	County	State	Company	Field	Fermation	Depth	Tés_mgt	Chicelete_mgt.	Bicerbonate_mgt	Suffeta_reg
NORTH EL MAR UNIT #617	3002508430	32,016605	-103.617691	30	265	330	t	1880N	660W	LUA	NA		EL MAR	DELAWARE	4742	25475	159400	80	21
NORTH EL MAR UNIT #057	3002508440	32.001946	-103.6131134	- 11	265	331		1935N	2090W	UA	NA		EL MAR	DELAWARE	4777	75955	163000	61	25
GOEDERE #002	3002508407	32.059799	-103.5579987	10	265	33£	G	1980N	1980E	LEA	PUM		SALADO DRAW	DELAWARE	5200	293921	184000	115	210
MARSHALL WOOT	3002508358	32.264832	-103.6176224	16	235	331	M	6605	660W	UA	NEA		CRUZ	DELAWARE	5237	25893		127	156
NORTH EL MAR UNIT 8022	3002508278	32.011667	-103.6262207	75	265	326	i .	19805	1980E	UA	NM		EL MAR	DELAWARE	4749	24481			220
NORTH EL MAR UNIT #032	3002508291	32.008019	-103.6434479	76	265	32E	0	660%	1980E	LEA	NA		EC MAIL	DELAWARE	4605	25489	1		
NORTH EL MAN UNIT HOZE	3002508296	32.011654	-103 6521072			320	i.	15805	660W	LEA	NM		ELMAR	DELAWARE	4565	34942	156000	978	373
NORTH EL MAR UNIT 8045	3002508308	32.004387	-103.6381307	35	265	126	Α.	660N	330f.	LEA	NM		EL MAR	DELAWARE	4633	255115	160000	85	310
COTTON DRAW UNIT HO24	1002508176	32.143180	-103 6650696	10	255	120	K	19805	1980W	LYA	NM		PAQUEA	ELAWARE:	4787	24655	152600	112	939
COTTON DRAW UNIT #001	3002508182	33.125053	-103 6693573	- 15	255	321	M	6605	660W	LEA .	NM		PADUCA	DELAWARE	4804	308600			
COTTON DRAW UNIT #001	3002508182	32.175053	-103.6693573	. 15	255	120	M	6605	660W	LEA	NM		PADUCA	DELAWARE	4804	30999			
MONSANTO STATE #001	3002508195	32,128666	-103.6736145	16	255	326	1	19805	640t	LEA	MM		PADUCA	DELAWARE	4800	274016	138600	139	462
OTTON BRAW UNIT #004	3002508221	37.121422	-103.6693649	22	255	37£	ti .	660N	WON	LEA	MM		PADUCA	DELAWARE	4685	276836			552
E JORDAN NCT-1 #021	100250A226	33.107822	-103 6704102	27	255	336	0	350N	330W	MA	NA		PADUCA	DELAWARE	4498	23/346	147600	61	906
IANAGAN B FEDERAL #001	3002508151	32,217124	-103.6603851	15	245	321	0	6605	19806	LEA	100		DOUBLE X	DELAWARE	4955	229878			45
IANAGAN B FEDERAL #001	3003938151	32.212124	-101.6603851	15	245	324	0	6605	19406	IIIA.	425.8		DOUBLE Y	DELAWARS	2055	239309	143100	164	491

Water Well Map and Well Data



Legend

★ Proposed SWD

NMOSE PODs

Status

- Active (0)
- Pending (0)
- O Change Location of Well (0)
- Capped (0)
- Plugged (0)
- Incomplete (0)
- O Unknown (0)

Water Wells Area of Review Byron Federal SWD #1 Lea County, New Mexico

Lea County, New Mexico

Proj Mgr.
Oan Arthur
November 25, 2019
Ben Bockelmann

Prepared for:



			Vista Disposal Solutions, LLC - I	Byron Federal SWD #1		
SWD	Water Wells	Owner	Available Contact Information	Use	Sampling Required	Notes

No Hydrologic Connection Statement & Technical

Assessment & Feasibility for Injection



December 10, 2019

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, New Mexico 87505

Subject: Vista Disposal Solutions, LLC – Hydrologic Connection Statement

To Whom It May Concern:

The purpose of this letter is to affirm that ALL Consulting (ALL), on behalf of Vista Disposal Solutions, LLC (Vista), has conducted an extensive technical review of the available geologic and engineering data and finds no evidence of open faults or any other hydrologic connection between the proposed Bell Canyon Formation disposal zone and any underground sources of drinking water.

Additionally, please find attached ALL's Technical Assessment and Feasibility document addressing injection into the Bell Canyon Formation at the proposed disposal well location.

Sincerely,

Tom Tomastik

Tom Tomastik, CPG Chief Geologist ALL Consulting



VISTA DISPOSAL SOLUTIONS

TECHNICAL ASSESSMENT AND FEASIBILITY FOR INJECTION INTO THE BELL CANYON FORMATION OF THE DELAWARE MOUNTAIN GROUP

ALL Consulting (ALL) has conducted an extensive technical review and geological assessment of the alleged New Mexico Oil Conservation Division (OCD) Delaware Mountain Group (DMG) saltwater disposal well (SWD) impacts to production wells and drilling operations associated with the Brushy Canyon Formation of the DMG in the Lea County, New Mexico area. This technical review included evaluation and analysis of the OCD DMG Cases and technical data submitted by both Chevron and Occidental (OXY) in defense of their disposal operations into the Bell Canyon and Cherry Canyon formations in Eddy County. OCD found in favor of both Chevron and OXY to continue disposal operations at their injection wells with additional technical requirements and testing. ALL is providing the following technical information in support of allowing the permitting of new disposal operations by Vista Disposal Solutions, LLC (Vista) into the Bell Canyon Formation (Bell Canyon).

- ALL will be submitting permit applications for Vista to dispose of oilfield waste fluids into only the Bell Canyon of the DMG.
- All disposal operations will be cased hole with perforations.
- There is approximately 600 to 800 feet of viable injection interval within the Bell Canyon with porosities ranging from 12 to 28% and averaging approximately 18%. These zones are consistent with the Bell Canyon across the area of interest (AOI) for Vista.
- All these proposed injection intervals show resistivity readings less than 10 ohm/meters, which is indicative of natural brine in the formation, so there is adequate porosity and permeability.
- Proposed bottom perforations would be approximate 100 to 150 feet above the top of the Cherry Canyon Formation and at least 1,500 to 1,600 feet above the top of the Brushy Canyon Formation.
- ALL has identified three to four consistent confining zones within the bottom of the Bell Canyon that have low porosities and high resistivities indicating that these zones will serve as barriers to downward fluid migration.
- There is no oil and gas production from the Bell Canyon or Cherry Canyon formations within a two-mile radius of the proposed SWD and there are adequate barriers and rock thickness to prevent fluid migration into the Brushy Canyon Formation.
- Injection pressures will be limited to the regulatory approved maximum allowable surface pressure based on 0.2 psi per foot.
- If OCD requires additional downhole testing requirements like was required in the Chevron and Oxy cases, Vista would be willing to perform the OCD required downhole testing such as initial pressure fall-off testing, radioactive tracer and temperature surveys,

- and record original bottom hole pressures to further demonstrate the technical feasibility of injection into the Bell Canyon.
- The potential for over pressurization of this injection interval can be addressed with the spacing of hundreds of perforations into porous and permeable zones within the Bell Canyon, which allows for injectate dispersion and reduces the potential for pressure build-up. Additionally, ALL has found several Bell Canyon SWDs in the OCD records that operated under a vacuum situation.
- With a sound pre-treatment and filtering system at the surface, issues such as skin effect
 and even potential formation damage can be avoided, which often leads to formation
 pressure build-up. ALL has extensive experience and expertise with pre-treatment and
 filtering systems to avoid these issues.
- Additional technical documentation can be provided by ALL if OCD deems additional information is necessary.

Public Notice Affidavit and Notice of Application Confirmations

Affidavit of Publication

STATE OF NEW MEXICO COUNTY OF LEA

I. Daniel Russell, Publisher of the Hobbs News-Sun, a newspaper published at Hobbs, New Mexico, solemnly swear that the clipping attached hereto was published in the regular and entire issue of said newspaper, and not a supplement thereof for a period of 1 issue(s).

> Beginning with the issue dated November 22, 2019 and ending with the issue dated November 22, 2019.

Sworn and subscribed to before me this 22nd day of November 2019.

Business Manager

My commission expires

anuary 29, 2023 (Seal)

OFFICIAL SEAL GUSSIE BLACK Notary Public State of New Mexico My Commission Expires 294.2

This newspaper is duly qualified to publish legal notices or advertisements within the meaning of Section 3, Chapter 167, Laws of

1937 and payment of fees for said

LEGAL

LEGAL

NOVEMBER 22, 2019

APPLICATION FOR AUTHORIZATION TO INJECT

NOTICE IS HEREBY GIVEN: That Vista Disposal Solutions, LLC, 12444 NW 10th St., Building G, Suite 202-512, Yukon, OK 73099, is requesting that the New Mexico Oil Conservation Division administratively approve the APPLICATION FOR AUTHORIZATION TO INJECT as follows:

PURPOSE: The intended purpose of the injection well is to dispose of sait water produced from permitted all and gas wells.

WELL NAME AND LOCATION: Byron Federal SWD NW 14 SW 14, Section 32, Township 25S, Range 1.810' FSL & 271' FWL Lea County, NM

NAME AND DEPTH OF DISPOSAL ZONE: Bell Canyon (5.330' + 6.175') EXPECTED MAXIMUM INJECTION RATE: 25.000 Buis/day EXPECTED MAXIMUM INJECTION PRESSURE: 1,086 psi (surface)

Objections or requests for hearing must be filed with the New Mexico Oil Conservation Division within lifteen (15) days. Any objection or request for hearing should be mailed to the Oil Conservation Division, 1220 South St. Francis Dr., Santa Fe, New Mexico 87505.

Additional information may be obtained by contacting Nate Alleman at 918-382-7581.

67115320

00236264

DANIEL ARTHUR ALL CONSULTING 1718 S. CHEYENNE AVE. TULSA, OK 74119

APPLICATION FOR AUTHORIZATION TO INJECT

NOTICE IS HEREBY GIVEN: That Vista Disposal Solutions, LLC, 12444 NW 10th St., Building G, Suite 202-512, Yukon, OK 73099, is requesting that the New Mexico Oil Conservation Division administratively approve the APPLICATION FOR AUTHORIZATION TO INJECT as follows:

PURPOSE: The intended purpose of the injection well is to dispose of salt water produced from permitted oil and gas wells.

WELL NAME AND LOCATION: Byron Federal SWD #1

NW ¼ SW ¼, Section 32, Township 25S, Range 35E

1,810' FSL & 271' FWL

Lea County, NM

NAME AND DEPTH OF DISPOSAL ZONE: Bell Canyon (5,330' – 6,175')

EXPECTED MAXIMUM INJECTION RATE: 25,000 Bbls/day

EXPECTED MAXIMUM INJECTION PRESSURE: 1,066 psi (surface)

Objections or requests for hearing must be filed with the New Mexico Oil Conservation Division within fifteen (15) days. Any objection or request for hearing should be mailed to the Oil Conservation Division, 1220 South St. Francis Dr., Santa Fe, New Mexico 87505.

Additional information may be obtained by contacting Nate Alleman at 918-382-7581.

Byron Federal S	SWD #1 - Notice of Application Re	cipients		
Entity	Address	City	State	Zip Code
Let Market and Spile and Spile and Let Let	andowner & Mineral Owner			
New Mexico BLM	620 E Greene St.	Carlsbad	NM	88220
	OCD District	AD LANGE		N.WEDE
NMOCD District 1	1625 N. French Drive	Hobbs	NM	88240
	Leasehold Operators			200
COG Operating, LLC				
(COG OPER LLC) (COG OPERATING LLC)	600 W. Illinois Ave.	Midland	TX	79701
(COG PROD LLC)				
Commision of Public Lands - State Land Office	310 Old Santa Fe Trail	Santa Fe	NM	87501
EOG Resources, LLC (EOG RES INC)	104 S. 4th Street	Artesia	NM	88210
Marathon Oil Permian, LLC	5555 6 5 11 61			
(MARATHON OIL PERMIAN LLC)	5555 San Felipe St.	Houston	TX	77056
Occidental Permian, LP				
(OCCIDENTAL PERMIAN LP)	5 Greenway Plaza, Suite 110	Houston	TX	77046

Notes: The table above shows the Entities who were identified as parties of interest requiring notification on either the 1-mile well detail list (Attachment 2) or on the 2-mile Mineral Lease Map (Attachment 2). The names listed above in parenthesis, are the abbreviated entity names used on either the 1-mile well detail list (Attachment 2) or on the 2-mile Mineral Lease Map (Attachment 2).

Certified Mail® Labels

ALL Consulting 1718 S. Cheyenne Ave. Tulsa, OK 74119

Place label at top of the center of the envelope and fold at dotted line.

\$5.60⁰ P US POSTAGE FIRST-CLASS FROM 74119 DEC 06 2019 US POSTAGE stamps

Top of the page

ALL Consulting 1718 S. Cheyenne Ave. Tulsa, OK 74119

Place label at top of the center of the envelope and fold at dotted line.

FROM 74119
DEC 06 2019
Stamps \$5.600 US POSTAGE FIRST-CLASS FROM 74119

Print postage using Stamps.com Template SDC-3610

CERTIFIED MAIL® CERTIFIED MAIL®



CERTIFIED MAIL®

CERTIFIED MAIL®



New Mexico BLM 620 E Greene St. Carlsbad NM 88220-6292

NMOCD District 1 1625 N. French Drive Hobbs NM 88240-9273

ALL Consulting 1718 S. Cheyenne Ave. Tulsa, OK 74119

Place label at top of the center of the envelope and fold at dotted line,

\$5.600 円 US POSTAGE **FIRST-CLASS** DEC 06 2019 stamps

CERTIFIED MAIL® CERTIFIED MAIL®

Place label at top of the center of the envelope and fold at dotted line.

> CERTIFIED MAIL® CERTIFIED MAIL®



Occidental Permian, LP 5 Greenway Plaza, Suite 110 Houston TX 77046-0521

Certified Mail® Labels

ALL Consulting 1718 S. Cheyenne Ave. Tulsa, OK 74119

Place label at top of the center of the envelope and fold at dotted line.

\$5.600 US POSTAGE FIRST-CLASS FROM 74119 DEC 06 2019 Stamps FROM 7419 stamps

ALL Consulting 1718 S. Cheyenne Ave. Tulsa, OK 74119

Top of the page

Place label at top of the center of the envelope and fold at dotted line.

\$5.600 US POSTAGE FIRST-CLASS FROM 74119 DEC 06 2019 stamps

Print postage using Stamps.com Template SDC-3610

CERTIFIED MAIL® CERTIFIED MAIL®



CERTIFIED MAIL®

CERTIFIED MAIL®

COG Operating, LLC 600 W. Illinois Ave. Midland TX 79701-4882



State Land Office Commission of Public Lands 310 Old Santa Fe Trail Santa Fe NM 87501-2708

ALL Consulting 1718 S. Cheyenne Ave. Tulsa, OK 74119

Place label at top of the center of the envelope and fold at dotted line.

\$5.60⁰ US POSTAGE FIRST-CLASS DEC 06 2019 stamps


ALL Consulting 1718 S. Cheyenne Ave. Tulsa, OK 74119

Place label at top of the center of the envelope and fold at dotted line.

\$5.600 POSTAGE US POSTAGE **FIRST-CLASS** FROM 74119 DEC 06 2019 stamps

©ERTIFIED MAIL® CERTIFIED MAIL®

CERTIFIED MAIL® CERTIFIED MAIL®



EOG Resources, Inc. 104 S. 4th Street Artesia NM 88210-2123



Marathon Oil Permian, LLC 5555 San Felipe St. Houston TX 77056-2701