

GW - 64

**GENERAL
CORRESPONDENCE**

YEAR(S):

2006-1990

NOTICE OF PUBLICATION

STATE OF NEW MEXICO ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT OIL CONSERVATION DIVISION

Notice is hereby given that pursuant to New Mexico Water Quality Control Commission Regulations, the following discharge plan application has been submitted to the Director of the Oil Conservation Division, 1220 S. St. Francis, Santa Fe, New Mexico 87505, Telephone (505) 476-3470:

(GW-192) Miller Chemicals, Inc., Mr. Steve Tigert, Area Manager, P.O. Box 298, Artesia, New Mexico, 88211-0298, has submitted a renewal application for the previously approved discharge plan for their Hobbs Facility located in the Section 21, Township 18 South, Range 38 East, NMPM, Lea County, in the city of Hobbs, New Mexico. The facility is an oil field chemical service company with no wastewater discharges from the facility. Groundwater most likely to be affected by a spill, leak or accidental discharge to the surface is at a depth of approximately 50 feet with a total dissolved solids concentration of approximately 100mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed. The OCD proposed conditions can be viewed at www.emnrd.state.nm.us/ocd in the Draft Discharge Permit for this facility.

(GW-078) - Williams Field Service, David Bays, Environmental Specialist, 188 CR 4900, Bloomfield, New Mexico 87413, has submitted a discharge plan renewal application for their 5-Points compressor station located in the NW/4 NE/4, Section 8, Township 25 North, Range 5 West, NMPM, Rio Arriba County, New Mexico. Approximately 500 barrels per year of wastewater with a total dissolved solids concentration in excess of 2000 mg/l is stored in a below

groundwater closed-top tank prior to transport to an OCD approved off-site disposal facility. The discharge permit addresses how oilfield products and waste will be properly handled, stored and disposed of, including how spills, leaks, and other accidental discharges to the surface will be managed in order to protect fresh water. Groundwater most likely to be affected by an accidental discharge is at a depth of approximately 310 feet with a total dissolved solids concentrations of approximately 1225 mg/l. The OCD proposed conditions can be viewed at

www.emnrd.state.nm.us/ocd in the Draft Discharge Permit for this facility.

(GW-079) - Williams Field Service, David Bays, Environmental Specialist, 188 CR 4900, Bloomfield, New Mexico 87413, has submitted a discharge permit renewal application for their Wild Horse compressor station located in the SW/4 SW/4, Section 27, Township 26 North, Range 4 West, NMPM, Rio Arriba County, New Mexico. Approximately 420 gallons per day of waste water is collected and stored in an above ground bermed closed top tank prior to transport to an OCD approved off-site disposal facility. The discharge permit addresses how oilfield products and waste will be properly handled, stored and disposed of, including how spills, leaks, and other accidental discharges to the surface will be managed in order to protect fresh water. Groundwater most likely to be affected by an accidental discharge is at a depth of approximately 770 feet with a total dissolved solids concentrations of approximately 1398 mg/l. The OCD proposed conditions can be viewed at www.emnrd.state.nm.us/ocd in the Draft Discharge Permit for this facility.

(GW-112) - Williams Field Service, David Bays, Environmental Specialist, 188 CR 4900, Bloomfield, New Mexico 87413, has submitted a discharge plan renewal application for their Carracas CDP com-

pressor station located in the SE/4 NW/4, Section 34, Township 32 North, Range 5 West, NMPM, Rio Arriba County, New Mexico. Approximately 5 gallons per day of waste water with a total dissolved solids concentration of approximately 1100 mg/l is stored in a closed top tank prior to transport to an OCD approved off-site disposal facility. The discharge permit addresses how oilfield products and waste will be properly handled, stored and disposed of, including how spills, leaks, and other accidental discharges to the surface will be managed in order to protect fresh water. Groundwater most likely to be affected by an accidental discharge is at a depth of approximately 100 feet with a total dissolved solids concentration of approximately 2000 mg/l. The OCD proposed conditions can be viewed at www.emnrd.state.nm.us/ocd in the Draft Discharge Permit for this facility.

(GW-062) - Williams Field Service, David Bays, Environmental Specialist, 188 CR 4900, Bloomfield, New Mexico 87413, has submitted a discharge permit renewal application for their Manzanares CDP compressor station located in the SE/4 SW/4, Section 28, Township 30 North, Range 8 West, NMPM, San Juan County, New Mexico. Approximately 14 barrels per day of exempt waste water is collected and stored in an above ground bermed closed top tank prior to transport to an OCD approved off-site disposal facility. The discharge permit addresses how oilfield products and waste will be properly handled, stored and disposed of, including how spills, leaks, and other accidental discharges to the surface will be managed in order to protect fresh water. Groundwater most likely to be affected by an accidental discharge is at a depth of 80 feet with a total dissolved solids concentrations of approximately 3150 mg/l.

(GW-063) - Williams Field Service, David Bays, Environmental

Specialist, 188 CR 4900, Bloomfield, New Mexico 87413, has submitted a discharge permit renewal application for their Pump Mesa CDP compressor station located in the SW/4 SE/4, Section 14, Township 31 North, Range 8 West, NMPM, San Juan County, New Mexico. Approximately 145 gallons per day of exempt waste water is collected and stored in an above ground bermed closed top tank prior to transport to an OCD approved off-site disposal facility. The discharge permit addresses how oilfield products and waste will be properly handled, stored and disposed of, including how spills, leaks, and other accidental discharges to the surface will be managed in order to protect fresh water. Groundwater most likely to be affected by an accidental discharge is at a depth of approximately 390 feet with a total dissolved solids concentrations of approximately 9800 mg/l.

(GW-064) - Williams Field Service, David Bays, Environmental Specialist, 188 CR 4900, Bloomfield, New Mexico 87413, has submitted a discharge permit renewal application for their Middle Mesa compressor station located in the SE/4 SW/4, Section 10, Township 31 North, Range 7 West, NMPM, San Juan County, New Mexico. Approximately 145 gallons per day of exempt waste water is collected and stored in an above ground bermed closed top tank prior to transport to an OCD approved off-site disposal facility. The discharge permit addresses how oilfield products and waste will be properly handled, stored and disposed of, including how spills, leaks, and other accidental discharges to the surface will be managed in order to protect fresh water. Groundwater most likely to be affected by an accidental discharge is at a depth of approximately 420 feet with a total dissolved solids concentrations of approximately 900 mg/l.

Any interested person may obtain further in-

formation from the Oil Conservation Division and may submit written comments to the Director of the Oil Conservation Division at the address given above. The discharge plan application may be viewed at the above address between 8:00 a.m. and 4:00 p.m., Monday through Friday. Prior to ruling on any proposed discharge plan or its modification, the Director of the Oil Conservation Division shall allow at least thirty (30) days after the date of publication of this notice during which comments may be submitted to him and a public hearing may be requested by any interested person. Requests for a public hearing shall set forth the reasons why a hearing should be held. A hearing will be held if the Director determines there is significant public interest.

If no public hearing is held, the Director will approve or disapprove the proposed plan based on information available. If a public hearing is held, the director will approve or disapprove the proposed plan based on information submitted at the hearing.

GIVEN under the Seal of New Mexico Oil Conservation Commission at Santa Fe, New Mexico, on this 21st day of February 2006.

STATE OF NEW MEXICO OIL CONSERVATION DIVISION

SEAL
Mark E. Fesmire, P.E., Director
Legal #78483
Pub. Feb. 24, 2006

RECEIVED

2007 NOV 13 AM 11 55



Environmental Department
188 County Road 4900
Bloomfield, NM 87413
505/632-4625
505/632-4781 Fax

November 7, 2007

Mr. Leonard Lowe
Oil Conservation Division, EMNRD
1220 South St. Francis Drive
Santa Fe, New Mexico 87505

RE: Update to Williams Four Corners, LLC OCD Discharge Plans

Dear Mr. Lowe,

Williams Four Corners, LLC (Williams) would like to update the "Description of Final Disposition" for wastes generated at its facilities, and to include clarification of sources of waste streams not previously specified in its existing OCD Discharge Plans. These items are discussed in Table 1, "Storage and Disposal of Process Fluids, Effluent and Waste Solids", and Table 2, "Source, Quantity, and Quality of Effluent and Waste Solids", in each of Williams' current facility-specific OCD Discharge Plans. (Note that in older plans, these table numbers are reversed).

More specifically, the updates to Table 1 include replacing language that stated waste would be disposed at a "NMOCD-approved" or simply "approved" disposal facility with text that states waste will be disposed at "any state, federal, or tribal agency to receive industrial solid waste. Any waste that is determined to be hazardous as defined by 40 CFR 260-265 will be disposed only at a facility permitted to accept such hazardous waste." Recently, Williams has had some difficulty using NMED-approved disposal sites due to the current language.

Updates to Table 2 include expanding the "Source" of "Used Process Filters" to include amine filters, charcoal, activated carbon, and molecular sieve in addition to the air, inlet, fuel, fuel gas and glycol filters typically included in the Discharge Plans. Additionally, the "Source" of "Condensate and/or Produced Water" has been expanded to include the inlet scrubber, gas inlet separator, and dehydrators. These changes are included for clarification purposes only and provide a more descriptive list of waste that may be generated at the facilities. All of the items listed are related to existing processes at the facilities.


Please see the attached Table 1 and Table 2, from the recent OCD Discharge Plan renewal application for Williams' Rosa Compressor Station, for an example of how the updates apply at a typical Williams' facility. The updated information is indicated by bold text. We will update this information in each OCD Discharge Plan as it comes up for renewal. In the meantime, we request that the updates described herein are effective immediately for the sites listed below upon your receipt of this letter.

Five Points (GW-078)
29-6#2 (GW-121)
29-6#3 (GW-198)
29-6#4 (GS-122)
30-5 (GW-108)
31-6 (GW-118)
32-7 (GW-117)
32-8#2 (GW-111)
32-8#3 (GW-116)
32-9 (GW-091)
Aztec (GW-155)
Blanco (GW-327)
Cabresto (GW-352)
Carracas (GW-112)
Cedar Hill (GW-087)
Chaco (GW-331)
Coyote (GW-250)
Crouch Mesa (GW-129)
Culpepper (GW-353)
Decker Junction (GW-134)
Dogie (GW-330)
El Cedro (GW-149)
Glade (GW-321)
Hare (GW-343)
Honolulu (GW-315)
Horse Canyon (GW-061)
Horton (GW-323)
Kernaghan (GW-271)

La Cosa (GW-187)
Laguna Seca (GW-307)
La Jara (GW-223)
Lateral N-30 (GW-256)
Lawson Straddle (GW-322)
Lybrook (GW-047)
Manzanares (GW-062)
Martinez (GW-308)
Middle Mesa (GW-064)
Milagro (GW-060)
Navajo (GW-182)
North Crandell (GW-310)
Pipkin (GW-120)
Pritchard (GW-274)
Pump Mesa (GW-063)
Quintana Mesa (GW-309)
Richardson (GW-320)
Sims Mesa (GW-068)
Snowshoe (GW-287)
Thompson (GW-328)
Trunk A (GW-248)
Trunk B (GW-249)
Trunk C (GW-257)
Trunk L (GW-180)
Trunk M (GW-181)
Trunk N (GW-306)
Wildhorse (GW-079)

These updates are not significant and do not pose a hazard to public health or undue risk to property. These facilities do not discharge wastewater to surface or subsurface waters. All wastes generated at these facilities are temporarily stored in tanks or containers.

Respectfully submitted,



David Bays
Senior Environmental Specialist

Attachment

**Table 1
Transfer, Storage and Disposal of Process Fluids, Effluent and Waste Solids**

PROCESS FLUID/WASTE	STORAGE	STORAGE CAPACITY (approximate)	CONTAINMENT/ SPILL PREVENTION	RCRA STATUS	DESCRIPTION OF FINAL DISPOSITION
Used Oil	Above Ground Storage Tank	500 gal*	Berm or concrete pad and wastewater system	Non-exempt	May be hauled to a Williams or contractor consolidation point before transport to EPA-registered used oil marketer for recycling.
Produced Water/Natural Gas Condensate	Above Ground Storage Tank	300 bbl 120 bbl 40 bbl	Berms	Exempt	Saleable liquids may be sold to refinery. The remaining liquids may be transported to a Williams' evaporation facility or may be disposed at any facility permitted by any state, federal, or tribal agency to receive industrial solid waste. Any waste that is determined to be hazardous as defined by 40 CFR 260-265 will be disposed only at a facility permitted to accept such hazardous waste.
Wash-down Water	Below Grade Sump, vaulted	70 bbl 45 bbl	Dual-walled tanks	Non-exempt	Contractor may pump wash water back into truck after washing; water may be transported to any facility permitted by any state, federal, or tribal agency to receive industrial solid waste ; or evaporation at Williams' facility may be considered. Any waste that is determined to be hazardous as defined by 40 CFR 260-265 will be disposed only at a facility permitted to accept such waste.
Used Oil Filters	Drum or other container	Varies	Transported in drum or other container	Non-exempt	Transported to a Williams or contractor consolidation point, drained, and ultimately transported for disposal at any facility permitted by any state, federal, or tribal agency to receive industrial solid waste. Any waste that is determined to be hazardous as defined by 40 CFR 260-265 will be disposed only at a facility permitted to accept such hazardous waste. A Waste Acceptance Profile will be filed with the disposal facility as necessary. Recycling options may be considered when available.
Used Process Filters	Drum or other container	Varies	Transported in drum or other container	Exempt	Transported to a Williams or contractor consolidation point, drained, and ultimately transported for disposal at any facility permitted by any state, federal, or tribal agency to receive industrial solid waste. Any waste that is determined to be hazardous as defined by 40 CFR 260-265 will be disposed only at a facility permitted to accept such hazardous waste. A Waste Acceptance Profile will be filed with the disposal facility as necessary. Recycling options may be considered when available.
Spill Residue (e.g., soil, gravel, etc.)	N/A	N/A	In situ treatment, land-farm, or alternate method	Incident dependent	Per Section VI, Remediation, in 8/13/93 NMOCD Guidelines for Remediation of Leaks, Spills, and Releases.
Used Absorbents	Drum or other container	Varies	Transported in drum or other container	Non-exempt	Transported to a Williams or contractor consolidation point, drained, and ultimately transported for disposal at any facility permitted by any state, federal, or tribal agency to receive industrial solid waste. Any waste that is determined to be hazardous as defined by 40 CFR 260-265 will be disposed only at a facility permitted to accept such hazardous waste. A Waste Acceptance Profile will be filed with the disposal facility as necessary. Recycling options may be considered when available.
Empty Drums / Containers	N/A	N/A	Berm	Non-exempt	Barrels are returned to supplier or transported to a Williams or contractor consolidation point and ultimately recycled/disposed consistent with applicable regulations.
Antifreeze	Above Ground Storage Tank		Berm or concrete pad and wastewater system	N/A	Off-spec material recycled or disposed consistent with applicable regulations.
Glycol	Above Ground Storage Tank	500 gal* 125 gal* 100 gal*	Berm or concrete pad and wastewater system	N/A	Off-spec material recycled or disposed consistent with applicable regulations.
Lube Oil	Above Ground Storage Tank	500 gal*	Berm or concrete pad and wastewater system	N/A	Off-spec material recycled or disposed consistent with applicable regulations.

*Number of tanks installed dependent on number of engines and dehydrators installed on site. Engines and dehydrators are installed or removed to meet demand.

Table 2
Source, Quantity, and Quality of Effluent and Waste Solids

PROCESS FLUID / WASTE	SOURCE	QUANTITY (Ranges)	QUALITY
Produced Water/Natural Gas Condensate	Inlet Scrubber, Gas Inlet Separator, Dehydrators	2000-8000 bbl/year	No Additives
Waste Water/Wash Down Water	Compressor and Dehy Skids	100-5000 gal/year/unit	Biodegradable soap and tap water with traces of used oil
Used Oil	Compressors	500-2000 gal/year/engine	Used Motor Oil w/ No Additives
Used Oil Filters	Compressors	50-500/year/engine	No Additives
Used Process Filters	Charcoal, Activated Carbon, Molecular Sieve	50-500 cubic yd/yr	No Additives
Used Process Filters	Air, Inlet, Fuel, Fuel Gas, Glycol, Amine, Amibitol	75-500/year	No Additives
Empty Drums/Containers	Liquid Containers	0-80/year	No Additives
Spill Residue (i.e. soil, gravel, etc)	Incidental Spill	Incident Dependent	Incident Dependent
Used Adsorbents	Incidental Spill/Leak Equipment Wipe-down	Incident Dependent	No Additives



NEW MEXICO ENERGY, MINERALS and NATURAL RESOURCES DEPARTMENT

BILL RICHARDSON

Governor

Joanna Prukop

Cabinet Secretary

January 26, 2006

Mark E. Fesmire, P.E.

Director

Oil Conservation Division

Mr. David Bays
Williams Field Services
188 CR 4900
Bloomfield, New Mexico 87413

**RE: Discharge Permit Renewal GW-064
Williams Field Services
Middle Mesa Compressor Station
San Juan County, New Mexico**

Dear Mr. Bays:

The ground water discharge permit renewal GW-064 for the Williams Field Services Middle Mesa Compressor Station located in the SE/4 SW/4 of Section 10, Township 31 North, Range 7 West, NMPM, San Juan County, New Mexico, is **hereby approved** under the conditions contained in the enclosed attachment. The discharge permit consists of the original discharge permit application, dated February 20, 1996, as approved April 16, 1996 and the renewal application dated January 12, 2006. Enclosed are two copies of the conditions of approval. **Please sign and return one copy to the New Mexico Oil Conservation Division (OCD) Santa Fe Office within 30 days of receipt of this letter.**

The discharge permit renewal application was submitted pursuant to 20 NMAC 3106 of the New Mexico Water Quality Control Commission (WQCC) Regulations. It is approved pursuant to 20 NMAC 3109.A. Please note 20 NMAC 3109.E and 20 NMAC 3109.F, which provide for possible future amendments or modifications of the plan. Please be advised that approval of this plan does not relieve Williams Field Services of liability should operations result in pollution of surface water, ground water, or the environment.

Please be advised that all exposed pits, including lined pits and open tanks (tanks exceeding 16 feet in diameter), shall be screened, netted, or otherwise rendered nonhazardous to wildlife including migratory birds.

Please note that 20 NMAC 3104 of the regulations provides: "When a plan has been approved, discharges must be consistent with the terms and conditions of the plan." Pursuant to 20 NMAC 3107.C., Williams Field Services is required to notify the Director of any facility expansion, production increase, or process modification that would result in any change in the discharge of water quality or volume.

Mr. David Bays
Middle Mesa Compressor Station GW-064
January 26, 2006
Page 2

Pursuant to 20 NMAC 3109.G.4., this renewal plan is for a period of five years. This renewal will expire on **April 16, 2011**, and Williams Field Services should submit an application in ample time before this date. Note that under 20 NMAC 3106.F. of the regulations, if a discharger submits a discharge permit renewal application at least 120 days before the discharge permit expires and is in compliance with the approved plan, then the existing discharge permit will not expire until the application for renewal has been approved or disapproved. It should be noted that all discharge permit facilities will be required to submit the results of an underground drainage testing program as a requirement for discharge permit.

The discharge permit renewal application for the Williams Field Services Middle Mesa Compressor Station is subject to WQCC Regulation 3114. Every billable facility submitting a discharge permit application will be assessed a fee equal to the filing fee of \$100. There is a renewal flat fee assessed for compressor station facilities with horsepower rating over 1001 horsepower equal to \$1,700.00. The OCD has received the filing fee.

On behalf of the staff of the OCD, I wish to thank you and your staff for your cooperation during this discharge permit review.

Sincerely,



~~Wayne Price~~
~~Roger C. Anderson~~

Chief, Environmental Bureau
Oil Conservation Division

RCA/wjf
Attachment

xc: OCD Aztec District Office

ATTACHMENT TO THE DISCHARGE PERMIT RENEWAL GW-064
WILLIAMS FIELD SERVICES
MIDDLE MESA COMPRESSOR STATION
DISCHARGE PERMIT APPROVAL CONDITIONS
(January 26, 2006)

1. Payment of Discharge permit Fees: The \$100.00 filing fee has been received by the OCD. There is a required flat fee equal to \$1,700.00 for compressor station facilities with horsepower rating over 1001 horsepower. The renewal flat fee required for this facility may be paid in a single payment due at the time of approval, or in equal annual installments over the duration of the discharge permit, with the first payment due upon receipt of this approval.
2. Williams Field Services Commitments: Williams Field Services will abide by all commitments submitted in the discharge permit renewal application dated January 12, 2006 and these conditions for approval.
3. Waste Disposal: All wastes will be disposed of at an OCD approved facility. Only oilfield exempt wastes shall be disposed of down Class II injection wells. Non-exempt oilfield wastes that are non-hazardous may be disposed of at an OCD approved facility upon proper waste characterization per 40 CFR Part 261.
4. Drum Storage: All drums containing materials other than fresh water must be stored on an impermeable pad with curbing. All empty drums will be stored on their sides with the bungs in and lined up on a horizontal plane. Chemicals in other containers such as sacks or buckets will also be stored on an impermeable pad and curb type containment.
5. Process Areas: All process and maintenance areas which show evidence that leaks and spills are reaching the ground surface must be either paved and curbed or have some type of spill collection device incorporated into the design.
6. Above Ground Tanks: All above ground tanks which contain fluids other than fresh water must be bermed to contain a volume of one-third more than the total volume of the largest tank or of all interconnected tanks. All new tanks or existing tanks that undergo a major modification, as determined by the Division, must be placed within an impermeable bermed enclosure.
7. Above Ground Saddle Tanks: Above ground saddle tanks must have impermeable pad and curb type containment unless they contain fresh water or fluids that are gases at atmospheric temperature and pressure.
8. Labeling: All tanks, drums and containers will be clearly labeled to identify their contents and other emergency notification information.

9. Below Grade Tanks/Sumps: All below grade tanks, sumps, and pits must be approved by the OCD prior to installation or upon modification and must incorporate secondary containment and leak-detection into the design. All pre-existing sumps and below-grade tanks must demonstrate integrity on an annual basis. Integrity tests include pressure testing to 3 pounds per square inch above normal operating pressure and/or visual inspection of cleaned out tanks and/or sumps, or other OCD approved methods. The OCD will be notified at least 72 hours prior to all testing.
10. Underground Process/Wastewater Lines: All underground process/wastewater pipelines must be tested to demonstrate their mechanical integrity a minimum of every 5 years. The permittee may propose various methods for testing such as pressure testing to 3 pounds per square inch above normal operating pressure or other means acceptable to the OCD. The OCD will be notified at least 72 hours prior to all testing.
11. Class V Wells: Leach fields and other wastewater disposal systems at OCD regulated facilities which inject non-hazardous fluid into or above an underground source of drinking water are considered Class V injection wells under the EPA UIC program. All Class V wells that inject non-hazardous industrial wastes or a mixture of industrial wastes and domestic wastes will be closed unless it can be demonstrated that groundwater will not be impacted in the reasonably foreseeable future. Closure of Class V wells must be in accordance with a plan approved by the Division's Santa Fe Office. The OCD allows industry to submit closure plans which are protective of fresh waters, public health and the environment, and are cost effective. Class V wells that inject domestic waste only must be permitted by the New Mexico Environment Department.
12. Housekeeping: All systems designed for spill collection/prevention will be inspected weekly and after each storm event to ensure proper operation and to prevent overtopping or system failure. A record of inspections will be retained on site for a period of five years.
13. Spill Reporting: All spills/releases will be reported pursuant to OCD Rule 116 and WQCC 1203 to the OCD Aztec District Office.
14. Transfer of Discharge permit: The OCD will be notified prior to any transfer of ownership, control, or possession of a facility with an approved discharge permit. A written commitment to comply with the terms and conditions of the previously approved discharge permit must be submitted by the purchaser and approved by the OCD prior to transfer.
15. Storm Water Permit: BP America Production Company shall maintain storm water runoff controls. As a result of BP America Production Company's operations any water contaminant that exceeds the WQCC standards listed in 20 NMAC 6.2.3101 is discharged in any storm water runoff then BP America Production Company shall notify the OCD within 24 hours, modify the permit within 15 days and submit for OCD approval. BP America Production Company shall also take immediate corrective actions pursuant to Item 12 of these conditions.

16. Closure: The OCD will be notified when operations of the Middle Mesa Compressor Station are discontinued for a period in excess of six months. Prior to closure of the Middle Mesa Compressor Station a closure plan will be submitted for approval by the Director. Closure and waste disposal will be in accordance with the statutes, rules and regulations in effect at the time of closure.
17. Certification: Williams Field Services, by the officer whose signature appears below, accepts this permit and agrees to comply with all terms and conditions contained herein. Williams Field Services further acknowledges that these conditions and requirements of this permit may be changed administratively by the Division for good cause shown as necessary to protect fresh water, human health and the environment.

Accepted:

WILLIAMS FIELD SERVICES

by _____

Title

ACKNOWLEDGEMENT OF RECEIPT
OF CHECK/CASH

I hereby acknowledge receipt of check No. [redacted] dated 1/18/06
or cash received on _____ in the amount of \$ 300.00

from Williams Field Serv.
Middle Mesa C.S.
for Mesa Verde C.S.
Pump Mesa C.S.
(Facility Name)

GW-064
GW-062
GW-063

Submitted by: [Signature] Date: 1/26/06
(DP No.)

Submitted to ASD by: _____ Date: _____

Received in ASD by: _____ Date: _____

Filing Fee New Facility _____ Renewal

Modification _____ Other _____
(Specify)

Organization Code 521.07 Applicable FY 2001

To be deposited in the Water Quality Management Fund.

Full Payment or Annual Increment _____

THIS MULTI-TONE AREA OF THE DOCUMENT CHANGES COLOR GRADUALLY AND EVENLY FROM DARK TO LIGHT WITH DARKER AREAS BOTH TOP AND BOTTOM. IT ALSO HAS A REFLECTIVE WATERMARK ON THE BACK.



WILLIAMS FIELD SERVICES COMPANY
PO Box 21219
Tulsa, OK 74121-1218
Customer Support 1-866-778-2665

JP Morgan Chase Bank, N.A.
Chicago, IL

01/18/2006
940116

DATE: 01/18/2006

PAY TO THE ORDER OF:

PAY \rightarrow \$*****300.00

USD

WATER MANAGEMENT QUALITY MANAGEMENT FUND
C/O OIL CONSERVATION DIV
1220 S ST FRANCIS DR

SANTA FE
UNITED STATES

NM 87505

[Signature]

Authorized Signer

SUPPLIER NUMBER
400443



**WILLIAMS FIELD SERVICES COMPANY**

PO Box 21218

Tulsa, OK 74121-1218

Customer Support 1-866-778-2665

CHECK NUMBER	PAY DATE	SUPPLIER NO	SUPPLIER NAME	TOTAL AMOUNT
██████████	01/18/2006	400443	WATER MANAGEMENT QUALITY MANAGEMENT FUND	*****300.00

INVOICE NUMBER	INV. DATE	INVOICE DESCRIPTION	NET AMOUNT
17-JAN-2006	20060117	APPLICATION RENEWAL & FILLING FEE	300.00

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Revised June 10, 2003
Submit Original
Plus 1 Copy
to Santa Fe
1 Copy to Appropriate
District Office

**DISCHARGE PLAN APPLICATION FOR SERVICE COMPANIES, GAS PLANTS,
REFINERIES, COMPRESSOR, GEOTHERMAL FACILITIES
AND CRUDE OIL PUMP STATIONS**

(Refer to the OCD Guidelines for assistance in completing the application)

New Renewal Modification

1. Type: Compressor Station (Middle Mesa Central Delivery Point, GW-064)
2. Operator: Williams Field Services Company
Address: 188 CR 4900, Bloomfield, NM 87413
Contact Person: David Bays Phone: 505-634-4951
3. Location: Section 10 Township 31 North Range 7 West
Submit large scale topographic map showing exact location.
4. Attach the name, telephone number and address of the landowner of the facility site.
5. Attach the description of the facility with a diagram indicating location of fences, pits, dikes and tanks on the facility.
6. Attach a description of all materials stored or used at the facility.
7. Attach a description of present sources of effluent and waste solids. Average quality and daily volume of waste water must be included.
8. Attach a description of current liquid and solid waste collection/treatment/disposal procedures.
9. Attach a description of proposed modifications to existing collection/treatment/disposal systems.
10. Attach a routine inspection and maintenance plan to ensure permit compliance.
11. Attach a contingency plan for reporting and clean-up of spills or releases.
12. Attach geological/hydrological information for the facility. Depth to and quality of ground water must be included.
13. Attach a facility closure plan, and other information as is necessary to demonstrate compliance with any other OCD rules, regulations and/or orders.

14. CERTIFICATION I hereby certify that the information submitted with this application is true and correct to the best of my knowledge and belief.

Name: David Bays Title: Sr. Environmental Specialist
Signature: David Bays Date: 01/12/2006
E-mail Address: david.bays@williams.com



Middle Mesa Compressor Station

NMOCD Discharge Plan GW-064

Williams Field Services
188 CR 4900
Bloomfield, NM 87413



Table of Contents

1.0	Type of Operation -----	2
2.0	Legally Responsible Party -----	2
3.0	Location of Facility -----	2
4.0	Landowner -----	2
5.0	Facility Description -----	2
6.0	Source, Quantity and Quality of Effluents and Waste Solids -----	2
7.0	Transfer, Storage and Disposal of Process Fluids, Effluents and Waste Solids -----	3
8.0	Storm Water Plan -----	3
9.0	Inspection, Maintenance, and Reporting -----	4
10.0	Spill/Leak Prevention and Reporting (Contingency Plans) -----	4
11.0	Site Characteristics -----	5
12.0	Facility Closure Plan -----	6

List of Tables

Table 1 – Source, Quantity and Quality of Effluent and Waste Solids

Table 2 – Transfer, Storage and Disposal of Process Fluids, Effluents, and Waste Solids

List of Figures

Figure 1 - Site Vicinity / Topographic Map

Figure 2 - Facility Plot Plan

List of Appendices

Appendix A – WFS Spill Control Procedures

Appendix B – NMOCD Notification and Corrective Action

Appendix C – Public Notice



Middle Mesa Central Delivery Point NMOCD Discharge Plan

Effective Date:

January 2006

Page 2

1.0 TYPE OF OPERATION

The Middle Mesa Central Delivery Point (CDP) was built in 1991 to provide metering, compression, and dehydration services to various producers for the gathering of natural gas for treatment and delivery through Williams Field Services (WFS) Milagro Plant.

2.0 LEGALLY RESPONSIBLE PARTY

Williams Field Services
188 CR 4900
Bloomfield, NM 87413
(505) 634-4951

Contact Person:
David Bays, Senior Environmental Specialist
Phone and Address, Same as Above

3.0 LOCATION OF FACILITY

The Middle Mesa CDP is located in Section 10, Township 31 North, Range 7 West, in San Juan County, New Mexico, approximately 27 miles northeast of Bloomfield, New Mexico. A site location map is attached (USGS 7.5 Min. Quadrangles: Burnt Mesa, New Mexico) as Figure 1. The facility layout is illustrated in Figure 2. All figures are attached following Section XI of the text.

4.0 LANDOWNER

Williams Field Services (WFS) is leasing the subject property from:

Bureau of Land Management
1235 N. La Plata Highway
Farmington, NM 87401
(505) 599-8900

5.0 FACILITY DESCRIPTION

This facility is classified as a field compressor station and is unmanned. The air quality permit for this site has allowed the operation of twenty 1,357-hp engines and six dehydrators. Currently, eighteen engines and three dehydrators exist at the site. Compressors and dehydrators may be installed or removed to meet demand. In addition, there are various storage tanks, support structures and ancillary equipment.

6.0 SOURCE, QUANTITY AND QUALITY OF EFFLUENTS AND WASTE SOLIDS

The source, quantity, and quality of effluent and waste solids generated at the plant are summarized in Table 1.



7.0 TRANSFER, STORAGE AND DISPOSAL OF PROCESS FLUIDS, EFFLUENTS AND WASTE SOLIDS

Wastes generated at this facility fall into two categories: exempt and non-exempt. Exempt wastes include, but may not be limited to, used process filters, certain absorbents, spill residues, and produced water with or without de minimus quantities of non-hazardous liquids. Non-exempt wastes include, but may not be limited to, used oil, used oil filters, laboratory waste, empty drums, and waste water. Table 2 describes the transfer, storage and disposal of exempt and non-exempt process fluids, effluents, and waste solids expected to be generated at the site.

Non-exempt waste management will be conducted in accordance with NMOCD requirements including the preparation of a Certificate of Waste Status for each non-exempt waste stream. Non-exempt wastes will be analyzed at a minimum for BTEX, TPH, RCRA D-List metals, ignitability, corrosivity, and reactivity to initially determine if such waste are hazardous as defined in 40 CFR Part 261. All wastes at the facility will be periodically surveyed for naturally occurring radioactive material (NORM) to determine if the concentrations of radium 226 exceed 30 picocuries per gram or if radiation exposure exceeds 50 microrentgens per hour. If affirmed, such materials will be handled and disposed in accordance with NMOCD NORM Regulations.

Barring facility modification and/or process changes, the classification of non-exempt wastes by laboratory analyses will be made once during the approval period of this plan. Subsequent laboratory analyses will be performed at the generator's discretion (minimum of once every five years), or more frequently to comply with waste acceptance procedures of the disposal facility.

8.0 STORM WATER PLAN

This storm water section was developed to provide a plan to monitor and mitigate impact to storm water runoff from the facility. It serves to satisfy storm water management concerns of the NMOCD. It is not intended to comply with 40 CFR Part 122, Storm Water Discharges as this facility is excluded in 122.26 (c) (1) (iii).

This section concentrates on the identification of potential pollutants, inspection and maintenance of the pollutant controls, and gives a description of structural controls to prevent storm water pollution.

8.1 Site Assessment and Facility Controls

An evaluation of the material used and stored on this site that may be exposed to storm water indicates that no materials would routinely be exposed to precipitation. There are no engineered storm water controls or conveyances; all storm water leaves the site by overland flow.

Any leakage or spill from the identified potential pollutant sources, if uncontained by existing berms, curbs, or emergency response actions, could flow overland to open off-site drainage ditches (arroyos) and thus impact storm water. In such an event, containment would occur by blocking the ditch or culvert downstream of the pollutant. Cleanup of the substance and implementation of mitigation measures could be conducted while protecting downstream storm watercourses.



8.2 Best Management Practices

Following are Best Management Practices (BMPs) to be implemented to prevent or mitigate pollution to storm water from facility operations:

- All waste materials and debris will be properly disposed of on an on-going basis in appropriate containers and locations for collection and removal from the site.
- Temporary storage of potential pollutant sources will be located in areas with appropriate controls for storm water protection. This would include ensuring all containers are sealed/covered and otherwise protected from contact with precipitation.
- Periodic inspection of channels and culverts shall be performed at least twice annually and after any major precipitation event.
- Sediment deposits and debris will be removed from the channels and culverts as necessary and any erosion damage at the outfall (if any) will be repaired or controlled.
- Conduct inspections of the facility on a regular basis as part of the preventive maintenance site check. Such inspections will include the visual assessment of corroded or damaged drums and tanks, broken or breached containment structures, collapsed or clogged drainages or drain lines.

Implementation of the BMPs will prevent or mitigate impact to storm water runoff from this facility.

9.0 INSPECTION, MAINTENANCE AND REPORTING

Williams' personnel will operate and maintain the facility. The facility will be remotely monitored for equipment malfunctions and an operator will be on call 24 hours per day, 7 days per week, 52 weeks per year. Regular inspections will be conducted throughout the facility. The above ground and below-grade tanks will be gauged regularly, and monitored for leak detection.

In the event of a release of a reportable quantity, the operator reports the release to a contracted spill notification service. The service immediately notifies the Williams Environmental Department and all appropriate agencies.

10.0 SPILL/LEAK PREVENTION AND REPORTING (CONTINGENCY PLANS)

Spill containment berms around above ground storage tanks will be designed to contain 133% of the tank capacity. The below-grade tanks will be constructed with a means of leak detection, and will either be double-walled tanks, double-bottomed tanks or a tank set on an impermeable pad.

Williams' corporate policy and procedure for Release Reporting and Pollution Prevention and Control are included in Appendix A. Significant spills and leaks are reported to the NMOCD pursuant to NMOCD Rule 116 and WQCC 1-203 using the NMOCD form (see Appendix B).



Middle Mesa Central Delivery Point NMOCD Discharge Plan

Effective Date:

January 2006

Page 5

11.0 SITE CHARACTERISTICS

The Middle Mesa CDP is located approximately 27 miles northeast of Bloomfield, New Mexico. The site elevation is approximately 6,600 feet above mean sea level. The natural ground surface topography slopes downward toward the south. The maximum relief over the site is approximately 20 feet. Intermittent flow from the site will follow the unnamed drainage towards the east to Negro Andy Canyon Wash. Approximately 2.3 miles southeast of the site, Negro Andy Canyon Wash drains into the Navajo Lake. Navajo Lake, at approximately 6,100 feet in elevation, is the nearest down-gradient perennial source of surface water to the site.

A review of the available hydrologic data (1,2) for this area revealed that there are no water wells within a ¼-mile radius of Middle Mesa Compressor Station. The water-bearing unit in this area is the San Jose Formation. The San Jose Formation is the youngest Tertiary bedrock unit. This formation consists of a sequence of interbedded sandstone and mudstone. The estimated ground water depth at the site is 500 to 900 feet. The total dissolved solids concentration of area ground water is expected to range from 200 to 2,000 PPM.

The table below presents available information provided for the nearest wells to the site.

Township; Range; Section	Quarter ^a	Apx. Distance from Site (mi)	Well #	Use ^b	Well Depth (ft)	Water Bearing Stratifications (ft)	Description	Depth to Water (ft)
31N; 7W; 14	124	~1.7	SJ 03426	Dom	540	500-540	Sandstone/Gravel/Conglomerate	420
31N; 7W; 2	14	~1.7-1.9	SJ 03649	Dom	600	320-600	Sandstone/Gravel/Conglomerate	300

Note a: 1=NW/4; 2=NE/4; 3=SW/4; 4=SE/4

Note b: Dom = domestic

The 100-year 24-hour precipitation event at a regional weather station is 2.8 inches. This small amount of rainfall for the area should pose minimal flood hazards. When practical, surface water runoff from the area surrounding the site is to be diverted around the facility into the natural drainage path. Vegetation in the area consists predominantly of sagebrush and native grasses.

References

¹Stone, W.J., Lyford, F.P., Frenzel, P.F., Mizell, N.H., Padgett, E.T., 1983, Hydrology and Water Resources of San Juan Basin, New Mexico Bureau of Mines and Mineral Resources, Hydrologic Report 6.

²Online Well Reports and Downloads, New Mexico Office of the State Engineer, 2005.



Middle Mesa Central Delivery Point NMOCD Discharge Plan

Effective Date:

January 2006

Page 6

12.0 FACILITY CLOSURE PLAN

All reasonable and necessary measures will be taken to prevent the exceedence of WCQQ Section 3103 water quality standards should Williams choose to permanently close the facility. Williams will submit a detailed closure plan to the NMOCD prior to closure.

Generally, closure measures will include removal or closure in place of underground piping and other equipment. All wastes will be removed from the site and properly disposed in accordance with the rules and regulations in place at the time of closure. When all fluids, contaminants, and equipment have been removed from the site, the site will be graded as close to the original contour as possible.

Should contaminated soil be discovered, any necessary reporting under NMOCD Rule 116 and WQCC Section 1203 will be made and clean-up activities will commence. Post-closure maintenance and monitoring plans would not be necessary unless contamination is encountered.

TABLES

TABLE 1
SOURCE, QUANTITY AND QUALITY OF EFFLUENT AND WASTE SOLIDS
MIDDLE MESA CDP

PROCESS FLUID / WASTE	SOURCE	QUANTITY (Ranges)	QUALITY
Produced Water	Scrubber, Gas Inlet Separator, Dehydrators	3000-6000 bbl/year	No Additives
Wash Down Water	Compressor Skid	1000-5000 gal/year/engine	Biodegradable soap and tap water with traces of used oil; rain/snow melt
Used Oil	Compressor	1000-2000 gal/year/engine	Used Motor Oil w/ No Additives
Used Oil Filters	Compressor	50-500/year/engine	No Additives
Used Process Filters	Air, Inlet, Fuel Gas	75-500/year	No Additives
Empty Drums/Containers	Liquid Containers	0-80/year	No Additives
Spill Residue (i.e. soil, gravel, etc)	Incidental Spill	Incident Dependent	Incident Dependent
Used Adsorbents	Incidental Spill/Leak Equipment Wipe-down	Incident Dependent	No Additives

TABLE 2
TRANSFER, STORAGE AND DISPOSAL OF PROCESS FLUIDS, EFFLUENT AND WASTE SOLIDS
MIDDLE MESA CDP


PROCESS FLUID/WASTE	STORAGE	STORAGE CAPACITY (approximate)	CONTAINMENT/ SPILL PREVENTION	RCRA STATUS	DESCRIPTION OF FINAL DISPOSITION
Produced Water	Above Ground Storage Tank	300 bbl; 210 bbl	Earthen Berm and Vault; Berm	Exempt	Saleable liquids may be sold to a refinery. Remaining liquids may be transported to a Williams evaporation facility or a NMOCD-approved disposal facility.
Waste Water/Wash-down Water	Above Ground Storage Tank	30 bbl; 740 gal	Earthen Vault; Dual-walled Tank	Non-exempt	Contractor may pump wash water back into truck after washing; water may be transported to NMOCD-approved facility; or evaporation at WFS facility may be considered.
Waste Water/Produced Water	Above Ground Storage Tank	165 bbl	Earthen Vault	Exempt	Saleable liquids may be sold to a refinery. Remaining liquids may be transported to a Williams evaporation facility or a NMOCD-approved disposal facility.
Used Oil	Above Ground Storage Tank	165 bbl; 19 @ 500 gal*	Earthen Vault; Concrete pad and wastewater system or other berm	Non-exempt	May be hauled to WFS or contractor consolidation point before transport to EPA-registered used oil marketer for recycling.
Used Oil Filters	Drum or other container	Varies	Transported to a Williams or contractor facility in drum or other container	Non-exempt	Transported to a Williams or contractor consolidation point, drained, and ultimately transported for disposal at an approved disposal facility. A Waste Acceptance Profile will be filed with the disposal facility. Recycling options may be considered when available.
Used Process Filters	Drum or other container	Varies	Transported to a Williams or contractor facility in drum or other container	Exempt	Transported to a Williams or contractor consolidation point, drained, and ultimately transported for disposal at an approved disposal facility. A Waste Acceptance Profile will be filed with the disposal facility. Recycling options may be considered when available.
Spill Residue (i.e., soil, gravel, etc.)	N/A	N/A	In situ treatment, land-farm, or alternate method	Incident dependent	Per Section VI, Remediation, in 8/13/93 NMOCD Guidelines for Remediation of Leaks, Spills, and Releases.
Used Absorbents	Drum or other container	Varies	Transported to a Williams or contractor facility in drum or other container	Non-exempt	Transported to a Williams or contractor consolidation point, drained, and ultimately transported for disposal at an approved disposal facility. A Waste Acceptance Profile will be filed with the disposal facility. Recycling options may be considered when available.
Empty Drums / Containers	N/A	N/A	Berm	Non -exempt	Barrels are returned to supplier or transported to a Williams or contractor consolidation point and ultimately recycled/disposed consistent with applicable regulations.
Antifreeze	Above Ground Storage Tank	2 @ 500 gal	Concrete pad and Wastewater System; Metal Tank	N/A	Off-spec material recycled or disposed consistent with applicable regulations.
Glycol	Above Ground Storage Tank	6 @ 100 gal* 6 @ 50 gal*	Concrete Pad and Wastewater System	N/A	Off-spec material recycled or disposed consistent with applicable regulations.

TABLE 2
TRANSFER, STORAGE AND DISPOSAL OF PROCESS FLUIDS, EFFLUENT AND WASTE SOLIDS
MIDDLE MESA CDP

PROCESS FLUID/WASTE	STORAGE	STORAGE CAPACITY (approximate)	CONTAINMENT/ SPILL PREVENTION	RCRA STATUS	DESCRIPTION OF FINAL DISPOSITION
Compressor Oil	Above Ground Storage Tank	100 bbl; 19 @ 500 gal*	Earthen Berm and Vault; Concrete pad and wastewater system or other berm	N/A	Off-spec material recycled or disposed consistent with applicable regulations.
Solvent	Above Ground Storage Tank	2 @ 500 gal	Concrete pad and wastewater system	N/A	Off-spec material recycled or disposed consistent with applicable regulations.

*Number of tanks varies with number of units installed.

FIGURES

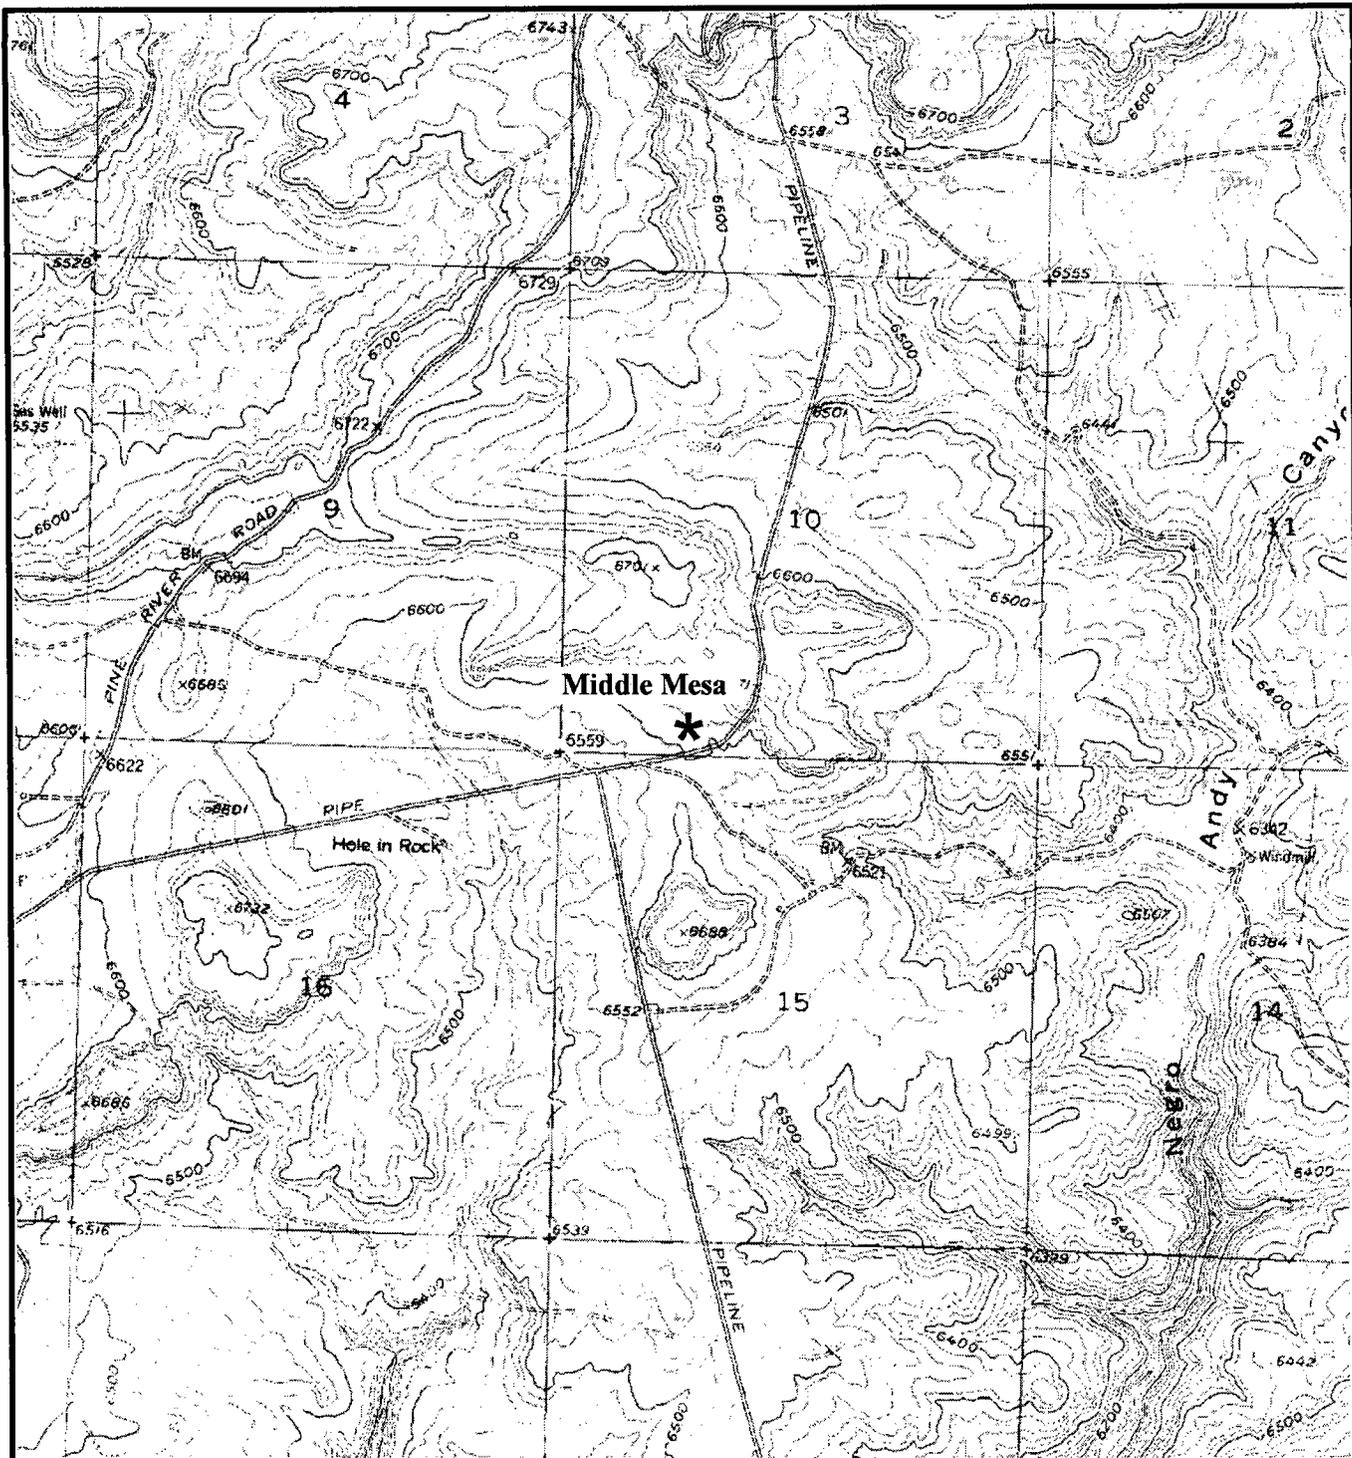

Source: USGS Burnt Mesa, NM Quadrangle





Figure 1 Site Vicinity / Topographic Map
Middle Mesa CDP Compressor Station
 Section 10, Township 31N Range 7W
 San Juan County, New Mexico

SPILL PREVENTION CONTROL AND COUNTERMEASURE PLAN

MIDDLE MESA COMPRESSOR STATION			
Section	SPILL PREVENTION CONTROL & COUNTERMEASURE PLAN	Tab	13
Effective Date	12/16/99	Issue No.	01
		Page No.	3 of 8

ATTACHMENT 'A' PRODUCT AND WASTE STORAGE LOCATIONS

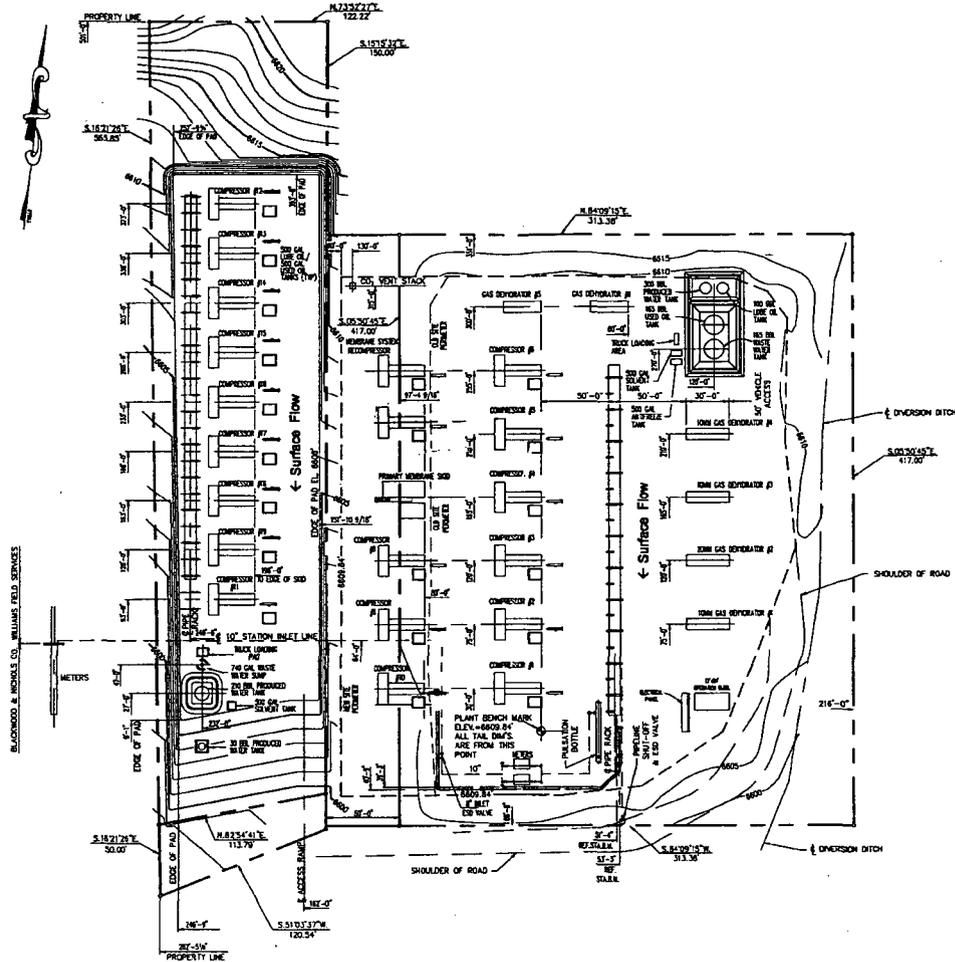

										DRAFTING BY: RES DATE: 12/16/99 COUNTY: HED ARIZONA		WILLIAMS GAS PROCESSING <small>ONE OF THE WILLIAMS COMPANIES</small>																																		
										STATE: NEW MEXICO COUNTY: HED ARIZONA		MIDDLE MESA COMPRESSOR STATION SPILL PREVENTION CONTROL & COUNTERMEASURE PLAN PLOT PLAN																																		
										ENGINEER BY: DATE:		SCALE: 1" = 40'-0" DWG. NO. MID-1-P16																																		
<table border="1"> <thead> <tr> <th>DRAWING NO.</th> <th>TITLE</th> <th>DRAWING NO.</th> <th>TITLE</th> <th>DRAWING NO.</th> <th>TITLE</th> <th>NO.</th> <th>DATE</th> <th>BY</th> <th>DESCRIPTION</th> <th>V. SIGNED</th> <th>CHK. DATE</th> <th>BY</th> <th>DESCRIPTION</th> <th>V. SIGNED</th> <th>CHK. DATE</th> <th>BY</th> </tr> </thead> <tbody> <tr> <td colspan="10">REFERENCE DRAWINGS</td> <td colspan="2">REVISIONS</td> <td colspan="4"></td> </tr> </tbody> </table>										DRAWING NO.	TITLE	DRAWING NO.	TITLE	DRAWING NO.	TITLE	NO.	DATE	BY	DESCRIPTION	V. SIGNED	CHK. DATE	BY	DESCRIPTION	V. SIGNED	CHK. DATE	BY	REFERENCE DRAWINGS										REVISIONS									
DRAWING NO.	TITLE	DRAWING NO.	TITLE	DRAWING NO.	TITLE	NO.	DATE	BY	DESCRIPTION	V. SIGNED	CHK. DATE	BY	DESCRIPTION	V. SIGNED	CHK. DATE	BY																														
REFERENCE DRAWINGS										REVISIONS																																				

APPENDICES

Appendix A
WFS Spill Control Procedures

	System Integrity Plan	Element:	Document No:	
		Revision No:	Revision Date:	Page:
Procedure:		Environmental Protection	6.04-ADM-001	
		6	01/01/05	1 of 8
POLLUTION PREVENTION AND CONTROL				

1.0 PURPOSE

- 1.1 To outline the conditions under which facilities are subject to the requirements of the EPA Oil Pollution Prevention program, specify the actions required at facilities to comply with pollution prevention and/or response plans, and to ensure facilities are in compliance with all applicable oil pollution prevention regulations.

2.0 PROCEDURE

- 2.1 At least Annually, perform visual inspections of oil storage tanks and containers (single containers with capacities >55 gallons) for signs of deterioration, discharges or accumulation of oil inside diked areas. Document Inspections on 0019 – External Visual Tank Inspection form.
- 2.2 Test each aboveground container for integrity on a regular schedule and whenever you make material repairs. These tests are performed in accordance with SIP-ADM-7.15 - Aboveground Storage Tank Integrity
- 2.3 Perform maintenance or repairs necessary to prevent or stop leaks or releases and document the work following company maintenance and repair procedures.
- 2.4 Maintain appropriate spill response equipment at an easily accessible location at the facility and ensure facility personnel are trained on the materials and their use(s).
- 2.5 Routine releases of storm water from containment areas shall be documented on WES-87 – Record of Secondary Containment Discharge. All other releases will be reported according to 6.04-ADM-002 – Release Reporting procedure.
- 2.6 **Facility Pollution Prevention Plans**
- 2.6.1 The oil pollution prevention regulations include two plans related to non-transportation onshore facilities. The most common is the Spill Prevention Control and Countermeasure (SPCC) Plan. The second is the Facility Response Plan (FRP).
- 2.6.1.1 An SPCC Plan is a written document that describes the steps a facility takes to prevent oil spills and to minimize the risk of harm to the environment.
- 2.6.1.2 A Facility Response Plan is a written document that

describes the procedures for responding to a spill.

NOTE

If your facility requires a Facility Response Plan (FRP), it will include an Emergency Response Action Plan (ERAP), which is equivalent to a Williams Emergency Response Plan (ERP). Therefore, if a facility has an FRP, the Environmental Specialist will be responsible for preparation of the ERAP, and a separate ERP (as required by SIP-ADM-12.01 - Emergency Response and Planning) is not required. See 6.04-ADM-003 – Plans Required for Facilities-Pipelines to determine the plans applicable to your facility/pipeline.

- 2.6.2 The Environmental Specialist is responsible for preparation of SPCC plans or FRPs.
- 2.6.3 Operations is responsible for:
 - 2.6.3.1 Reviewing draft plan(s), providing comments to the Environmental Specialist (ES) and meeting published timeframes for reviews and comments
 - 2.6.3.2 Ensuring it is capable of complying with the document upon publication
 - 2.6.3.3 Reviewing the plan(s) Annually and providing revisions or updates to the ES
 - 2.6.3.4 Performing inspections required by the plan(s)
 - 2.6.3.5 Maintaining documentation required by the plan(s) on the appropriate forms
 - 2.6.3.6 Conducting annual drills if an FRP is in-place for the facility
 - 2.6.3.7 Ensuring adequate response contractors are available in the area
 - 2.6.3.8 Providing to the ES a current site survey to allow for secondary containment calculations to be conducted.
- 2.6.4 Requirements to Maintain Records - The facility is required to maintain all inspection logs, secondary containment drainage logs, etc., for a period of 5 years. These records must be maintained in a centralized location at the facility and must be easily accessible to an inspector.
- 2.6.5 Requirements to Maintain the EMIS - The EMIS will be populated with all requirements of the facility's plans (SPCC/FRP) and any associated best management practices. The Environmental Group (ES, and CA) is responsible for maintaining the database.

- 2.6.6 Training Requirements – The Federal regulations for oil pollution prevention require annual training on the facility's plans and an overall education on plan requirements/purpose. Operations is responsible for ensuring all personnel receive the required SPCC/FRP training on an annual basis. This training may be coordinated with the Environmental Specialist as part of the required annual review.

3.0 REFERENCES

3.1 Regulatory

- 3.1.1 Oil Pollution Prevention Act of 1990
- 3.1.2 40 CFR 112, Oil Pollution Prevention (EPA)
- 3.1.3 Applicable state, regional and local regulations

3.2 Related Policies/Procedures

- 3.2.1 Training CD for SPCC Plans
- 3.2.2 SIP-ADM-7.15 - Aboveground Storage Tank Integrity

3.3 Forms and Attachments

- 3.3.1 WES-87 – Record of Secondary Containment Discharge
- 3.3.2 WES-35 - Release Report Form
- 3.3.3 6.04-ADM-002 - Release Reporting
- 3.3.4 6.04-ADM-003 – Plans Required for Facilities-Pipelines
- 3.3.5 0019 – External Visual Tank Inspection
- 3.3.6 SIP-ADM-12.01 - Emergency Response and Planning
- 3.3.7 Spill Prevention Control and Countermeasure (SPCC) Plan
- 3.3.8 Facility Response Plan
- 3.3.9 SIP Feedback/Change Request

4.0 DEFINITIONS

- 4.1 **Aboveground Storage Tank (AST)** – A tank that has all its surfaces above the existing grade so as to allow visual inspection of all the tank surfaces.
- 4.2 **DOT** – Department of Transportation
- 4.3 **EPA** – Environmental Protection Agency

- 4.4 Facility** – Any terminal, facility, pipeline, etc. owned or operated by Williams.
- 4.5 Facility Response Plan** - Required for any non-transportation related facility that could be expected to cause substantial harm to the environment by discharging oil into or on navigable waters or adjoining shorelines.
- 4.6 MMS** – Minerals Management Service
- 4.7 Navigable Waters** – The Clean Water Act defines the navigable waters of the United States as the following: all navigable waters, as defined in judicial decisions prior to the passage of the Clean Water Act, and tributaries of such waters; interstate waters; intrastate lakes, rivers, and streams that are used by interstate travelers for recreational or other purposes; and intrastate lakes, rivers, and streams from which fish and shellfish are taken and sold in interstate commerce.
- 4.8 Oil** – Oil of any kind or any form, including, but not limited to, petroleum, fuel oil, sludge, oil refuse, and oil mixed with wastes other than dredged spoil. The EPA accepts the definition of oil as the list provided by the USCG at <http://www.uscg.mil/vrp/faq/oil.shtml>.
- 4.9 Oil Pollution Act (OPA) of 1990** – OPA 1990 requires regulated facilities to submit spill response plans that address the facility owner's or operator's ability to respond to a "worst-case discharge." OPA 90 is being implemented by EPA under 40 CFR 112, Oil Pollution Prevention, Section 112.20, Facility Response Plans.
- 4.10 Oil Spill Response Plan** – An Oil Spill Response Plan provides information on responding to a spill at a facility and is intended to satisfy the requirements of the Oil Pollution Act of 1990; Facility Response Plan requirements of 40 CFR 112, Oil Pollution Prevention (EPA); Pipeline Response Plan requirements of 49 CFR 194, Response Plans for Onshore Oil Pipelines (RSPA); Facility Response Plan requirements of 33 CFR 154 Subpart F, Response Plans for Oil Facilities (USCG); and 30 CFR 254, Oil-Spill Response Requirements for Facilities Located Seaward of the Coast Line (MMS).
- 4.11 OSRO** – Oil Spill Response Organization
- 4.12 PREP** – National Preparedness for Response Exercise Program
- 4.13 Release** – synonymous with spill in this document. Williams' definition of a release is contained in the Release Reporting Guidelines which is maintained by the Environmental Group.
- 4.14 RSPA** – Research and Special Programs Administration
- 4.15 Spill Prevention, Countermeasures, and Control (SPCC) Plan** – An SPCC Plan provides information on spill prevention at a facility and is intended to satisfy the requirements of the SPCC Plan requirements in 40 CFR 112, Oil Pollution Prevention.

4.16 Underground Storage Tank (UST) – A tank that has all its surfaces below the existing grade.

4.17 USCG – United States Coast Guard

➤➤➤End of Procedure<<<

System Integrity Plan Change Log

Date	Change Location	Brief Description of Change
9/3/3	2.1.5	Deleted
	2.2.1 B	Added "O'Brien's Oil Pollution Services (OOPS) at 985-781-0804 and"
	2.2.2 B	Changed 48-72 to "4 working days"
	2.2.2 C	Changed to "For offshore releases: If the release is not reported to OOPS, the ES will complete the WES Release Report Form and distribute for review. All corrections must be provided to the ES in a return email within 4 working days of receipt. For releases reported to OOPS the ES will not distribute an initial report."
	2.2.3 B	Changed to "For off-shore or marine facility releases: The ES or Compliance Administrator will gather corrections and distribute the final report to all stakeholders via the final distribution list."
	2.3.3	Deleted Marine Facility and is responsible Rewrote to read "The Environmental Specialist is responsible for preparation of SPCC plans or FRP's ."
10/24/03	2.2.4.1	Deleted "Controlled by Area FOA"
	2.3.4.3	Deleted "If release is not reported to Oops"
	2.2.4.3	Deleted "for releases reported to Oops, the ES will not distribute an initial report."
	2.2.5.2	Deleted "marine facility"
	2.2.6.1	Deleted "there is no specific timeframe to submit this information."
	2.3.3.1	Deleted "or the SPCC/FRP Program Manager"
	2.3.3.3	Deleted "or the SPCC/FRP Program Manager"
	2.3.5	Deleted "Program Manager" and "Local"
9/15/04	2.1	Deleted for manned facilities Deleted daily facility Deleted for unmanned facilities perform daily inspections. Added Document Inspections on 0018 – Visual External Inspections.
	2.2	New - Test each aboveground container for integrity on a regular schedule and whenever you make material repairs. These tests are performed in accordance with <u>SIP-ADM-7.15 - Aboveground Storage Tank Integrity</u> Renumbered

<p>2.5</p>	<p>New Routine releases of storm water from containment areas shall be documented on <u>WES-87 – Record of Secondary Containment Discharge</u>. All other releases will be reported according to 6.04-ADM-002 – Release Reporting procedure.</p>
<p>2.5</p>	<p>Deleted:</p> <p>When to Initiate</p> <p>2.5.1 The first person to discover a spill/release at a facility will immediately take appropriate action to protect life, and ensure safety of personnel. An attempt will be made to mitigate the effects of the spill by terminating operations, closing valves, or taking other measures to stop the leak or spill as long as personnel are not in danger.</p> <p>2.5.2 For onshore releases: If the spill is reportable (refer to <u>6.04-ADM-002 - Release Reporting procedure</u>), the appropriate person (usually person discovering the release) will immediately notify the 24 hour O&TS release hotline at 1-888-677-2370 and, if necessary, local emergency response personnel/contractors.</p> <p style="text-align: center;">NOTE</p> <p>The current 24 hour O&TS release hotline is managed by a contractor, 3E. 3E provides 24-hour service/support, to include reporting major incidents and providing on-demand MSDSs.</p> <p>2.5.3 Offshore releases: If the spill creates a sheen (refer to <u>6.04-ADM-002 - Release Reporting procedure</u>), the appropriate person (usually person discovering the release) will immediately notify O'Brien's Oil Pollution Services (OOPS) at 985-781-0804 and the Environmental Specialist or his/her management team.</p> <p>2.5.4 Receiving and reviewing the initial release report</p> <p>2.5.4.1 Onshore releases: Within 24 hours, 3E will distribute an initial release report to the Area. The initial distribution will be made via Area e-mail boxes.</p> <p>2.5.4.2 Each person that receives an initial report is required to review the report for correctness and clarity. All corrections must be provided to 3E in a return e-mail within 4 working days of receipt.</p> <p>2.5.4.3 Offshore releases: The ES will complete the <u>WES-35 - Release Report Form</u> and distribute for review. All corrections must be provided to the ES in a return email within 4 working days of receipt.</p> <p>2.5.5 Receiving a final release report</p>

		<p>2.5.5.1 Onshore releases: 3E will gather the corrections from the <i>initial release report</i> and distribute a <i>final report</i> within 5 days of the release. The final report is sent to a distribution list controlled by Williams.</p> <p>2.5.5.2 Off-shore releases: The ES or Compliance Administrator will gather corrections and distribute the final report to all stakeholders using the appropriate area and final distribution lists.</p> <p>2.5.6 <i>Providing Follow-up Information on the Release</i></p> <p>2.5.6.1 The Operations Manager or his/her designee shall notify the local Environmental Specialist of the specific response measures taken to respond to the release and all follow-up actions that were taken as a result of the spill or release, if this information was not reported to 3E. It is recommended that the update be provided within 2 workdays of the actions being completed.</p>
	2.6 Note Box	Added See 6.04-ADM-003 – <u>Plans Required for Facilities-Pipelines</u> to determine the plans applicable to your facility/pipeline.
	2.6.6	Added This training may be coordinated with the Environmental Specialist as part of the required annual review.
	3.3.4	Added 0018 – Visual External Inspections Renumbered
	4.6	Deleted Hydrocarbons and Other Fluids definition

	System Integrity Plan	System Integrity Plan	Document No. 6.04-ADM-002	
		Revision No: 7	Effective Date: 01/01/05	Page: 1 of 10
<small>Procedure:</small> <p style="text-align: center;">RELEASE REPORTING</p>				

1.0 PURPOSE

- 1.1 To define the process for reporting releases and certain other events. The terms "release" and "spill" may be used synonymously within this procedure.

Note 1:

Due to the rigid timeframes for reporting to regulatory agencies (usually within one hour of an event) and the possibility for penalties associated with delayed reporting, **it is imperative that releases and events requiring reporting by this procedure are reported immediately. If you are unsure of the release amount do not delay reporting by attempting to exactly determine the amount. Report immediately with an estimate, and correct later.**

Note 2:

Third parties operating Company facilities (i.e., Hanover / POI) are responsible for reporting in accordance with this procedure.

2.0 PROCEDURE

2.1 Offshore Release Reporting (w/sheen on water)

- 2.1.1 Immediately report to O'Brien's Oil Pollution Services (OOPS) at 985-781-0804, your Environmental Specialist, and the DOT Compliance Coordinator (Tulsa) the following type(s) of offshore release(s):

2.1.1.1 Any release that causes sheen on water.

- 2.1.2 OOPS will immediately make the required telephonic notifications and submit written reports to the appropriate regulatory agencies, the appropriate Qualified Individual (QI), and the Environmental Specialist.

2.2 Offshore Release Reporting (w/o sheen on water)

- 2.2.1 Immediately report to your Environmental Specialist and the DOT Compliance Coordinator (Tulsa) the following type(s) of offshore release(s) or event(s):

2.2.1.1 Any Gas release >50 MSCF;

2.2.1.2 Any event that involves a release of any amount of Gas or Hazardous Liquid from a DOT Jurisdictional Pipeline or Pipeline Facility and a death or personal injury necessitating in-patient hospitalization;

2.2.1.3 Any DOT Jurisdictional Pipeline or Pipeline Facility event that results in estimated property damage, including cost of Gas or Hazardous Liquids lost **and/or**, costs of clean up or recovery of the operator **and/or** others \geq \$50,000;

- 2.2.1.4 Any unintentional, non-maintenance related release ≥ 5 gallons of a Hazardous Liquid from a DOT Jurisdictional Pipeline or Pipeline Facility;
- 2.2.1.5 Any release of Hazardous Liquid from a DOT Jurisdictional Pipeline or Pipeline Facility that results in explosion or fire not intentionally set by the operator; or
- 2.2.1.6 Any DOT Jurisdictional Pipeline or Pipeline Facility event that is significant, in the judgment of the operator, even though it did not meet any of the criteria in 2.3.2.1 through 2.3.1.6.
- 2.2.2 The Environmental Specialist and the DOT Compliance Coordinator will determine reportability and, if required, perform telephonic notifications in accordance with applicable regulations.
- 2.2.3 The Environmental Specialist will complete the WES - 35 Release Report Form and forward to the Release Report Database Compliance Specialist in Tulsa within 10 working days.
- 2.2.4 The Environmental Specialist will complete any required follow-up written reports and/or documentation for non-transportation events within regulatory timeframes in accordance with the Telephonic and Written Release Reporting Requirements.
- 2.2.5 The DOT Compliance Coordinator will complete any required follow-up reports and/or documentation for transportation related events within regulatory timeframes in accordance with the Telephonic and Written Release Reporting Requirements.

2.3 Onshore Releases

- 2.3.1 Immediately report to 3E Company at 888-677-2370 (toll free) the following type(s) of onshore release(s) or event(s):
 - 2.3.1.1 Any liquid release that enters, or is expected to enter, any waterway (i.e., ditch, arroyo, intermittent stream, etc.);
 - 2.3.1.2 Any individual liquid release (i.e., gasoline, diesel, MDEA, TEG, NGL, etc.) > 1 gallon;
 - 2.3.1.3 Any cumulative liquid release (i.e., gasoline, diesel, MDEA, TEG, NGL, etc.) > 5 gallons within a 24-hour period (drips, pinhole leaks, etc.). (NOTE: Report immediately upon determining, or suspecting that the 5 gallon/24 hour threshold will be met or exceeded);
 - 2.3.1.4 Any Gas release > 50 MSCF;
 - 2.3.1.5 Any event that involves a release of any amount of Gas or hazardous liquid from a DOT Jurisdictional Pipeline or Pipeline Facility and a death or personal injury necessitating in-patient hospitalization;

- 2.3.1.6 Any DOT Jurisdictional Pipeline or Pipeline Facility event that results in estimated property damage, including cost of Gas or hazardous liquids lost and/or, costs of clean up or recovery of the operator and/or others \geq \$50,000;
 - 2.3.1.7 Any unintentional, non-maintenance related release \geq 5 gallons of a hazardous liquid from a DOT Jurisdictional Pipeline or Pipeline Facility;
 - 2.3.1.8 Any release of hazardous liquid from a DOT Jurisdictional Pipeline or Pipeline Facility that results in explosion or fire not intentionally set by the operator; or
 - 2.3.1.9 Any DOT Jurisdictional Pipeline or Pipeline Facility event that is significant, in the judgment of the operator, even though it did not meet any of the criteria in 2.4.1.1 through 2.4.1.8.
- 2.3.2 3E Company will immediately make the required telephonic notifications in accordance with the Telephonic and Written Release Reporting Requirements.
 - 2.3.3 Information that will be needed when reporting to 3E is on WES-35 - Release Report Form.
 - 2.3.4 Refer to the Onshore Release/Spill Notification Flowchart for more information regarding the onshore reporting workflow.
 - 2.3.5 The Environmental Specialist will follow-up with Operations to verify that adequate response and reporting measures have been taken for each release and track closure of each release report with appropriate regulatory agencies.

Note:**Flares and Thermal Oxidizers**

Flares, thermal oxidizers and other pollution control devices typically have permit limits and conditions and may require tracking of flaring and/or other routine and/or non-routine events. Refer to your facility specific permit conditions. Immediately report any exceedance of permit limits or variance from permit to your Environmental Specialist, whom will notify the appropriate regulatory agency(s).

2.4 Planned / Scheduled Blowdowns

- 2.4.1 Notify your Environmental Specialist as far as possible in advance of planned / scheduled blowdowns that are not an exception per 2.5 of this procedure.
- 2.4.2 Be prepared to provide to your Environmental Specialist a current extended chromatographic analysis of the product to be released.

2.4.3 The Environmental Specialist will:

- 2.4.3.1 Review information provided;
- 2.4.3.2 Notify appropriate agencies;
- 2.4.3.3 Obtain required permits or permissions;
- 2.4.3.4 Provide Operations with any special conditions and / or limitations to be observed before, during, and/or after the planned / scheduled blowdown event; and
- 2.4.3.5 Perform any required post event reporting or follow-up to agencies.

2.5 Exceptions to Procedure:

- 2.5.1 Sheen on rainwater within facilities, dikes, valve boxes, etc.. that is not the result of a release event. However, one must follow proper disposal and housekeeping practices for these cases.
- 2.5.2 Routine releases to pollution control devices (flares, thermal oxidizers, etc.) **in accordance with permit conditions or limitations.**
- 2.5.3 Site-specific procedures may qualify as an exception, if reviewed and approved by your Environmental Specialist.

2.5 Post Report Follow-up (for Remediation and Cost Purposes)

- 2.5.1 Within 45 days of any release that affected soil or water, Operations will submit to the Environmental Specialist the following information:
 - 2.5.1.1 Quantity of soil, water, or product removed as a result of a release;
 - 2.5.1.2 Disposition of soil, water, or product removed (i.e., land, farm, landfill, disposal, etc.);
 - 2.5.1.3 Update of costs incurred because of release. (Includes value of lost product, repair costs response costs, clean up costs, disposal costs, etc.)
 - 2.5.1.4 Environmental Specialist will update release database with additional information from 2.5.1.1 through 2.5.1.3.

2.6 Release Database

- 2.6.1 The Tulsa Release Reporting Compliance Specialist will maintain the release database and update with follow-up information from 2.5.1.1 through 2.5.1.3 above.

3.0 REFERENCES

3.1 Regulatory

- 3.1.1 Various regulatory requirements at the State and Federal levels require reporting of releases and/or release events.
- 3.1.2 49 CFR 191, 192 and 195

3.2 Related Policies/Procedures

- 3.2.1 SIP-ADM-6.04 - Pollution Prevention and Spill Response
- 3.2.2 5.05-ADM-002 - Accident Reporting
- 3.2.3 SIP-ADM-12.01 Emergency Response and Planning

3.3 Forms and Attachments

- 3.3.1 WES-35 - Release Report Form
- 3.3.2 Onshore Release/Spill Notification Flow Chart
- 3.3.3 Telephonic and Written Release Reporting Requirements
- 3.3.4 SIP Feedback/Change Request

4.0 DEFINITIONS

- 4.1 **Liquid** - For the purposes of these reporting criteria, a substance should be considered a liquid if it is transported or stored in liquid form. Liquid releases should be reported using the measurement unit used when transporting the product (i.e., gallons/barrels).
- 4.2 **Gas** - For the purposes of these reporting criteria, a substance should be considered a gas if it is transported or stored in gaseous state. Gas releases should be reported using the measurement unit used when transporting the product (i.e., m.s.c.f.).
- 4.3 **Facility Boundary** - The Facility Boundary is the area within the fenced perimeter or the property line. If no fence or clear property line exists, then the facility boundary is that area clearly maintained by Operations (graveled, mowed, cleared, etc.), excluding pipeline rights-of-way.
- 4.4 **Offshore Release** - Any release that occurs seaward of the coastline or in an onshore Tidally Affected Zone.

- 4.5 **Onshore Release** - Any release that does not occur offshore in a Tidally Affected Zone.
- 4.6 **Tidally Affected Zone** - Relating to or affected by tides: *the tidal maximum; tidal pools; tidal waters.*
- 4.7 **DOT jurisdictional Pipeline or Pipeline Facility** – Pipeline or pipeline facility subject to 49 CFR Parts 192 or 195.
- 4.8 **Hazardous Liquid** – Per 49 CFR 195.2 - petroleum, petroleum products, or anhydrous ammonia.

➤➤➤End of Procedure<<<

System Integrity Plan Change Log

Date	Change Location	Brief Description of Change
01/20/03		Added link to Onshore Release/Spill Notification Flowchart
	2.0	Deleted Scope
	3.1	<p>Deleted "Certain Company operated assets can be the source of hydrocarbon or other fluid releases or atmospheric releases into the environment. Although we can learn much about our assets and operating practices by tracking <u>all</u> releases, the procedure below has been developed so that the Company can allocate its resources most appropriately. However, every spill situation is different: If there is a realistic risk of exposure to the public, livestock, the soil or ground water, the event and condition must be reported. Proper reporting ensures a proper response."</p> <p>Added "This procedure applies to liquid and gas releases"</p>
	3.2	Deleted "direct the administration of all Release reporting in their area and provide the following:"
	3.2 bullet	<p>Deleted "Provide reportable release volumes to Operations, as requested, for common routine, intentional, maintenance blow-down events."</p> <p>Deleted "Compile all submitted release data to calculate total release-related associated costs for their area."</p> <p>Rewrote to read "Submit release follow-up information to the applicable regulatory agencies"</p>
	4.1	Added "Liquid releases should be reported using the measurement unit used when transporting the product"
	4.4	Added "A deliberate, controlled release of gaseous or liquid material to the environment"
	5.0	Deleted Responsibilities
	6.1	Added "Onshore"
7/11/03	1.0	Delete "The purpose of this procedure is to provide a standard method for determining what constitutes a", reportable and details instruction on what needs to be done when a reportable release occurs"
7/11/03	2.0	Delete "SCOPE"
	2.1	Deleted "Applies To - all of Williams Energy Services' domestic Midstream/NGL and inland Transportation and Terminal facilities."

	2.2	Deleted "Exceptions - Williams Energy Canada (WEC) Foreign assets, marine terminals, and offshore assets. Marine facilities and offshore assets will report releases in accordance with facility specific Offshore Spill Response Plans and reportable quantities. The Offshore Spill Notification Matrix should also be adhered to. Foreign locations WEC will report releases per their WEC management team's guidelines."
	3.1	Deleted "Certain Company operated assets can be the source of hydrocarbon or other fluid releases or atmospheric releases into the environment. Although we can learn much about our assets and operating practices by tracking all releases, the procedure below has been developed so that the Company can allocate its resources most appropriately. However, every spill situation is different: If there is a realistic risk of exposure to the public, livestock, the soil or ground water, the event and condition must be reported. Proper reporting ensures a proper response." Added "This procedure applies to liquid and gas releases."
	3.2	Deleted "Administration", "direct the administration of all Release reporting in their area and provide the following", "liquid maintenance", "Provide reportable release volumes to Operations, as requested, for common routine intentional maintenance blow-down events", "Compile all submitted release data to calculate total release costs for their area.", "Each Environmental Specialist will communicate to their respective Area the required timeframes for submittal." Added "Submit to the applicable regulatory agencies"
	4.0	Moved "Definitions" to end of document
	5.0	Deleted "Responsibilities" Section
7/11/03	6.1	Added "Offshore Releases - Operations will immediately report all offshore releases to O'Brien Oil Pollution Services (985-781-0804) and to the Environmental Specialist. O'Brien will make the required notifications and reports to the appropriate regulatory agencies in accordance with the (add O'Brien matrix)"
	6.1.1	Added "The Environmental Specialist will complete the WES 35 - Release Report Form and forward to the Compliance Specialist in Tulsa within 5 working days"
	6.2	Deleted "or their designee", "(or within 15 minutes if an ammonia release"
	6.2.1	Deleted "Due to a system/part failure", within a 24 hour period (unless excluded by", "Any non-maintenance release from a pipeline 5 gallons or greater (i.e., seal failure or leaking valve) Added "where the release", "within a 24-hour period"

RELEASE REPORTING

6.04-ADM-002

	6.2.2	Deleted "Sheen on rainwater puddles in a facility (follow proper housekeeping practices)", NOTE - FLARES" "A permitted flare may have permit limits and may require tracking of flaring events Exceedance of permit limits must be immediately reported to your local Environmental Specialist, not to the toll free number", " with the exception of ammonia which must be reported for any release of 20 gallons (100 pounds) or more." Added "Routine", "A permitted flare may have permit limits and may require tracking of flaring events. Exceedance of permit limits must be immediately report to your local Environmental Specialist not to the toll-free number"
	6.2.3	Deleted "can be found at the link provided in Section 7/3. (WES-35 - Release Report Form.xls). (Changed this to a link and changed the title of the link" Added "onshore releases is listed in WES-35 Release Report Form
7/11/03	6.2.4	Deleted "NOTE - RESPONSE MEASURES The Environmental Specialist will contact local Operations to ensure adequate response measures have been taken for each release event and to track closure of each release event wit the appropriate regulatory agencies (if necessary). Added "The third party contractor will notify the appropriate regulatory agencies in accordance with the Release Matrices"
	6.3	Change "90" to "45", "record" to "database" Deleted "(KC filter press, contract disposal, etc.),",
	7.2.1	Added "Pollution Prevention and Spill Response"
	7.3	Added " <u>Release Report Form. WES-35</u> (changed the title of the link)" " <u>Offshore Incident Notification Matrix</u> ", " <u>Onshore Release/Spill Notification Flowchart</u> ", "O'Brien Matrix"
8/22/03	2.2.2	Added "Allow sufficient time for Operations..."
	2.0	Added "Written reports are required..." to Note section
	3.1.7	Deleted "within one hour of occurrence or discovery"
	2.4.7	Added "Some materials, such a ethylene/propylene..."
	2.4.12	Added "Louisiana allows 1.0 MMscf releases without approval or notification..."
	2.5	Added "Compliance Specialist" for maintaining database
9/3/3	3.3.3	Deleted "any release that exists an offshore platform and causes a sheen"

RELEASE/SPILL REPORTING

MATERIAL SAFETY DATA SHEETS

CHEMICAL EXPOSURES/POISONINGS

Dial

24HRS/DAY - 7DAYS/WEEK

1-888-677-2370

Info you should have when calling:

- **Time of Release/Spill**
- **Location of the Release**
- **Asset where Release Occurred**
- **Amount Released**
- **Name of Chemical or Product Released**



3E COMPANY

1905 Aston Avenue, Carlsbad, CA 92008

Telephone: 760-602-8700

Fax: 760-602-8888

Release/Spill Report Form

Month Day Year
 Release Verification Time: Release Stop Time:
 Region District Area
 Location Name Location Identifier
 Mainline Name Mainline Identifier
 Area Manager Company Asset State
 Address County Zip Code
 Release Discovered by: Time
 Release Reported by: Time
 Section Township Range NDEP Tract #
 Offshore Latitude Longitude
 Release Reportable? Waterway Affected? Name

Report	Date	Number	Time	Name	Title	City	State
NRG <input type="checkbox"/>							
SERC <input type="checkbox"/>							
LEPC <input type="checkbox"/>							
TRRC <input type="checkbox"/>							
EPA <input type="checkbox"/>							
Other <input type="checkbox"/>							

 Product Released: Total BBL's Released 0
 Cause of Release: BBL's Recovered Wet 0
 Released To: Other: BBL's Recovered Soil 0
 BBL's Not Recovered 0
 Remarks:

 Origin Of Release:
 Temperature Relative Humidity Precipitation
 Cloud Cover Wind Speed Wind Direction
 Injury Death Fire Explosion
 Unconsciousness Hospitalization
 Loss/Damage Estimate
 Incident Investigator:
 Environmental Contact for this Release:
 Safety Contact for this Release:
 Compliance Administrator for this area:
 Form completed by:
 Completion Date:
 Form was e-mailed to Williams on:

Appendix B
NMOCD Notification and Corrective Action

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-141
Revised October 10, 2003

Submit 2 Copies to appropriate
District Office in accordance
with Rule 116 on back
side of form

Release Notification and Corrective Action

OPERATOR

Initial Report Final Report

Name of Company	Contact	
Address	Telephone No.	
Facility Name	Facility Type	
Surface Owner	Mineral Owner	Lease No.

LOCATION OF RELEASE

Unit Letter	Section	Township	Range	Feet from the	North/South Line	Feet from the	East/West Line	County

Latitude _____ Longitude _____

NATURE OF RELEASE

Type of Release	Volume of Release	Volume Recovered
Source of Release	Date and Hour of Occurrence	Date and Hour of Discovery
Was Immediate Notice Given? <input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> Not Required	If YES, To Whom?	
By Whom?	Date and Hour	
Was a Watercourse Reached? <input type="checkbox"/> Yes <input type="checkbox"/> No	If YES, Volume Impacting the Watercourse.	

If a Watercourse was Impacted, Describe Fully.*

Describe Cause of Problem and Remedial Action Taken.*

Describe Area Affected and Cleanup Action Taken.*

I hereby certify that the information given above is true and complete to the best of my knowledge and understand that pursuant to NMOCD rules and regulations all operators are required to report and/or file certain release notifications and perform corrective actions for releases which may endanger public health or the environment. The acceptance of a C-141 report by the NMOCD marked as "Final Report" does not relieve the operator of liability should their operations have failed to adequately investigate and remediate contamination that pose a threat to ground water, surface water, human health or the environment. In addition, NMOCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other federal, state, or local laws and/or regulations.

Signature:	OIL CONSERVATION DIVISION	
	Approved by District Supervisor:	
Printed Name:	Approval Date:	Expiration Date:
Title:	Conditions of Approval:	
E-mail Address:	Attached <input type="checkbox"/>	
Date:	Phone:	

* Attach Additional Sheets If Necessary

Appendix C
Public Notice

PUBLIC NOTICE

Notice of Discharge Plan Renewal Application

Middle Mesa Central Delivery Point

Pursuant to the requirements of the New Mexico Water Quality Control Commission Regulation 20 NMAC 2.6.2 – GROUND AND SURFACE WATER PROTECTION, Williams Field Services Company of 188 County Road 4900, Bloomfield, NM 87413, hereby announces intent to apply to the New Mexico Oil Conservation Division to renew the Discharge Plan for the Middle Mesa Central Delivery Point. Williams expects to submit the permit application to the Oil Conservation Division in January 2006.

The facility, located in Section 10, Township 31 North, Range 7 West, San Juan County, New Mexico, approximately 27 miles northeast of Bloomfield, provides natural gas compression and conditioning services.

The discharge permit addresses how spills, leaks, and other accidental discharges to the surface will be managed. The facility does not discharge wastewater to surface or subsurface waters. All wastes generated will be temporarily stored in tanks or containers. Waste shipped offsite will be disposed or recycled at an OCD approved site. In the event of an accidental discharge, ground water most likely will not be affected. The estimated ground water depth at the site is expected to be at least 500 to 900 feet. The total dissolved solids concentration of area ground water is expected to be in the range of 200-2,000 parts per million.

Comments or inquiries regarding this permit or the permitting process may be directed to:

Director of the Oil Conservation Division
1220 South Saint Francis Dr.
Santa Fe NM 87505
(505) 827-1464

Please refer to the company name and site name, as used in this notice, or send a copy of this notice when making inquiries, since the Department might not have received the application at the time of this notice.



Four Corners Area
 Environmental Department
 #188 County Road 4900
 Bloomfield, N.M. 87413
 Phone: (505) 632-4625
 Fax: (505) 632-4781

December 23, 2005

CERTIFIED MAIL - RETURN RECEIPT REQUESTED

Bureau of Land Management
 1235 N. La Plata Highway
 Farmington, NM 87401

Dear Madam/Sir:

This letter is to advise you that Williams Field Services Company is preparing to submit to the Oil Conservation Division a Discharge Plan Renewal application for the permitted Middle Mesa Central Delivery Point (GW-064). This notice is a requirement pursuant to New Mexico Water Quality Control Commission Regulations. We expect to submit the Discharge Plan Renewal application to the Oil Conservation Division during January 2006.


The facility, located in Section 10, Township 31 North, Range 7 West, San Juan County, New Mexico, approximately 27 miles northeast of Bloomfield, provides natural gas compression and conditioning services.

The discharge permit addresses how spills, leaks, and other accidental discharges to the surface will be managed. The facility does not discharge wastewater to surface or subsurface waters. All wastes generated will be temporarily stored in tanks or containers. Waste shipped offsite will be disposed or recycled at an OCD approved site. In the event of an accidental discharge, ground water most likely will not be affected. The estimated ground water depth at the site is expected to be at least 500 to 900 feet. The total dissolved solids concentration of area ground water is expected to be in the range of 200-2,000 parts per million.

Comments or inquiries regarding this permit or the permitting process may be directed to:

Director of the Oil Conservation Division
 1220 South Saint Francis Dr.
 Santa Fe NM 87505

Respectfully submitted,

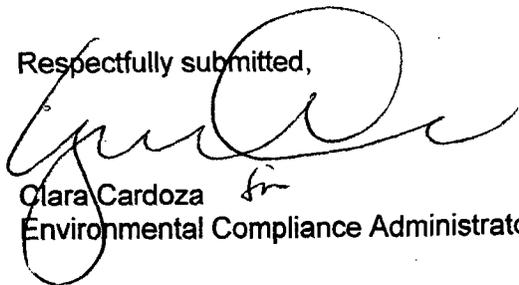

Clara Cardoza
 Environmental Compliance Administrator

7004 2510 0005 2372 4705

US Postal Service	
CERTIFIED MAIL RECEIPT	
FARMINGTON, NM 87401	
OFFICIAL USE	
Postage	\$ 0.37
Certified Fee	2.30
Return Receipt Fee (Endorsement Required)	1.75
Restricted Delivery Fee (Endorsement Required)	
Total Postage & Fees	\$ 4.42

DEC 23 2005
 USPS 12/23/05

Sent To: BLM
 Street, Apt. No. or PO Box No.: 1235 N. La Plata Hwy
 City, State, ZIP: Farmington, NM 87401

ACKNOWLEDGEMENT OF RECEIPT
OF CHECK/CASH

I hereby acknowledge receipt of check No. [redacted] dated 4/14/06

or cash received on _____ in the amount of \$ 1700⁰⁰

from Williams Field Services Co.

for Middle Mesa CS GW-064

Submitted by: Lawrence K... Date: 4/20/06

Submitted to ASD by: Lawrence K... Date: 4/20/06

Received in ASD by: _____ Date: _____

Filing Fee _____ New Facility _____ Renewal _____

Modification _____ Other _____

Organization Code 521.07 Applicable FY 2004

To be deposited in the Water Quality Management Fund.

Full Payment or Annual Increment _____

THIS MULTI-TONE AREA OF THE DOCUMENT CHANGES COLOR GRADUALLY AND EVENLY FROM DARK TO LIGHT WITH DARKER AREAS BOTH TOP AND BOTTOM. IT ALSO HAS A REFLECTIVE WATERMARK ON THE BACK.



WILLIAMS FIELD SERVICES COMPANY
PO Box 21218
Tulsa, OK 74121-1218
Customer Support 1-866-778-2665

JPMorgan Chase Bank, N.A.
Chicago, IL

770-3122-7115
A/C 2401157



DATE: 04/14/2006

PAY TO THE ORDER OF:

PAY →

\$*****7,600.00

USD

WATER MANAGEMENT QUALITY MANAGEMENT FUND
C/O OIL CONSERVATION DIV
1220 S ST FRANCIS DR

SANTA FE
UNITED STATES

NM 87505

John Humphill

Authorized Signer

SUPPLIER NUMBER
400443

GW-062 GW-063 GW-064 GW-078 GW-079 GW-112



AFFIDAVIT OF PUBLICATION

Ad No. 53016

STATE OF NEW MEXICO
County of San Juan:

CONNIE PRUITT, being duly sworn says:
That she is the ADVERTISING MANAGER of
THE DAILY TIMES, a daily newspaper of
general circulation published in English at
Farmington, said county and state, and that
the hereto attached Legal Notice was
published in a regular and entire issue of the
said DAILY TIMES, a daily newspaper duly
qualified for the purpose within the meaning of
Chapter 167 of the 1937 Session Laws of the
State of New Mexico for publication and
appeared in the Internet at The Daily Times
web site on the following day(s):

Thursday, February 23, 2006.

And the cost of the publication is \$131.44.

Connie Pruitt

ON 2/23/06 CONNIE PRUITT
appeared before me, whom I know personally
to be the person who signed the above
document.

Wynell Corey
My Commission Expires November 17, 2008

COPY OF PUBLICATION

916 Legals

NOTICE OF PUBLICATION
STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION

Notice is hereby given that pursuant to New Mexico Water Quality Control Commission Regulations, the following discharge plan application has been submitted to the Director of the Oil Conservation Division, 1220 S. St. Francis, Santa Fe, New Mexico 87505, Telephone (505) 476-3470:

(GW-062) - Williams Field Service, David Bays, Environmental Specialist, 188 CR 4900, Bloomfield, New Mexico 87413, has submitted a discharge permit renewal application for their Manzanaras CDP compressor station located in the SE/4 SW/4, Section 28, Township 30 North, Range 8 West, NMPM, San Juan County, New Mexico. Approximately 14 barrels per day of exempt waste water is collected and stored in an above ground bermed closed top tank prior to transport to an OCD approved off-site disposal facility. The discharge permit addresses how oilfield products and waste will be properly handled, stored and disposed of, including how spills, leaks, and other accidental discharges to the surface will be managed in order to protect fresh water. Groundwater most likely to be affected by an accidental discharge is at a depth of 80 feet with a total dissolved solids concentrations of approximately 3150 mg/l.

(GW-063) - Williams Field Service, David Bays, Environmental Specialist, 188 CR 4900, Bloomfield, New Mexico 87413, has submitted a discharge permit renewal application for their Pump Mesa CDP compressor station located in the SW/4 SE/4, Section 14, Township 31 North, Range 8 West, NMPM, San Juan County, New Mexico. Approximately 145 gallons per day of exempt waste water is collected and stored in an above ground bermed closed top tank prior to transport to an OCD approved off-site disposal facility. The discharge permit addresses how oilfield products and waste will be properly handled, stored and disposed of, including how spills, leaks, and other accidental discharges to the surface will be managed in order to protect fresh water. Groundwater most likely to be affected by an accidental discharge is at a depth of approximately 390 feet with a total dissolved solids concentrations of approximately 9800 mg/l.

(GW-064) - Williams Field Service, David Bays, Environmental Specialist, 188 CR 4900, Bloomfield, New Mexico 87413, has submitted a discharge permit renewal application for their Middle Mesa compressor station located in the SE/4 SW/4, Section 10, Township 31 North, Range 7 West, NMPM, San Juan County, New Mexico. Approximately 145 gallons per day of exempt waste water is collected and stored in an above ground bermed closed top tank prior to transport to an OCD approved off-site disposal facility. The discharge permit addresses how oilfield products and waste will be properly handled, stored and disposed of, including how spills, leaks, and other accidental discharges to the surface will be managed in order to protect fresh water. Groundwater most likely to be affected by an accidental discharge is at a depth of approximately 420 feet with a total dissolved solids concentrations of approximately 900 mg/l.

Any interested person may obtain further information from the Oil Conservation Division and may submit written comments to the Director of the Oil Conservation Division at the address given above. The discharge plan application may be viewed at the above address between 8:00 a.m. and 4:00 p.m., Monday through Friday. Prior to ruling on any proposed discharge plan or its modification, the Director of the Oil Conservation Division shall allow at least thirty (30) days after the date of publication of this notice during which comments may be submitted to him and a public hearing may be requested by any interested person. Requests for a public hearing shall set forth the reasons why a hearing should be held. A hearing will be held if the Director determines there is significant public interest.

If no public hearing is held, the Director will approve or disapprove the proposed plan based on information available. If a public hearing is held, the director will approve or disapprove the proposed plan based on information in the plan and information submitted at the hearing.

GIVEN under the Seal of New Mexico Oil Conservation Commission at Santa Fe New Mexico, on this 21st day of February 2006.

STATE OF NEW MEXICO
OIL CONSERVATION DIVISION

SEAL Mark E. Fesmire, P.E., Director

Legal No. 53016 published in The Daily Times, Farmington, New Mexico on Thursday, February 23, 2006.



Environmental Affairs
188 CR 4900
Bloomfield, NM 87413
505/632-4606
505/632-4781 Fax

April 18, 2006

Mr. Jack Ford
New Mexico Oil Conservation Division
Water Quality Management Fund
2040 South Pacheco
Santa Fe NM 87505

Re: Discharge Plan GW-062, -063, -064, -078, -079 and -112

Dear Mr. Ford:

Enclosed please find the signed copy of the discharge plan conditions for the following Williams Field Services (WFS) sites:

- Manzanares CDP (GW-062)
- Pump Mesa CDP (GW-063)
- Middle Mesa CS (GW-064)
- 5-Points CS (GW-078)
- Wild Horse CS (GW-079)
- Carracas CS (GW-112)

Also included is check 4027013955 for \$7600 to cover the flat fee required by the approval conditions for all sites.

Williams Field Services appreciates your assistance in handling these approvals and processing the fees. If you have any questions or require additional information, please contact me at 505/632/4606.

Thank you,

A handwritten signature in black ink, appearing to read "Clara M. Cardoza".

Clara M. Cardoza
Environmental Compliance

enclosures

2006 AUG 23 AM 11 44



Environmental Department
188 County Road 4900
Bloomfield, NM 87413
505/632-4606
505/632-4781 Fax

August 22, 2006

Mr. Wayne Price
New Mexico Oil Conservation Division
Environmental Bureau
1220 South St. Francis Drive
Santa Fe, NM 87505

Re: Change of Company Name

Dear Mr. Price;

In accordance with Conditions of Discharge Plan Approval attached to each discharge plan approved by the New Mexico Oil Conservation Division, we hereby provide notice of a change of ownership for the Williams facilities identified in the attached table to Williams Four Corners, LLC.

As a corporate strategy, Williams has created regional limited liability corporations for our assets. So, although a new corporation has been created, Williams Four Corners LLC is still a wholly-owned unit of Williams, and there is no change of corporate ownership for these facilities. Williams will continue to comply with the terms and conditions of all approved discharge plans. All other administrative items (responsible official, environmental contacts, mailing addresses, etc.) remain unchanged.

If you have any questions, please call David Bays, Senior Environmental Specialist, at (505) 632-4951 or Ingrid Deklau of Cirrus Consulting at (801) 583-3107.

Sincerely,

A handwritten signature in cursive script that reads "David Bays".

David Bays
Senior Environmental Specialist

Attachments

xc: Clara Cardoza
Monica Sandoval
WFS FCA file 210



NEW MEXICO ENERGY, MINERALS and NATURAL RESOURCES DEPARTMENT

GARY E. JOHNSON
Governor
Betty Rivera
Cabinet Secretary

Lori Wrotenberg
Director
Oil Conservation Division

August 14, 2002

CERTIFIED MAIL
RETURN RECEIPT NO. 3929 9086

Mr. Mark J. Baretta
Williams Field Services
188 CR 4900
Bloomfield, New Mexico 87413

RE: Site Modification Notification
GW-064, Middle Mesa Compressor Station
San Juan County, New Mexico

Dear Mr. Baretta:

The OCD has received the site modification letter, dated July 12, 2002, from Williams Field Services for the Middle Mesa Compressor Station GW-064 located in SE/4 SW/4 of Section 10, Township 31 North, Range 7 West, NMPM, San Juan County, New Mexico. **The discharge plan modification as applies to the description of glycol overflow storage tanks located on the dehydrator skids is approved without modification to the requirements of the discharge plan renewal approved June 6, 2001.**

Please note that Section 3104 of the regulations requires that **“When a plan has been approved, discharges must be consistent with the terms and conditions of the plan.”** Pursuant to Section 3107.C Williams Field Services is required to notify the Director of any facility expansion, production increase, or process modification that would result in any change in the discharge of water quality or volume. Further, this approval does not relieve Williams Field Services from liability should operations result in contamination to the environment.

Sincerely,

W. Jack Ford, C.P.G.
Environmental Bureau
Oil Conservation Division

cc: Mr. Denny Foust - Aztec District Office

U.S. Postal Service CERTIFIED MAIL RECEIPT <i>Ford</i> <small>(Domestic Mail Only; No Insurance Coverage Provided)</small>	
OFFICIAL USE	
Postage \$	
Certified Fee	
Return Receipt Fee (Endorsement Required)	
Restricted Delivery Fee (Endorsement Required)	
Total Postage & Fees \$	
Sent To <i>M. Baretta</i>	
Street, Apt. No., or PO Box No. <i>87503</i>	
City, State, ZIP+4 <i>GW-064</i>	
PS Form 3800, January 2001 See Reverse for Instructions	

9086 3929 4000 0417 7001

SANTA FE NM
AUG 5 2005



Four Corners Area
Environmental Department
#188 CR 4900
Bloomfield, N.M. 87413
Phone: (505) 634-4956
Fax: (505) 632-4781

July 12, 2002

Mr. Jack Ford
State of New Mexico
Oil Conservation Division
1220 South St. Francis Drive
Santa Fe, NM 87505

RECEIVED

AUG 13 2002
Environmental Bureau
Oil Conservation Division

Re: **Middle Mesa CDP Compressor Station (GW-64) Discharge Plan Modification**

Dear Mr. Ford:

Please be advised that six 35-gallon glycol overflow storage tanks have not been described previously in the site's Discharge Plans. The storage tanks are located on the dehydrator skids within concrete containment. The containment is at least 133% of the tank capacity.

The tank location is highlighted on attached facility plot plan. An updated Table 2 is attached. Please make note of this change in the facility's Discharge Plan.

If you have any questions or require additional information, I can be reached at (505) 634-4956.

Sincerely,


Ethel Holiday
Environmental Compliance Specialist

Attachments: Middle Mesa CDP Plot Plan
Table 2

Xc: Denny Foust, Aztec OCD

Project	MIDDLE MESA COMPRESSOR STATION	Tab	13	Document No.	42.13.001
Section	SPILL PREVENTION CONTROL & COUNTERMEASURE PLAN	Issue No.	01	Page No.	3 of 8
Effective Date	12/16/99				

ATTACHMENT "A" PRODUCT AND WASTE STORAGE LOCATIONS

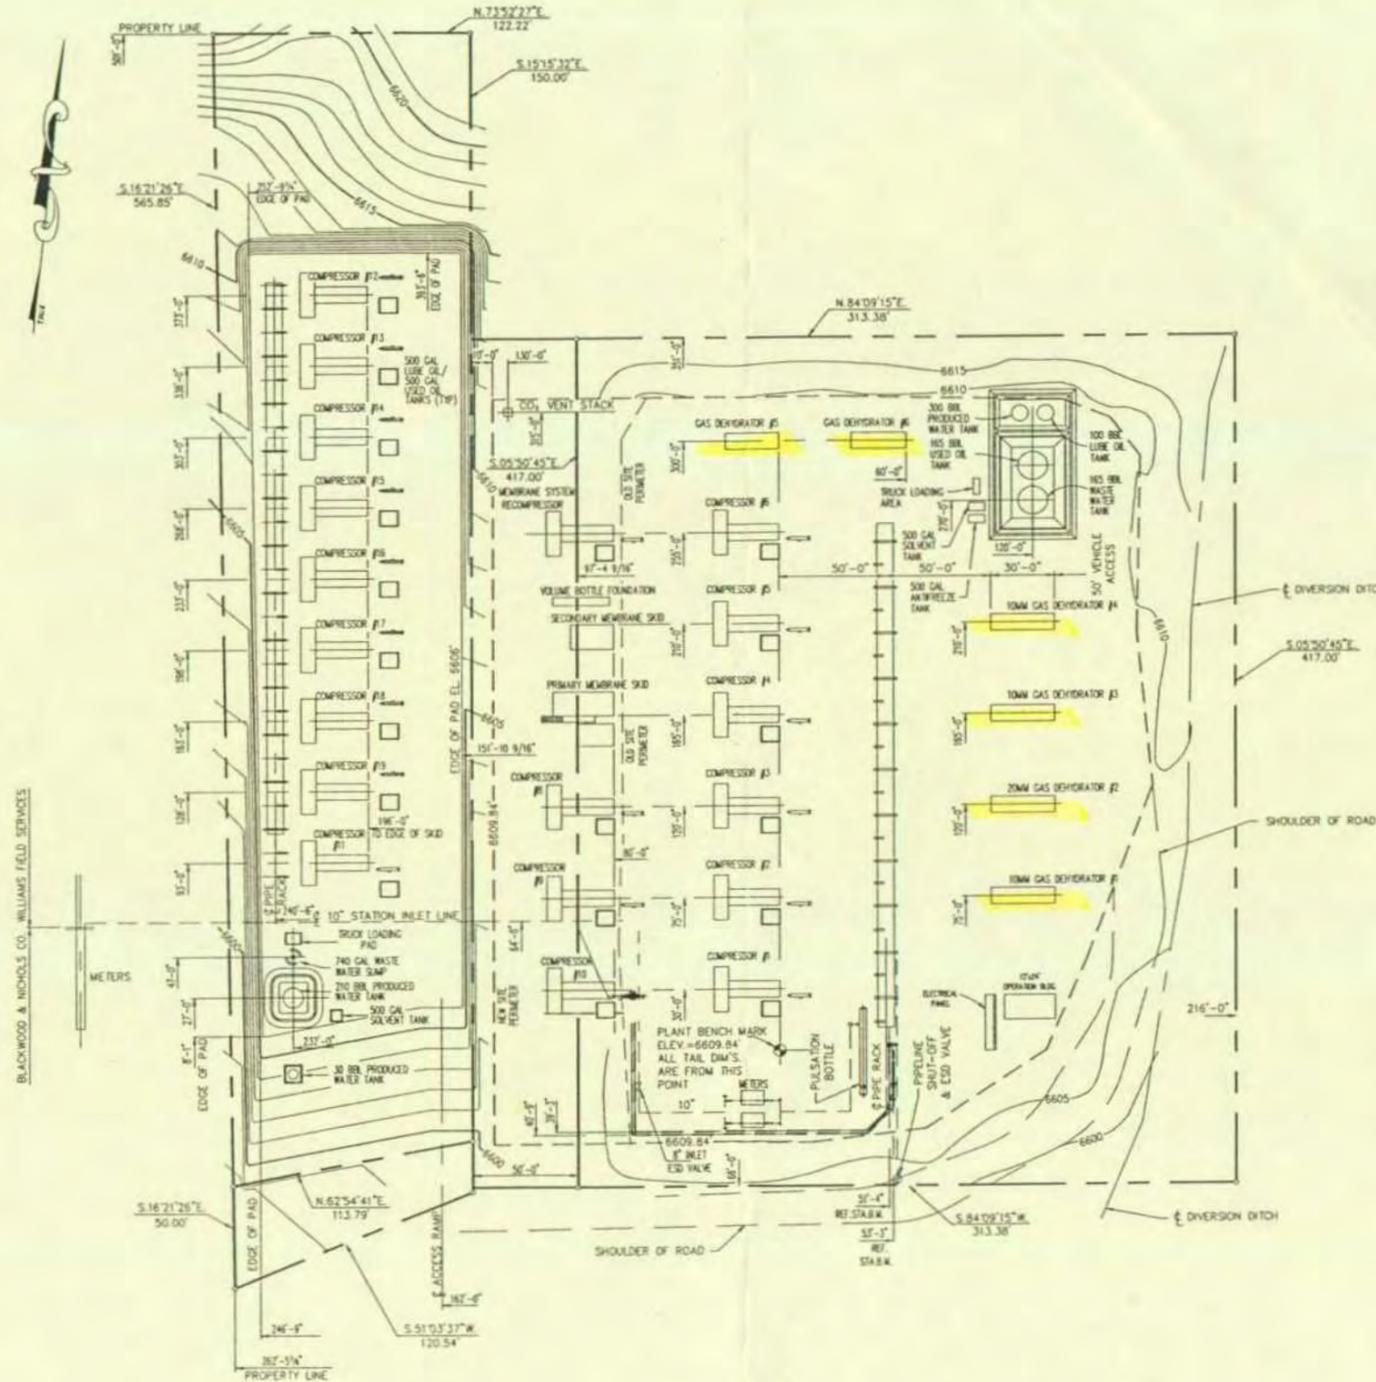

										DRAFTING	BY	DATE	STATE: NEW MEXICO	WILLIAMS GAS PROCESSING ONE OF THE WILLIAMS COMPANIES
										DRAWN BY	BES	12/16/99	COUNTY: RIO ARriba	
										CHECKER BY			MIDDLE MESA COMPRESSOR STATION SPILL PREVENTION CONTROL & COUNTERMEASURE PLAN PLOT PLAN	
										APPROVED BY				
										ENGINEER	BY	DATE	SCALE: 1" = 40'-0"	
										DESIGNED BY				
										PROJ. APPROVED			DWG NO.	MID-1-P16
										REVISIONS				01
REFERENCE DRAWINGS														
REFERENCE DRAWINGS														

TABLE 2
TRANSFER, STORAGE, AND DISPOSAL OF PROCESS FLUIDS, EFFLUENTS, AND WASTE SOLIDS
MIDDLE MESA CDP COMPRESSOR STATION

PROCESS FLUID/WASTE	STORAGE	CONTAINER CAPACITY (approximate)	CONTAINMENT/ SPILL PREVENTION	RCRA STATUS	DESCRIPTION OF FINAL DISPOSITION
Used Oil	Above ground storage tank	(9) 500 gallons 165 bbl	Berm	Non-exempt	May be hauled to a WFS or contactor consolidation point before transport to EPA-registered used oil marketer for recycling.
Used Oil Filters	Drum or other container	Varies	Transported to a WFS or contractor facility in drum or other container	Non-exempt	Transported to a WFS or contractor consolidation point, drained, and ultimately transported for disposal at an approved disposal facility. A Waste Acceptance Profile will be filed with the disposal facility. Recycling options may be considered when available.
Natural Gas Condensate	Above Ground Storage Tanks	210 bbl 300 bbl	Berm	Exempt	Saleable liquids may be sold to refinery or liquid may be disposed at NMOCD- approved facility.
Waste Water/ Wash-down Water	Below-grade vaulted tank	165 bbl 30 bbl 740 gallons	Berm	Exempt	Water may be transported to NMOCD-approved facility; or evaporation at WFS facility may be considered in future.
Used Process Filters	Drum or other container	Varies	Transported to a WFS or contractor facility in drum or other container	Exempt	Transported to a WFS or contractor consolidation point, drained, and ultimately transported for disposal at an approved disposal facility. A Waste Acceptance Profile will be filed with the disposal facility. Recycling options may be considered when available.
Empty Drums / Containers	N/A	N/A	Berm	Non -exempt	Barrels are returned to supplier or transported to a WFS or contractor consolidation point and ultimately recycled/disposed
Spill Residue (i.e., soil, gravel)	N/A	N/A	In situ treatment, land-farm, or alternate method	Incident dependent	Per Section VI, Remediation, in 8/13/93 NMOCD Guidelines for Remediation of Leaks, Spills, and Releases.
Used Absorbents	Drum or other container	Varies	Transported to a WFS or contractor facility in drum or other container	Non-exempt	Transported to a WFS or contractor consolidation point, drained, and ultimately transported for disposal at an approved disposal facility. A Waste Acceptance Profile will be filed with the disposal facility. Recycling options may be considered when available.
Glycol	Above ground storage tanks	(6) 100 gallons (6) 35 gallons 500 gallons	Berm	N/A	Off-spec material recycled or disposed consistent with applicable regulations.
Solvent	Above ground storage tanks	(2) 500 gallons	Berm	N/A	Off-spec material recycled or disposed consistent with applicable regulations.
Compressor Oil	Above ground storage tanks	(19) 500 gallons 100 bbl	Berm	N/A	Off-spec material recycled or disposed consistent with applicable regulations.



Four Corners Area
Environmental Department
#188 CR 4900
Bloomfield, N.M. 87413

RECEIVED

DEC 07 2001

Environmental Bureau
Oil Conservation Division

December 7, 2001

Mr. Jack Ford
State of New Mexico
Oil Conservation Division
1220 South St. Francis Drive
Santa Fe, NM 87505

Re: Drain Line Testing Results at Various Williams Field Services Facilities


Dear Mr. Ford:

WFS conducted a facility review and drain line testing in accordance to the Oil Conservation Division (OCD) Discharge Plan requirements. Subsurface, non-pressurized process and wastewater lines were tested. The facility drain line testing reports enclosed with this letter. A review and testing summary is provided in the table below.

Facility	Permit #	Completion Date	Results	Comments
29-6#3 CDP	GW-198	9/13/2001	Passed	
32-9 CDP	GW-091	9/28/2001	Passed	
Blanco Compressor	GW-327	NA	NA	No drain lines to be tested.
Cedar Hill CDP	GW-087	9/19/2001	Passed	
Chaco Compressor	GW-331	NA	NA	No drain lines to be tested.
Coyote Springs Compressor	GW-250	9/12/2001	Passed	
Dogie Compressor	GW-330	NA	NA	No drain lines to be tested.
Hare Compressor	GW-343	8/27/2001	Passed	
Keblah Compressor	GW-329	NA	NA	No drain lines to be tested.
Kernaghan Compressor	GW-271	9/12/2001	Passed	
Kutz NGL Pump Station	GW-334	8/31/2001	Passed	UST leak detection sys. is OK
La Jara Compressor	GW-233	NA	NA	No drain lines to be tested.
Middle Mesa CDP	GW-064	10/9/2001	Passed	
Milagro Plant	GW-060	8/20/2001	Passed	
Pritchard Compressor	GW-274	9/6/2001	Passed	
Pump Mesa CDP	GW-063	10/23/2001	Passed	
Thompson Compressor	GW-328	NA	NA	No drain lines to be tested.

If you have any questions or require additional information, I can be reached at (505) 632-4634.

Sincerely;

A handwritten signature in black ink, appearing to read 'Mark J. Bareta', with a stylized flourish at the end.

Mark J. Bareta
Senior Environmental Specialist

Attachments: Drain Line Testing Reports
xc: Denny Foust, Aztec OCD



October 29, 2001
AMEC Project No. 1-517-000087

Mr. Mark Baretta
Williams Field Services
188 CR 4900
Bloomfield, New Mexico 87413

**RE: Drain Line Testing
Williams Field Services Middle Mesa Compressor Station
San Juan County, New Mexico**

Dear Mr. Baretta,

AMEC Earth & Environmental, Inc. (AMEC) is pleased to provide Williams Field Services (WFS) with results of hydrostatic testing for the subsurface, non-pressurized, process and wastewater drain system at the WFS Middle Mesa Compressor Station located in rural San Juan County, New Mexico. Only subsurface, non-pressurized process and wastewater lines were tested according to the facilities' Oil Conservation Division (OCD) Ground Water Discharge Plan requirements.

AMEC mobilized to the site and began drain line testing activities on October 2, 2001. The work was completed on October 11, 2001. AMEC's on-site crew consisted of Bruce Hare (Site Supervisor) and a 3-man field crew.

The underground pipelines carrying process or wastewater were isolated. Each isolated system was filled with clean water and air was removed. A water-filled riser of sufficient height was used to provide a minimum of 3 pounds per square inch above normal operating pressure (all risers were at least 8-feet in height). A system was considered passing or non-leaking when the height of the water column held steady for a period of 60 minutes. Any leaks encountered were repaired and the system was re-tested until the passing criteria described above was met.

Details of each drain line tested are summarized in the attached Pressure Test Reports.

In keeping with WFS's policy, along with AMEC's own internal Health and Safety policies, AMEC's on-site employees attended daily safety meetings.

Williams Field Services
Drain Line Testing-Middle Mesa Compressor Station
Phase 4, Task 15
October 29, 2001



AMEC appreciates the opportunity to perform these services at the Middle Mesa Compressor Station for WFS. Should you have any questions, please feel free to contact our office at 327-7928.

Respectfully submitted,

AMEC Earth & Environmental, Inc.

A handwritten signature in cursive script that reads "Robert Thompson".

Robert Thompson
Project Manager

Attachments: Daily Summary of Line Testing

Copies: Addressee (3)

Hydrostatic Line Testing Form



AMEC Project Number: 15170060 87 Client: Williams Field Services

Task: 15 Facility Name: Middle MESA Compressor

Test Description: Test with water for leaks

System Description: 2" x 4" steel line

Test Medium: Water Test Pressure: 3 PSI Test Date: 10-4-01

Test Requirements: Hydrostatic pressure test on all underground process/wastewater pipelines in accordance with the State of New Mexico, Energy, Minerals, and Natural Resources Department - Oil Conservation Division Best Management Practices minimum requirements. Perform a hydrostatic pressure test on underground process/wastewater pipelines at 3 pounds per square inch for a period of one hour.

Test Data:

Start	Stop	Pressure	Pass/Fail	Lines Tested
1:00 P	2:00 P	94" WC	Pass	Tested units #11 thru #19, main line to waste water Tank & line to overflow Tank

Review and Approvals:

<u>Bruce Hare</u> AMEC Representative Signature	<u>Bruce Hare</u> Printed Name	<u>10-4-01</u> Date
<u>Charlie Price</u> Client Representative Signature	<u>Charlie Price</u> Printed Name	<u>10-4-01</u> Date

Hydrostatic Line Testing Form



AMEC Project Number: 1517000087 Client: Williams Field Services

Task: 15 Facility Name: Middle Mesa CDP Compressor

Test Description: Hydrostat Drain Lines with Water

System Description: #2-#4 Sch 80 PVC pipe

Test Medium: Water Test Pressure: 3 PSI Test Date: 10-9-01

Test Requirements: Hydrostatic pressure test on all underground process/wastewater pipelines in accordance with the State of New Mexico, Energy, Minerals, and Natural Resources Department - Oil Conservation Division Best Management Practices minimum requirements. Perform a hydrostatic pressure test on underground process/wastewater pipelines at 3 pounds per square inch for a period of one hour.

Test Data:

Start	Stop	Pressure	Pass/Fail	Lines Tested
12:05P	1:10P	94" WC	PASS	Drain Lines on Units #1 thru #11, Also Dry units #1 thru #6.

Review and Approvals:

<u>Bruce Hare</u> AMEC Representative Signature	<u>Bruce Hare</u> Printed Name	<u>10-9-01</u> Date
<u>Charlie Price</u> Client Representative Signature	<u>Charlie Price</u> Printed Name	<u>10-9-01</u> Date



NEW MEXICO ENERGY, MINERALS and NATURAL RESOURCES DEPARTMENT

GARY E. JOHNSON
Governor
Jennifer A. Salisbury
Cabinet Secretary

Lori Wrotenbery
Director
Oil Conservation Division

July 25, 2001

CERTIFIED MAIL

RETURN RECEIPT NO. 5051 0722

Ms. Clara L Garcia
Williams Field Services
188 CR 4900
Bloomfield, New Mexico 87413

**RE: Discharge Plan Renewal Approval GW-064
Williams Field Services
Middle Mesa Compressor Station
San Juan County, New Mexico**

Dear Ms. Garcia:

The ground water discharge plan renewal GW-064 for the Williams Field Services Middle Mesa Compressor Station located in the SE/4 SW/4 of Section 10, Township 31 North, Range 7 West, NMPM, San Juan County, New Mexico, **is hereby approved** under the conditions contained in the enclosed attachment. Enclosed are two copies of the conditions of approval. **Please sign and return one copy to the New Mexico Oil Conservation Division (OCD) Santa Fe Office within 30 days of receipt of this letter.**

The original discharge plan application was submitted on April 12, 1991 pursuant to Section 5101.B.3. of the New Mexico Water Quality Control Commission (WQCC) Regulations. The discharge plan renewal application was submitted May 21, 2001 pursuant to Section 3106 of the New Mexico Water Quality Control Commission (WQCC) Regulations. It is approved pursuant to Section 3109.A. Please note Section 3109.G., which provides for possible future amendment of the plan. Please be advised that approval of this plan does not relieve Williams Field Services of liability should operations result in pollution of surface water, ground water, or the environment.

Please be advised that all exposed pits, including lined pits and open tanks (tanks exceeding 16 feet in diameter), shall be screened, netted, or otherwise rendered nonhazardous to wildlife including migratory birds.

Please note that Section 3104 of the regulations provides: "When a plan has been approved, discharges must be consistent with the terms and conditions of the plan." Pursuant to Section 3107.C., Williams Field Services is required to notify the Director of any facility expansion, production increase, or process modification that would result in any change in the discharge of water quality or volume.

Pursuant to Section 3109.H.4., this discharge plan is for a period of five years. This plan will expire on **June 5, 2006**, and Williams Field Services should submit an application in ample time before this date. Note that under Section 3106.F. of the regulations, if a discharger submits a discharge plan renewal application at least 120 days before the discharge plan expires and is in compliance with the approved plan, then the existing discharge plan will not expire until the application for renewal has been approved or disapproved. It should be noted that all discharge plan facilities will be required to submit the results of an underground drainage testing program as a requirement for discharge plan .

Williams Field Services will submit a storm water run-off plan for approval by the OCD within six (6) months of the date of this approval letter for the Middle Mesa Compressor Station.

Ms. Clara L. Garcia
GW-064 Middle Mesa Compressor Station
July 25, 2001
Page 2

The discharge plan application for the Williams Field Services Middle Mesa Compressor Station is subject to WQCC Regulation 3114. Every billable facility submitting a discharge plan application will be assessed a non-refundable fee equal to the filing fee of \$100. There is a flat fee assessed for natural gas compressor stations with horsepower rating greater than 1001 horsepower equal to \$1700.00. The OCD has received the filing fee.

**Please make all checks payable to: Water Management Quality Management Fund
C/o: Oil Conservation Division
1220 South St. Francis Drive
Santa Fe, New Mexico 87505.**

If you have any questions please contact Mr. W. Jack Ford at (505) 476-3489. On behalf of the staff of the OCD, I wish to thank you and your staff for your cooperation during this discharge plan review.

Sincerely,


Roger C. Anderson
Chief, Environmental Bureau
Oil Conservation Division

RCA/wjf
Attachment

xc: OCD Aztec Office

7099 3220 0000 5051 0722

U.S. Postal Service CERTIFIED MAIL RECEIPT (Domestic Mail Only; No Insurance Coverage Provided)		
Article Sent To:		
Postage \$		Postmark Here
Certified Fee		
Return Receipt Fee (Endorsement Required)		
Restricted Delivery Fee (Endorsement Required)		
Total Postage & Fees \$		
Name (Please Print Clearly) (To be completed by mailer) <i>C. Garcia</i>		
Street, Apt. No., or PO Box No. <i>WFS</i>		
City, State, ZIP+ 4 <i>GW-064</i>		
PS Form 3800, July 1999		See Reverse for Instructions

ATTACHMENT TO THE DISCHARGE PLAN GW-064
WILLIAMS FIELD SERVICES
MIDDLE MESA COMPRESSOR STATION
DISCHARGE PLAN APPROVAL CONDITIONS
(July 25, 2001)

1. Payment of Discharge Plan Fees: The \$100.00 filing fee has been received by the OCD. There is a flat fee assessed for natural gas compressor stations with horsepower rating greater than 1001 horsepower equal to \$1700.00. The required flat fee may be paid in a single payment due at the time of approval, or in equal annual installments over the duration of the plan, with the first payment due upon receipt of this approval.
2. Williams Field Services Commitments: Williams Field Services will abide by all commitments submitted in the discharge plan application dated May 21, 2001 and these conditions for approval.
3. Waste Disposal: All wastes will be disposed of at an OCD approved facility. Only oilfield exempt wastes shall be disposed of down Class II injection wells. Non-exempt oilfield wastes that are non-hazardous may be disposed of at an OCD approved facility upon proper waste determination per 40 CFR Part 261. Any waste stream that is not listed in the discharge plan will be approved by OCD on a case-by-case basis.
4. Drum Storage: All drums containing materials other than fresh water must be stored on an impermeable pad with curbing. All empty drums will be stored on their sides with the bungs in and lined up on a horizontal plane. Chemicals in other containers such as sacks or buckets will also be stored on an impermeable pad and curb type containment.
5. Process Areas: All process and maintenance areas which show evidence that leaks and spills are reaching the ground surface must be either paved and curbed or have some type of spill collection device incorporated into the design.
6. Above Ground Tanks: All above ground tanks which contain fluids other than fresh water must be bermed to contain a volume of one-third more than the total volume of the largest tank or of all interconnected tanks. All new tanks or existing tanks that undergo a major modification, as determined by the Division, must be placed within an impermeable bermed enclosure.
7. Above Ground Saddle Tanks: Above ground saddle tanks must have impermeable pad and curb type containment unless they contain fresh water or fluids that are gases at atmospheric temperature and pressure.

16. Closure: The OCD will be notified when operations of the Middle Mesa Compressor Station are discontinued for a period in excess of six months. Prior to closure of the Middle Mesa Compressor Station a closure plan will be submitted for approval by the Director. Closure and waste disposal will be in accordance with the statutes, rules and regulations in effect at the time of closure.
17. Certification: Williams Field Services, by the officer whose signature appears below, accepts this permit and agrees to comply with all terms and conditions contained herein. Williams Field Services further acknowledges that these conditions and requirements of this permit may be changed administratively by the Division for good cause shown as necessary to protect fresh water, human health and the environment.

Accepted:

WILLIAMS FIELD SERVICES

by _____
Title

ACKNOWLEDGEMENT OF RECEIPT
OF CHECK/CASH

I hereby acknowledge receipt of check No. [REDACTED] dated 8/13/01

or cash received in _____ in the amount of \$ 3,500.00

from Williams Field Services

for Lateral N-30 C.S. - GW-256
Horse Canyon C.S. - GW-061

Middle Mesa C.S. - GW-064

Submitted by: [Signature] Date: 9-11-01

Submitted to ASD by: _____ Date: _____

Received in ASD by: _____ Date: _____

Filing Fee _____ Periodic _____ Renewal

Modification _____ Other _____
(Specify)

Organization Code 521.0 Applicable FY 2001

To be deposited in: Water Quality Management Fund.

Full Payment Annual Increment _____

WILLIAMS FIELD SERVICES COMPANY
P.O. Box 645 Tusk, OK 74101-0645
70-2321-710
70-2321-1076
DATE: 09/13/2001
PAY TO THE ORDER OF: *****\$3,500.00
NEW MEXICO OIL & GAS REVENUE
NM WATER QUALITY FUND
20400 PACHECO
SANTA FE United States NM 87504
Bank One, NA
[Signature: M. Humphreys]
Authorized Signer

AFFIDAVIT OF PUBLICATION

Ad No. 44643

STATE OF NEW MEXICO
County of San Juan:

ALETHIA ROTH LISBERGER, being duly sworn says: That she is the Classified Manager of THE DAILY TIMES, a daily newspaper of general circulation published in English at Farmington, said county and state, and that the hereto attached Legal Notice was published in a regular and entire issue of the said DAILY TIMES, a daily newspaper duly qualified for the purpose within the meeting of Chapter 167 of the 1937 Session Laws of the State of New Mexico for publication on the following day(s):

Friday, June 22, 2001.

And the cost of the publication is \$131.44.

Alethia Rothlisberger

ON 6/27/01 ALETHIA ROTH LISBERGER appeared before me, whom I know personally to be the person who signed the above document.

Lorin Beck
My Commission Expires April 02, 2004

COPY OF PUBLICATION

918

Legals

NOTICE OF PUBLICATION

STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION

Notice is hereby given that pursuant to the New Mexico Water Quality Control Commission Regulations, the following discharge plan application has been submitted to the Director of the Oil Conservation Division, 1220 South Saint Francis Drive, Santa Fe, New Mexico 87505, Telephone (505) 476-3440:

(GW-061) - Williams Field Service, Mark J. Barets, Senior Environmental Specialist, 188 CR 4900, Bloomfield, New Mexico 87413, has submitted a discharge plan renewal application for their Horse Canyon compressor station located in the NE/4 NE/4, Section 27, Township 30 North, Range 9 West, NMPM, San Juan County, New Mexico. Approximately 55 gallons per day of exempt waste water is collected and stored in an above ground bermed closed top tank prior to transport to an OCD approved off-site disposal facility. Groundwater most likely to be affected by an accidental discharge is at a depth of 380 feet with a total dissolved solids concentrations of approximately 3150 mg/l. The discharge plan addresses how spill, leaks, and other accidental discharges to the surface will be managed.

(GW-063) - Williams Field Service, Mark J. Barets, Senior Environmental Specialist, 188 CR 4900, Bloomfield, New Mexico 87413, has submitted a discharge plan renewal application for their Pump Mesa CDP compressor station located in the SW/4 SE/4, Section 14, Township 31 North, Range 8 West, NMPM, San Juan County, New Mexico. Approximately 55 gallons per day of exempt waste water is collected and stored in an above ground bermed closed top tank prior to transport to an OCD approved off-site disposal facility. Groundwater most likely to be affected by an accidental discharge is at a depth of approximately 938 feet with a total dissolved solids concentrations of approximately 9800 mg/l. The discharge plan addresses how spill, leaks, and other accidental discharges to the surface will be managed.

(GW-064) - Williams Field Service, Mark J. Barets, Senior Environmental Specialist, 188 CR 4900, Bloomfield, New Mexico 87413, has submitted a discharge plan renewal application for their Middle Mesa compressor station located in the SE/4 SW/4, Section 10, Township 31 North, Range 7 West, NMPM, San Juan County, New Mexico. Approximately 55 gallons per day of exempt waste water is collected and stored in an above ground bermed closed top tank prior to transport to an OCD approved off-site disposal facility. Groundwater most likely to be affected by an accidental discharge is at a depth of approximately 940 feet with a total dissolved solids concentrations of approximately 900 mg/l. The discharge plan addresses how spill, leaks, and other accidental discharges to the surface will be managed.

Any interested person may obtain further information from the Oil Conservation Division and may submit written comments to the Director of the Oil Conservation Division at the address given above. The discharge plan application may be viewed at the above address between 8:00 a.m. and 4:00 p.m., Monday thru Friday.

Prior to ruling on any proposed discharge plan or its modification, the Director of the Oil Conservation Division shall allow at least thirty (30) days after the date of publication of this notice during which comments may be submitted to him and public hearing may be requested by any interested person. Request for public hearing shall set forth the reasons why a hearing shall be held. A hearing will be held if the director determines that there is significant public interest.

If no hearing is held, the Director will approve or disapprove the plan based on the information available. If a public hearing is held, the Director will approve the plan based on the information in the plan and information presented at the hearing.

GIVEN under the Seal of New Mexico Conservation Commission at Santa Fe, New Mexico, on this 1st day of June, 2001.

STATE OF NEW MEXICO
OIL CONSERVATION DIVISION

SEAL

LORI WROTENBERY, Director

**NOTICE OF PUBLICA-
TION**

**STATE OF NEW MEXICO
ENERGY, MINERALS
AND
NATURAL RESOURCES
DEPARTMENT
OIL CONSERVATION
DIVISION**

Notice is hereby given that pursuant to the New Mexico Water Quality Control Commission Regulations, the following discharge plan application has been submitted to the Director of the Oil Conservation Division, 1220 South Saint Francis Drive, Santa Fe, New Mexico 87505, Telephone (505) 476-3440:

(GW-061) - Williams Field Service, Mark J. Barets, Senior Environmental Specialist, 188 CR 4900, Bloomfield, New Mexico 87413, has submitted a discharge plan renewal application for their Horse Canyon compressor station located in the NE/4

NE/4, Section 27, Township 30 North, Range 9 West, NMPM, San Juan County, New Mexico. Approximately 55 gallons per day of exempt waste water is collected and stored in an above ground bermed closed top tank prior to transport to an OCD approved off-site disposal facility. Groundwater most likely to be affected by an accidental discharge is at a depth of 380 feet with a total dissolved solids concentrations of approximately 3150 mg/l. The discharge plan addresses how spill, leaks, and other accidental discharges to the surface will be managed.

(GW-063) - Williams Field Service, Mark J. Barets, Senior Environmental Specialist, 188 CR 4900, Bloomfield, New Mexico 87413, has submitted a discharge plan renewal application for their Pump Mesa CDP compressor station located in the SW/4 SE/4, Section 14, Township 31 North, Range 8 West, NMPM, San Juan County, New Mexico. Approximately 55 gallons per day of exempt waste water is collected and stored in an above ground bermed closed top tank prior to transport to an OCD approved off-site disposal facility. Groundwater most likely to be affected by an accidental discharge is at a depth of approximately 938 feet with a total dissolved solids concentrations of approximately 9800 mg/l. The discharge plan addresses how spill, leaks, and other accidental discharges to the surface will be managed.

(GW-064) - Williams Field Service, Mark J. Barets, Senior Environmental Specialist, 188 CR 4900, Bloomfield, New Mexico 87413, has submitted a discharge plan renewal application for their Middle Mesa compressor station located in the SE/4 SW/4, Section 10, Township 31 North, Range 7 West, NMPM, San Juan County, New Mexico. Approximately 55 gallons per day of exempt waste water is collected and stored in an above ground bermed closed top tank prior to transport to an OCD approved off-site disposal facility. Groundwater most likely to be affected by an accidental discharge is at a depth of approximately 940 feet with a total dissolved solids concentrations of approximately 900 mg/l. The discharge plan addresses how spill, leaks, and other accidental discharges to the surface will be managed.

Any interested person may obtain further infor-

mation from the Oil Conservation Division and may submit written comments to the Director of the Oil Conservation Division at the address given above. The discharge plan application may be viewed at the above address between 8:00 a.m. and 4:00 p.m., Monday thru Friday.

Prior to ruling on any proposed discharge plan or its modification, the Director of the Oil Conservation Division shall allow at least thirty (30) days after the date of publication of this notice during which comments may be submitted to him and public hearing may be requested by any interested person. Request for public hearing shall set forth the reasons why a hearing shall be held. A hearing will be held if the director determines that there is significant public interest.

If no hearing is held, the Director will approve or disapprove the plan based on the information available. If a public hearing is held, the Director will approve the plan based on the information in the plan and information presented at the hearing.

GIVEN under the Seal of New Mexico Conservation Commission at Santa Fe, New Mexico, on this 1st day of June, 2001.

STATE OF NEW MEXICO
OIL CONSERVATION DIVISION

LORI WROTENBERY, Director
Legal #69613
Pub. June 25, 2001

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 South First, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
2040 South Pacheco, Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources

Oil Conservation Division
2040 South Pacheco
Santa Fe, NM 87505

GW-064

Revised March 17, 1999

Submit Original
Plus 1 Copy
to Santa Fe
1 Copy to Appropriate
District Office

DISCHARGE PLAN APPLICATION FOR SERVICE COMPANIES, GAS PLANTS, REFINERIES, COMPRESSOR, AND CRUDE OIL PUMP STATIONS

(Refer to the OCD Guidelines for assistance in completing the application)

New Renewal Modification

1. Type: Compressor Station (Middle Mesa CDP Compressor Station)

2. Operator: Williams Field Services Company

*Filing Fee
Paid*

Address: 188 CR 4900, Bloomfield, New Mexico 87413

Contact Person: Mark J. Baretta

Phone: (505) 632-4634

3. Location: SE/4 SW/4 Section 10 Township 31 North Range 7 West

Submit large scale topographic map showing exact location.

San Juan

4. Attach the name, telephone number and address of the landowner of the facility site.

5. Attach the description of the facility with a diagram indicating location of fences, pits, dikes and tanks on the facility.

6. Attach a description of all materials stored or used at the facility.

7. Attach a description of present sources of effluent and waste solids. Average quality and daily volume of waste water must be included.

8. Attach a description of current liquid and solid waste collection/treatment/disposal procedures.

9. Attach a description of proposed modifications to existing collection/treatment/disposal systems.

10. Attach a routine inspection and maintenance plan to ensure permit compliance.

11. Attach a contingency plan for reporting and clean-up of spills or releases.

12. Attach geological/hydrological information for the facility. Depth to and quality of ground water must be included.

13. Attach a facility closure plan, and other information as is necessary to demonstrate compliance with any other OCD rules, regulations and/or orders.

14. CERTIFICATION

I hereby certify that the information submitted with this application is true and correct to the best of my knowledge and belief.

Name: Mark J. Beretta

Title: Senior Environmental Specialist

Signature: *Mark J. Beretta*

Date: *May 21, 2001*

DISCHARGE PLAN RENEWAL

**MIDDLE MESA CDP COMPRESSOR STATION
(GW-64)**

Williams Field Services Company

March 2001

Table of Contents

I.	Type of Operation-----	1
II.	Legally Responsible Party -----	1
III.	Location of Facility -----	1
IV.	Landowner -----	1
V.	Facility Description-----	1
VI.	Source, Quantity, and Quality of Effluents and Waste Solids-----	1
VII.	Transfer, Storage, and Disposal of Process Fluids, Effluents, and Waste Solids-----	2
VIII.	Storm Water Plan -----	4
IX.	Inspection, Maintenance, and Reporting -----	5
X.	Spill/Leak Prevention and Reporting (Contingency Plans)-----	5
XI.	Site Characteristics -----	5
XII.	Facility Closure Plan -----	6

List of Tables

Table 1 - Source, Quantity, and Quality of Effluent and Waste Solids -----	2
Table 2 - Transfer, Storage, and Disposal of Process Fluids, Effluents, and Waste Solids -----	3

List of Figures - All figures follow Section XI

- Figure 1 - Site Vicinity / Topographic Map
- Figure 2 - Facility Plot Plan

List of Appendices

- Appendix A – WES Spill Control Procedures
- Appendix B – NMOCD Notification of Fire, Breaks, Spills, Leaks, and Blowouts

I. TYPE OF OPERATION

The Middle Mesa CDP Compressor Station was built in 1991 to provide metering, compression, and dehydration services to various producers for the gathering of natural gas for treatment and delivery through Williams Field Services (WFS) Milagro Plant.

II. LEGALLY RESPONSIBLE PARTY

Williams Field Services
188 CR 4900
Bloomfield, NM 87413
(505) 632-4634

Contact Person:

Mark J. Baretta, Senior Environmental Specialist
Phone and Address, Same as Above

III. LOCATION OF FACILITY

The Middle Mesa CDP Compressor Station is located in Section 10, Township 31 North, Range 7 West, in San Juan County, New Mexico, approximately 27 miles northeast of Bloomfield, New Mexico. A site location map is attached (USGS 7.5 Min. Quadrangle: Burnt Mesa, New Mexico) as Figure 1. The facility layout is illustrated in Figure 2. All figures are attached following Section XI of the text.

IV. LANDOWNER

Williams Field Services is leasing the subject property from:

Bureau of Land Management
1235 N. La Plata Highway
Farmington, NM 87401
(505) 599-8900

V. FACILITY DESCRIPTION

This facility is classified as a field compressor station and is unmanned. The air quality permit for this site has allowed the operation of nineteen 1,362-hp engines. In addition, there are various storage tanks, support structures and ancillary equipment. Records related to facility operations are maintained at central office locations.

VI. SOURCE, QUANTITY, AND QUALITY OF EFFLUENTS AND WASTE SOLIDS

The source, quantity, and quality of effluent and waste solids generated at the compressor station are summarized in Table 1.

TABLE 1
SOURCE, QUANTITY, AND QUALITY OF EFFLUENT AND WASTE SOLIDS
MIDDLE MESA CDP COMPRESSOR STATION

PROCESS FLUID/WASTE	SOURCE	QUANTITY (Ranges)	QUALITY
Used Oil	Compressor	1000-2000 gal/year/engine.	Used motor oil w/no additives
Used Oil Filters	Compressor	50-100 filters/year/engine	No additives
Wash-down Water	Compressor Skid	1000-1500 gal/year/engine	Biodegradable Soap and tap water w/traces of used oil
Natural Gas Condensate	Scrubber, Gas Inlet Separator	3000-6000 bbl/year	No additives
Waste Water	Drawn of Natural Gas Condensate Tank	500 bbl/year	No additives
Used Process Filters	Air, Inlet and Fuel Gas	75- 100/year	No additives
Empty Drums / Containers	Liquid Containers	20-40/year	No additives
Spill Residue (i.e., gravel, soil)	Incidental spills	Incident dependent	Incident dependent
Used Absorbents	Incidental spill/leak equipment wipe-down	Incident dependent	No additives

VII. TRANSFER, STORAGE, AND DISPOSAL OF PROCESS FLUIDS, EFFLUENTS AND WASTE SOLIDS

Wastes generated at this facility fall into two categories: exempt and non-exempt. Exempt wastes include, but may not be limited to, used process filters, condensate spill cleanups (spill residue), certain absorbents, and produced water with or without de minimus quantities of non-hazardous liquids. Non-exempt wastes include, but may not be limited to, used oil, used oil filters, and engine coolant.

Non-exempt waste management will be conducted in accordance with NMOCD requirements including the preparation of a Certificate of Waste Status for each non-exempt waste stream. Non-exempt wastes will be analyzed at a minimum for BTEX, TPH, RCRA D-List metals, ignitability, corrosivity, and reactivity to initially determine if such waste are hazardous as defined in 40 CFR Part 261. All wastes at the facility will be periodically surveyed for naturally occurring radioactive material (NORM) to determine if the concentrations of radium 226 exceed 30 picocuries per gram or if radiation exposure exceeds 50 microrentgens per hour. If affirmed, such materials will be handled and disposed in accordance with NMOCD NORM Regulations.

Barring facility modification and/or process changes, the classification of non-exempt wastes by laboratory analyses will be made once during the approval period of this plan. Subsequent laboratory analyses will be performed at the generator's discretion (minimum of once every five years), or more frequently to comply with waste acceptance procedures of the disposal facility.

Table 2 describes the transfer, storage and disposal of exempt and non-exempt process fluids, effluents, and waste solids expected to be generated at the site.

TABLE 2
TRANSFER, STORAGE, AND DISPOSAL OF PROCESS FLUIDS, EFFLUENTS, AND WASTE SOLIDS
MIDDLE MESA CDP COMPRESSOR STATION

PROCESS FLUID/WASTE	STORAGE	CONTAINER CAPACITY (approximate)	CONTAINMENT/ SPILL PREVENTION	RCRA STATUS	DESCRIPTION OF FINAL DISPOSITION
Used Oil	Above ground storage tank	(9) 500 gallons 165 bbl	Berm	Non-exempt	May be hauled to a WFS or contractor consolidation point before transport to EPA-registered used oil marketer for recycling.
Used Oil Filters	Drum or other container	Varies	Transported to a WFS or contractor facility in drum or other container	Non-exempt	Transported to a WFS or contractor consolidation point, drained, and ultimately transported for disposal at an approved disposal facility. A Waste Acceptance Profile will be filed with the disposal facility. Recycling options may be considered when available.
Natural Gas Condensate	Above Ground Storage Tanks	210 bbl 300 bbl	Berm	Exempt	Saleable liquids may be sold to refinery or liquid may be disposed at NMOCD- approved facility.
Waste Water/ Wash-down Water	Below-grade vaulted tank	165 bbl 30 bbl 740 gallons	Berm	Exempt	Water may be transported to NMOCD-approved facility; or evaporation at WFS facility may be considered in future.
Used Process Filters	Drum or other container	Varies	Transported to a WFS or contractor facility in drum or other container	Exempt	Transported to a WFS or contractor consolidation point, drained, and ultimately transported for disposal at an approved disposal facility. A Waste Acceptance Profile will be filed with the disposal facility. Recycling options may be considered when available.
Empty Drums / Containers	N/A	N/A	Berm	Non -exempt	Barrels are returned to supplier or transported to a WFS or contractor consolidation point and ultimately recycled/disposed
Spill Residue (i.e., soil, gravel)	N/A	N/A	In situ treatment, land-farm, or alternate method	Incident dependent	Per Section VI, Remediation, in 8/13/93 NMOCD Guidelines for Remediation of Leaks, Spills, and Releases.
Used Absorbents	Drum or other container	Varies	Transported to a WFS or contractor facility in drum or other container	Non-exempt	Transported to a WFS or contractor consolidation point, drained, and ultimately transported for disposal at an approved disposal facility. A Waste Acceptance Profile will be filed with the disposal facility. Recycling options may be considered when available.
Glycol	Above ground storage tanks	(6) 100 gallons 500 gallons	Berm	N/A	Off-spec material recycled or disposed consistent with applicable regulations.
Solvent	Above ground storage tanks	(2) 500 gallons	Berm	N/A	Off-spec material recycled or disposed consistent with applicable regulations.
Compressor Oil	Above ground storage tanks	(19) 500 gallons 100 bbl	Berm	N/A	Off-spec material recycled or disposed consistent with applicable regulations.

VIII. STORM WATER PLAN

This storm water section was developed to provide a plan to monitor and mitigate impact to storm water runoff from the facility. It serves to satisfy storm water management concerns of the NMOCD. It is not intended to comply with 40 CFR Part 122, Storm Water Discharges as this facility is excluded in 122.26 (c) (1) (iii).

This section concentrates on the identification of potential pollutants, inspection and maintenance of the pollutant controls, and gives a description of structural controls to prevent storm water pollution.

Site Assessment and Facility Controls

An evaluation of the material used and stored on this site that may be exposed to storm water indicates that no materials would routinely be exposed to precipitation. There are no engineered storm water controls or conveyances; all storm water leaves the site by overland flow.

Any leakage or spill from the identified potential pollutant sources, if uncontained by existing berms, curbs, or emergency response actions, could flow overland to open off-site drainage ditches (arroyos) and thus impact storm water. In such an event, containment would occur by blocking the ditch or culvert downstream of the pollutant. Cleanup of the substance and implementation of mitigation measures could be conducted while protecting downstream storm watercourses.

Best Management Practices

Following are Best Management Practices (BMPs) to be implemented to prevent or mitigate pollution to storm water from facility operations:

- All waste materials and debris will be properly disposed of on an on-going basis in appropriate containers and locations for collection and removal from the site.
- Temporary storage of potential pollutant sources will be located in areas with appropriate controls for storm water protection. This would include ensuring all containers are sealed/covered and otherwise protected from contact with precipitation.
- Periodic inspection of channels and culverts shall be performed at least twice annually and after any major precipitation event.
- Sediment deposits and debris will be removed from the channels and culverts as necessary and any erosion damage at the outfall (if any) will be repaired or controlled.
- Conduct inspections of the facility on a regular basis as part of the preventive maintenance site check. Such inspections will include the visual assessment of corroded or damaged drums and tanks, broken or breached containment structures, collapsed or clogged drainages or drain lines.

Implementation of the BMPs will prevent or mitigate impact to storm water runoff from this facility.

IX. INSPECTION, MAINTENANCE AND REPORTING

WFS personnel will operate and maintain the compression unit at the facility. The facility will be remotely monitored for equipment malfunctions through Gas Dispatch. The facility will be visited several times per week at a minimum, and an operator will be on call 24 hours per day, 7 days per week, 52 weeks per year. The above ground and below-grade tanks will be gauged regularly, and monitored for leak detection.

In the event of a release of a reportable quantity, the operator reports the release to a WFS spill notification service. The service immediately notifies the WFS Environmental Department and all appropriate agencies.

X. SPILL/LEAK PREVENTION AND REPORTING (CONTINGENCY PLANS)

Spill containment berms around above ground storage tanks will be designed to contain 1-1/3 times the volume of the tank and will be equipped with an impermeable liner. The below-grade tanks will be constructed with a means of leak detection, and will either be double-bottomed tanks or a tank set on an impermeable pad.

WFS corporate policy and procedure for the controlling and reporting of Discharges or Spills of Oil or Hazardous Substances is provided in Appendix A. Significant spills and leaks are reported to the NMOCD pursuant to NMOCD Rule 116 and WQCC 1-203 using the NMOCD form (see Appendix B).

XI. SITE CHARACTERISTICS

The Middle Mesa CDP Compressor Station is located approximately 27 miles northeast of Bloomfield, New Mexico. The site elevation is approximately 6,600 feet above mean sea level. The natural ground surface topography slopes downward toward the south. The maximum relief over the site is approximately 20 feet. Intermittent flow from the site will follow the unnamed drainage towards the east to Negro Andy Canyon Wash. Approximately 2.3 miles southeast of the site, Negro Andy Canyon Wash drains into the Navajo Lake. Navajo Lake, at approximately 6,100 feet in elevation, is the nearest down-gradient perennial source of surface water to the site.

A review of the available hydrologic data^{1,2,3} for this area revealed that there are no water wells within a 1/4-mile radius of Middle Mesa CDP Compressor Station. The water-bearing unit in this area is the San Jose Formation. The San Jose Formation is the youngest Tertiary bedrock unit. This formation consists of a sequence of interbedded sandstone and mudstone. The estimated ground water depth at the site is 500 to 900 feet. The total dissolved solids concentration of area ground water is expected to range from 200 to 2,000 parts per million.

The 100-year 24-hour precipitation event at a regional weather station is 2.8 inches. This small amount of rainfall for the area should pose no flood hazards. Vegetation in the area consists predominantly of sagebrush and native grasses.

Flood Protection: Surface water runoff from the area surrounding the site will be diverted around the facility into the natural drainage path.

References

¹Stone, W.J., Lyford, F.P., Frenzel, P.F., Mizell, N.H., Padgett, E.T., 1983, Hydrology and Water Resources of San Juan Basin, New Mexico Bureau of Mines and Mineral Resources, Hydrologic Report 6.

²Records of Water Wells in San Juan County, 1978-1983.

³Online Well Reports and Downloads, New Mexico Office of the State Engineer, 2000.

XII. FACILITY CLOSURE PLAN

All reasonable and necessary measures will be taken to prevent the exceedence of WCQQ Section 3103 water quality standards should WFS choose to permanently close the facility. WFS will submit a detailed closure plan to the NMOCD prior to closure.

Generally, closure measures will include removal or closure in place of underground piping and other equipment. All wastes will be removed from the site and properly disposed in accordance with the rules and regulations in place at the time of closure. When all fluids, contaminants, and equipment have been removed from the site, the site will be graded as close to the original contour as possible.


Should contaminated soil be discovered, any necessary reporting under NMOCD Rule 116 and WQCC Section 1203 will be made and clean-up activities will commence. Post-closure maintenance and monitoring plans would not be necessary unless contamination is encountered.

FIGURE 1

SITE VICINITY / TOPOGRAPHIC MAP

FIGURE 2

SITE PLAN

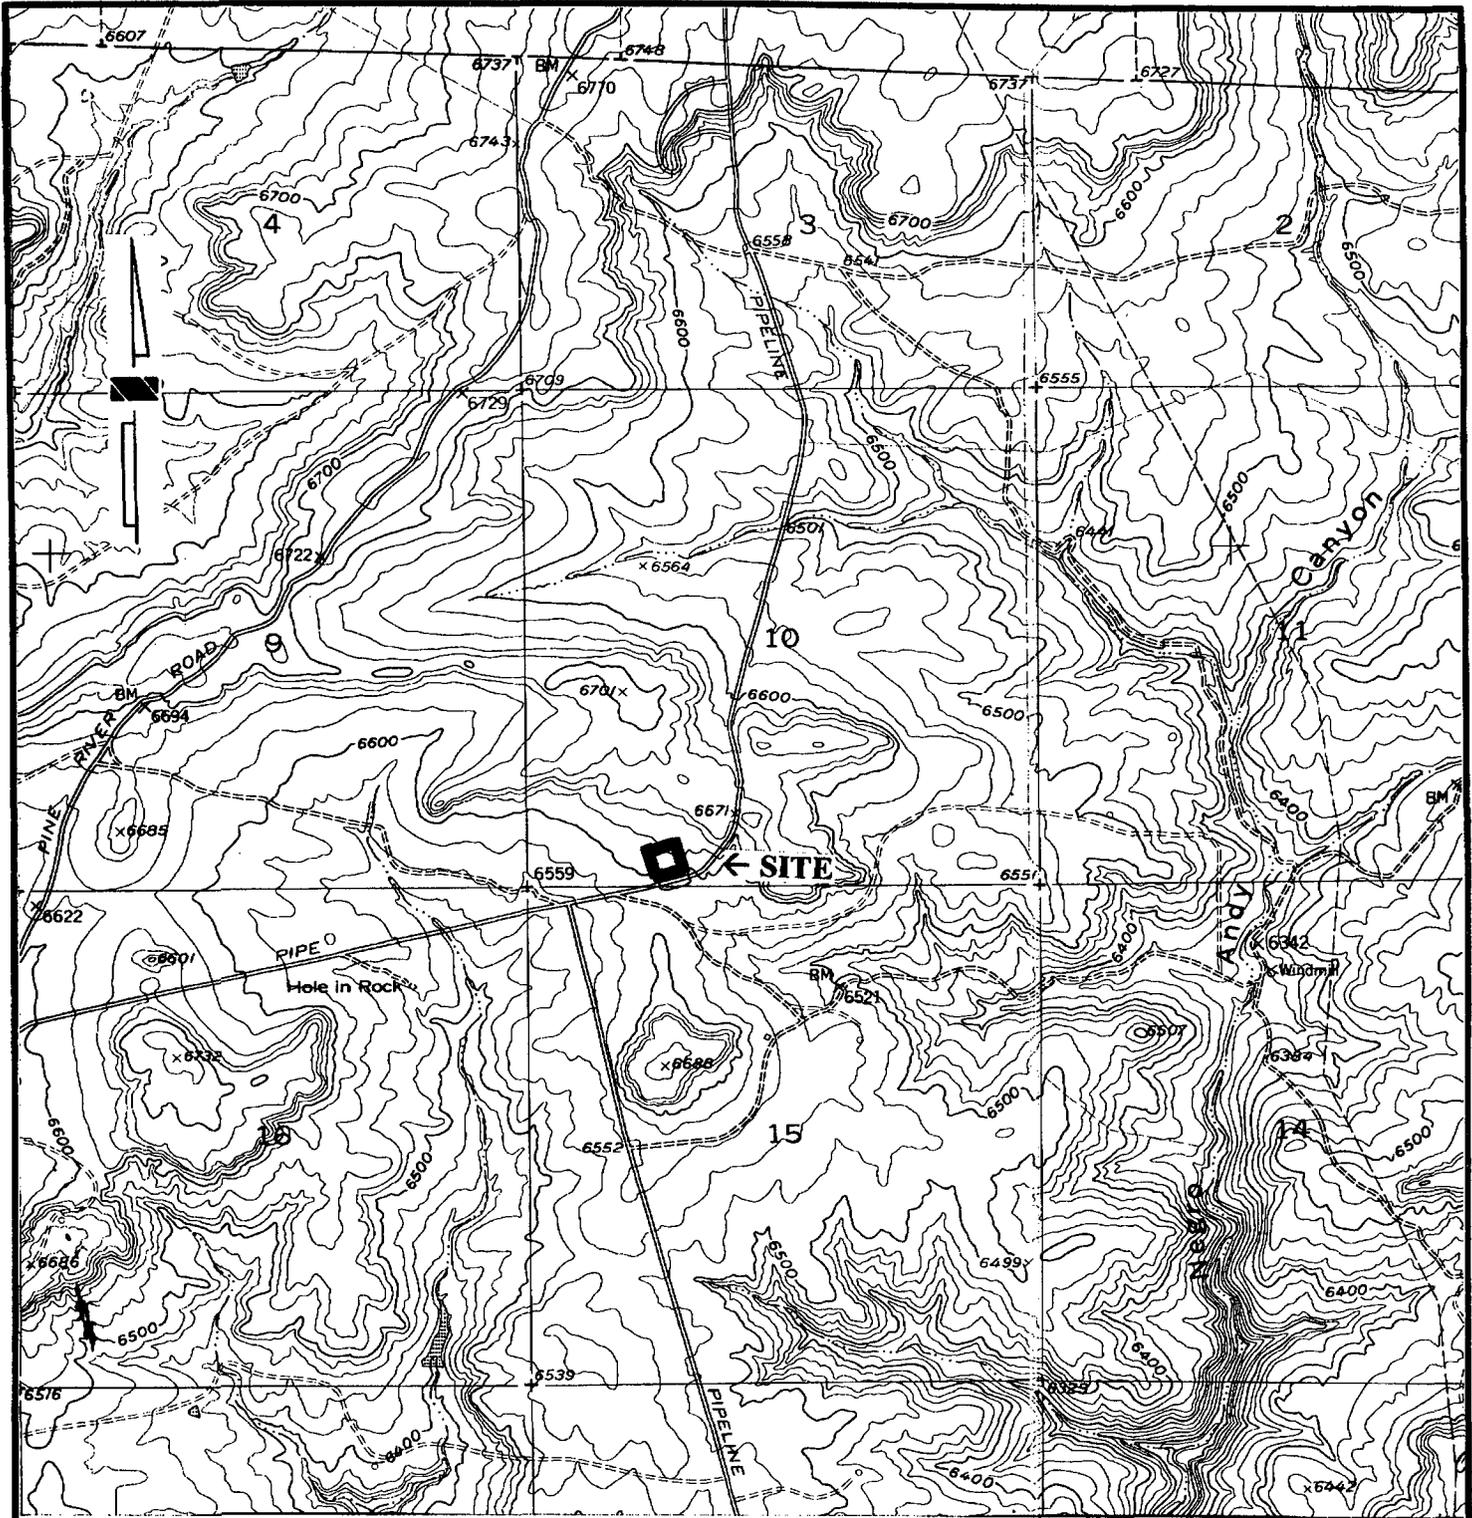

Source: USGS Burnt Mesa Quadrangle, New Mexico


Scale: 1" = 2,000'



Figure 1 Site Vicinity / Topographic Map
Middle Mesa CDP Compressor Station
 Section 10, Township 31N Range 7W
 San Juan County, New Mexico

OPERATIONS		
Manual	MIDDLE MESA COMPRESSOR STATION	
Section	Tab	Document No.
SPILL PREVENTION CONTROL & COUNTERMEASURE PLAN	13	42.13.001
Effective Date	Issue No.	Page No.
12/16/99	01	5 of 8

ATTACHMENT 'A' PRODUCT AND WASTE STORAGE LOCATIONS

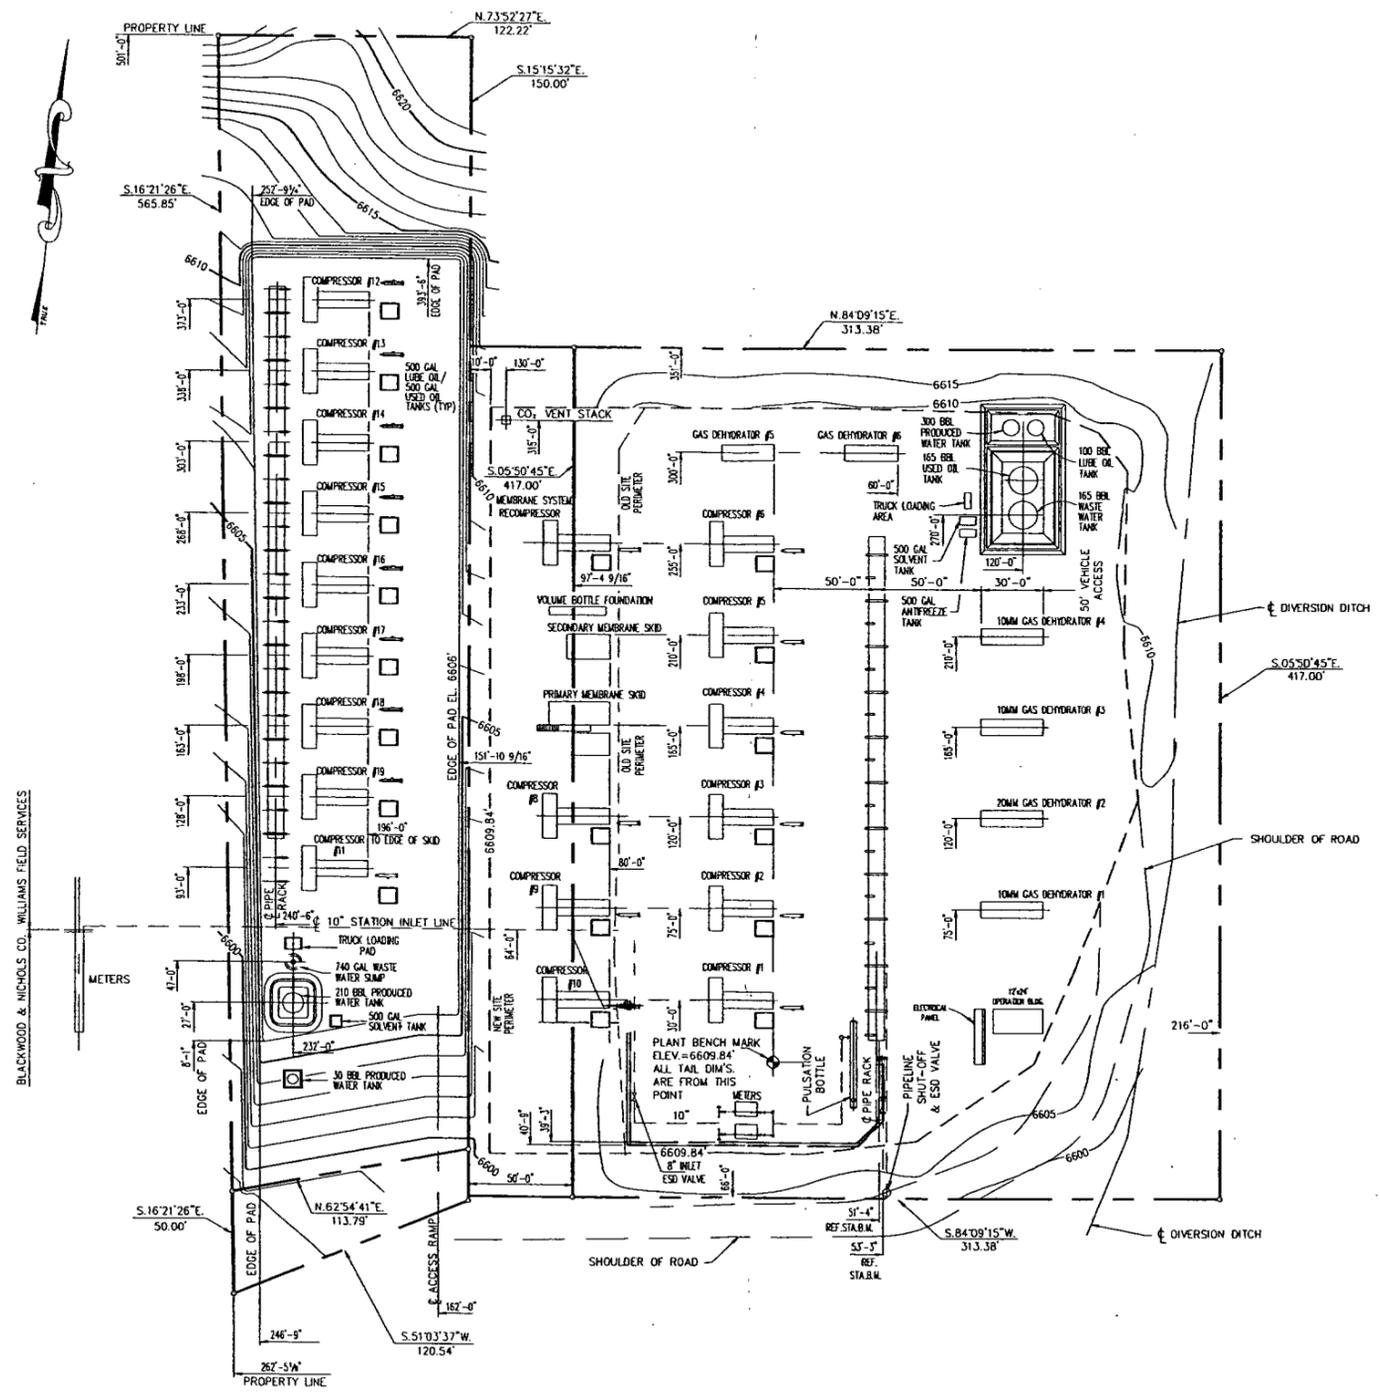

REFERENCE DRAWINGS		REFERENCE DRAWINGS		NO. DATE BY		DESCRIPTION		V.D. NO.		CHK. APP. NO.		DATE BY		DESCRIPTION		V.D. NO.		CHK. APP.		DESIGNED BY		SCALE: 1" = 40'-0"		DWG. NO.		MID-1-P16		SHEET REV		01	

DRAFTING BY DATE
 DRAWN BY: BES 12/16/99
 CHECKED BY:
 APPROVED BY:
ENGINEER BY DATE
 DESIGNED BY:
 PROJ. APPROVED:

STATE: NEW MEXICO
 COUNTY: RIO ARriba

WILLIAMS GAS PROCESSING
 ONE OF THE WILLIAMS COMPANIES

MIDDLE MESA COMPRESSOR STATION
 SPILL PREVENTION CONTROL & COUNTERMEASURE PLAN
 PLOT PLAN

01 12/16/99 BES NEW DRAWING

APPENDIX A

SPILL CONTROL PROCEDURES

	Reference (Book Title) Operations/Maintenance Field Services	Task/Document No. 21.10.020
	Section General/Safety	Regulation No./Reference
	Subject Discharges or Spills of Oil or Hazardous Substances; Preventing, Controlling and Reporting of	Effective Date 12/15/99

[Back](#) | [Feedback](#) | [Index](#) | [Search Library](#)
 Hit "CTRL-F" to find text on this page.

▶ **Document History (ISO9001)**

▼ **Document Body**

1.0 PURPOSE AND SCOPE

- 1.1 To establish the policy and procedure for preventing, controlling and reporting of discharges or spills of oil or hazardous substances to the environment in accordance with Company practices and federal, state and local requirements, including Title 40 of the Code of Federal Regulations - Part 112 (Oil Pollution Prevention).
- 1.2 This document pertains to Company personnel, Company and non-company facilities. The spill prevention and control requirements in this Policy and Procedure are Federally mandated guidelines for oil pollution prevention. The Company policy is to also apply these standards, where appropriate, to facilities containing hazardous substances. This is a discretionary application of the standards; however, variations from the standards should be approved by the responsible Director.

2.0 CONTENTS

3.0 POLICY

3.1 GENERAL

- 3.1.1 All Company facilities which could discharge or spill, oil or hazardous substances which may affect natural resources or present an imminent and substantial danger to the public health or welfare including, but not limited to, fish, shellfish, wildlife, shorelines and beaches are subject to the provisions of this document.
- 3.1.2 Oil, for purpose of this document, means oil of any kind or in any form, including but not limited to petroleum hydrocarbon, fuel oil, Y grade, natural gas liquids, condensate, mixed products, sludge, oil refuse and oil mixed with wastes other than dredged spoil (earth and rock). LPG (propane, butane, ethane) is not considered to be oil.
- 3.1.3 Hazardous Substance, for purposes of this procedure, is defined as any chemical or

material that has or should have a Material Safety Data Sheet (MSDS); however, hazardous substances are further defined by the following environmental statutes:

- a. Section 101(N) and Section 102 of the Comprehensive Environmental Response, Compensation and Liability Act (CERCLA)
- b. Section 307(a) and Section 311(b)(2)(A) of the Clean Water Act
- c. Section 3001 of the Solid Waste Act (excluding items suspended by Congress)
- d. Section 112 of the Clean Air Act
- e. Section 7 of the Toxic Substance Control Act

3.1.4 The term hazardous substance does not include petroleum hydrocarbon, including crude oil or any fraction thereof and the term does not include natural gas, natural gas liquids (including condensate), liquefied natural gas or synthetic gas usable for fuel (or mixtures of natural gas and such synthetic gas).

3.1.5 Facilities which could discharge or spill, oil or hazardous substances into a watercourse must comply with the applicable federal, state or local laws and regulations. A discharge includes but is not limited to any spilling, leaking, pumping, pouring, emitting, emptying or dumping. A watercourse is any perennial or intermittent river, stream, gully, wash, lake or standing body of water capable of collecting or transporting an oil or hazardous substance.

3.1.6 Facilities which are subject to the requirements stated in this policy are as follows:

a. Non-Transportation Related Facilities

(1) Storage or drip tanks and other aboveground containers (excluding pressurized or inline process vessels) having a capacity in excess of 660 gallons for each single container or an aggregate capacity of 1,321 gallons or more for multiple containers.

(2) Underground storage facilities having a total capacity in excess of 42,000 gallons.

b. Transportation Related Facilities

(1) All vehicles, pipeline facilities, loading/unloading facilities and other mobile facilities which transport oil or hazardous substances.

3.1.7 Each Company location which has facilities subject to paragraph C.1.1 shall have a site specific Spill Prevention Control and Countermeasure Plan (SPCC Plan) which identifies all facilities subject to 40 CFR 112. The plan shall identify all oil and hazardous substance storage vessels (as defined in a.(1) above) at the facility and the spill prevention measures in place to control discharges or spills. This plan shall also identify all regulatory agencies that must be notified in case of a spill.

3.1.8 The facility superintendent is responsible for spill prevention. His/her duties include,

but are not limited to, the following:

- a. Instructing personnel in the operation and maintenance of equipment to prevent the discharge of oil.
 - b. Conduct annual briefings for operating personnel at intervals frequent enough to assure adequate understanding of the Spill Plan at that facility.
 - c. Briefings should highlight and describe known discharges or spills and recently developed precautionary measures.
- 3.1.9 Each individual facility is checked annually by the superintendent or designee to determine the potential for discharges or spills of oil or hazardous substances in harmful quantities that violate water quality standards or which may cause a film, sheen or discoloration on the surface of water. All facilities which have the potential for discharging or spilling harmful quantities of oil or hazardous substances into a watercourse are required to have the following preventive measures:
- a. Examination of all tanks, valves and fittings, at least annually, to determine any maintenance requirements.
 - b. All tank batteries should, as far as practicable, have a secondary means of containment for the entire contents of the largest single tank plus sufficient freeboard in the containment facility to allow for precipitation.
 - c. An annual monitoring and inspection program to prevent accidental spills or discharges into watercourses. This includes annual inspection for faulty systems and monitoring line valves and liquid pipelines for leaks or blowouts.
- 3.1.10 Any field drainage ditches, road ditches, traps, sumps or skimmers should be inspected at regular scheduled intervals for accumulation of oil or other hazardous substances which may have escaped from small leaks. Any such accumulations should be removed.

3.2 BULK STORAGE TANKS

- 3.2.1 A tank should not be used for storage of oil or hazardous substances unless the material and construction of the tank is compatible with the oil or substance stored and conditions of storage such as pressure and temperature. Buried storage tanks must be protected from corrosion by coatings, cathodic protection or other methods compatible with local soil conditions. Aboveground tanks should be subject to visual inspection for system integrity.
- 3.2.2 The facility superintendent should evaluate tank level monitoring requirements to prevent tank overflow.
- 3.2.3 Leaks which result in loss of oil or hazardous substances from tank seams, gaskets, rivets and bolts sufficiently large to cause accumulation of oil or hazardous substances in diked areas should be promptly corrected.
- 3.2.4 Mobile or portable oil or hazardous substances storage tanks should be positioned or located to prevent the contents from reaching a watercourse. The mobile facilities should be located so their support structure will not be undermined by periodic flooding or washout.

3.3 FACILITY DRAINAGE

- 3.3.1** Make provisions for drainage from diked storage areas where necessary in areas with high precipitation levels. Drainage from diked areas should be restrained by valves or other means to prevent a discharge or spill. Diked areas should be emptied by pumps or ejectors which are manually activated. Valves used for the drainage of diked areas should be of manual, open-and-closed design.
- 3.3.2** Rain water may be drained from diked areas providing drainage water does not contain oil or hazardous substances that may cause a harmful discharge. Drain valves must be closed following drainage of diked areas.
- 3.3.3** When possible, drainage systems from undiked areas should flow into ponds, lagoons or catchment basins designed to retain oil or hazardous substances or return the substances to the facility. Any drainage system which is not designed to allow flow into ponds, lagoons or catchment basins should be equipped with a diversion system that could, in the event of a discharge or spill, contain the oil or hazardous substances on the Site.
- 3.3.4** The principal means of containing discharges or spills is the use of dikes which are constructed wherever regulated quantities of oil or hazardous substances have the potential of reaching a watercourse. The construction of dikes must meet the following requirements:
- a.** Capacity must be at least equivalent to the storage capacity of the largest tank of the battery plus sufficient freeboard to allow for precipitation or displacement by foreign materials.
 - b.** Small dikes for temporary containment are constructed at valves where potential leaking of oil or hazardous substances may occur.
 - c.** Any dike three feet or higher should have a minimum cross section of two feet at the top.
- Other means of containment or spill control include, but are not limited to:
- 3.3.5**
- a.** Berms or retaining walls
 - b.** Curbing
 - c.** Culverting, gutters or other drainage systems
 - d.** Weirs, booms or other barriers
 - e.** Spill diversion ponds or retention ponds
 - f.** Sorbent materials

3.4 TRANSFER OPERATIONS, PUMPING and IN-PLANT/STATION PROCESS

- 3.4.1** Aboveground valves and pipelines should be examined regularly by operating

personnel to determine whether there are any leaks from flange joints, expansion joints, valve glands and bodies, catch pans, pipeline supports, valve locks and metal surfaces.

3.5 FACILITY TANK CAR AND TANK TRUCK LOADING/UNLOADING RACK

- 3.5.1 Rack area drainage which does not flow into a catchment basin or treatment facility designed to handle spills should have a quick drainage system for use in tank truck loading and unloading areas. The containment system should have a maximum capacity of any single compartment of a truck loaded or unloaded in the station.
- 3.5.2 Aboveground piping that has potential for damage by vehicles entering the Site should be protected by logically placed warning signs or by concrete-filled pipe barriers.
- 3.5.3 Loading and unloading areas should be provided with an interlocked warning light, grounding shutdown, physical barrier system or warning signs to prevent vehicular departure before complete disconnect of flexible or fixed transfer lines. All drains and outlets of any truck should be closely examined for leakage prior to filling and departure. All drains and outlets that may allow leakage should be tightened, adjusted or replaced to prevent liquid leakage while in transit.

NOTE: LPG loading facilities and remote field loading of condensate are exempt from the C.5 requirements of this document.

4.0 PROCEDURE

4.1 Identifying, Containing and Initial Reporting of a Discharge or Spill of Oil or Hazardous Substance Any Employee

- 4.1.1 Upon noticing a discharge or spill of an oil or hazardous substance in any quantity shall immediately contain the release (if safe to do so) and notify the facility superintendent, dispatcher or other designee. Releases must be reported to gas control in the following three circumstances:

I. The Following Situations Always Require IMMEDIATE Reporting to Gas Control:

1. Release reaches or may reach surface water: (pond, lake, wash or ground water)
2. Release leaves Williams property
3. Release is of questionable nature (i.e., unknown product, unknown hazards)

II. Onsite Releases of Certain Common Industrial Materials Above 10 Gallon Threshold Are Reportable.

Releases that do not migrate off-site or reach surface water may require reporting as well. All releases of 10 gallons or greater of the following materials should be contained and promptly reported to Gas Control:

- Ammonia
- Antifreeze
- Amine

- Chromate Mixtures
- Condensate
- Glycol
- Lube Oil
- Methanol
- Sulfuric Acid
- Sodium Hydroxide
- Natural Gas Liquids
- Other Hydrocarbon Products
- Natural Gas (1 MMSCF)

III. Releases of Certain Other Materials Reportable:

Releases of the following materials above the indicated amount should be reported to gas control:

- PCB's (Concentration > 50 ppm) - any amount
- Mercaptan (Ethyl Mercaptan) - 1 lb.
- Mercury - 1 lb.
- Hydrogen Sulfide - 100 lbs.
- Pesticides - 1 lb.
- Other Material Not Listed - 1 lb.

NOTE 1: A release includes material released (intentionally or unintentionally) to air, water or soil. When notifying Gas Control of a Release, be prepared to provide information on the type of material spilled, amount released, weather conditions, time and date of release, person discovering release and measures taken to control the release.

NOTE 2: Refer to Attachment A for containment procedures.
Facility Superintendent, Controller or Designee

4.1.2 Contacts Gas Control immediately by telephone and provides the following information:

- a. Name of company facility and/or location of facility and nature of discharge or spill
- b. Description and quantity of emission or substance discharged
- c. Description of the circumstances causing the discharge or spill
- d. Name, title and telephone number of person initially reporting the discharge or spill and person reporting to Gas Control
- e. Action taken or being taken to mitigate and correct discharge or spill
- f. Water bodies or streams involved
- g. Time and duration of discharge or spill

h. Outside involvement during discharge or spill (public government agencies, etc. See Emergency Operating Procedure Manuals)

Gas Control Personnel

- 4.1.3 Advises Environmental Affairs departments immediately by telephone concerning the incident including any incidents reported by persons not employed with the Company.

NOTE: If Gas Control is contacted by a person not employed with the Company, the necessary information is obtained as indicated in D.1.2 and the Superintendent and Environmental Affairs are immediately contacted to begin containment and clean-up of the discharge or spill.

- 4.1.4 If Environmental Affairs cannot be contacted, notifies Director over Environmental Affairs.

Facility Superintendent

- 4.1.5 Coordinates containment and clean-up of discharge or spill, keeping the responsible Director Informed.
- 4.1.6 Coordinates containment and clean-up of discharge or spill, keeping the responsible Director Informed. If the discharge or spill is too large for Company personnel to contain, contacts qualified local contractors for assistance. (See Emergency Operating Procedure Manuals tab #11, contractors with available equipment and services).

- 4.1.7 Advises Environmental Affairs by telephone if emergency containment or clean-up assistance from a state agency or a response team from the U.S. Coast Guard is required.

Environmental Affairs

- 4.1.8 Assesses reporting requirements to state and federal agencies (contacts Legal Department and Right-of-Way Department, if appropriate). (See Emergency Operating Procedure Manuals).
- 4.1.9 Makes appropriate contacts with National Response Center and state and local agencies, when necessary.
- 4.1.10 If spill is significant, dispatches Environmental Specialist to scene to oversee cleanup and reporting responsibilities.

**4.2 SUBMITTING WRITTEN NOTIFICATION OF A DISCHARGE OR SPILL
Facility Superintendent or Designee**

- 4.2.1 Completes a written description of the incident as soon as possible after initial notification is given, which should include the following:

- a. Time and date of discharge or spill
- b. Facility name and location
- c. Type of material spilled
- d. Quantity of material spilled

e. Area affected

f. Cause of spill

g. Special circumstances

h. Corrective measures taken

i. Description of repairs made

j. Preventative measures taken to prevent recurrence.

4.2.2 Forwards the completed written description to Environmental Affairs. Retains a copy for future reference.

NOTE: Environmental Affairs, in coordination with the Legal Department, if necessary, submits written reports to government agencies.

**ATTACHMENT A
DISCHARGE OR SPILL CONTAINMENT PROCEDURES AND MATERIALS**

TYPE OF FACILITY WHERE THE DISCHARGE OR SPILL OCCURS	CONTAINMENT PROCEDURES	MATERIALS USED FOR CONTAINMENT
A. Oil Pipeline (as defined in C.1.4)	<ol style="list-style-type: none">1. Closes appropriate block valves.2. Contains Discharge or spill by: Ditching covering, applying sorbents, constructing an earthen dam or burning.3. If burning is required, obtains approval from the appropriate state air quality control government agencies before burning.	<ol style="list-style-type: none">1. Straw2. Loose Earth3. Oil Sorbent 3M Brand4. Plain Wood chips5. Sorb-Oil Chips Banta Co.6. Sorb-Oil Swabs Banta Co.7. Sorb-Oil Mats Banta Co.8. Or Equivalent Materials
B. Vehicle	<ol style="list-style-type: none">1. Contains discharge or spill by: ditching, covering surface with dirt, constructing earthen dams, apply sorbents or burning.2. Notifies immediately Environmental Affairs and if there is any imminent danger to local residents; notifies immediately the highway patrol or local police officials.	

	<p>3. If burning is required, obtains approval from the appropriate state air quality control government agencies before burning.</p> <p>Note: Any vehicle carrying any hazardous or toxic substance will carry a shovel or other ditching device to contain a spill. If the vehicle has sufficient room, sorbent materials should also be carried.</p>
<p>C. Bulk Storage Tanks or any other Facilities</p>	<p>1. Contains discharge or spill by: ditching, covering, applying sorbents, constructing an earthen dam or burning.</p> <p>2. If burning is required, obtains approval from the appropriate state air quality control government agencies before burning.</p>

[Back](#) | [Feedback](#) | [Index](#) | [Search Library](#)

If you have questions, suggestions, comments or concerns regarding the SETS Library, please contact [Documentation Services](#).

APPENDIX B

**NMOCD NOTIFICATION OF FIRE, BREAKS, SPILLS, LEAKS,
AND BLOWOUTS**

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 South First, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
2040 South Pacheco, Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources
Oil Conservation Division
2040 South Pacheco
Santa Fe, NM 87505

Form C-141
Revised March 17, 1999
Submit 2 Copies to appropriate
District Office in accordance
with Rule 116 on back
side of form

Release Notification and Corrective Action

OPERATOR

Initial Report Final Report

Name of Company	Contact	
Address	Telephone No.	
Facility Name	Facility Type	
Surface Owner	Mineral Owner	Lease No.

LOCATION OF RELEASE

Unit Letter	Section	Township	Range	Feet from the	North/South Line	Feet from the	East/West Line	County

NATURE OF RELEASE

Type of Release	Volume of Release	Volume Recovered
Source of Release	Date and Hour of Occurrence	Date and Hour of Discovery
Was Immediate Notice Given? <input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> Not Required	If YES, To Whom?	
By Whom?	Date and Hour	
Was a Watercourse Reached? <input type="checkbox"/> Yes <input type="checkbox"/> No	If YES, Volume Impacting the Watercourse.	
If a Watercourse was Impacted, Describe Fully.*		
Describe Cause of Problem and Remedial Action Taken.*		
Describe Area Affected and Cleanup Action Taken.*		
I hereby certify that the information given above is true and complete to the best of my knowledge and understand that pursuant to NMOCD rules and regulations all operators are required to report and/or file certain release notifications and perform corrective actions for releases which may endanger public health or the environment. The acceptance of a C-141 report by the NMOCD marked as "Final Report" does not relieve the operator of liability should their operations have failed to adequately investigate and remediate contamination that pose a threat to ground water, surface water, human health or the environment. In addition, NMOCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other federal, state, or local laws and/or regulations.		
Signature:	OIL CONSERVATION DIVISION	
Printed Name:	Approved by District Supervisor:	
Title:	Approval Date:	Expiration Date:
Date:	Phone:	Conditions of Approval:
		Attached <input type="checkbox"/>

* Attach Additional Sheets If Necessary

NOTICE OF PUBLICATION

STATE OF NEW MEXICO ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT OIL CONSERVATION DIVISION

Notice is hereby given that pursuant to the New Mexico Water Quality Control Commission Regulations, the following discharge plan application has been submitted to the Director of the Oil Conservation Division, 1220 South Saint Francis Drive, Santa Fe, New Mexico 87505, Telephone (505) 476-3440:

(GW-061) - Williams Field Service, Mark J. Barets, Senior Environmental Specialist, 188 CR 4900, Bloomfield, New Mexico 87413, has submitted a discharge plan renewal application for their Horse Canyon compressor station located in the NE/4 NE/4, Section 27, Township 30 North, Range 9 West, NMPM, San Juan County, New Mexico. Approximately 55 gallons per day of exempt waste water is collected and stored in an above ground bermed closed top tank prior to transport to an OCD approved off-site disposal facility. Groundwater most likely to be affected by an accidental discharge is at a depth of 380 feet with a total dissolved solids concentrations of approximately 3150 mg/l. The discharge plan addresses how spill, leaks, and other accidental discharges to the surface will be managed.

(GW-063) - Williams Field Service, Mark J. Barets, Senior Environmental Specialist, 188 CR 4900, Bloomfield, New Mexico 87413, has submitted a discharge plan renewal application for their Pump Mesa CDP compressor station located in the SW/4 SE/4, Section 14, Township 31 North, Range 8 West, NMPM, San Juan County, New Mexico. Approximately 55 gallons per day of exempt waste water is collected and stored in an above ground bermed closed top tank prior to transport to an OCD approved off-site disposal facility. Groundwater most likely to be affected by an accidental discharge is at a depth of approximately 938 feet with a total dissolved solids concentrations of approximately 9800 mg/l. The discharge plan addresses how spill, leaks, and other accidental discharges to the surface will be managed.

(GW-064) - Williams Field Service, Mark J. Barets, Senior Environmental Specialist, 188 CR 4900, Bloomfield, New Mexico 87413, has submitted a discharge plan renewal application for their Middle Mesa compressor station located in the SE/4 SW/4, Section 10, Township 31 North, Range 7 West, NMPM, San Juan County, New Mexico. Approximately 55 gallons per day of exempt waste water is collected and stored in an above ground bermed closed top tank prior to transport to an OCD approved off-site disposal facility. Groundwater most likely to be affected by an accidental discharge is at a depth of approximately 940 feet with a total dissolved solids concentrations of approximately 900 mg/l. The discharge plan addresses how spill, leaks, and other accidental discharges to the surface will be managed.


Any interested person may obtain further information from the Oil Conservation Division and may submit written comments to the Director of the Oil Conservation Division at the address given above. The discharge plan application may be viewed at the above address between 8:00 a.m. and 4:00 p.m., Monday thru Friday.

Prior to ruling on any proposed discharge plan or its modification, the Director of the Oil Conservation Division shall allow at least thirty (30) days after the date of publication of this notice during which comments may be submitted to him and public hearing may be requested by any interested person. Request for public hearing shall set forth the reasons why a hearing shall be held. A hearing will be held if the director determines that there is significant public interest.

If no hearing is held, the Director will approve or disapprove the plan based on the information available. If a public hearing is held, the Director will approve the plan based on the information in the plan and information presented at the hearing.

GIVEN under the Seal of New Mexico Conservation Commission at Santa Fe, New Mexico, on this 1st day of June, 2001.

STATE OF NEW MEXICO
OIL CONSERVATION DIVISION

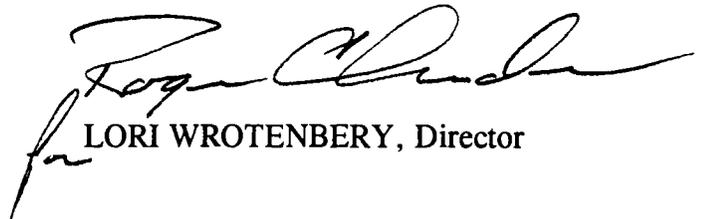


LORI WROTENBERY, Director

SEAL



Environmental Affairs
188 CR 4900
Bloomfield, NM 87413
505/634-4956
505/632-4781 Fax

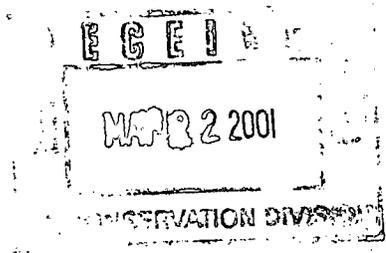

May 21, 2001

Mr. Jack Ford
New Mexico Oil Conservation Division
2040 South Pacheco
Santa Fe NM 87505

Re: Discharge Plan Application and Filing Fee for WFS Compressor Stations

Dear Mr. Ford:

Enclosed please find copies of Discharge Plan application and check number 1000291383 for \$500.00 to cover the filling fee for the following Williams Field Services (WFS) Compressor Stations:

- Middle Mesa Compressor Station - GW 064
- Horse Canyon Compressor Station - GW 061
- Pump Mesa Compressor Station - GW 063
- La Jara Compressor Station - GW 233
- Wild Horse Compressor Station - GW 079

Also included in check number 1000291383 is \$8,800.00 to cover the flat fee for discharge plans on the following sites:

- White Lakes Pump Station GW-341 (\$1,200)
- Hare Compressor Station GW-343 (\$400)
- Mesa Pump Station GW-338 (\$1,200)
- San Luis Pump Station GW-333 (\$1,200)
- San Ysidro Pump Station GW-332 (\$1,200)
- Huerfano Pump Station GW-335 (\$1,200)
- Duran Pump Station GW-336 (\$1,200)
- Kutz Pump Station GW-334 (\$1,200)

Williams Field Services appreciates your assistance in handling these applications and fees. If you have any questions or require additional information, please contact me at 505/634/4956.

Thank you,

Clara M Garcia
Environmental Compliance

Xc: Denny Foust, Aztec, OCD Dist III

ACKNOWLEDGEMENT OF RECEIPT
OF CHECK/CASH

I hereby acknowledge receipt of check No. [REDACTED] dated 5/18/01
or cash received on _____ in the amount of \$ 9300.00
from Williams Field Services Company
for SEE ATTACHED

Submitted by: [Signature] (Family Name) Date: 5-25-01 (DP No.)

Submitted to ASD by: _____ Date: _____

Received in ASD by: _____ Date: _____

Filing Fee New Facility Renewal
Modification Other

Organization Code 521.07 Applicable FY 2001

To be deposited in the Water Quality Management Fund.
Full Payment or Annual Increment

THIS MULTI-TONE AREA OF THE DOCUMENT CHANGES COLOR GRADUALLY AND EVENLY FROM DARK TO LIGHT WITH DARKER AREAS BOTH TOP AND BOTTOM. IT ALSO HAS A REFLECTIVE WATERMARK ON THE BACK.

Williams

DATE: 05/18/2001

PAY TO THE ORDER OF: _____

PAY → *****\$9,300.00

NEW MEXICO OIL CONSERVATION DI
NM WATER QUALITY MGMT FUND
2040 S PACHECO

SANTA FE NM 87504
United States

Bank One, NA
Illinois

[Signature]
Authorized Signer

VOID VOID VOID VOID VOID VOID VOID VOID

MA1353 (10/99)



NEW MEXICO ENERGY, MINERALS and NATURAL RESOURCES DEPARTMENT

GARY E. JOHNSON
Governor
Jennifer A. Salisbury
Cabinet Secretary

February 9, 2001

Lori Wrotenbery
Director
Oil Conservation Division

CERTIFIED MAIL
RETURN RECEIPT NO. 5051 0074

Ms. Clara M. Garcia
Williams Field Services
188 CR 4900
Bloomfield, New Mexico 87413

RE: Discharge Plan Renewal Notice for Williams Field Services Facilities

Dear Ms. Garcia:

Williams Field Services has the following discharge plans, which expire during the current calendar year.

GW-060 expires 3/21/2001 – Milagro Compressor Station
GW-233 expires 4/1/2001 – La Jara Compressor Station
GW-061 expires 6/6/2001 – Horse Canyon Compressor Station
GW-062 expires 6/6/2001 – Manzanares Compressor Station
GW-063 expires 6/6/2001 – Pump Mesa Compressor Station
GW-064 expires 6/6/2001 – Middle Mesa Compressor Station
GW-079 expires 6/21/2001 – Wild Horse Compressor Station
GW-078 expires 6/21/2001 - 5-Points Compressor Station
GW-250 expires 8/9/2001 – Coyote Springs Compressor Station
GW-249 expires 8/9/2001 – Trunk B Booster Compressor Station
GW-248 expires 8/9/2001 – Trunk A Booster Compressor Station
GW-257 expires 9/18/2001 – Trunk C Compressor Station
GW-256 expires 9/18/2001 – Koch-Gardner Compressor Station
GW-087 expires 11/27/2001 – Cedar Hill Compressor Station
GW-271 expires 12/17/2001 – Kernaghan Compressor Station
GW-274 expires 12/17/2001 – Pritchard Straddle Compressor Station
GW-273 expires 12/17/2001 – Moore Compressor Station
GW-272 expires 12/17/2001 – Kernaghan B-8 Compressor Station

WQCC 3106.F. If the holder of an approved discharge plan submits an application for discharge plan renewal at least 120 days before the discharge plan expires, and the discharger is not in violation of the approved discharge plan on the date of its expiration, then the existing approved discharge plan for the same activity shall not expire until the application for renewal has been approved or disapproved. A discharge plan continued

under this provision remains fully effective and enforceable. An application for discharge plan renewal must include and adequately address all of the information necessary for evaluation of a new discharge plan. Previously submitted materials may be included by reference provided they are current, readily available to the secretary and sufficiently identified to be retrieved. [12-1-95]

The discharge plan renewal application for each of the above facilities is subject to WQCC Regulation 20NMAC 6.2.3114. Every billable facility submitting a discharge plan renewal will be assessed a fee equal to the filing fee of \$100.00. After January 15, 2001 renewal discharge plans require a flat fee equal to the flat fee schedule for gas processing facilities pursuant to revised WQCC Regulations 20NMAC 6.2.3114. A copy of the revised fee schedule is included for your assistance. The \$100.00 filing fee is to be submitted with each discharge plan renewal application and is nonrefundable.

Please make all checks payable to: **NMED-Water Quality Management** and addressed to the OCD Santa Fe Office. Please submit the original discharge plan renewal application and one copy to the OCD Santa Fe Office and one copy to the OCD Aztec District Office. **Note that the completed and signed application form must be submitted with your discharge plan renewal request.** A complete copy of the regulations is also available on NMED's website at www.nmenv.state.nm.us).

If any of the above-sited facilities no longer has any actual or potential discharges and a discharge plan is not needed, please notify this office. If the Williams Field Services has any questions, please do not hesitate to contact Mr. Jack Ford at (505) 476-3489.

Sincerely,



Roger C. Anderson
Oil Conservation Division

cc: OCD Aztec District Office

work copy

SITE NAME	DISCHARGE PLAN #	CURRENT OCD PLAN # of Units/ HP	ACTUAL INSTALLS # of Units/ HP	AQB PERMITTED # of Units/ HP
Category 1 - Update OCD Plans for actual compression; AQB permit allows additional installations				
OK 31-6 #1	X	GW-118	6 units/990 HP ea 5+4	15 units/1370 HP ea
No Mod. request → OK 32-7 #1	X	GW-117	4 units/895 HP ea ok	6 units/1357 HP ea
No Mod. request → OK 32-8 #2	X	GW-111	4 units/895 HP ea 4+2	5 units/1357 HP ea
OK HORSE CYN. CDP	ok	GW-61	4 units/895 HP ea 14	6 units/1390 HP ea
OK MIDDLE MESA CDP	X	GW-64	10 units/895 HP ea 10+4	19 units/1362 HP ea
OK PUMP MESA CDP	ok	GW-63	6 units/895 HP ea 6+6	10 units/1363 HP ea
OK TRUNK N C.S.	ok	GW-306	5 units/1140 HP ea	6 units/1140 HP ea
No Mod. request → OK TRUNK L C.S.	X	GW-180	6 units/990 HP ea	10 units/990 HP ea
Category 2 - OCD Plan currently reflects all AQB permitted units; however, all units not yet installed				
29-6 #4CDP		GW-122	10 units; total site HP 10,980 4+3	6 units/1377 HP ea.; 1 unit/1148 HP
32-9 CDP		GW-91	8 units/1379 HP ea	5 units/1379 HP ea
OK CEDAR HILL CDP		GW-87	10 units/1386 HP ea ok 5+1	7 units/1386 HP ea
KERNAGHAN B-8 STRADDLE		GW-272	2 units/764 HP ea	1 unit/764 HP
MANZANARES CDP		GW-62	4 units/895 HP ea	3 units/895 HP ea
MOORE STRADDLE		GW-273	2 units/ 778 HP ea	1 unit/ 778 hp
NAVAJO CDP		GW-182	4 units/2946 HP ea	3 units/2916 HP ea
TRUNK A BOOSTER C.S.		GW-248	6 units/1367 HP ea	3 units/1367 HP ea
TRUNK B BOOSTER C.S.		GW-249	7 units/1367 HP ea	3 units/1367 HP ea
MARTINEZ DRAW		GW-308	2 units/1380 HP ea	1 unit/1380 HP
QUINTANA MESA		GW-309	2 units/1380 HP & 1151 HP	1 unit/1232 HP
Category 3 - Update OCD Plans for actual compression; all AQB permitted units installed				
29-6 #2CDP	X	GW-121	5 units/895 HP ea. 5+2	12 units/1370 HP ea.
ROSA #1 CDP	X	GW-292	1 unit/1372 HP	2 unit/1372 HP
TRUNK M C.S.	X	GW-181	1 unit/990 HP	2 units/1378 HP ea
PIPKIN		GW-120	2 units/856 HP total	1 unit/1403 HP
LA JARA FIELD	X	GW-233	1 Solar T-3000/ 2831 hp; 2 Solar T-4000/ 2897 hp ea.	2 Solar T-4000, 2 Solar T-4700S, 1 Solar T-4700=total 17,700 hp

Notice about units 7-97. Noted app.

Notice on renewal

(mod. to 14 units '96)

(14 units in renewal app. '99)

(6 units in appl. '95)


(up to 8 units in renewal app. '98)

OK

-change hp rating

No Mod. request → OK

No Mod. request → OK

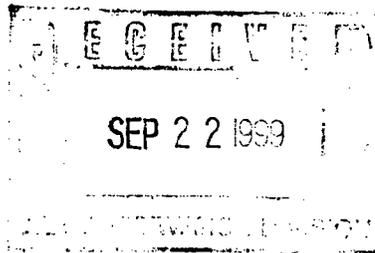

295 Chipeta Way
P.O. Box 58900
Salt Lake City, UT 84108
801/584-6543
801/584-7760

September 17, 1999

Mr. Jack Ford
New Mexico Oil Conservation Division
2040 South Pacheco Street
Santa Fe, New Mexico 87505

Re: Underground Line Testing Results at various Williams Field Services Facilities

Dear Mr. Ford:

Enclosed, please find a copy of the results of the underground drain line testing that was performed at the Williams Field Services (WFS) facilities listed below.

Pump Mesa, GW-063 (tested 8/9/99)
Middle Mesa, GW-064 (tested 2/3/99)

If you have any questions concerning this submittal, please call me at 801-584-6543.

Sincerely,

A handwritten signature in black ink, appearing to read "Ingrid Deklau".

Ingrid Deklau
Environmental Specialist

enclosures

XC: Denny Foust, NM OCD



**NEW MEXICO ENERGY, MINERALS
& NATURAL RESOURCES DEPARTMENT**

OIL CONSERVATION DIVISION
2040 South Pacheco Street
Santa Fe, New Mexico 87505

May 24, 1999

CERTIFIED MAIL
RETURN RECEIPT NO. Z-357-870-092

Ms. Ingrid A. Deklau
Williams Field Services
P.O. Box 58900
Salt Lake City, Utah 84108

**RE: Site Modifications Notification
GW-064, Middle Mesa Compressor Station
San Juan County, New Mexico**

Dear Ms. Deklau:

The OCD has received the site modification letter, dated May 11, 1999, from Williams Field Services for the Middle Mesa Compressor Station GW-064 located in SE/4 SW/4, Section 10, Township 31 North, Range 7 West, NMPM, San Juan County, New Mexico. The requested modification is considered a minor modification to the above referenced discharge plan and public notice will not be issued. **The site modifications are approved without modification to the discharge plan with the stipulation that all modifications comply with the discharge renewal plan approved April 16, 1996.**

Please note that Section 3104 of the regulations requires that **"When a plan has been approved, discharges must be consistent with the terms and conditions of the plan."** Pursuant to Section 3107.C Williams Field Services is required to notify the Director of any facility expansion, production increase, or process modification that would result in any change in the discharge of water quality or volume. Further, this approval does not relieve Williams Field Services from liability should operations result in contamination to the environment.

Sincerely,

W. Jack Ford, C.P.G.
Environmental Bureau
Oil Conservation Division

cc: Mr. Denny Foust - Aztec District Office

Z 357 870 092

US Postal Service
Receipt for Certified Mail
No Insurance Coverage Provided.
Do not use for International Mail (See reverse)

Sent to	Ingrid
Street & Number	WFS
Post Office, State, & ZIP Code	SLC
Postage	\$
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt Showing to Whom & Date Delivered	
Return Receipt Showing to Whom, Date, & Addressee's Address	
TOTAL Postage & Fees	\$
Postmark or Date	GW-064 5-24-98

PS Form 3800, April 1995



295 Chipeta Way
P.O. Box 58900
Salt Lake City, UT 84108
801/584-6543
801/584-7760

May 11, 1999

Mr. Jack Ford
NM OCD
2040 South Pacheco
Santa Fe, New Mexico 87505

Re: Modification of Williams Field Services Discharge Plan for Middle Mesa (GW – 064)

Dear Mr. Ford:

Pursuant to our conversation today and my March 1999 submittal to you, Williams Field Services (WFS) formally requests modification to the Discharge Plan for the Middle Mesa compressor site to allow the installation of up to twenty 1362 horsepower units. There are currently nineteen units operating at the site. This modification includes the installation of additional units and an increase in horsepower from 895 to 1362. No additional waste streams will be generated with this modification. This modification corresponds to permitting levels allowed by the Air Permit currently held for this site.

If you have any questions or require additional information, I can be reached at 801-584-6543.

Sincerely,


A handwritten signature in black ink, appearing to read "Ingrid Deklau".

Ingrid Deklau
Environmental Specialist

XC: Denny Foust, Aztec OCD



295 Chipeta Way
P.O. Box 58900
Salt Lake City, UT 84108
801/584-6543
801/584-7760

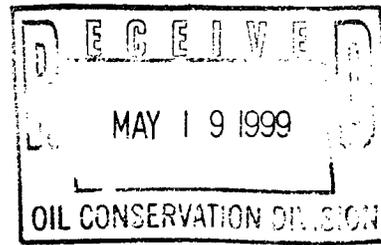

May 14, 1999

Mr. Jack Ford
NM OCD
2040 South Pacheco
Santa Fe, New Mexico 87505

Re: WFS Requests for Modification of Various OCD Discharge Plans

Dear Mr. Ford:

Enclosed you will find formal requests for modification of OCD Discharge Plans for sites listed in the following categories on my March 1999 submittal to you:

- Category 1 Update OCD Plans for actual compression; AQB permit allows additional installs
- Category 3 Update OCD Plans for actual compression; all AQB permitted units installed
- Category 5 Current OCD Plan reflects actual installs; AQB permit allows additional installs.

The table below lists the sites for which modifications have been requested.


Category 1	Category 3	Category 5
31-6	Rosa #1	30-5
32-7	Trunk M	30-8
32-8#2	La Jara	Decker Junction
Horse Canyon	Note 1: 29-6#2 belongs in Cat. 6	Sims Mesa
↙ Middle Mesa	Note 2: Pipkin OCD plan reflects more units than actual installs	Lateral N-30
Pump Mesa		
Trunk N		
Trunk L		

For sites that fall under Categories 1 and 3, the OCD Discharge Plans need to be modified to reflect the actual number of units currently installed at the site, and also allow room for additional installations for which WFS currently holds Air Permits.

For sites that fall under Category 5, the OCD Discharge Plan properly reflects the current number of units installed, but the Plan should be modified to allow for the additional units allowed under WFS Air Permits for the site.

If you have any questions or require additional information, I can be reached at 801-584-6543.

Sincerely,

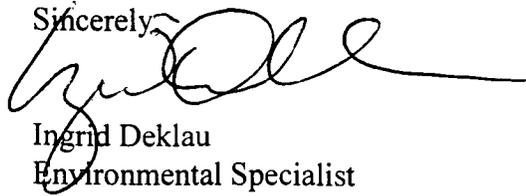A handwritten signature in black ink, appearing to read 'Ingrid Deklau', written over the word 'Sincerely,'.

Ingrid Deklau
Environmental Specialist

Xc: Denny Foust, Aztec OCD

ACKNOWLEDGEMENT OF RECEIPT
OF CHECK/CASH

I hereby acknowledge receipt of check No. [REDACTED] dated 5/3/96,
or cash received on _____ in the amount of \$ 690.00

from W.F.S.
for Middle Mesa C.S. GW-64

Submitted by: _____ Date: _____
(Facility Name) (OP No.)

Submitted to ASD by: R. Anderson Date: 5/9/96

Received in ASD by: M. Jupp Date: 5-20-96

Filing Fee _____ New Facility _____ Renewal X

Modification _____ Other _____
(Specify)

Organization Code 521.07 Applicable FY 96

To be deposited in the Water Quality Management Fund.

Full Payment X or Annual Increment _____

WILLIAMS FIELD SERVICES COMPANY
ONE OF THE WILLIAMS COMPANIES
P.O. Box 58900
Salt Lake City, Utah 84158-0900

Chemical Bank Delaware
1201 Market Street
Wilmington DE 19801
62-26 5736-09
311

DATE	CHECK NO.	NET AMOUNT
05/03/96	[REDACTED]	690.00

PAY
LX HUNDRED NINETY AND 00/100-----

TO THE ORDER OF
WQCC
OIL CONSERVATION DIVISION
2040 S. PACHECO
SANTA FE NM 87505

Williams Field Services Company
Jim Anderson
VICE PRESIDENT
AUTHORIZED REPRESENTATIVE



Williams Field Services Company

9810 WQCC

05/03/96



INVOICE NUMBER	DESCRIPTION	INVOICE DATE	AMOUNT	DISCOUNT	NET AMOUNT
GW-64	Middle Mesa Comp.	04/16/96	690.00	0.00	690.00
			690.00	0.00	690.00

PLEASE DETACH BEFORE DEPOSITING



STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT

OIL CONSERVATION DIVISION
2040 S. PACHECO
SANTA FE, NEW MEXICO 87505
(505) 827-7131

November 20, 1996

CERTIFIED MAIL
RETURN RECEIPT NO. P-288-258-695

Ms. Leigh E. Gooding
Williams Field Services
P.O. Box 58900, M.S. 2G1
Salt Lake City, Utah 84158-0900

RE: Minor Modification
Williams Field Services
GW-064, Middle Mesa Compressor Station
San Juan County, NM

Dear Ms. Gooding:

The New Mexico Oil Conservation Division (OCD) has received the WFS letter dated October 23, 1996 for the **Middle Mesa Compressor Station located in SE/4 SW/4 of Section 10, Township 31 North, Range 7 West, NMPM, San Juan County, New Mexico.** The WFS request is considered a minor modification to the above referenced discharge plan and public notice will not be issued. The minor modification will consist of the following as outlined by Williams Field Services with the Revision dated October 23, 1996:

- The Addition of four additional compressors to the existing ten compressors already at the facility, bringing the total number of compressors at the site to fourteen. The total horsepower at the site remains above 3,000 horsepower.

Based on the information outlined above, **the requested minor modification is hereby approved.**

The Application for modification was submitted pursuant to Water Quality Control Commission (WQCC) Regulation 3107.C and is approved pursuant to WQCC Regulation 3109.

Please note that "When a plan has been approved, discharges must be consistent with the terms and conditions of the plan". Pursuant to Section 3107.C WFS is required to notify the Director of any facility expansion, production increase or process modification that would result in a significant modification in the discharge of potential ground water contaminants.

Ms. Leigh E. Gooding
WFS-Middle Mesa
GW-064
November 20, 1996
Page No. 2

Note, that OCD approval does not relieve WFS of liability should WFS operation's result in contamination of surface waters, ground waters or the environment. Also, OCD approval does not relieve WFS from compliance with other federal, state, and local rules and regulations that may apply.

Sincerely,



Roger C. Anderson
Environmental Bureau Chief

RCA/pws

P 288 258 695

US Postal Service
Receipt for Certified-Mail
No Insurance Coverage Provided.
Do not use for International Mail (See reverse)

Sent to WFS - Gooding	
Street & Number Mesa Mesa, GW-064	
Post Office, State, & ZIP Code	
Postage	\$
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt Showing to Whom & Date Delivered	
Return Receipt Showing to Whom, Date, & Addressee's Address	
TOTAL Postage & Fees	\$
Postmark or Date	

PS Form 3800, April 1995

XC: Mr. Denny Foust - Environmental Geologist

P.O. Box 58900 Salt Lake City, Utah 84158-0900

October 23, 1996

OCT 28 1996

ENVIRONMENTAL DIVISION


Mr. Roger Anderson
New Mexico Oil Conservation Division
2040 South Pacheco
Santa Fe, New Mexico 87504

Discharge Plan Revisions: **32-9 CDP Compressor Station (GW-091)**
 Middle Mesa CDP Compressor Station (GW-64)
 Simms Mesa CDP Compressor Station (GW-68)

Dear Mr. Anderson:

Enclosed, please find Discharge Plan Revisions for proposed modifications at the above referenced Williams Field Services facilities. If you have any questions or require additional information, please feel free to contact me at (801) 584-6543.

Sincerely,

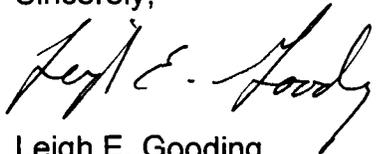

Leigh E. Gooding
Sr. Environmental Specialist

enclosure

cc: Denny Foust

RECEIVED

OCT 28 1996

Environmental Bureau
Oil Conservation Division

**WILLIAMS FIELD SERVICES
MIDDLE MESA CDP DISCHARGE PLAN REVISION
October 1996**

I. BACKGROUND INFORMATION

In April, 1991, Williams Field Services Company (WFS) submitted a discharge plan application for the the Middle Mesa CDP Compressor Station (GW-64) to the New Mexico Oil Conservation Division (NMOCD). On June 6, 1991, the application was approved. According to the terms of the Discharge Plan, WFS is required to notify the Director of the NMOCD of any facility expansion, production increase, or process modification that would result in any change in the discharge of water quality or volume. This revision addresses proposed waste disposal modifications at the facility.

II PROPOSED MODIFICATIONS

There are currently ten (10) Waukesha 7042 GL engines site-rated at 895 horse power. WFS proposes to install four (4) additional Waukesha 7042 GL engines at the site and increase the site-rated horse power of all fourteen (14) engines to 1364 hp each.

III SUMMARY

No new wastes will be generated at the facility as a result of the proposed modification. The proposed medication will result in an increase in the volume of used oil and wash-down water generated at the facility. All liquid wastes will be handled in accordance with the approved OCD Discharge Plan and its Renewal (GW-64).

IV AFFIRMATION

I hereby certify that I am familiar with the information contained in and submitted with this revision and that such information is true, accurate, and complete to the best of my knowledge and belief.

 10-23-96
Signature Date

Terry G. Spradlin

Manager, Environment, Health & Safety



NEW MEXICO ENERGY, MINERALS
& NATURAL RESOURCES DEPARTMENT

OIL CONSERVATION DIVISION
2040 South Pacheco Street
Santa Fe, New Mexico 87505
(505) 827-7131

July 11, 1996

CERTIFIED MAIL

RETURN RECEIPT NO. P-594-835-277

Ms. Leigh E. Gooding
Williams Field Services
P.O. Box 58900, M.S. 2G1
Salt Lake City, Utah 84158-0900

**RE: Discharge Plan Inspections
GW-61, GW-62, GW-63, GW-64 and GW-87
San Juan County, New Mexico**

Dear Ms. Gooding:

The New Mexico Oil Conservation Division (OCD) on June 4, 1996 along with Williams Field Service Operator Mr. Frank Chacon inspected the Horse Canyon (GW-61), Manzanares (GW-62), Pump Mesa (GW-63), Middle Mesa (GW-64), and Cedar Hill (GW-87) compressor stations. The inspections purpose was to determine compliance with the previously approved OCD discharge plan renewals for the facilities. The information that follows will address the concerns of the OCD at the above mentioned facilities.

Note: For WFS information the OCD has enclosed duplicate copies of all photos taken during the inspections.

1. GW-61 or Horse Canyon Compressor Station,(Inspected 06/04/96)

A. The overall house keeping and pollution prevention in place at the site appears to be in compliance with OCD discharge permit GW-061. However, it should be noted that many of the lube oil saddle tanks at the site did not have pad and curb type containment under them - **WFS within 30 days of receipt of this letter will propose a time line to the OCD for coming into compliance with this item.**

B. Waste issues - it appears that painting does occur at the facility as paint products were found to be in storage at the site - **WFS shall within 30 days of receipt of this inspection report determine how the paint waste is disposed/recycled and provide the OCD with an answer.**

C. Solvents - **WFS shall not commingle solvent wastes with other wastes that are non-hazardous in terms of RCRA unless WFS can prove by characteristic testing or process knowledge (i.e. MSDS) that the solvent is non-hazardous. WFS will address this issue within 30 days of receipt of this inspection report to the OCD.**

Ms. Leigh Gooding
WFS: GW-61, GW-62, GW-63,
GW-64, & GW-87
July 11, 1996
Page 2

(D.) WFS needs to make certain that only RCRA Subtitle C Exempt wastes are being disposed of at Class II UIC disposal well facilities - and other wastes that do not meet the criteria of the exemption are not injected into class II UIC disposal wells.

2. GW-62 or Manzanares Compressor Station, (Inspected 06/04/96)

A. The overall house keeping and pollution prevention in place at the site appears to be in compliance with OCD discharge permit GW-062. However, it should be noted that many of the lube oil saddle tanks at the site did not have pad and curb type containment under them - **WFS within 30 days of receipt of this letter will propose a time line to the OCD for coming into compliance with this item.**

B. Waste issues - it appears that painting does occur at the facility as paint products were found to be in storage at the site - **WFS shall within 30 days of receipt of this inspection report determine how the paint waste is disposed/recycled and provide the OCD with an answer.**

C. Solvents - WFS shall not commingle solvent wastes with other wastes that are non-hazardous in terms of RCRA unless WFS can prove by characteristic testing or process knowledge (i.e. MSDS) that the solvent is non-hazardous. **WFS will address this issue within 30 days of receipt of this inspection report to the OCD.**

(D.) WFS needs to make certain that only RCRA Subtitle C Exempt wastes are being disposed of at Class II UIC disposal well facilities - and other wastes that do not meet the criteria of the exemption are not injected into class II UIC disposal wells.

3. GW-63 or Pump Mesa Compressor Station, (Inspected 06/04/96)

A. Same as (1.) and (2.) above.

4. GW-64 or Middle Mesa Compressor Station, (Inspected 06/04/96)

A. Same as (1.) and (2.) above.

B. A 5 gallon can of "Carburetor Cleaner" NAPA 6406 containing Methylene chloride was found at the site - it appears POI uses this chemical as part of valve maintenance on the recipis - WFS should require POI to use solvents that would not cause potential RCRA problems - as an example what would happen if a 5 gallon can of this chemical were accidentally spilled into to the below grade waste water piping at the site and then hauled to a class II disposal well?

Ms. Leigh Gooding
WFS: GW-61, GW-62, GW-63,
GW-64, & GW-87
July 11, 1996
Page 3

5. **GW-87 or Cedar Hill Compressor Station, (Inspected 06/04/96)**

A. Same as (1.) and (2.) above.

Note: All OCD rules/regulations/and guidelines are available on the Internet at WWW.EMNRD.STATE.NM.US.

The OCD would like to thank the Williams Field Service Operators for their professional conduct during the discharge plan inspection site visits.

If there any questions regarding this report feel free to call me at (505)-827-7156.

Sincerely,



Patricio W. Sanchez
Petroleum Engineering Specialist

XC: Mr. Denny Foust - Geologist.

Ms. Leigh Gooding
WFS: GW-61,GW-62,GW-63,
GW-64, & GW-87
July 11, 1996
Page 4

**ATTACHMENT NO.1 - WFS GW-61
Horse Canyon COMPRESSOR**

Ms. Leigh Gooding
WFS: GW-61, GW-62, GW-63,
GW-64, & GW-87
July 11, 1996
Page 5

**ATTACHMENT NO.2 - WFS GW-62
Manzanares COMPRESSOR**

Ms. Leigh Gooding
WFS: GW-61, GW-62, GW-63,
GW-64, & GW-87
July 11, 1996
Page 6

**ATTACHMENT NO.3 - WFS GW-63
Pump Mesa COMPRESSOR**

Ms. Leigh Gooding
WFS: GW-61, GW-62, GW-63,
GW-64, & GW-87
July 11, 1996
Page 7

**ATTACHMENT NO.4 - WFS GW-64
Middle Mesa COMPRESSOR**

<WFS> GW-064 (PHOTOS BY OCD)



PHOTO NO. 01

DATE: 06/04/96



PHOTO NO. 02

DATE: 06/04/96

<WFS> GW-064 (PHOTOS BY OCD)



PHOTO NO. 03

DATE: 06/04/96



PHOTO NO. 04

DATE: 06/04/96

<WFS> GW-064 (PHOTOS BY OCD)



PHOTO NO. 05

DATE: 06/04/96

Ms. Leigh Gooding
WFS: GW-61, GW-62, GW-63,
GW-64, & GW-87
July 11, 1996
Page 8

**ATTACHMENT NO.5 - WFS GW-87
Cedar Hill COMPRESSOR**



February 21, 1996

Roger C. Anderson
Environmental Bureau Chief
New Mexico Energy, Minerals and Natural Resources Department
Oil Conservation Division
2040 S. Pacheco
Santa Fe, NM 87505

Re: Groundwater Discharge Plan Renewals

Dear Mr. Anderson

On behalf of Williams Field Services and Williams Gas Processing - Blanco I am submitting renewal applications for the following Groundwater Discharge Plans.

- GW-61 Horse Canyon Compressor Station, San Juan County
- GW-62 Manzanares Compressor Station, San Juan County
- GW-63 Pump Mesa Compressor Station, San Juan County
- GW-64 Middle Mesa Compressor Station, San Juan County
- GW-78 Five Points Compressor Station, Rio Arriba County
- GW-79 Wild Horse Compressor Station, Rio Arriba County

4665 INDIAN SCHOOL NE

SUITE 106

I am enclosing a check for \$ 300.00 to cover the filing fee for the 6 applications. If you have any questions or need clarification, please call me or Leigh Gooding of Williams Field Services at 801-584-6543.

ALBUQUERQUE

Sincerely,

A handwritten signature in cursive script that reads 'Susan E. Boyle'.

Susan E. Boyle
Project Manager

NEW MEXICO

87110

cc: w/attachments
Denny Foust
OCD Aztec Office

PHO 505 266 6611

ACKNOWLEDGEMENT OF RECEIPT
OF CHECK/CASH

I hereby acknowledge receipt of check No. [redacted] dated 2/21/96
or cash received on _____ in the amount of \$ ~~247.96~~
\$ 300.00

from Environmental Services
for WFS Horse Canyon (GW 61); Manzaneros (GW 62); Pump Mesa (GW 63); Middle Mesa (GW 64); Five Points (GW 78); Wild Horse (GW 79)

Submitted by: _____ Date: _____

Submitted to ASD by: R. Chudler Date: 3/25/96

Received in ASD by: Angela Herrera Date: 3-29-96

Filing Fee New Facility _____ Renewal _____
Modification _____ Other _____

Organization Code 521.07 Applicable FY 96

To be deposited in the Water Quality Management Fund.

Full Payment _____ or Annual Increment _____



Norwest Bank New Mexico, N.A.
Albuquerque, New Mexico 87103-1081

Cashier's
Check

0204/c.gilbert

Remitter ****Environmental Services, Inc.****

Date February 21, 1996

95-219/1070

Pay NORWEST BANK NEW MEXICO, N.A. 300.00 \$ ****300.00****

To the Order of ****Oil Conservation Division****

Christy Gilbert
Authorized Representative



RECEIVED

FEB 28 1996

2260
USFWS - NMESCO

OIL CONSERVATION DIVISION
RECEIVED

96 MAR 14 AM 8 52

NOTICE OF PUBLICATION

**STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION**

Notice is hereby given that pursuant to New Mexico Water Quality Control Commission Regulations, the following discharge plan renewal applications have been submitted to the Director of the Oil Conservation Division, 2040 South Pacheco, Santa Fe, New Mexico 87505, Telephone (505) 827-7131:

(GW-61) - Williams Field Services, Ms. Leigh Gooding, (801)-584-6543, P.O. Box 58900, M.S. 2G1, Salt Lake City, Utah 84158-0900, has submitted a Discharge Plan Renewal Application for the Horse Canyon CDP located in the NE/4 NE/4, Section 27, Township 30 North, Range 9 West, NMPM, San Juan County, New Mexico. Approximately 55 gallons per day of waste water is stored in an above ground bermed closed top tank. All wastes are disposed of offsite at an NMOCD approved facility. Groundwater most likely to be affected by a spill, leak, or accidental discharge to the surface is at a depth of approximately 380 feet with a total dissolved solids concentration of approximately 3,150 mg/L. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

(GW-62) - Williams Field Services, Ms. Leigh Gooding, (801)-584-6543, P.O. Box 58900, M.S. 2G1, Salt Lake City, Utah 84158-0900, has submitted a Discharge Plan Renewal Application for the Manzanares CDP located in the SE/4 SW/4, Section 28, Township 30 North, Range 8 West, NMPM, San Juan County, New Mexico. Approximately 27 gallons per day of waste water is stored in an above ground bermed closed top tank. All wastes are disposed of offsite at an NMOCD approved facility. Groundwater most likely to be affected by a spill, leak, or accidental discharge to the surface is at a depth of approximately 115 feet with a total dissolved solids concentration of approximately 910 mg/L. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

(GW-63) - Williams Field Services, Ms. Leigh Gooding, (801)-584-6543, P.O. Box 58900, M.S. 2G1, Salt Lake City, Utah 84158-0900, has submitted a Discharge Plan Renewal Application for the Punup Mesa CDP located in the SW/4 SE/4, Section 14, Township 31 North, Range 8 West, NMPM, San Juan County, New Mexico. Approximately 55 gallons per day of waste water is stored in an above ground bermed closed top tank. All wastes are disposed of offsite at an NMOCD approved facility. Groundwater most likely to be affected by a spill, leak, or accidental discharge to the surface is at a depth of approximately 938 feet with a total dissolved solids concentration of approximately 9800 mg/L. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.


(GW-64) - Williams Field Services, Ms. Leigh Gooding, (801)-584-6543, P.O. Box 58900, M.S. 2G1, Salt Lake City, Utah 84158-0900, has submitted a Discharge Plan Renewal Application for the Middle Mesa CDP located in the SE/4 SW/4, Section 10, Township 31 North, Range 7 West, NMPM, San Juan County, New Mexico. Approximately 55 gallons per day of waste water is stored in an above ground bermed closed top tank. All wastes are disposed of offsite at an NMOCD approved facility. Groundwater most likely to be affected by a spill, leak, or accidental discharge to the surface is at a depth of approximately 940 feet with a total dissolved solids concentration of approximately 900 mg/L. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

Any interested person may obtain further information from the Oil Conservation Division and may submit written comments to the Director of the Oil Conservation Division at the address given above. The discharge plan applications may be viewed at the above address between 8:00 a.m. and 4:00 p.m., Monday through Friday. Prior to ruling on any proposed discharge plan or its modification, the Director of the Oil Conservation Division shall allow at least thirty (30) days after the date of publication of this notice during which comments may be submitted to him and a public hearing may be requested by any interested person. Requests for a public hearing shall set forth the reasons why a hearing should be held. A hearing will be held if the Director determines there is significant public interest.

If no public hearing is held, the Director will approve or disapprove the proposed plan based on information available. If a public hearing is held, the director will approve or disapprove the proposed plan based on information in the discharge plan application and information submitted at the hearing.

GIVEN under the Seal of New Mexico Oil Conservation Commission at Santa Fe, New Mexico, on this 26th day of February, 1996.

STATE OF NEW MEXICO
OIL CONSERVATION DIVISION

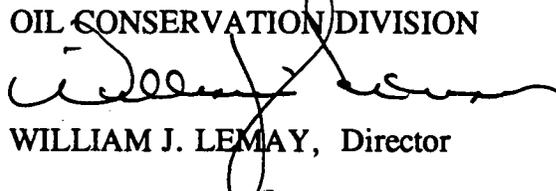
WILLIAM J. LEMAY, Director

WJL/pws


SEAL

NO EFFECT FINDING

The described action will have no effect on listed species, wetlands, or other important wildlife resources.

Date March 13, 1996

Consultation # GWCD96-1

Approved by 

U.S. FISH and WILDLIFE SERVICE
NEW MEXICO ECOLOGICAL SERVICES FIELD OFFICE
ALBUQUERQUE, NEW MEXICO

RECEIVED

MAR 15 1996

Environmental Bureau
Oil Conservation Division

AFFIDAVIT OF PUBLICATION

No. 35978

COPY OF PUBLICATION

STATE OF NEW MEXICO
County of San Juan:


ROBERT LOVETT being duly sworn says: That he is the Classified Manager of THE DAILY TIMES, a daily newspaper of general circulation published in English at Farmington, said county and state, and that the hereto attached Legal Notice was published in a regular and entire issue of the said DAILY TIMES, a daily newspaper duly qualified for the purpose within the meaning of Chapter 167 of the 1937 Session Laws of the State of New Mexico for publication on the following day(s):

Monday, March 4, 1996

and the cost of publication is: \$110.60



On 3/5/96 ROBERT LOVETT appeared before me, whom I know personally to be the person who signed the above document.


My Commission Expires March 21, 1998

Legals

NOTICE OF PUBLICATION

STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION

Notice is hereby given that pursuant to New Mexico Water Quality Control Commission Regulation the following discharge plan renewal applications have been submitted to the Director of the Oil Conservation Division, 2040 South Pacheco, Santa Fe, New Mexico 87505, Telephone (505) 7131-7131:

(GW-61) - Williams Field Services, Ms. Leigh Gooding, (801) 584-6543, P.O. Box 58900, M.S. 2G1, Salt Lake City, Utah 84158-0900, has submitted a Discharge Plan Renewal Application for the Horses Canyon CDP located in the NE/4 NE/4, Section 27, Township 3 North, Range 9 West, NMPM, San Juan County, New Mexico. Approximately 55 gallons per day of waste water is stored in an above ground bermed closed top tank. All waste are disposed of onsite at an NMOCD approved facility. Groundwater most likely to be affected by a spill, leak, or accidental discharge to the surface is at a depth of approximately 380 feet with a total dissolved solids concentration of approximately 3,150 mg/L. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

(GW-62) - Williams Field Services, Ms. Leigh Gooding, (801) 584-6543, P.O. Box 58900, M.S. 2G1, Salt Lake City, Utah 84158-0900, has submitted a Discharge Plan Renewal Application for the Manzanares CDP located in the SE/4 SW/4, Section 28, Township 31 North, Range 8 West, NMPM, San Juan County, New Mexico. Approximately 27 gallons per day of waste water is stored in an above ground bermed closed top tank. All waste are disposed of onsite at an NMOCD approved facility. Groundwater most likely to be affected by a spill, leak, or accidental discharge to the surface is at a depth of approximately 115 feet with a total dissolved solids concentration of approximately 910 mg/L. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

(GW-63) - Williams Field Services, Ms. Leigh Gooding, (801) 584-6543, P.O. Box 58900, M.S. 2G1, Salt Lake City, Utah 84158-0900, has submitted a Discharge Plan Renewal Application for the Pump Mesa CDP located in the SW/4 SE/4, Section 14, Township 31 North, Range 8 West, NMPM, San Juan County, New Mexico. Approximately 55 gallons per day of waste water is stored in an above ground bermed closed top tank. All wastes are disposed of onsite at an NMOCD approved facility. Groundwater most likely to be affected by a spill, leak, or accidental discharge to the surface is at a depth of approximately 938 feet with a total dissolved solids concentration of approximately 9800 mg/L. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

(GW-64) - Williams Field Services, Ms. Leigh Gooding, (801) 584-6543, P.O. Box 58900, M.S. 2G1, Salt Lake City, Utah 84158-0900, has submitted a Discharge Plan Renewal Application for the Middle Mesa CDP located in the SE/4 SW/4, Section 10, Township 31 North, Range 7 West, NMPM, San Juan County, New Mexico. Approximately 55 gallons per day of waste water is stored in an above ground bermed closed top tank. All wastes are disposed of onsite at an NMOCD approved facility. Groundwater most likely to be affected by a spill, leak, or accidental discharge to the surface is at a depth of approximately 940 feet with a total dissolved solids concentration of approximately 900 mg/L. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

Any interested person may obtain further information from the Oil Conservation Division and may submit written comments to the Director of the Oil Conservation Division at the address given above. The discharge plan applications may be viewed at the above address between 8:00 a.m. and 4:00 p.m., Monday through Friday. Prior to ruling on any proposed discharge plan or its modification, the Director of the Oil Conservation Division shall allow at least thirty (30) days after the date of publication of this notice during which comments may be submitted to him and a public hearing may be requested by any interested person. Requests for a public hearing shall set forth the reasons why a hearing should be held. A hearing will be held if the Director determines there is significant public interest.

If no public hearing is held, the Director will approve or disapprove the proposed plan based on information available. If a public hearing is held, the director will approve or disapprove the proposed plan based on information in the discharge plan application and information submitted at the hearing.

The Santa Fe New Mexican

Since 1849. We Read You.

NEW MEXICO OIL CONSERVATION

AD NUMBER: 473905

ACCOUNT: 56689

LEGAL NO: 59186

P.O. #: 96199002997

308 LINES once at \$ 123.20
Affidavits: 5.25
Tax: 8.03
Total: \$ 136.48

AFFIDAVIT OF PUBLICATION


STATE OF NEW MEXICO
COUNTY OF SANTA FE

I, BETSY PERNER being first duly sworn declare and say that I am Legal Advertising Representative of THE SANTA FE NEW MEXICAN, a daily news paper published in the English language, and having a general circulation in the Counties of Santa Fe and Los Alamos, State of New Mexico and being a News paper duly qualified to publish legal notices and advertisements under the provisions of Chapter 167 on Session Laws of 1937; that the publication # 50186 a copy of which is hereto attached was published in said newspaper once each week for one consecutive week(s) and that the notice was published in the newspaper proper and not in any supplement; the first publication being on the 1st day of MARCH 1996 and that the undersigned has personal knowledge of the matter and things set forth in this affidavit.

/S/

Betsy Perner
LEGAL ADVERTISEMENT REPRESENTATIVE

Subscribed and sworn to before me on this
1st day of MARCH A.D., 1996



OFFICIAL SEAL

Candace C. Ruiz

NOTARY PUBLIC - STATE OF NEW MEXICO

My Commission Expires: 9/20/99

NOTICE OF PUBLICATION

STATE OF NEW MEXICO

**Energy, Minerals and
Natural Resources
Department
Oil Conservation Division**

Notice is hereby given that pursuant to New Mexico Water Quality Control Commission Regulations, the following discharge plan application has been submitted to the Director of the Oil Conservation Division, 2040 South Pacheco, Santa Fe, New Mexico, 87505. Telephone (505) 827-7131:

(GW-61) - Williams Field Services, Ms. Leigh Gooding, (801)-584-6543, P.O. Box 58900, M.S. 2G1, Salt Lake City, Utah 84158-0900, has submitted a Discharge Plan Renewal Application for the Horse Canyon CDP located in the NE/4 NE/4, Section 27, Township 30 North, Range 9 West, NMPM, San Juan County, New Mexico. Approximately 55 gallons per day of waste water is stored in an above ground bermed closed top tank. All wastes are disposed of offsite at an NMOCD approved facility. Groundwater most likely to be affected by a spill, leak, or accidental discharge to the surface is at a depth of approximately 380 feet with a total dissolved solids concentration of approximately 3,150 mg/L. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

(GW-62) - Williams Field Services, Ms. Leigh Gooding, (801)-584-6543, P.O. Box 58900, M.S. 2G1, Salt Lake City, Utah 84158-0900, has submitted a Discharge Plan Renewal Application for the Manzanares CDP located in the SE/4 SW/4, Section 28, Township 30 North, Range 8 West, NMPM, San Juan County, New Mexico. Approximately 27 gallons per day of waste water is stored

in an above ground bermed closed top tank. All wastes are disposed of offsite at an NMOCD approved facility. Groundwater most likely to be affected by a spill, leak, or accidental discharge to the surface is at a depth of approximately 115 feet with a total dissolved solids concentration of approximately 910 mg/L. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

(GW-63) - Williams Field Services, Ms. Leigh Gooding, (801)-584-6543, P.O. Box 58900, M.S. 2G1, Salt Lake City, Utah 84158-0900, has submitted a Discharge Plan Renewal Application for the Pump Mesa CDP located in the SW/4 SE/4, Section 14, Township 31 North, Range 8 West, NMPM, San Juan County, New Mexico. Approximately 55 gallons per day of waste water is stored in an above ground bermed closed top tank. All wastes are disposed of offsite at an NMOCD approved facility. Groundwater most likely to be affected by a spill, leak, or accidental discharge to the surface is at a depth of approximately 938 feet with a total dissolved solids concentration of approximately 9800 mg/L. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

(GW-64) - Williams Field Services, Ms. Leigh Gooding, (801)-584-6543, P.O. Box 58900, M.S. 2G1, Salt Lake City, Utah 84158-0900, has submitted a Discharge Plan Renewal Application for the Middle Mesa CDP located in the SE/4 SW/4, Section 10, Township 31 North, Range 7 West, NMPM, San Juan County, New Mexico. Approximately 55 gallons per day of waste water is stored in an above ground bermed closed top tank. All wastes are disposed of offsite at an NMOCD approved facility. Groundwater most likely to

be affected by a spill, leak, or accidental discharge to the surface is at a depth of approximately 940 feet with a total dissolved solids concentration of approximately 900 mg/L. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

Any interested person may obtain further information from the Oil Conservation Division and may submit written comments to the Director of the Oil Conservation Division at the address given above. The discharge plan application may be viewed at the above address between 8:00 a.m. and 4:00 p.m., Monday thru Friday. Prior to ruling on any proposed discharge plan or its modification, the Director of the Oil Conservation Division shall allow at least thirty (30) days after the date of publication of this notice during which comments may be submitted to him and a public hearing may be requested by any interested person. Requests for a public hearing shall set forth the reasons why a hearing shall be held. A hearing will be held if the Director determines there is significant public interest.

If no hearing is held, the Director will approve or disapprove the plan based on the information available. If a public hearing is held, the director will approve the plan based on information in the discharge plan application and information submitted at the hearing.

GIVEN under the Seal of New Mexico Oil Conservation Commission at Santa Fe, New Mexico, on this 26th day of February, 1996.

STATE OF NEW MEXICO
OIL CONSERVATION DIVISION
WILLIAM J. LEMAY, Director

#59186
Pub. March 1, 1996

NOTICE OF PUBLICATION

STATE OF NEW MEXICO ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT OIL CONSERVATION DIVISION

Notice is hereby given that pursuant to New Mexico Water Quality Control Commission Regulations, the following discharge plan renewal applications have been submitted to the Director of the Oil Conservation Division, 2040 South Pacheco, Santa Fe, New Mexico 87505, Telephone (505) 827-7131:

(GW-61) - Williams Field Services, Ms. Leigh Gooding, (801)-584-6543, P.O. Box 58900, M.S. 2G1, Salt Lake City, Utah 84158-0900, has submitted a Discharge Plan Renewal Application for the Horse Canyon CDP located in the NE/4 NE/4, Section 27, Township 30 North, Range 9 West, NMPM, San Juan County, New Mexico. Approximately 55 gallons per day of waste water is stored in an above ground bermed closed top tank. All wastes are disposed of offsite at an NMOCD approved facility. Groundwater most likely to be affected by a spill, leak, or accidental discharge to the surface is at a depth of approximately 380 feet with a total dissolved solids concentration of approximately 3,150 mg/L. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

(GW-62) - Williams Field Services, Ms. Leigh Gooding, (801)-584-6543, P.O. Box 58900, M.S. 2G1, Salt Lake City, Utah 84158-0900, has submitted a Discharge Plan Renewal Application for the Manzanares CDP located in the SE/4 SW/4, Section 28, Township 30 North, Range 8 West, NMPM, San Juan County, New Mexico. Approximately 27 gallons per day of waste water is stored in an above ground bermed closed top tank. All wastes are disposed of offsite at an NMOCD approved facility. Groundwater most likely to be affected by a spill, leak, or accidental discharge to the surface is at a depth of approximately 115 feet with a total dissolved solids concentration of approximately 910 mg/L. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

(GW-63) - Williams Field Services, Ms. Leigh Gooding, (801)-584-6543, P.O. Box 58900, M.S. 2G1, Salt Lake City, Utah 84158-0900, has submitted a Discharge Plan Renewal Application for the Pump Mesa CDP located in the SW/4 SE/4, Section 14, Township 31 North, Range 8 West, NMPM, San Juan County, New Mexico. Approximately 55 gallons per day of waste water is stored in an above ground bermed closed top tank. All wastes are disposed of offsite at an NMOCD approved facility. Groundwater most likely to be affected by a spill, leak, or accidental discharge to the surface is at a depth of approximately 938 feet with a total dissolved solids concentration of approximately 9800 mg/L. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.


(GW-64) - Williams Field Services, Ms. Leigh Gooding, (801)-584-6543, P.O. Box 58900, M.S. 2G1, Salt Lake City, Utah 84158-0900, has submitted a Discharge Plan Renewal Application for the Middle Mesa CDP located in the SE/4 SW/4, Section 10, Township 31 North, Range 7 West, NMPM, San Juan County, New Mexico. Approximately 55 gallons per day of waste water is stored in an above ground bermed closed top tank. All wastes are disposed of offsite at an NMOCD approved facility. Groundwater most likely to be affected by a spill, leak, or accidental discharge to the surface is at a depth of approximately 940 feet with a total dissolved solids concentration of approximately 900 mg/L. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

Any interested person may obtain further information from the Oil Conservation Division and may submit written comments to the Director of the Oil Conservation Division at the address given above. The discharge plan applications may be viewed at the above address between 8:00 a.m. and 4:00 p.m., Monday through Friday. Prior to ruling on any proposed discharge plan or its modification, the Director of the Oil Conservation Division shall allow at least thirty (30) days after the date of publication of this notice during which comments may be submitted to him and a public hearing may be requested by any interested person. Requests for a public hearing shall set forth the reasons why a hearing should be held. A hearing will be held if the Director determines there is significant public interest.

If no public hearing is held, the Director will approve or disapprove the proposed plan based on information available. If a public hearing is held, the director will approve or disapprove the proposed plan based on information in the discharge plan application and information submitted at the hearing.

GIVEN under the Seal of New Mexico Oil Conservation Commission at Santa Fe, New Mexico, on this 26th day of February, 1996.

STATE OF NEW MEXICO
OIL CONSERVATION DIVISION

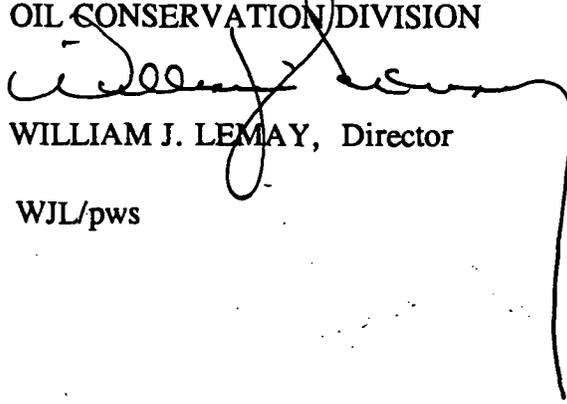
WILLIAM J. LEMAY, Director

WJL/pws

S E A L

OIL CONSERVATION DIVISION

October 18, 1995

CERTIFIED MAILRETURN RECEIPT NO. Z-765-963-079

Ms. Leigh E. Gooding
 Williams Field Services
 P.O. Box 58900, M.S. 2G1
 Salt Lake City, Utah 84158-0900

**RE: Discharge Plan GW-64 Renewal
 Middle Mesa CDP
 San Juan County, New Mexico**

Dear Ms. Gooding:

On June 6, 1991, the groundwater discharge plan, GW-64, for the Williams Field Services CDP located in SE/4 SW/4, Section 10, Township 31 North, Range 7 West, NMPM, San Juan County, New Mexico, will expire on June 5, 1996. The plan was approved by the Director of the New Mexico Oil Conservation Division (OCD). This discharge plan was required and submitted pursuant to Water Quality Control Commission (WQCC) regulations and was approved for a period of five years.

If your facility continues to have potential or actual effluent or leachate discharges and you wish to continue operation, you must renew your discharge plan. If Williams Field Services submits an application for renewal at least 120 days before the discharge plan expires (on or before February 5, 1996), then the existing approved discharge plan for the same activity shall not expire until the application for renewal has been approved or disapproved. The OCD is reviewing discharge plan submittals and renewals carefully and the review time can extend for several weeks to months. Please indicate whether you have made, or intend to make, any changes in your system, and if so, please include these modifications in your application for renewal.

The discharge plan renewal application for the Middle Mesa CDP is subject to the WQCC Regulations 3-114 discharge plan fee. Every billable facility submitting a discharge plan renewal will be assessed a fee equal to the filing fee of fifty (50) dollars plus a flat fee of \$690 for Compressor Stations over 3,000 horsepower.

The (50) dollar filing fee is to be submitted with the discharge plan renewal application and is nonrefundable. The flat fee for an approved discharge plan renewal may be paid in a single payment due at the time of approval, or in equal annual installments over the duration of the discharge plan - with the first payment due at the time of approval. Please make all checks payable to: **NMED-Water Quality Management** and addressed to the OCD Santa Fe Office.

Ms. Leigh Gooding
October 18, 1995
Page 2

Please submit the original and one copy to the OCD Santa Fe Office and one copy to the OCD Aztec District Office. Note that the completed and signed application form must be submitted with your discharge plan renewal request. The following information is included: Application form, Guidelines, and WQCC regulations.

If you no longer have any actual or potential discharges a discharge plan is not needed, please notify this office. If you have any questions regarding this matter, please do not hesitate to contact Patricio W. Sanchez at (505) 827-7156.

Sincerely,



Roger C. Anderson
Environmental Bureau Chief

RCA/pws

xc: Mr. Denny Foust

Is your RETURN ADDRESS completed on the reverse side?	SENDER: (pws) WFS (REN) GW-61,62,63,64	I also wish to receive the following services (for an extra fee):
	<ul style="list-style-type: none">• Complete items 1 and/or 2 for additional services.• Complete items 3, and 4a & b.• Print your name and address on the reverse of this form so that we can return this card to you.• Attach this form to the front of the mailpiece, or on the back if space does not permit.• Write "Return Receipt Requested" on the mailpiece below the article number.• The Return Receipt will show to whom the article was delivered and the date delivered.	1. <input type="checkbox"/> Addressee's Address
	3. Article Addressed to:	2. <input type="checkbox"/> Restricted Delivery
	Ms. Leigh E. Gooding Williams Field Services P.O. Box 58900, M.S. 2G1 Salt Lake City, Utah 84158-0900	Consult postmaster for fee.
5. Signature (Addressee)	4a. Article Number	Thank you for using Return Receipt Service.
6. Signature (Agent)	Z-765-963-079	
	4b. Service Type	
	<input type="checkbox"/> Registered <input type="checkbox"/> Insured <input checked="" type="checkbox"/> Certified <input type="checkbox"/> COD <input type="checkbox"/> Express Mail <input type="checkbox"/> Return Receipt for Merchandise	
	8. Addressee's Address (Only if requested and fee is paid)	
	ORIGINAL IN GW-61	
PS Form 3811, December 1991 ☆ U.S.G.P.O.: 1992 307-530		
DOMESTIC RETURN RECEIPT		



STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT

OIL CONSERVATION DIVISION



BRUCE KING
GOVERNOR

April 26, 1994

POST OFFICE BOX 2088
STATE LAND OFFICE BUILDING
SANTA FE, NEW MEXICO 87504
(505) 827-5800

ANITA LOCKWOOD
CABINET SECRETARY

CERTIFIED MAIL
RETURN RECEIPT NO. P-667-242-163

Mr. H. Lee Bauerle, Environmental Specialist
Williams Field Services
P.O. Box 58900
Salt Lake City, Utah 84158-0900

RE: Proposed Work Plan
Middle Mesa Compressor Station
San Juan County, New Mexico

Dear Mr. Bauerle:

The Oil Conservation Division (OCD) has received your proposed work plan, dated April 7, 1994, for the transport and disposal of the contaminated soils removed from the above referenced facility.

Based on the information provided, the work plan is approved. Please be advised that approval of this plan does not relieve you of liability should your operation result in actual pollution of surface or ground waters or the environment actionable under other laws and/or regulations.

If you have any questions please call me at (505) 827-5812.

Sincerely:

Roger C. Anderson
Environmental Bureau Chief

xc: Denny Foust- Aztec

WILLIAMS FIELD SERVICES
ONE OF THE WILLIAMS COMPANIES 

P.O. Box 58900
Salt Lake City, UT 84158-0900
(801) 584-7033
FAX: (801) 584-6483

OIL CONSERVATION DIVISION
RECEIVED

1994 APR 11 AM 8 49

April 7, 1994

Mr. Roger Anderson
New Mexico Oil Conservation Division
State Office Building
310 Old Santa Fe Trail
Santa Fe, NM 87504

Re: Proposed Work Plan - Middle Mesa Condensate Contaminated Soils

Dear Mr. Anderson:

As we discussed on the telephone today, I am submitting a report and a proposed work plan for the soil that was removed from our Middle Mesa Compressor Station. The soil was dumped in error by Consolidated Contractors at the San Juan County Landfill. The report was prepared by Cindy Gray of On Site Technologies. Her report summarizes the incident and provides a proposed work plan for your approval.

Please review the information provided and if possible, provide your written concurrence. If any additional information is needed, please call me at (801) 584-6999.

Sincerely,



H. Lee Bauerle
Environmental Specialist

xc: Denny Faust OCD/Aztec

Facsimile Cover Sheet

To: Mr. Lee Bauerle
Company: Williams Field Services
Phone: (801)584-6999
Fax: (801)584-7751

From: Cynthia A. Sluyter-Gray
Company: On Site Technologies, LTD.
Phone: (505) 325-8786
Fax: (505) 327-1496

Date: 04/06/94

**Pages Including this
cover page: Six**

Comments:

The following is the report regarding the condensate spill at Middle Mesa and a narrative concerning the errant truck. The last paragraph on the second page contains the information for the workplan proposal which needs to be sent from Williams Field Services to Roger Anderson at NMOC in Santa Fe with a copy to Benny Foust at NMOCU Aztec. Verbal approval was given by Mr. Anderson to me at the Four Corners Oil & Gas Conference 3/31 but the request needs to come from Williams Field Services. He will then provide a written approval. His FAX number in Santa Fe is (505) 827-5741.

Please call me if you have any questions or concerns. Thank you.

Cindy



**ON SITE
TECHNOLOGIES, LTD.**

April 4, 1994

Williams Field Services
Manzanaras District
Attn.: Mr. Jim Jackson
P. O. Box 215
Bloomfield, NM 07410

On Site Job Number 4-1082
Middle Mesa CDP
Condensate Spill Cleanup

Dear Mr. Jackson:

This letter is intended to provide information regarding the condensate spill to which we responded March 22, 1994 at the Williams Field Services Middle Mesa CDP. We were notified of the occurrence by Mr. Charlie Price of Williams Field Services and arrangements were made to meet Mr. Price and a crew from Pine River Enterprises at the Middle Mesa CDP on March 22, 1994 to begin the cleanup. Appropriate notifications to New Mexico Oil Conservation Division were made by Williams Field Services personnel. It was determined that the contaminated soil should be classified as Exempt Oilfield Waste and arrangements were made by On Site Technologies for the acceptance of the soil by the Tierra Environmental Landfarm.

Spilag Sorb Industrial absorbent was applied to the free product present on the surface inside the tank berm. Approximately ten cubic yards of soils and absorbent material were excavated and removed from the bermed area around the condensate tank and stockpiled on plastic until transportation for disposal could be arranged. During the excavation process, a PhotoVac MicroTip Photo Ionization Detector was used to determine the extent of the spill by checking for the volatile components of condensate. Field notes, field testing results, and a rough site map locating the tested areas are attached to this letter. Excavation was discontinued when acceptable readings on the PID were reached. However, visual observation of the underlying soils indicated the probable presence of another spill, assumed to be lube oil due to the lack of volatile response on the PID. The probable lube oil spill will be discussed in a separate report. A sample was taken from the removed and stockpiled material for laboratory analysis for Total Petroleum Hydrocarbons using EPA Method 418.1. The laboratory results and Chain of Custody are also attached to this letter.

Consolidated Constructors of Farmington, New Mexico was hired by On Site Technologies to transport the condensate-contaminated materials from the stockpile at Middle Mesa CDP to the Tierra Environmental Landfarm at Crouch Mesa with the permission of the New Mexico Oil Conservation Division. On March 23, 1994, the materials were loaded by Pine River Enterprises into a single Consolidated Constructors dump truck. However, the driver hauled the materials, in error, to the San Juan County Regional Landfill on Crouch Mesa. Also in error, the landfill operator allowed the truck to enter and dump. The compactor then processed the material with other solid waste already present in the working face. Realizing the error, the landfill operator, Waste Management, isolated the area and notified On Site Technologies and the New Mexico Solid Waste Bureau. On Site notified both New Mexico Oil

FAX: (505) 327-1496 • 24 HR. - (505) 327-7105 • OFF.: (505) 325-8786

3005 NORTHRIDGE DRIVE • SUITE F • P. O. BOX 2606 • FARMINGTON, NEW MEXICO 87499



April 4, 1994

Williams Field Services
Manzanares District
Attn.: Mr. Jim Jackson
P. O. Box 215
Bloomfield, NM 87413

On Site Job Number 4-1082
Middle Mesa CDP
Condensate Spill Cleanup

Dear Mr. Jackson:

This letter is intended to provide information regarding the condensate spill to which we responded March 22, 1994 at the Williams Field Services Middle Mesa CDP. We were notified of the occurrence by Mr. Charlie Price of Williams Field Services and arrangements were made to meet Mr. Price and a crew from Pine River Enterprises at the Middle Mesa CDP on March 22, 1994 to begin the cleanup. Appropriate notifications to New Mexico Oil Conservation Division were made by Williams Field Services personnel. It was determined that the contaminated soil should be classified as Exempt Oilfield Waste and arrangements were made by On Site Technologies for the acceptance of the soil by the Tierra Environmental Landfarm.

Sphag Sorb industrial absorbent was applied to the free product present on the surface inside the tank berm. Approximately ten cubic yards of soils and absorbent material were excavated and removed from the bermed area around the condensate tank and stockpiled on plastic until transportation for disposal could be arranged. During the excavation process, a PhotoVac MicroTip Photo Ionization Detector was used to determine the extent of the spill by checking for the volatile components of condensate. Field notes, field testing results, and a rough site map locating the tested areas are attached to this letter. Excavation was discontinued when acceptable readings on the PID were reached. However, visual observation of the underlying soils indicated the probable presence of another spill, assumed to be lube oil due to the lack of volatiles response on the PID. The probable lube oil spill will be discussed in a separate report. A sample was taken from the removed and stockpiled material for laboratory analysis for Total Petroleum Hydrocarbons using EPA Method 418.1. The laboratory results and Chain of Custody are also attached to this letter.

Consolidated Constructors of Farmington, New Mexico was hired by On Site Technologies to transport the condensate-contaminated materials from the stockpile at Middle Mesa CDP to the Tierra Environmental Landfarm at Crouch Mesa with the permission of the New Mexico Oil Conservation Division. On March 23, 1994, the materials were loaded by Pine River Enterprises into a single Consolidated Constructors dump truck. However, the driver hauled the materials, in error, to the San Juan County Regional Landfill on Crouch Mesa. Also in error, the landfill operator allowed the truck to enter and dump. The compactor then processed the material with other solid waste already present in the working face. Realizing the error, the landfill operator, Waste Management, isolated the area and notified On Site Technologies and the New Mexico Solid Waste Bureau. On Site notified both New Mexico Oil

FAX: (505) 327-1496 • 24 HR.: (505) 327-7105 • OFF.: (505) 325-8786

2005 NORTH RIDGE DRIVE - SUITE F - P. O. BOX 2606 - FARMINGTON, NEW MEXICO 87499

Conservation Division and Tierra Environmental Landfarm as well as Williams Field Services.


After viewing the situation within the hour on March 23 and discussing it with Mr. Roger Anderson of the NMOCD, On Site Technologies instructed Consolidated Constructors to immediately load the contaminated materials and the embedded solid waste in a transport trailer, cover it, and haul it to a secure area for safekeeping until a solution could be proposed to and approved by the NMOCD. The trailer with approximately twenty cubic yards of contaminated materials and solid waste was taken to Consolidated Constructors' fenced equipment yard in Farmington, New Mexico by early afternoon the same day that the error occurred.

Consolidated Constructors have acknowledged their responsibility for the problem and willingness to cooperate in the execution of an NMOCD approved workplan. Several options have been discussed with Mr. Roger Anderson and Mr. Denny Foust of NMOCD, Mr. Lee Bauerle of Williams Field Services, and Mr. Stan Kozimor of Consolidated Constructors as well as the Tierra Environmental Landfarm.

A proposed workplan needs to be submitted by Williams Field Services as the waste generator to Mr. Roger Anderson of NMOCD in Santa Fe with a copy to Mr. Denny Foust of NMOCD in Aztec for approval. The action option which appears to be most cost effective and can be executed in a timely fashion is for Consolidated Constructors to build a lined berm, placing the trailer in it. The material can then be slowly removed from the trailer using an auger-type material handler. The non-soil waste material will then be sorted out by hand for separate disposal. It is also important that Mr. Denny Foust of NMOCD, Mr. Phil Nubis of Tierra Environmental Landfarm, and Mrs. Cindy Gray of On Site Technologies be notified and have the opportunity to examine the material after sorting and prior to transportation to the Tierra Landfarm. Consolidated Constructors has been advised of the proposed workplan and has agreed to cooperate entirely.

If you, Mr. West, or Mr. Bauerle have any questions or need additional information regarding the proposed workplan or this report, please feel free to contact me at any time.

Respectfully submitted,



Cynthia A. Gray
Project Supervisor
On Site Technologies, Ltd

attch. x 3

FAX copy to Mr. Lee Bauerle
Williams Field Services
801-584-7751

10:00 AM

pid Reading

First Assessment

Sample 1 0.7

Sample 2 0.8

Sample 3 1.0

Sample 4 0.6

Sample 5 1.9


Sample 6 15.4

Sample 7 5.2

Sample 8 19.4

Sample 9 16.9

Sample 10 66.1

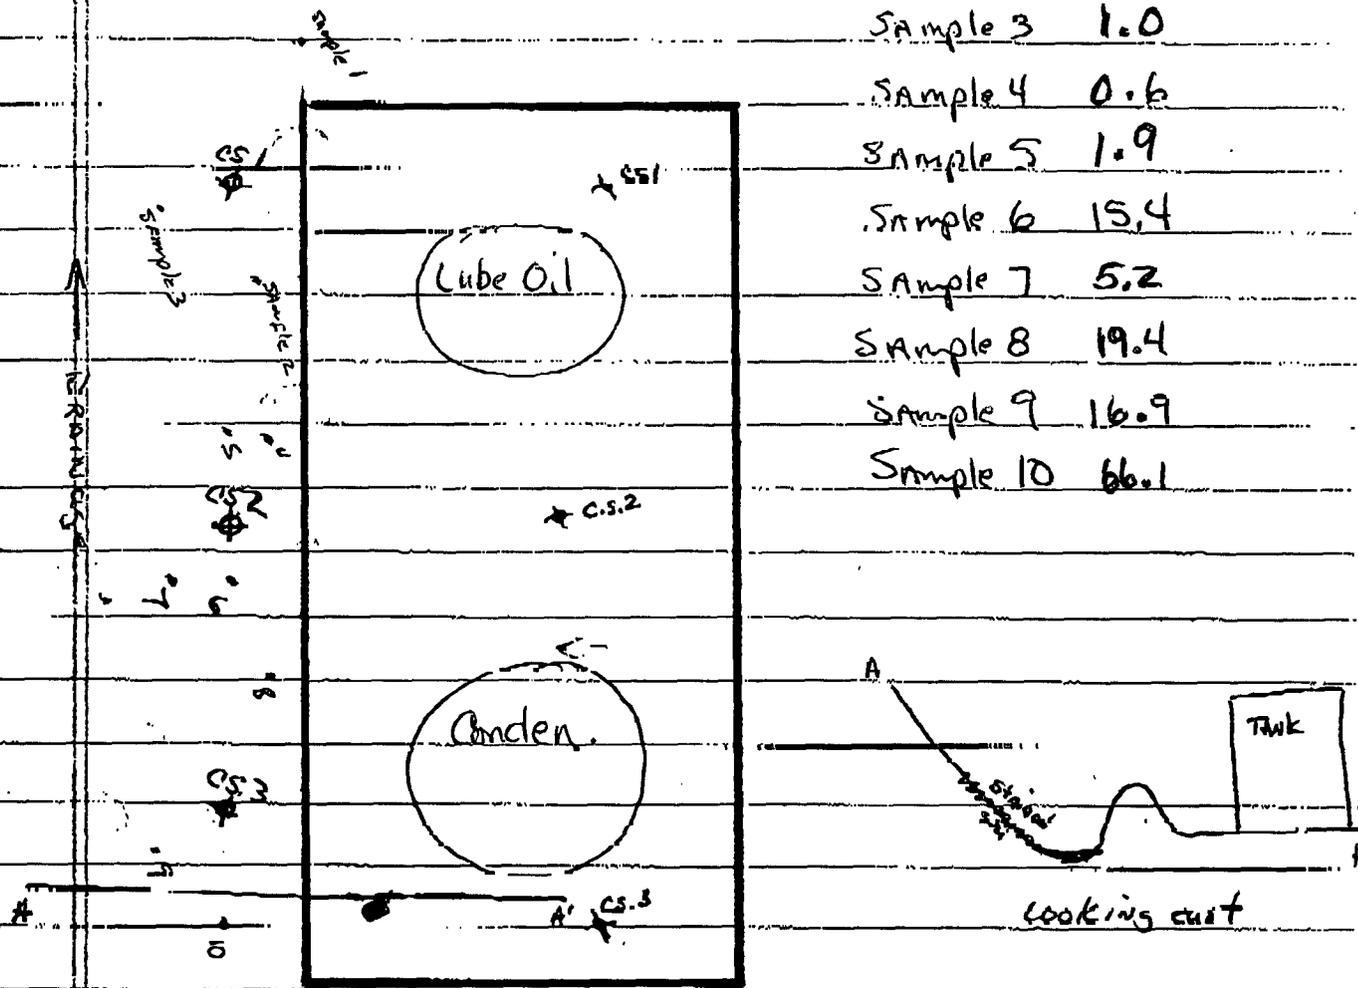

10:20 site has been stripped of soil outside from area and samples checked for Potassium- Hydroxide.

11:00 Clearance samples taken outside been



**ON SITE
TECHNOLOGIES, LTD.**

TOTAL PETROLEUM HYDROCARBONS

Attn: *Cindy Gray*
 Company: *On Site Technologies*
 Address: *3005 Northridge Drive Ste F*
 City, State: *Farmington, NM 87499*

Date: *4/5/94*
 Lab ID: *146b*
 Sample No. *1246*
 Job No. *4-1082*

Project Name: *Williams Field Service Job No. 4-1082*
 Project Location: *Sample Off Plastic to be Hauled*
 Sampled by: *JL* Date: *3/22/94*
 Analyzed by: *JL* Date: *3/24/94*
 Type of Sample: *Soil*

Laboratory Analysis

Laboratory Identification	Sample Identification	Total Petroleum Hydrocarbons
<i>1246-1465</i>	<i>Williams Field Service Job No. 4-1082 Sample Off Plastic to be Hauled</i>	<i>02300 mg/kg</i>

Method - EPA Method 418.1 Total Petroleum Hydrocarbons

Approved by: *[Signature]*

Date: *4/5/94*



CHAIN OF CUSTODY RECORD

1455

Date: 3/23/94

Page 1 of 1

657 W. Maple • P. O. Box 2606 • Farmington, NM 87499
 LAB: (505) 325-5667 • FAX: (505) 325-6256

Purchase Order No.:		Reference No.: <u>4-1082</u>		REPORT RESULTS TO	Name		Title				
SEND INVOICE TO	Name				Company						
	Company: <u>William Field Service</u>				Dept.						
	Address: <u>P.O. Box 2606 Farmington, NM</u>				Mailing Address						
	City, State, Zip				City, State, Zip						
Special Instructions:		Sampler: <u>J.L. Little</u>		Number of Containers	ANALYSIS REQUESTED					Remarks (matrix)	
SAMP. IDENTIFICATION		DATE/TIME SAMPLED	COMPOSITE/GRAB		PRESERVATIVES	T.P.H.					
<u>1240-1465 Clean Sample #1 surface</u>		<u>3/22/94</u>	<u>G</u>		<u>4°C</u>						
<u>1241-1465 Clean Sample #2 surface</u>		<u>3/22/94</u>	<u>G</u>		<u>4°C</u>						
<u>1242-1465 Clean Sample #3 surface</u>		<u>3/22/94</u>	<u>G</u>		<u>4°C</u>						
<u>1243-1465 Clean Sample #4 surface</u>		<u>3/22/94</u>	<u>G</u>		<u>4°C</u>						
<u>1244-1465 Clean Sample #5 surface</u>		<u>3/22/94</u>	<u>G</u>		<u>4°C</u>						
<u>1245-1465 Clean Sample #6 surface</u>		<u>3/22/94</u>	<u>G</u>		<u>4°C</u>						
<u>1246-1465 Sample of plastic tarp material</u>		<u>3/22/94</u>	<u>G</u>		<u>4°C</u>						
<u>1247-1465 NW Corner outside beam clean</u>		<u>3/22/94</u>	<u>G</u>		<u>4°C</u>						
<u>1248-1465 NW Corner outside beam after</u> <u>Ball Loc</u>		<u>3/22/94</u>	<u>G</u>	<u>4°C</u>							
Relinquished by: <u>[Signature]</u>		Date/Time: <u>3/23/94 8:00</u>		Received by: <u>[Signature]</u>		Date/Time: <u>3/23/94 8:00</u>					
Relinquished by:		Date/Time:		Received by:		Date/Time:					
Relinquished by:		Date/Time:		Received by:		Date/Time:					
Method of Shipment:		Rush	5 Working Days	10 Working Days	Sampling Location:						
Authorized by: <u>[Signature]</u>		Date: <u>3/23/94</u>									
(Client Signature Must Accompany Request)											

NORTHWEST PIPELINE CORPORATION
ONE OF THE WILLIAMS COMPANIES

P.O. BOX 58900
SALT LAKE CITY, UTAH 84158-0900
801-583-8800
FAX: (801) 584-6483

OIL CONSERVATION DIVISION
RECEIVED

'93 MAR 24 AM 8 54

March 15, 1993

Mr. William J. LeMay, Director
State of New Mexico Oil Conservation Division
P.O. Box 2088
Santa Fe, NM 87504

Re: Payment of Discharge Plan Filing Fees

Dear Mr. LeMay:

Pursuant to you March 3, 1993 letter, I am attaching a check for \$550.00 to cover the \$50.00 filing fee for discharge plan modifications for the following facilities:

San Juan 29-6 No. 2 C.D.P.	GW-121
San Juan 29-6 No. 4 C.D.P.	GW-122
San Juan 31-6 No. 1 C.D.P.	GW-118
San Juan 32-7 No. 1 C.D.P.	GW-117
San Juan 32-8 No. 2 C.D.P.	GW-111
San Juan 32-8 No. 3 C.D.P.	GW-116
Cedar Hill Compressor Station	GW-87
Horse Canyon Compressor Station	GW-61
Middle Mesa Compressor Station	GW-64
Pump Mesa Compressor Station	GW-63
Sims Mesa Compressor Station	GW-68

I appreciate your staff's prompt review of these modifications. Please call me at (801) 584-6716 if you have any questions or need additional information.

Sincerely,

Carol Revelt

Carol Revelt
Environmental Specialist

ACKNOWLEDGEMENT OF RECEIPT
OF CHECK/CASH

I hereby acknowledge receipt of check No. [REDACTED] dated 3/19/93,
or cash received on 3/26/93 in the amount of \$ 550.00
from Williams Field Services Company
for See attached letter

Submitted by: _____ (Facility Name) Date: _____ (DP No.)

Submitted to ASD by: Kathy Brown Date: 3/26/93

Received in ASD by: Angie M. Albre Date: 3/26/93

Filing Fee New Facility _____ Renewal _____
Modification Other _____
(specify)

Organization Code 521.07 Applicable FY 93

To be deposited in the Water Quality Management Fund.

Full Payment _____ or Annual Increment _____

WILLIAMS FIELD SERVICES COMPANY
ONE OF THE WILLIAMS COMPANIES 

P. O. BOX 58900
SALT LAKE CITY, UTAH 84158-0900

CORESTATES BANK OF DELAWARE, N.A.
In cooperation with 1st Interstate Bank

62-22
311

DATE	CHECK NO.	NET AMOUNT
03/19/93	[REDACTED]	*****550.00

PAY

FIVE HUNDRED FIFTY AND 00/100 DOLLARS

TO THE
ORDER
OF

NEW MEXICO OIL CONSERVATN DIV@@
310 OIL SANTA FE TRAIL
STATE LAND OFFICE BUILDING
SANTA FE, NM

87504

WILLIAMS FIELD SERVICES COMPANY

Ronald E. Houston
ASSISTANT TREASURER
AUTHORIZED REPRESENTATIVE



STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION



BRUCE KING
GOVERNOR

ANITA LOCKWOOD
CABINET SECRETARY

March 3, 1993

POST OFFICE BOX 2088
STATE LAND OFFICE BUILDING
SANTA FE, NEW MEXICO 87504
(505) 827-5800

CERTIFIED MAIL
RETURN RECEIPT NO. P-111-334-304

Ms. Carol Revelt
Environmental Specialist
Williams Field Services Company
P.O. Box 58900
Salt Lake City, Utah

**Re: Discharge Plan Modifications
Manzanares Gathering System
San Juan County, New Mexico
Rio Arriba County, New Mexico**

Dear Ms. Revelt:

The Oil Conservation Division (OCD) has received your letter dated February 17, 1993 requesting a determination on Williams Field Services' proposed modifications of existing compressor facilities as to what effect this would have on the existing discharge plans. The discharge plan modifications were submitted pursuant to Section 3-109.F. of the New Mexico Water Quality Control Commission (WQCC) Regulations.

Pursuant to WQCC Regulation 3-109.F. the modification to the previously approved discharge plans are hereby approved. The OCD has determined that these modifications are minor, therefore, public notice was not issued and the required flat rate fee for modification of a discharge plan is waived. However, the regulations require that a fifty (50) dollar filing fee be paid for each of the eleven specified facilities. The filing fee for the discharge plan modifications are due upon receipt of this letter.

Please make checks payable to: **NMED-Water Quality Management** and addressed to the OCD Santa Fe Office.


Ms. Carol Revelt
March 3, 1993
Page 2

The approved modifications are to the following facilities:

(GW-121) San Juan 29-6 No.2 C.D.P. Compressor Station
(GW-122) San Juan 29-6 No.4 C.D.P. Compressor Station
(GW-118) San Juan 31-6 No.1 C.D.P. Compressor Station
(GW-117) San Juan 32-7 No.1 C.D.P. Compressor Station
(GW-111) San Juan 32-8 No.2 C.D.P. Compressor Station
(GW-116) San Juan 32-8 No.2 C.D.P. Compressor Station
(GW-87) Cedar Hill Compressor Station
(GW-61) Horse Canyon Compressor Station
(GW-64) Middle Mesa Compressor Station
(GW-63) Pump Mesa Compressor Station
(GW-68) Sims Mesa Compressor Station

If you have any question you can contact the Environmental Bureau at (505) 827-5812.

Sincerely,

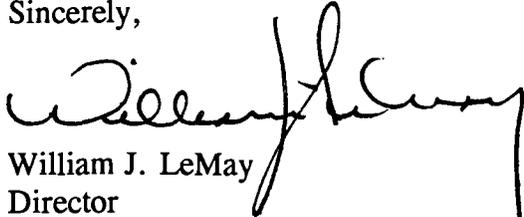

William J. LeMay
Director

CEE/WJL
xc: Denny Foust-OCD Aztec Office
11 Discharge Plan files

OIL CONSERVATION DIVISION
RECEIVED

'93 FEB 22 AM 9 44

WILLIAMS FIELD SERVICES COMPANY 
ONE OF THE WILLIAMS COMPANIES

P.O. BOX 58900
SALT LAKE CITY, UTAH 84158-0900
801-583-8800
FAX: (801) 584-6483

February 17, 1993

Mr. Roger Anderson
New Mexico Oil Conservation Division
State Land Office Building
310 Old Santa Fe Trail
Santa Fe, New Mexico 87504

Re: Manzanares System C.D.P. Facility Expansion - San Juan and Rio Arriba Counties

Dear Mr. Anderson:

The attached table summarizes the anticipated current and future expansion of the Williams Field Services' Manzanares Gathering System C.D.P.'s, and the corresponding increase in waste fluids which will be generated at these locations. Although new compressors and/or dehydrators are being added at these sites, no additional bulk storage for waste liquids (used oil, waste water, etc.) will be installed above that which is currently located at the facilities.

Williams Field Services believes that the addition of these units will result in insignificant increases in the fluids handled at the specific C.D.P.'s. Please review this table and advise me of any Discharge Plan modifications which you determine will be necessary.

Thank you for your attention to this matter.

Sincerely,

Carol Revelt

Carol Revelt
Environmental Specialist

Attachment

cc: D. Compton, 10309
J. West, MND

**WILLIAMS FIELD SERVICES - MANZANARES GATHERING SYSTEM
CENTRAL DELIVERY POINT EXPANSION/MODIFICATION**

<u>C.D.P. Name</u>	<u>Location</u>	<u>Discharge Permit #</u>	<u>Original # Compressors</u>	<u>Additional Compressors</u>	<u>Anticipated Additional Waste-Oil Generated</u>	<u>Original # Dehydrators</u>	<u>Additional Dehydrators</u>	<u>Anticipated Additional Waste Water Generated</u>
29-6 No. 2	Sec. 10, 29N, 6W Rio Arriba County	GW-121	5	2	250 gal/quarter	5	2	30 gal/day
29-6 No. 4	Sec. 19, 29N, 6W Rio Arriba County	GW-122	4	3	375 gal/quarter	2	2	30 gal/day
31-6 No. 1 118	Sec. 1, 30N, 6W Rio Arriba County	GW-118	5	4	500 gal/quarter	5	4	60 gal/day
32-7 No. 1 117	Sec. 34, 32N, 7W San Juan County	GW-117	4	---	---	2	1	15 gal/day
32-8 No. 2 111	Sec. 27, 32N, 8W San Juan County	GW-111	4	---	---	2	1	15 gal/day
32-8 No. 3 116	Sec. 9, 31N, 8W San Juan County	GW-116	4	2	250 gal/quarter	2	1	15 gal/day
Cedar Hill 87	Sec. 28, 32N, 10W San Juan County	GW-87	5	1	125 gal/quarter	3	3	45 gal/day
Horse Canyon 61	Sec. 27, 30N, 9W San Juan County	GW-61	14	---	---	9	1	15 gal/day
Middle Mesa 64	Sec. 10, 31N, 7W San Juan County	GW-64	7	---	---	4	3	45 gal/day
Pump Mesa 3	Sec. 14, 31N, 8W San Juan County	GW-63	6	6	750 gal/quarter	4	4	60 gal/day
Sims Mesa	Sec. 22, 30N, 7W Rio Arriba County	GW-68	7	---	---	5	1	15 gal/day

STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION

BRUCE KING
GOVERNOR

June 6, 1991

POST OFFICE BOX 2088
STATE LAND OFFICE BUILDING
SANTA FE, NEW MEXICO 87504
(505) 827-5800

CERTIFIED MAIL
RETURN RECEIPT NO. P-327-278-152

Ms. Sandy Fishler
Williams Field Services
P. O. Box 58900
Salt Lake City, Utah 84158-0990

RE: Discharge Plan GW-64
Middle Mesa Compressor Station
San Juan County, New Mexico

Dear Ms. Fishler:

The groundwater discharge plan GW-64 for the Williams Field Services Middle Mesa Compressor Station located in the SE/4 SW/4, Section 10, Township 31 North, Range 7 West, NMPM San Juan County, New Mexico is hereby approved. The discharge plan consists of the application dated April 12, 1991.

The discharge plan was submitted pursuant to Section 3-106 of the New Mexico Water Quality Control Commission Regulations. It is approved pursuant to Section 3-109.A., please note Section 3-109.F., which provides for the possible future amendments of the plan. Please be advised that the approval of this plan does not relieve you of liability should your operation result in actual pollution of surface or ground waters or the environment which may be actionable under other laws and/or regulations.

Please be advised that all exposed pits, including lined pits and open top tanks (tanks exceeding 16 feet in diameter), shall be screened, netted, or otherwise rendered nonhazardous to wildlife including migratory birds.


Please note that Section 3-104 of the regulations requires that "When a plan has been approved, discharges must be consistent with the terms and conditions of the plan." Pursuant to Section 3-107.C. you are required to notify the Director of any facility expansion, production increase, or process modification that would result in any change in the discharge of water quality or volume.

Ms. Sandy Fishler
June 6, 1991
Page -2-

Pursuant to Section 3-109.G.4., this plan approval is for a period of five (5) years. This approval will expire June 5, 1996 and you should submit an application for renewal in ample time before that date.

On behalf of the staff of the Oil Conservation Division, I wish to thank you and your staff for your cooperation during this discharge plan review.

Sincerely,

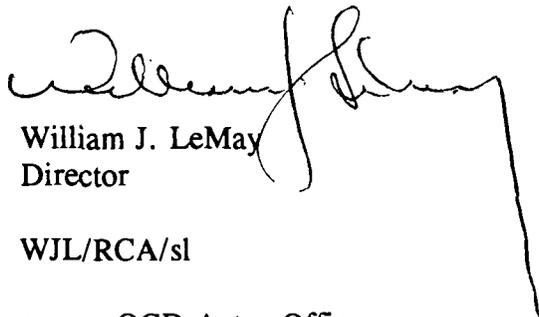

William J. LeMay
Director

WJL/RCA/sl

cc: OCD Aztec Office



STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION


BRUCE KING
GOVERNOR

June 6, 1991

POST OFFICE BOX 2088
STATE LAND OFFICE BUILDING
SANTA FE, NEW MEXICO 87504
(505) 827-5800

CERTIFIED MAIL
RETURN RECEIPT NO. P-327-278-152

Ms. Sandy Fishler
Williams Field Services
P. O. Box 58900
Salt Lake City, Utah 84158-0990

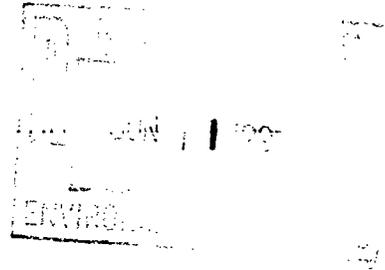

RE: Discharge Plan GW-64
Middle Mesa Compressor Station
San Juan County, New Mexico

Dear Ms. Fishler:

The groundwater discharge plan GW-64 for the Williams Field Services Middle Mesa Compressor Station located in the SE/4 SW/4, Section 10, Township 31 North, Range 7 West, NMPM San Juan County, New Mexico is hereby approved. The discharge plan consists of the application dated April 12, 1991.

The discharge plan was submitted pursuant to Section 3-106 of the New Mexico Water Quality Control Commission Regulations. It is approved pursuant to Section 3-109.A., please note Section 3-109.F., which provides for the possible future amendments of the plan. Please be advised that the approval of this plan does not relieve you of liability should your operation result in actual pollution of surface or ground waters or the environment which may be actionable under other laws and/or regulations.

Please be advised that all exposed pits, including lined pits and open top tanks (tanks exceeding 16 feet in diameter), shall be screened, netted, or otherwise rendered nonhazardous to wildlife including migratory birds.


Please note that Section 3-104 of the regulations requires that "When a plan has been approved, discharges must be consistent with the terms and conditions of the plan." Pursuant to Section 3-107.C. you are required to notify the Director of any facility expansion, production increase, or process modification that would result in any change in the discharge of water quality or volume.

Ms. Sandy Fishler
June 6, 1991
Page -2-

Pursuant to Section 3-109.G.4., this plan approval is for a period of five (5) years. This approval will expire June 5, 1996 and you should submit an application for renewal in ample time before that date.

On behalf of the staff of the Oil Conservation Division, I wish to thank you and your staff for your cooperation during this discharge plan review.

Sincerely,

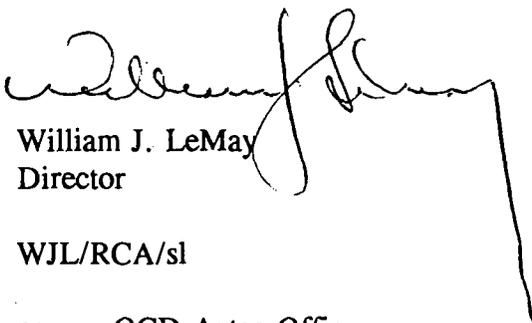


William J. LeMay
Director

WJL/RCA/sl

cc: OCD Aztec Office



STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION



BRUCE KING
GOVERNOR

March 18, 1991

POST OFFICE BOX 2088
STATE LAND OFFICE BUILDING
SANTA FE, NEW MEXICO 87504
(505) 827-5800

CERTIFIED MAIL
RETURN RECEIPT NO. P-327-278-107

Ms. Sandy Fishler
Environmental Specialist
Williams Field Services
P. O. Box 58900
Salt Lake City, Utah 84158-0990

RE: Authorization to Discharge

Dear Ms. Fishler:

The Oil Conservation Division (OCD) has received your requests dated March 12, 1991 for authorization to discharge for 120 days without an approved discharge plan for the following five (5) new compressor stations:

1. Horse Canyon - NE/4 NE/4, Section 27, Township 30 North, Range 9 West, San Juan County, New Mexico
2. Manzanares - NE/4 NW/4, Section 33, Township 30 North, Range 8 West, San Juan County, New Mexico
3. Pump Mesa - SW/4 SE/4, Section 14, Township 31 North, Range 8 West, San Juan County, New Mexico
4. Middle Mesa - SE/4 SW/4, Section 10, Township 31 North, Range 7 West, San Juan County, New Mexico
5. Simms Mesa - NW/4 NE/4, Section 22, Township 30 North, Range 7 West, San Juan County, New Mexico

This authorization will allow start-up, testing and operation of the stations while the discharge plan applications are being reviewed.

Ms. Sandy Fishler

March 18, 1991

Page -2-

Pursuant to Water Quality Control Commission (WQCC) Regulations 3-106.B. and for good cause shown, you are hereby authorized to discharge at the five compressor stations listed above without an approved discharge plan for a period not to exceed 120 day commencing on the start-up date of each station. Notify this office of the actual dates of start-up.

During the 120 day period, processing of the discharge plan application will continue. Since the 120 day period can not be extended, timely submittal of any OCD-requested information will ensure that permitting is concluded prior to the expiration date.

If you have any questions, please contact David Boyer at (505) 827-5812 or Roger Anderson at (505) 827-5884.

Sincerely,

A handwritten signature in cursive script that reads "William J. LeMay". The signature is written in dark ink and is positioned above the typed name and title.

William J. LeMay

Director

WJL/RCA/sl

cc: OCD Aztec Office



UNITED STATES
DEPARTMENT OF THE INTERIOR
FISH AND WILDLIFE SERVICE
Ecological Services
Suite D, 3530 Pan American Highway, NE
Albuquerque, New Mexico 87107

May 28, 1991

RECEIVED

MAY 31 1991

OIL CONSERVATION DIVISION

Mr. William J. Lemay, Director
New Mexico Energy, Minerals and
Natural Resources Department
Oil Conservation Division
P.O. Box 2088
Santa Fe, New Mexico 87504-2088

Dear Mr. Lemay:

The U.S. Fish and Wildlife Service (Service) has reviewed the Public Notices dated April 24, 1991, regarding the effects of granting State of New Mexico groundwater discharge permits on fish, shellfish, and wildlife resources in New Mexico.

The Service has determined that there are no wetlands or other environmentally sensitive habitats that will be adversely affected by the following activities.

BW-1: Conoco Incorporated, Midland, Texas.

BW-4: Wasserhund Incorporated, Lovington, New Mexico.

The Service has determined that there may be risks to migratory birds from the proposed permitted activities listed below, and that nets or screens be erected over the tanks to prevent any migratory bird species (waterfowl, shorebirds, songbirds, or raptors) from gaining access to the washdown water and used oil. If a migratory bird should be killed by coming in contact with these fluids, a violation of the Migratory Bird Treaty Act will have occurred.

The proposed permittees are:

GW-61: Williams Field Services, Salt Lake City, Utah, Horse Canyon Compressor Station.

GW-62: Williams Field Services, Salt Lake City, Utah, Manzanares Compressor Station.

GW-63: Williams Field Services, Salt Lake City, Utah, Pump Mesa Compressor Station.

GW-64: Williams Field Services, Salt Lake City, Utah, Middle Mesa Compressor Station.

GW-77: Meridian Oil, Inc., Farmington, New Mexico, Middle Mesa Compressor Station.

If you have any questions, please call Richard Roy at (505) 883-7877.

Sincerely,

A handwritten signature in cursive script, appearing to read "Jennifer Fowler-Propst", written in black ink.

Jennifer Fowler-Propst
Field Supervisor

cc:

Director, New Mexico Department of Game and Fish, Santa Fe, New Mexico
Director, New Mexico Energy, Minerals and Natural Resources Department,
Forestry and Resources Conservation Division, Santa Fe, New Mexico
Regional Administrator, U.S. Environmental Protection Agency, Dallas, Texas
Regional Director, U.S. Fish and Wildlife Service, Fish and Wildlife
Enhancement, Albuquerque, New Mexico

NOTICE OF PUBLICATION

STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION

Notice is hereby given that pursuant to New Mexico Water Quality Control Commission Regulations, the following discharge plan applications have been submitted to the Director of the Oil Conservation Division, State Land Office Building, P. O. Box 2088, Santa Fe, New Mexico 87504-2088, Telephone (505) 827-5800:

(GW-61) - Williams Field Services, Robert Peacock, Project Manager, P. O. Box 58900, Salt Lake City, Utah 84158-0900, has submitted a discharge plan application for its proposed Horse Canyon compressor station located in the NE/4 NE/4, Section 27, Township 30 North, Range 9 West, NMPM, San Juan County, New Mexico. Approximately 115 gallons per day of washdown water and used oil will be stored in an above ground steel tank sited within a bermed area prior to transport to a state approved recycling contractor or an OCD approved offsite disposal facility. Groundwater most likely to be affected by any spill, leak or other accidental discharge to the surface is at a depth of approximately 380 feet with a total dissolved solids concentration of approximately 3150 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.

(GW-62) - Williams Field Services, Robert Peacock, Project Manager, P. O. Box 58900, Salt Lake City, Utah 84158-0900, has submitted a discharge plan application for its proposed Manzanares compressor station located in the SE/4 SW/4, Section 28, Township 30 North, Range 8 West, NMPM, San Juan County, New Mexico. Approximately 35 gallons per day of washdown water and used oil will be stored in an above ground steel tank sited within a bermed area prior to transport to a state approved recycling contractor or an OCD approved offsite disposal facility. Groundwater most likely to be affected by any spill, leak or other accidental discharge to the surface is at a depth of approximately 115 feet with a total dissolved solids concentration of approximately 910 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.

Journal 5/22/91
Third Unit Planned at Gas Pla

BLANCO, N.M. — Williams Field Services Co. will add a third unit at its coal seam natural gas processing plant here, increasing the plant's daily processing capability to 500 million cubic feet.

Susan Flaim, spokeswoman for the company based in Salt Lake City, said the third unit is being built at the northwest New Mexico plant because the other two units won't be able to process all the gas the plant will be receiving.

When the third unit is completed, the company will have spent \$130 million for its processing plant at Blanco, she said.

- The processing units remove carbon dioxide from
- coal seam gas that contains as much as 10 percent carbon dioxide. The carbon dioxide must be removed
- before the gas is delivered to main transport pipelines.

(GW-63) - Williams Field Services, Robert Peacock, Project Manager, P. O. Box 58900, Salt Lake City, Utah 84158-0900, has submitted a discharge plan application for its proposed Pump Mesa compressor station located in the SE/4 SE/4, Section 14, Township 31 North, Range 8 West, NMPM, San Juan County, New Mexico. Approximately 70 gallons per day of washdown water and used oil will be stored in an above ground steel tank sited within a bermed area prior to transport to a state approved recycling contractor or an OCD approved offsite disposal facility. Groundwater most likely to be affected by any spill, leak or other accidental discharge to the surface is at a depth of approximately 938 feet with a total dissolved solids concentration of approximately 9800 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.

(GW-64) - Williams Field Services, Robert Peacock, Project Manager, P. O. Box 58900, Salt Lake City, Utah 84158-0900, has submitted a discharge plan application for its proposed Middle Mesa compressor station located in the SE/4 SW/4, Section 10, Township 31 North, Range 7 West, NMPM, San Juan County, New Mexico. Approximately 70 gallons per day of washdown water and used oil will be stored in an above ground steel tank sited within a bermed area prior to transport to a state approved recycling contractor or an OCD approved offsite disposal facility. Groundwater most likely to be affected by any spill, leak or other accidental discharge to the surface is at a depth of approximately 940 feet with a total dissolved solids concentration of approximately 900 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.

(GW-77) - Meridian Oil Inc., Danny W. Hill, Plant and Pipeline Manager, P. O. Box 4289, Farmington, New Mexico 87499-4289, has submitted a discharge plan application for its proposed Middle Mesa compressor station located in the NW/4, Section 15 and the SW/4, Section 10, Township 31 North, Range 7 West, NMPM, San Juan County, New Mexico. Approximately 450 gallons per day of washdown water and produced water will be stored in an above ground steel tank sited within a bermed area prior to transport to an OCD approved disposal facility. Groundwater most likely to be affected by any spill, leak or other accidental discharge to the surface is at a depth of approximately 25 feet with a total dissolved solids concentration of approximately 1500 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.

Any interested person may obtain further information from the Oil Conservation Division and may submit written comments to the Director of the Oil Conservation Division at the address given above. The discharge plan application may be viewed at the above address between 8:00 a.m. and 5:00 p.m., Monday through Friday. Prior to ruling on any proposed discharge plan or its modification, the Director of the Oil Conservation Division shall allow at least thirty (30) days after the date of publication of this notice during which comments may be submitted to him and public hearing may be requested by any interested person. Requests for public hearing shall set forth the reasons why a hearing should be held. A hearing will be held if the Director determines there is significant public interest.

If no public hearing is held, the Director will approve or disapprove the proposed plan based on information available. If a public hearing is held, the Director will approve or disapprove the proposed plan based on information in the plan and information submitted at the hearing.

GIVEN under the Seal of New Mexico Oil Conservation Commission at Santa Fe, New Mexico, on this 24th day of April, 1991. To be published on or before May 3, 1991.

STATE OF NEW MEXICO
OIL CONSERVATION DIVISION


WILLIAM J. LEMAY, Director

S E A L



STATE OF NEW MEXICO
 ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT

OIL CONSERVATION DIVISION
 2040 S. PACHECO
 SANTA FE, NEW MEXICO 87505
 (505) 827-7131

April 16, 1996

CERTIFIED MAIL
RETURN RECEIPT NO. Z-765-963-133

Ms. Leigh E. Gooding
 Williams Field Services
 P.O. Box 58900, M.S. 2G1
 Salt Lake City, Utah 84158-0900

**RE: Approval of Discharge Plan Renewal GW-64
 Middle Mesa Compressor Station
 San Juan County, New Mexico**

Dear Ms. Gooding:

The discharge plan GW-64 for the Williams Field Services Middle Mesa Compressor Station located in SE/4 SW/4, Section 10, Township 31 North, Range 7 West, NMPM, San Juan County, New Mexico, is hereby approved under the conditions contained in the enclosed attachment. The discharge plan renewal consists of the application dated February 20, 1996, as well as this approval letter with conditions of approval from OCD dated April 16, 1996. Enclosed are two copies of the conditions of approval. **Please sign and return one copy to the New Mexico Oil Conservation Division (OCD) Santa Fe Office within five working days of receipt of this letter.**

The discharge plan application was submitted pursuant to Section 3106 of the New Mexico Water Quality Control Commission Regulations. Please note Sections 3109.E and 3109.F which provide for possible future amendments or modifications of the plan. Please be advised that the approval of this plan does not relieve Williams Field Services of liability should the operations associated with this facility result in pollution of surface water, ground water, or the environment.

Please be advised that all exposed pits, including lined pits and open top tanks (tanks exceeding 16 feet in diameter), shall be screened, netted, or otherwise rendered nonhazardous to wildlife including migratory birds.

Z 765 963-133



Receipt for
Certified Mail
 No Insurance Coverage Provided
 Do not use for International Mail
 (See Reverse)

Sent to WFS- GW-64 REM	
Street and No.	
P.O., State and ZIP Code	
Postage	\$
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt Showing to Whom & Date Delivered	
Return Receipt Showing to Whom, Date, and Addressee's Address	
TOTAL Postage & Fees	\$
Postmark or Date	

PS Form 3800, March 1993

Ms. Leigh Gooding
Williams Field Services
Page 2
April 16, 1996

Please note that Section 3104 of the regulations requires that "When a plan has been approved, discharges must be consistent with the terms and conditions of the plan." Pursuant to Section 3107.C Williams Field Services is required to notify the Director of any facility expansion, production increase, or process modification that would result in any change in the discharge of water quality or volume.


Pursuant to Section 3109.G.4, this plan is for a period of five (5) years. This approval will expire April 16, 2001, and an application for renewal should be submitted in ample time before that date. It should be noted that all discharge plan facilities will be required to submit plans for, or the results of, an underground drainage testing program as a requirement for discharge plan approval.

The discharge plan renewal for the Williams Field Services Middle Mesa Compressor Station GW-64 is subject to the WQCC Regulation 3114 discharge plan fee. Every billable facility submitting a discharge plan will be assessed a fee equal to the filing fee of fifty dollars (\$50) plus the flat fee of six-hundred and ninety dollars (\$690) for Compressor Stations over 3,000 horsepower.

The \$50 filing fee has been received by the OCD. The flat fee for an approved discharge plan has not been received by the OCD.

On behalf of the staff of the Oil Conservation Division, I wish to thank you and your staff for your cooperation during this discharge plan review.

Sincerely,

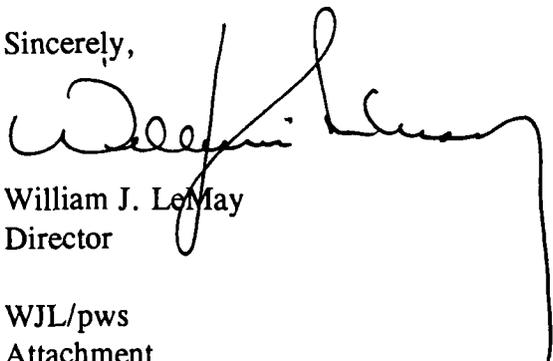

William J. LeMay
Director

WJL/pws
Attachment

xc: Mr. Denny Foust

Ms. Leigh Gooding
Williams Field Services
Page 3
April 16, 1996

ATTACHMENT TO DISCHARGE PLAN GW-64
Williams Field Services - Middle Mesa Compressor Station
DISCHARGE PLAN REQUIREMENTS
(April 16, 1996)

1. **Payment of Discharge Plan Fees:** The \$690 flat fee shall be submitted upon receipt of this approval. The required flat fee may be paid in a single payment due at the time of approval, or in equal annual installments over the duration of the plan, with the first payment due upon receipt of this approval.
2. **Williams Field Services Commitments:** Williams Field Services will abide by all commitments submitted in the Application dated February 20, 1996, as well as this Discharge Plan Renewal Approval from OCD dated April 16, 1996.
3. **Drum Storage:** All drums containing materials other than fresh water must be stored on an impermeable pad and curb type containment. All empty drums should be stored on their sides with the bungs in place and lined up on a horizontal plane. Chemicals in other containers such as sacks or buckets should also be stored on an impermeable pad and curb type containment.
4. **Process Areas:** All process and maintenance areas which show evidence that leaks and spills are reaching the ground surface must be either paved and curbed or have some type of spill collection device incorporated into the design.
5. **Above Ground Tanks:** All above ground tanks which contain fluids other than fresh water must be bermed to contain a volume of one-third more than the total volume of the largest tank or of all interconnected tanks. All new facilities or modifications to existing facilities must place the tank on an impermeable type pad.
6. **Above Ground Saddle Tanks:** Above ground saddle tanks must have impermeable pad and curb type containment unless they contain fresh water or fluids that are gases at atmospheric temperature and pressure.
7. **Tank Labeling:** All tanks should be clearly labeled to identify their contents and other emergency information necessary if the tank were to rupture, spill, or ignite.

Ms. Leigh Gooding
Williams Field Services
Page 4
April 16, 1996

8. **Below Grade Tanks/Sumps**: All below grade tanks, sumps, and pits must be approved by the OCD prior to installation or upon modification and must incorporate secondary containment and leak-detection into the design. All pre-existing sumps and below-grade tanks that do not have secondary containment and leak detection must demonstrate integrity on an annual basis. Integrity tests include pressure testing to 3 pounds per square inch above normal operating pressure and/or visual inspection of cleaned out tanks /or sumps.

9. **Underground Process/Wastewater Lines**: All underground process/wastewater pipelines must be tested to demonstrate their mechanical integrity at present and then every 5 years there after. Companies may propose various methods for testing such as pressure testing to 3 pounds per square inch above normal operating pressure or other means acceptable to the OCD.

10. **Housekeeping**: All systems designed for spill collection/prevention should be inspected to ensure proper operation and to prevent overtopping or system failure.

Any contaminated soils that are collected at the facility will be tested for hazardous constituents, and after receiving OCD approval, will be disposed of at an OCD approved site.

11. **Spill Reporting**: All spills/releases shall be reported pursuant to OCD Rule 116 and WQCC 1203 to the Aztec OCD District Office at (505)-334-6178.

12. **Transfer of Discharge Plan**: The OCD will be notified prior to any transfer of ownership, control, or possession of a facility with an approved discharge plan. A written commitment to comply with the terms and conditions of the previously approved discharge plan must be submitted by the purchaser and approved by the OCD prior to transfer.

13. **Closure**: The OCD will be notified when operations of the facility are discontinued for a period in excess of six months. Prior to closure of the facility a closure plan will be submitted for approval by the director. Closure and waste disposal will be in accordance with the statutes, rules and regulations in effect at the time of closure.

14. **Conditions accepted by:**

Title

February 21, 1996



Roger C. Anderson
Environmental Bureau Chief
New Mexico Energy, Minerals and Natural Resources Department
Oil Conservation Division
2040 S. Pacheco
Santa Fe, NM 87505

RECEIVED

FEB 22 1996

Environmental Bureau
Oil Conservation Division

Re: Groundwater Discharge Plan Renewals

Dear Mr. Anderson

On behalf of Williams Field Services and Williams Gas Processing - Blanco I am submitting renewal applications for the following Groundwater Discharge Plans.

GW-61 Horse Canyon Compressor Station, San Juan County
GW-62 Manzanares Compressor Station, San Juan County
GW-63 Pump Mesa Compressor Station, San Juan County
GW-64 Middle Mesa Compressor Station, San Juan County
GW-78 Five Points Compressor Station, Rio Arriba County
GW-79 Wild Horse Compressor Station, Rio Arriba County

4665 INDIAN SCHOOL NE

SUITE 106

I am enclosing a check for \$ 300.00 to cover the filing fee for the 6 applications. If you have any questions or need clarification, please call me or Leigh Gooding of Williams Field Services at 801-584-6543.

ALBUQUERQUE

Sincerely,

A handwritten signature in cursive script that reads "Susan E. Boyle". The signature is written in black ink and is positioned above the typed name and title.

Susan E. Boyle
Project Manager

NEW MEXICO

87110

cc: w/attachments
Denny Foust
OCD Aztec Office

PHO 505 266 6611

Environmental Bureau
Oil Conservation Division
2040 S. Pacheco
Santa Fe, NM 87505

RECEIVED

FEB 22 1996

Environmental Bureau
Oil Conservation Division

12/93

**DISCHARGE PLAN APPLICATION FOR NATURAL GAS PROCESSING PLANTS,
OIL REFINERIES AND GAS COMPRESSOR STATIONS**


(Refer to OCD Guidelines for assistance in completing the application.)

- I. TYPE: Natural Gas Compressor Station - Middle Mesa Compressor Station
- II. OPERATOR: Williams Field Services
ADDRESS: 295 Chipeta Way, Salt Lake City, Utah 84158-0900
CONTACT PERSON: Leigh Gooding PHONE: 801-584-6543
- III. LOCATION: SE/4 SW/4 Section 10 Township 31 North Range 7 West
Submit large scale topographic map showing exact location.
- IV. Attach the name and address of the landowner(s) of the facility site.
- V. Attach description of the facility with a diagram indicating location of fences, pits, dikes, and tanks on the facility.
- VI. Attach a description of sources, quantities and quality of effluent and waste solids.
- VII. Attach a description of current liquid and solid waste transfer and storage procedures.
- VIII. Attach a description of current liquid and solid waste disposal procedures.
- IX. Attach a routine inspection and maintenance plan to ensure permit compliance.
- X. Attach a contingency plan for reporting and clean-up of spills or releases.
- XI. Attach geological/hydrological evidence demonstrating that disposal of oil field wastes will not adversely impact fresh water. Depth to and quality of ground water must be included.
- XII. Attach such other information as is necessary to demonstrate compliance with any other OCD rules, regulations and/or orders.
- XIII. CERTIFICATION

I hereby certify that the information submitted with this application is true and correct
to the best of my knowledge and belief.

Name: Terry G. Spradlin

Manager,
Title: Environmental Health and Safety

Signature: 

Date: 2-20-96

Middle Mesa Compressor Station—Groundwater Discharge Plan

Table of Contents

	Page
1 Type of Operation.....	1
2 Operator/Legally Responsible Party.....	1
3 Location of Discharge/Facility.....	1
4 Landowner.....	2
5 Facility Description.....	2
6 Materials Stored or Used.....	2
7 Sources and Quantities of Effluent and Waste Solids.....	2
8 Liquid and Solid Waste Collection/Storage/Disposal.....	5
9 Proposed Modifications.....	7
10 Inspection, Maintenance, and Reporting.....	7
11 Spill/Leak Prevention and Reporting (Contingency Plans).....	7
12 Site Characteristics.....	7
13 Additional Information.....	8

Site Location

Effluent and Solid Waste Production Diagram

Site Diagram..... Appendix 1

NMOCD Rule 116 and WQCC Section 1203..... Appendix 2

WFS Policy and Procedures on Spill Reporting..... Appendix 3

Site Characteristics..... Appendix 4

Compliance History Documentation..... Appendix 5



Middle Mesa Compressor Station

Groundwater Discharge Plan GW-64

This document constitutes an application to renew Groundwater Discharge Plan GW-64 for Middle Mesa Compressor Station. Discharge Plan GW-64 was approved by the New Mexico Oil Conservation Division (NMOCD) on June 6, 1991 and it expires on June 5, 1996. Modifications to the plan to incorporate station expansions were approved by the OCD on March 3, 1993. This renewal application consolidates the information presented in the original plan and covered by the subsequent modification.

This renewal application has been prepared in accordance with the NMOCD "Guidelines for the Preparation of Ground Water Discharge Plans at Natural Gas Processing Plants, Oil Refineries, and Gas Compressor Stations" (revised 12-95) and New Mexico Water Quality Control Commission (WQCC) regulations 3-104 and 3-106.

1 Type of Operation

Middle Mesa Compressor Station is owned and operated by Williams Field Services (WFS) and provides metering, CO₂ removal, compression and dehydration services to a natural gas producer (Producer) for the gathering of coal seam methane gas on a contract basis for ultimate delivery to the WFS Milagro Plant near Bloomfield, NM. WFS has contracted the day-to-day operation of the compression equipment to Production Operators, Inc. (POI).

2 Operator/Legally Responsible Party

Operator

Williams Field Services
295 Chipeta Way
PO Box 58900
Salt Lake City, UT 84158-0900
(801) 584-6543
attention: Leigh Gooding

Legally Responsible Party

Williams Field Services
295 Chipeta Way
PO Box 58900
Salt Lake City, UT 84158-0900
(801) 584-6543
attention: Leigh Gooding

3 Location of Discharge/Facility

San Juan County, NM
Township 31 North, Range 7 West, SE/4 SE/4 sec 10.
(appendix 1 contains a map of the site location)

4 Landowner

The site is owned by Williams Field Services.

5 Facility Description

Appendix 1 contains the facility layout. The facility removes liquids and CO₂ and compresses field gas as it travels toward the Milagro Plant. There are 9 compressors at the facility, 6 dehydration units and 2 CO₂ membrane units.

6 Materials Stored or Used

Table 1 identifies materials and storage methods for substances used and stored at the plant. The first column corresponds to the identification labels on the layout and effluent production diagrams in appendix 1 as well as the SPCC Plan.

Table 1

Materials Used and Stored

<i>Id</i>	<i>Name</i>	<i>Composition</i>	<i>Type</i>	<i>Container</i>	<i>Capacity</i>
TK-a	Lube oil	Oil	Liquid	AGT	100 bbl
TK-b1	Antifreeze	Ethylene glycol	Liquid	AGT	500 gal
TK-b2	Antifreeze	Ethylene glycol	Liquid	AGT	500 gal
TK-c*	Lube oil	Oil	Liquid	AGT	500 gal
TK-d	Condensate	Hydrocarbons, water	Liquid	AGT	300 bbl
TK-e	Waste oil	Waste oil	Liquid	AGT	165 bbl
TK-f	Wastewater	Hydrocarbons, water, detergent, solvent, antifreeze	Liquid	AGT	165 bbl
TK-g	Solvent	Varsol	Liquid	AGT	500 gal
-	Filters	Drained waste	Solid	Drums	55-gal

AGT = aboveground tank (non-pressurized)

* Tanks (TK-c1 through TK-c9) located adjacent to each compressor.

MSD Sheets are maintained on the site and will be provided to the OCD upon request.

7 Sources and Quantities of Effluent and Waste Solids

Table 2 summarizes the effluent and solid wastes generated at the plant. The major sources of liquid and solid waste are described in the sections following table 2.

Table 2
Effluent and Solid Waste Sources, Quantity, Quality and Disposition

<i>Source</i>	<i>Waste/Quality</i>	<i>Quantity</i>	<i>Disposition</i>
Compressor engines	Drained oil	< 165 bbl 1x/yr	TK-e Waste oil tank Removed by contractor for recycling
Separators, scrubbers, CO ₂ pretreat units	Natural gas liquids	< 300 bbl 26x/yr	TK-d Condensate tank Removed by contractor to injection facility
Condensate tank bottoms, engine washwater, storage area rainwater, CO ₂ units	Water, hydrocarbons, coolant, detergent, solvent	<165 bbl 26x/yr	TK-f Wastewater tank Removed by contractor to injection facility
Used engine oil filters, sorbents	Special solid waste	10 filters/unit 4x/yr	Removed by POI to special waste container at POI office. Bin picked up by Waste Management and taken to special waste landfill
Used dehydrator glycol filters	Special solid waste	1 filter/unit 4x/yr	Removed by WFS to special waste container at District office. Bin picked up by Waste Management and taken to special waste landfill
Used CO ₂ unit filters, silicon beads from guard bed	Special solid waste	7 filters/skid 3x/yr	Removed by WFS to special waste container at District office. Bin picked up by Waste Management and taken to special waste landfill
Trash	Solid waste	varies	Stored in Flint bin removed weekly
Porta-potty	Sewage	varies	Removed by contractor

Separators/Scrubbers

Liquids from the pulsation bottle, suction scrubbers at each engine, filter separators, header dumps, CO₂ units, and dehydrator separators discharge into the condensate tank TK-d via underground piping. The amount of liquids accumulated by these units varies and is dependent upon the moisture content of the inlet gas stream.



Boilers and Cooling Towers/Fans

There are no boilers or cooling towers/fans located at the facility.

Process and Storage Equipment Wash Down

Oily waste water is generated during wash down of the compressor engines. Engine wash water contains water and detergent with trace amounts of lube oil, coolant and solvent. Compressor engines are washed down once per month. A maximum of 80 gallons of wash water is generated during each washing. Each compressor skid is equipped with a drain line which transports wash water to waste water tank TK-f. No RCRA-listed hazardous wastes are contained in the wash water.

Drums, tanks, and trucks are not washed at the facility.

Solvents/Degreasers

Less than 1 gallon per unit of dishwashing-type detergent is used for compressor engine wash down. Detergent is brought to the site as needed by the contractor responsible for performing the wash. Solvent is stored on site in an above-ground tank, TK-g. Less than 10 gallons per month of solvent is used at the site. Wash water collection and storage is discussed above in Process and Storage Equipment Wash Down.

Spent Acids/Caustics

There are no spent acids or caustics at the facility.

Used Engine Coolants

A composition of 50 percent antifreeze and 50 percent water is used to cool the compressor engines at the facility. Prior to use, antifreeze is stored in tanks TK-b1 and TK-b2. No waste coolant is generated as engine use causes the coolant to evaporate.

Waste Lubrication and Motor Oils

The engine oil of the compressor units is changed twice a year. Waste oil from the units is drained via underground lines to the waste oil tank TK-e. The contents of TK-e are emptied about once a year.

Used Filters

Each of the compressor units and engines generates 10 filters with every oil change. After removal from the unit, the filters are placed on a drain unit located in the truck loading and containment area. Drained sorbents and filters are stored in closed containers prior to removal from the site.

Each of the dehydrator units generates 1 glycol filter per quarter. Spent units are stored

in closed 55-gallon drums on one of the dehy skids until removed by WFS to a special waste container at their District office.

Each of the CO₂ processing skids generates up to 7 waste filters. Filters are changed as needed but never more than three times a year. Silicon beads from the guard beds may be changed as often as once a year.

Solids and Sludges

No solids or sludges are generated at the facility.

Painting Wastes

No painting wastes are generated at the facility.

Sewage

A porta-potty is located at the facility. It is owned and maintained by a contractor who removes liquids for off-site disposal as necessary.

Lab Wastes

The facility is not equipped with a lab.

Other Liquid and Solid Wastes

Paper and other solid waste, excluding filters and sorbents, are removed from the site weekly by Flint Company.

8 Liquid and Solid Waste Collection/Storage/Disposal

This section provides a general description of the collection, storage, and disposal systems used for effluents and solid wastes generated at the plant. Section 7 identifies the specific collection, storage, and disposal method utilized for each of the effluents generated at the plant.

Collection

Wastewater, natural gas liquids, and waste oil are transferred to their respective tanks via underground piping. Lube oil is transported to each of the compressor units from their respective lube oil tanks TK-c1 through TK-c9 via underground piping.

All underground piping was installed in 1991 when the facility was constructed. Hydrostatic testing of underground effluent pipelines has not been conducted at the facility. Hydrostatic testing will take place within the five-year period of the renewed discharge plan. WFS will submit a plan and timetable for hydrostatic testing of the underground effluent pipelines for OCD approval 6 months prior to the planned test.



Storage

All storage tanks located at the facility are constructed of steel. They are all situated on gravel.

The condensate tank TK-d, wastewater tank TK-f, waste oil tank TK-e, and lube oil tank TK-a are surrounded by interconnected gravel berms which were constructed to contain approximately 133% the volume of the largest tank.

All of the lube oil tanks TK-c1 through TK-c9 are on saddleracks. For overflow containment, tanks on saddle racks are underlain by concrete splash aprons equipped with retainment curbs or have containment of piping and valving. Fluids which collect within the curbed area drain through a pipe into the closed containment system.

The antifreeze tanks TK-b1 and TK-b2 and the solvent tank TK-g are on elevated stands located within the barrel storage area. The barrel storage area is constructed of concrete and is curbed. Rainwater from the pad drains into the wastewater tank TK-f.

On-Site Disposal

There are no on-site disposal facilities at the facility.

Off-site Disposal

All effluent and waste is removed and disposed of as identified on table 3.

Table 3
Off Site Disposal Contractors and Disposal Facilities

<i>Waste</i>	<i>Removal Contractor</i>	<i>Disposal Facility</i>
Wastewater, and condensate	Triple-S Trucking Aztec, NM 505-334-6193	Basin Disposal Co. 6 CR 5046 Bloomfield, NM 505-325-6336 OGRID #001739
Used oil	D&D Oil Recycling Bloomfield, NM 505-632-9130	D&D Oil Recycling Bloomfield, NM 505-632-9130
Filters and sorbents	Waste Management (picked up at WFS District office at Milagro plant or POI office in Aztec)	San Juan County Regional Landfill #78 County Rd 3140 Farmington, NM 505-334-1121

9 Proposed Modifications

No modifications to the facility are necessary to meet NMOCD requirements.

10 Inspection, Maintenance, and Reporting

The facility is inspected daily by the operator. Maintenance is performed and records are kept according to POI and WFS procedures.

11 Spill/Leak Prevention and Reporting (Contingency Plans)

The station is graveled to allow for early leak detection and quick response by facility personnel in the event of a leak of process fluids. POI is contractually obligated to handle all spills as required by the SPCC Plan and WFS procedures and to report all spills and leaks according to the requirements of the state of New Mexico found in NMOCD Rule 116 and WQCC Section 1203. Copies of these regulations are in appendix 3.

12 Site Characteristics

Appendix 4 contains the information regarding site characteristics from the facility's initial application for groundwater discharge plan approval.

13 Additional Information

History of Ownership and Compliance

The facility commenced operation in 1991 under discharge plan GW-63. The facility




discharge plan was subsequently modified to reflect equipment changes in 1993. In March 1994, a condensate spill took place. The OCD approved WFS' clean-up plan on April 26, 1994. Appendix 5 contains copies of all relevant documentation.

Closure Plan

All reasonable and necessary measures will be taken to prevent the exceedance of WQCC Section 3103 quality standards should WFS choose to permanently close the facility. Closure measures will include removal or closure in place of all underground piping and equipment. All tanks will be emptied. No potentially toxic materials or effluents will remain on the site. All potential sources of toxic pollutants will be inspected. Should contaminated soil be discovered, any necessary reporting under NMOCD Rule 116 and WQCC Section 1203 will be made and clean-up activities will commence. Post-closure maintenance and monitoring plans would not be necessary unless contamination is encountered.

Affirmation

I hereby certify that I am familiar with the information contained in and submitted with this discharge plan for the Middle Mesa Compressor Station and that such information is true, accurate, and complete to the best of my knowledge and belief.




Terry G. Spradlin
Manager, Environmental Health and Safety
Williams Field Services


2-20-96
Date

Appendix


1

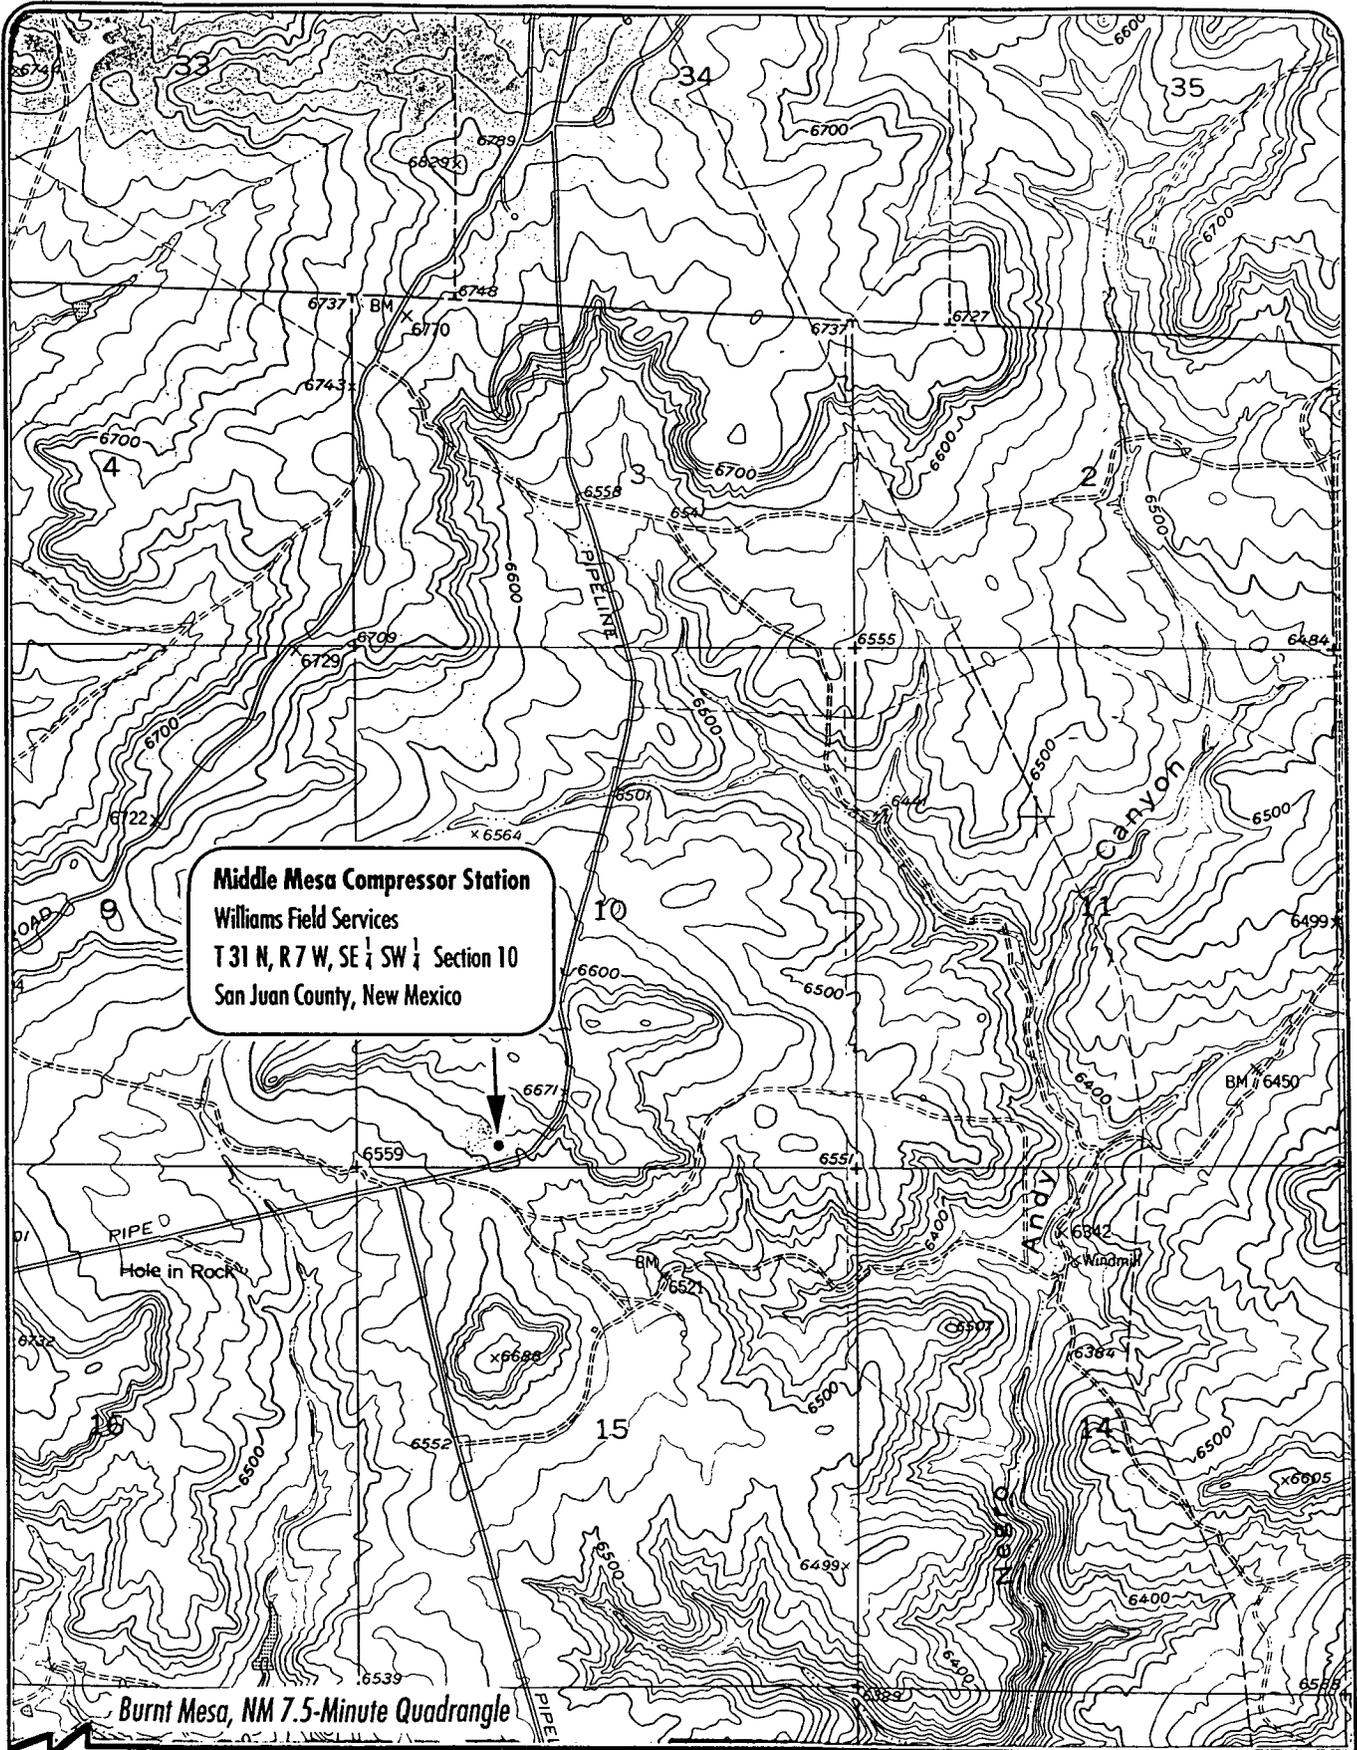

Middle Mesa Compressor Station
 Williams Field Services
 T 31 N, R 7 W, SE 1/4 SW 1/4 Section 10
 San Juan County, New Mexico



Location of Middle Mesa Compressor Station

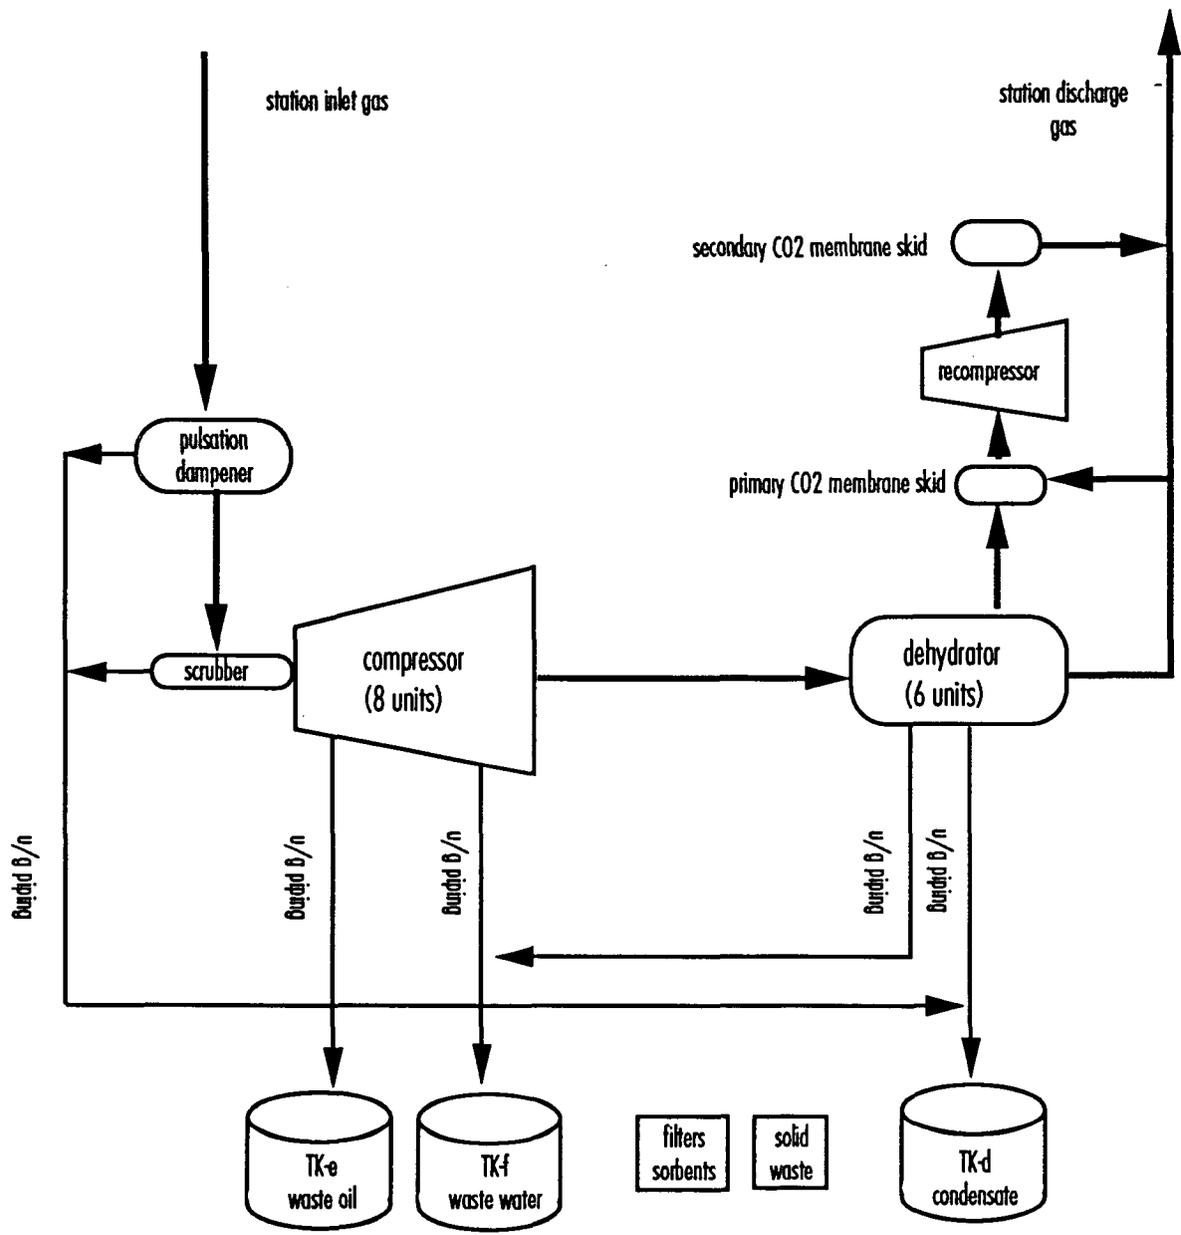


Middle Mesa Compressor Station Effluent and Solid Waste Production Diagram

Section EMERGENCY OPERATIONS PROCEDURES	Tab 13	Document No. 42.13.001
Effective Date JANUARY, 1995	Issue No. 02	Page No. 3 of 5

Subject or Title: SPILL PREVENTION CONTROL & COUNTERMEASURE PLAN

ATTACHMENT "A" PRODUCT & WASTE STORAGE LOCATIONS

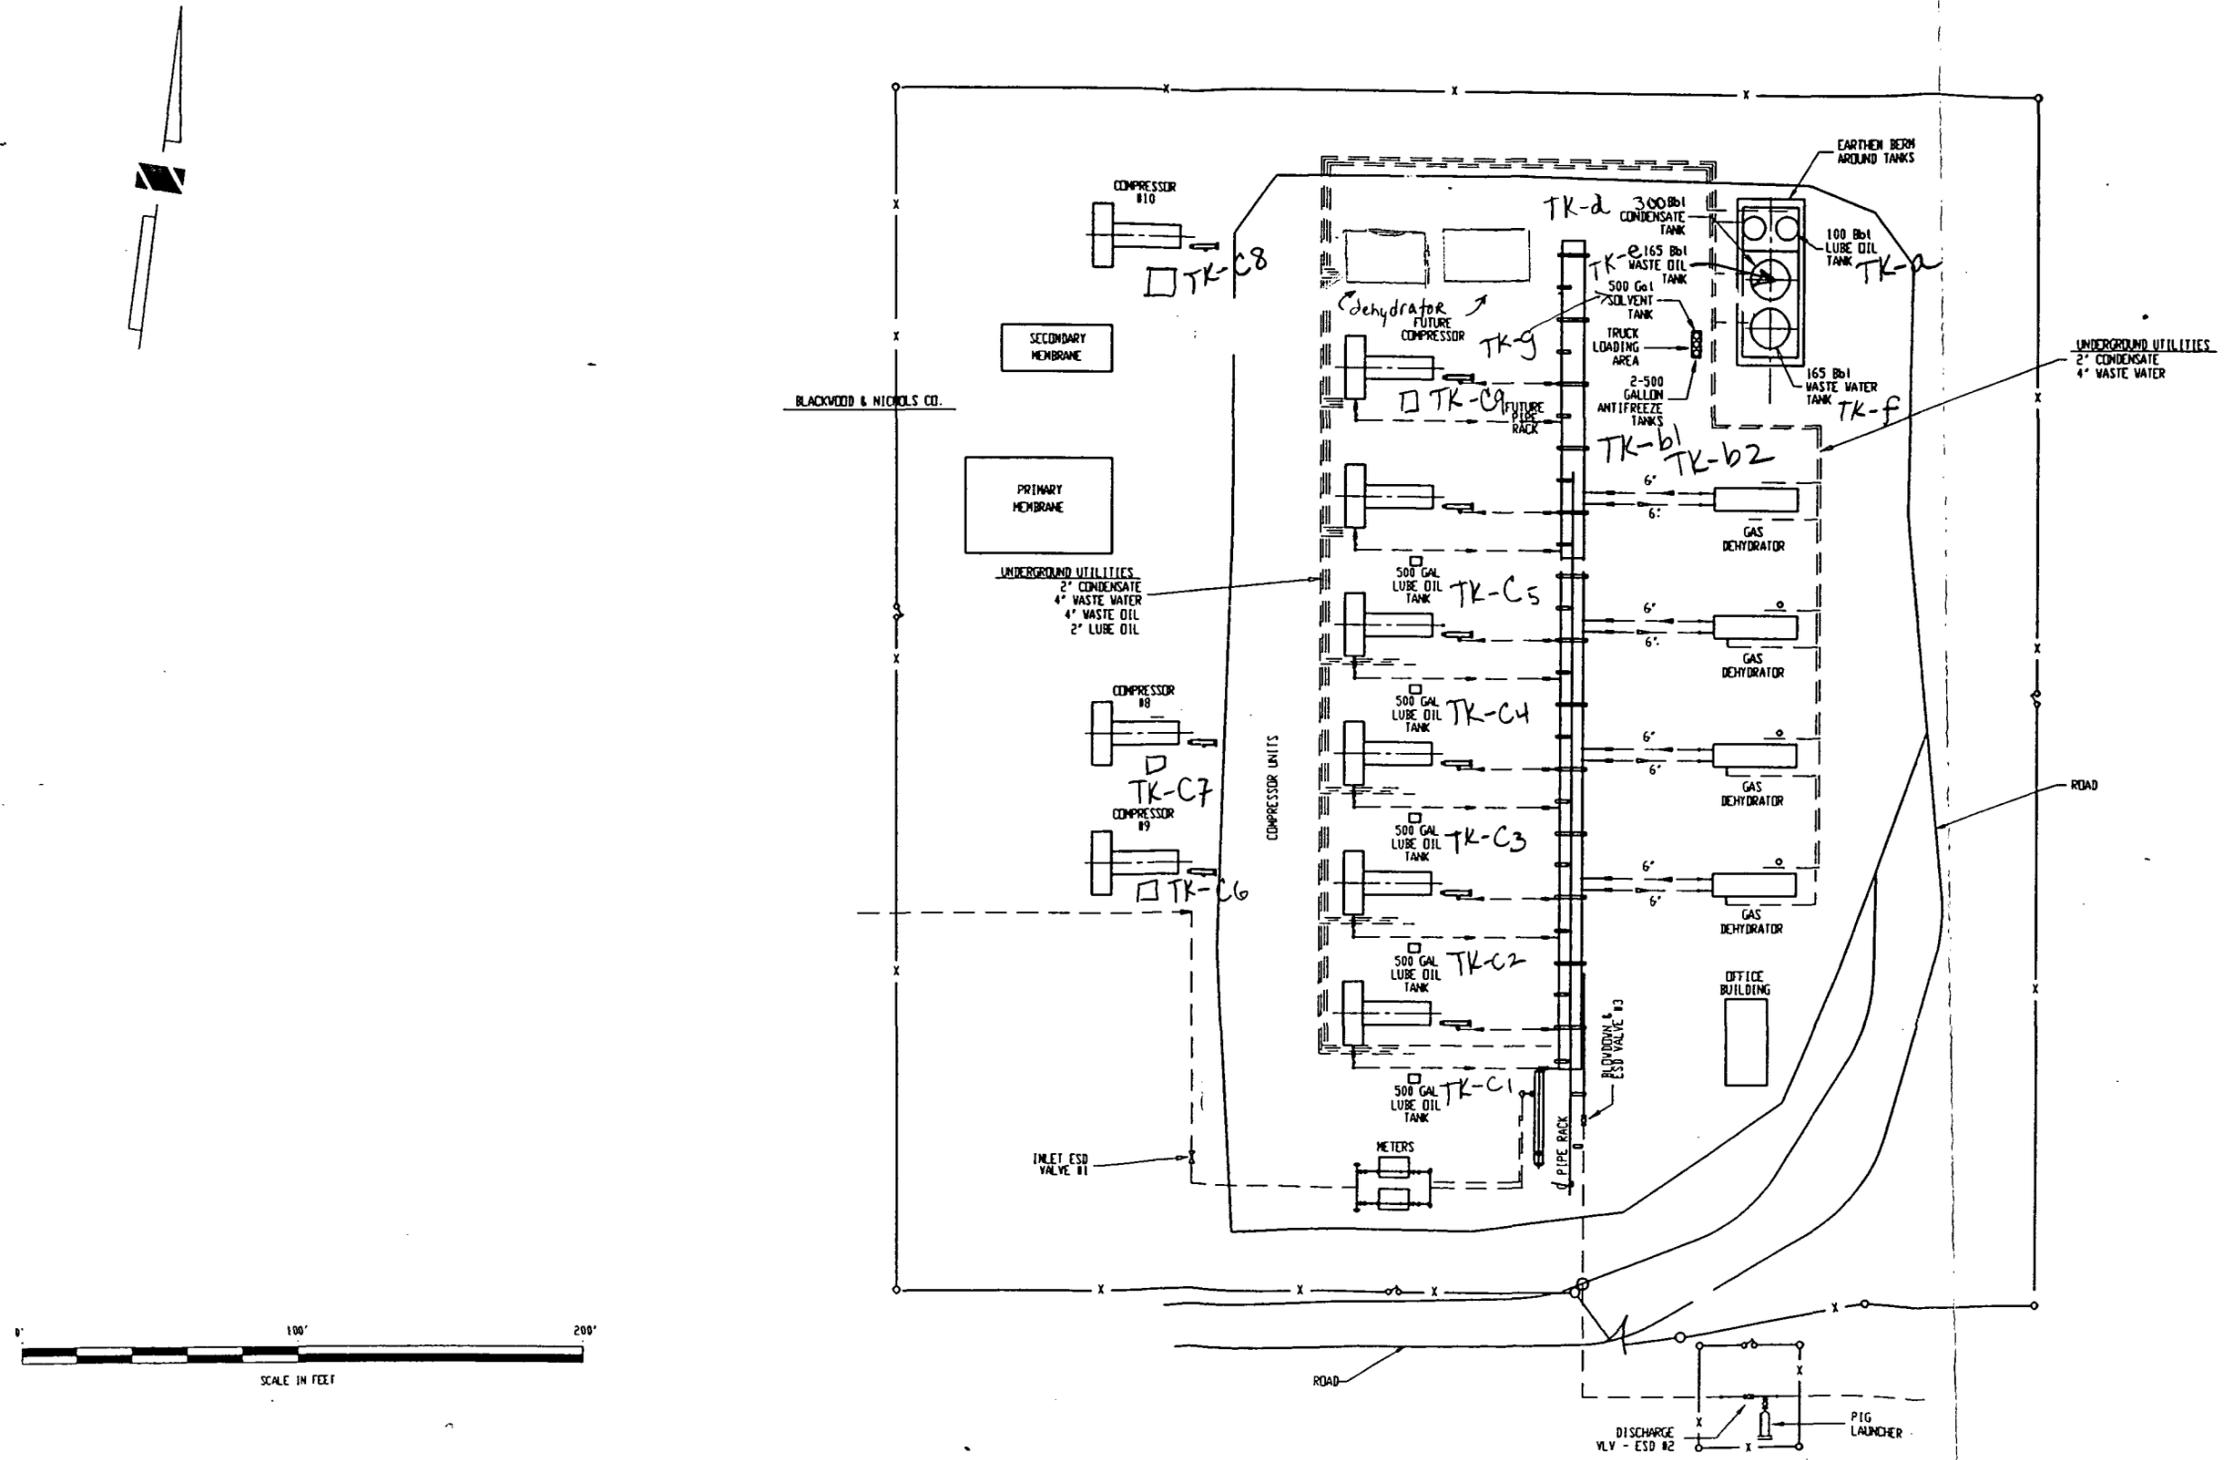

RULE 113. - SHOOTING AND CHEMICAL TREATMENT OF WELLS

(as of 3-1-91)

If injury results to the producing formation, injection interval, casing or casing seat from shooting, fracturing, or treating a well and which injury may create underground waste or contamination of fresh water, the operator shall give written notice to the Division within five (5) working days and proceed with diligence to use the appropriate method and means for rectifying such damage. If shooting, fracturing, or chemical treating results in irreparable injury to the well the Division may require the operator to properly plug and abandon the well.

RULE 114. - SAFETY REGULATIONS

(as of 3-1-91)

A. All oil wells shall be cleaned into a pit or tank, not less than 40 feet from the derrick floor and 150 feet from any fire hazard. All flowing oil wells must be produced through an oil and gas separator of ample capacity and in good working order. No boiler or portable electric lighting generator shall be placed or remain nearer than 150 feet to any producing well or oil tank. Any rubbish or debris that might constitute a fire hazard shall be removed to a distance of at least 150 feet from the vicinity of wells and tanks. All waste shall be burned or disposed of in such manner as to avoid creating a fire hazard.

B. When coming out of the hole with drill pipe, drilling fluid shall be circulated until equalized and subsequently drilling fluid level shall be maintained at a height sufficient to control subsurface pressures. During course of drilling blowout preventers shall be tested at least once each 24-hour period.

RULE 115. - WELL AND LEASE EQUIPMENT

(as of 3-1-91)

A. Christmas tree fittings or wellhead connections shall be installed and maintained in first class condition so that all necessary pressure tests may easily be made on flowing wells. On oil wells the Christmas tree fittings shall have a test pressure rating at least equivalent to the calculated or known pressure in the reservoir from which production is expected. On gas wells the Christmas tree fittings shall have a test pressure equivalent to at least 150 percent of the calculated or known pressure in the reservoir from which production is expected.

B. Valves shall be installed and maintained in good working order to permit pressures to be obtained on both casing and tubing. Each flowing well shall be equipped to control properly the flowing of each well, and in case of an oil well, shall be produced into an oil and gas separator of a type generally used in the industry.

RULE 116. - NOTIFICATION OF FIRE, BREAKS, LEAKS, SPILLS
AND BLOWOUTS

*(Due to be
rev. still
1/96)*

(as of 3-1-91)

A. The Division shall be notified of any fire, break, leak, spill, or blowout occurring at any injection or disposal facility or at any oil or gas drilling, producing, transporting, or processing facility in the State of New Mexico by the person operating or controlling such facility.

B. "Facility," for the purpose of this rule, shall include any oil or gas well, any injection or disposal well, and any drilling or workover well; any pipe line through which crude oil, condensate, casinghead or natural gas, or injection or disposal fluid (gaseous or liquid) is gathered, piped, or transported (including field flow-lines and lead-lines but not including natural gas distribution systems); any receiving tank, holding tank, or storage tank, or receiving and storing receptacle into which crude oil, condensate, injection or disposal fluid, or casinghead or natural gas is produced, received, or stored; any injection or disposal pumping or compression station including related equipment; any processing or refining plant in which crude oil, condensate, or casinghead or natural gas is processed or refined; and any tank or drilling pit or slush pit associated with

oil or gas well or injection or disposal well drilling operations or any tank, storage pit, or pond associated with oil or gas production or processing operations or with injection or disposal operations and containing hydrocarbons or hydrocarbon waste or residue, salt water, strong caustics or strong acids, or other deleterious chemicals or harmful contaminants.

C. Notification of such fire, break, leak, spill, or blowout shall be in accordance with the provisions set forth below:

(1) Well Blowouts. Notification of well blowouts and/or fires shall be "immediate notification" described below. ("Well blowout" is defined as being loss of control over and subsequent eruption of any drilling or workover well, or the rupture of the casing, casinghead, or wellhead or any oil or gas well or injection or disposal well, whether active or inactive, accompanied by the sudden emission of fluids, gaseous or liquid, from the well.)

(2) "Major" Breaks, Spills, or Leaks. Notification of breaks, spills, or leaks of 25 or more barrels of crude oil or condensate, or 100 barrels or more of salt water, none of which reaches a watercourse or enters a stream or lake; breaks, spills, or leaks in which one or more barrels of crude oil or condensate or 25 barrels or more of salt water does reach a watercourse or enters a stream or lake; and breaks, spills, or leaks of hydrocarbons or hydrocarbon waste or residue, salt water, strong caustics or strong acids, gases, or other deleterious chemicals or harmful contaminants of any magnitude which may with reasonable probability endanger human health or result in substantial damage to property, shall be "immediate notification" described below.

(3) "Minor" Breaks, Spills, or Leaks. Notification of breaks, spills, or leaks of 5 barrels or more but less than 25 barrels of crude oil or condensate, or 25 barrels or more but less than 100 barrels of salt water, none of which reaches a watercourse or enters a stream or lake, shall be "subsequent notification" described below.

(4) "Gas Leaks and Gas Line Breaks. Notification of gas leaks from any source or of gas pipe line breaks in which natural or casinghead gas of any quantity has escaped or is escaping which may with reasonable probability endanger human health or result in substantial damage to property shall be "immediate notification" described below. Notification of gas pipe line breaks or leaks in which the loss is estimated to be 1000 or more MCF of natural or casinghead gas but in which there is no danger to human health nor of substantial damage to property shall be "subsequent notification" described below.

(5) Tank Fires. Notification of fires in tanks or other receptacles caused by lightning or any other cause, if the loss is, or it appears that the loss will be, 25 or more barrels of crude oil or condensate, or fires which may with reasonable probability endanger human health or result in substantial damage to property, shall be "immediate notification" as described below. If the loss is, or it appears that the loss will be at least 5 barrels but less than 25 barrels, notification shall be "subsequent notification" described below.

(6) Drilling Pits, Slush Pits, and Storage Pits and Ponds. Notification of breaks and spills from any drilling pit, slush pit, or storage pit or pond in which any hydrocarbon or hydrocarbon waste or residue, strong caustic or strong acid, or other deleterious chemical or harmful contaminant endangers human health or does substantial surface damage, or reaches a watercourse or enters a stream or lake in such quantity as may with reasonable probability endanger human health or result in substantial damage to such watercourse, stream, or lake, or the contents thereof, shall be "immediate notification" as described below. Notification of breaks or spills of such magnitude as to not endanger human health, cause substantial surface damage, or result in substantial damage to any watercourse, stream, or lake, or the contents thereof, shall be "subsequent notification" described below, provided however, no notification shall be required where there is no threat of any damage resulting from the break or spill.

(7) IMMEDIATE NOTIFICATION. "Immediate Notification" shall be as soon as possible after discovery and shall be either in person or by telephone to the district office of the Division district in which the incident occurs, or if the incident occurs after normal business hours, to the District Supervisor, the Oil and Gas Inspector, or the Deputy Oil and Gas Inspector. A complete written report ("Subsequent Notification") of

the incident shall also be submitted in DUPLICATE to the appropriate district office of the Division within ten days after discovery of the incident.

(8) SUBSEQUENT NOTIFICATION. "Subsequent Notification" shall be a complete written report of the incident and shall be submitted in duplicate to the district office of the Division district in which the incident occurred within ten days after discovery of the incident.

(9) CONTENT OF NOTIFICATION. All reports of fires, breaks, leaks, spills, or blowouts, whether verbal or written, shall identify the location of the incident by quarter-quarter, section, township, and range, and by distance and direction from the nearest town or prominent landmark so that the exact site of the incident can be readily located on the ground. The report shall specify the nature and quantity of the loss and also the general conditions prevailing in the area, including precipitation, temperature, and soil conditions. The report shall also detail the measures that have been taken and are being taken to remedy the situation reported.

(10) WATERCOURSE, for the purpose of this rule, is defined as any lake-bed or gully, draw, stream bed, wash, arroyo, or natural or man-made channel through which water flows or has flowed.

RULE 117. - WELL LOG, COMPLETION AND WORKOVER REPORTS

(as of 3-1-91)

Within 20 days after the completion of a well drilled for oil or gas, or the recompletion of a well into a different common source of supply, a completion report shall be filed with the Division on Form C-105. For the purpose of this rule, any hole drilled or cored below fresh water or which penetrates oil- or gas-bearing formations or which is drilled by an "owner" as defined herein shall be presumed to be a well drilled for oil or gas.

RULE 118. - HYDROGEN SULFIDE GAS - PUBLIC SAFETY

(as of 3-1-91)

A. The intent of this rule is to provide for the protection of the public's safety in areas where hydrogen sulfide (H₂S) gas in concentrations greater than 100 parts per million (PPM) may be encountered.

B. Producing operations should be conducted with due consideration and guidance from American Petroleum Institute (API) publication "Conducting Oil and Gas Production Operations Involving Hydrogen Sulfide" (RP-55). The operator of a lease producing, or a gas processing plant handling H₂S or any other related facility where H₂S gas is present in concentrations of 100 PPM or more shall take reasonable measures to forewarn and safeguard persons having occasion to be on or near the property. In addition to training operator's employees in H₂S safety such measures may include, but are not necessarily limited to, posting of warning signs, fencing of surface installations, installation of safety devices and wind direction indicators, and maintaining tanks, thief hatches and gaskets, valves and piping in condition so as to prevent avoidable loss of vapors. Where release of hydrogen sulfide is unavoidable, the operator shall burn or vent the gas stream in such a manner as to avoid endangering human life.

C. Wells drilled in known H₂S gas producing areas, or where there is substantial probability of encountering H₂S gas in concentrations of 100 PPM or more, should be planned and drilled with due regard to and guidance from API RP-49 "Recommended Practices for Safe Drilling of Wells Containing Hydrogen Sulfide", latest edition. Wells completed and serviced by well servicing units where there is substantial probability of encountering H₂S gas in concentrations of 100 PPM or more should be worked on with due regard to the latest industry accepted practices. These practices may include, but are not necessarily limited to, the proper training of personnel in H₂S safety and the use of H₂S safety equipment as listed for safe operations by the American Petroleum Institute draft report for "Land, Oil and Gas Well Servicing and Workover Operations Involving Hydrogen Sulfide."*

1995 OCT 27 PM 1:25

B. Plans, specifications and reports required by this Section, if related to facilities for the production, refinement and pipeline transmission of oil and gas, or products thereof, shall be filed instead with the Oil Conservation Division. [1-4-68, 12-1-95]

C. Plans and specifications required to be filed under this Section must be filed prior to the commencement of construction. [9-3-72]

1203. NOTIFICATION OF DISCHARGE--REMOVAL.

A. With respect to any discharge from any facility of oil or other water contaminant, in such quantity as may with reasonable probability injure or be detrimental to human health, animal or plant life, or property, or unreasonably interfere with the public welfare or the use of property, the following notifications and corrective actions are required: [2-17-74, 12-24-87]

1. As soon as possible after learning of such a discharge, but in no event more than twenty-four (24) hours thereafter, any person in charge of the facility shall orally notify the Chief of the Ground Water Protection and Remediation Bureau of the department, or his counterpart in any constituent agency delegated responsibility for enforcement of these rules as to any facility subject to such delegation. To the best of that person's knowledge, the following items of information shall be provided:

a. the name, address, and telephone number of the person or persons in charge of the facility, as well as of the owner and/or operator of the facility;

b. the name and address of the facility;

c. the date, time, location, and duration of the discharge;

d. the source and cause of discharge;

e. a description of the discharge, including its chemical composition;

f. the estimated volume of the discharge; and

g. any actions taken to mitigate immediate damage from the discharge.

[2-17-74, 2-20-81, 12-24-87, 12-1-95]

2. When in doubt as to which agency to notify, the

1995 OCT 27 PM 1: 25

person in charge of the facility shall notify the Chief of the Ground Water Protection and Remediation Bureau of the department. If that department does not have authority pursuant to commission delegation, the department shall notify the appropriate constituent agency. [12-24-87, 12-1-95]

3. Within one week after the discharger has learned of the discharge, the facility owner and/or operator shall send written notification to the same department official, verifying the prior oral notification as to each of the foregoing items and providing any appropriate additions or corrections to the information contained in the prior oral notification. [12-24-87]

4. The oral and written notification and reporting requirements contained in this Subsection A are not intended to be duplicative of discharge notification and reporting requirements promulgated by the Oil Conservation Commission (OCC) or by the Oil Conservation Division (OCD); therefore, any facility which is subject to OCC or OCD discharge notification and reporting requirements need not additionally comply with the notification and reporting requirements herein. [2-17-74, 12-24-87]

5. As soon as possible after learning of such a discharge, the owner/operator of the facility shall take such corrective actions as are necessary or appropriate to contain and remove or mitigate the damage caused by the discharge. [2-17-74, 12-24-87]

6. If it is possible to do so without unduly delaying needed corrective actions, the facility owner/operator shall endeavor to contact and consult with the Chief of the Ground Water Protection and Remediation Bureau of the department or appropriate counterpart in a delegated agency, in an effort to determine the department's views as to what further corrective actions may be necessary or appropriate to the discharge in question. In any event, no later than fifteen (15) days after the discharger learns of the discharge, the facility owner/operator shall send to said Bureau Chief a written report describing any corrective actions taken and/or to be taken relative to the discharge. Upon a written request and for good cause shown, the Bureau Chief may extend the time limit beyond fifteen (15) days. [12-24-87, 12-1-95]

7. The Bureau Chief shall approve or disapprove in writing the foregoing corrective action report within thirty (30) days of its receipt by the department. In the event that the report is not satisfactory to the department, the Bureau Chief shall specify in writing to the facility owner/operator any shortcomings in the report or in the corrective actions already taken or proposed to be taken relative to the discharge, and shall give the facility owner/operator a reasonable and clearly specified

1995 OCT 27 PM 1:25

time within which to submit a modified corrective action report. The Bureau Chief shall approve or disapprove in writing the modified corrective action report within fifteen (15) days of its receipt by the department. [12-24-87]

8. In the event that the modified corrective action report also is unsatisfactory to the department, the facility owner/operator has five (5) days from the notification by the Bureau Chief that it is unsatisfactory to appeal to the department secretary. The department secretary shall approve or disapprove the modified corrective action report within five (5) days of receipt of the appeal from the Bureau Chief's decision. In the absence of either corrective action consistent with the approved corrective action report or with the decision of the secretary concerning the shortcomings of the modified corrective action report, the department may take whatever enforcement or legal action it deems necessary or appropriate. [12-24-87, 12-1-95]

9. If the secretary determines that the discharge causes or may with reasonable probability cause water pollution in excess of the standards and requirements of Section 4103 of this Part, and the water pollution will not be abated within one hundred and eighty (180) days after notice is required to be given pursuant to Section 1203.A.1 of this Part, the secretary may notify the facility owner/operator that he is a responsible person and that an abatement plan may be required pursuant to Sections 4104 and 4106.A of this Part. [12-1-95]

B. Exempt from the requirements of this Section are continuous or periodic discharges which are made: [2-17-74]

1. in conformance with regulations of the commission and rules, regulations or orders of other state or federal agencies; or [2-17-74]

2. in violation of regulations of the commission, but pursuant to an assurance of discontinuance or schedule of compliance approved by the commission or one of its duly authorized constituent agencies. [2-17-74]

C. As used in this Section and in Sections 4100 through 4115, but not in other Sections of this Part: [2-17-74, 12-1-95]

1. "discharge" means spilling, leaking, pumping, pouring, emitting, emptying, or dumping into water or in a location and manner where there is a reasonable probability that the discharged substance will reach surface or subsurface water; [2-17-74]

2. "facility" means any structure, installation, operation, storage tank, transmission line, motor vehicle, rolling

1995 OCT 27 PM 1:25

stock, or activity of any kind, whether stationary or mobile;
[2-17-74]

3. "oil" means oil of any kind or in any form including petroleum, fuel oil, sludge, oil refuse and oil mixed with wastes; [2-17-74]

4. "operator" means the person or persons responsible for the overall operations of a facility; and
[12-24-87]

5. "owner" means the person or persons who own a facility, or part of a facility. [12-24-87]

D. Notification of discharge received pursuant to this Part or information obtained by the exploitation of such notification shall not be used against any such person in any criminal case, except for perjury or for giving a false statement.
[2-17-74]

E. Any person who has any information relating to any discharge from any facility of oil or other water contaminant, in such quantity as may with reasonable probability injure or be detrimental to human health, animal or plant life, or property, or unreasonably interfere with the public welfare or the use of property, is urged to notify the Chief of the Ground Water Protection and Remediation Bureau of the department. Upon such notification, the secretary may require an owner/operator or a responsible person to perform corrective actions pursuant to Sections 1203.A.5 or 1203.A.9 of this Part. [12-1-95]

[1204-1209] Reserved

1210. VARIANCE PETITIONS.

A. Any person seeking a variance pursuant to Section 74-6-4 (G) NMSA 1978, shall do so by filing a written petition with the commission. The petitioner may submit with his petition any relevant documents or material which the petitioner believes would support his petition. Petitions shall: [7-19-68, 11-27-70, 9-3-72]

1. state the petitioner's name and address;
[7-19-68, 11-27-70]

2. state the date of the petition; [7-19-68]

3. describe the facility or activity for which the variance is sought; [7-19-68, 11-27-70]

4. state the address or description of the property upon which the facility is located; [11-27-70]

Appendix

3

OPERATIONS

Manual O & M Procedure	Department	
Section Safety/General	Tab 10	Document No. 21.10.020
Effective Date 6-16-93	Issue No. 1	Page No. 1 of 6

Subject of Title

DISCHARGES OR SPILLS OF OIL OR HAZARDOUS SUBSTANCES; Preventing, Controlling and Reporting of

A. PURPOSE AND SCOPE

- A.1 To establish the policy and procedure for preventing, controlling, and reporting of spills or discharges of oil or hazardous substances to the environment in accordance with Company practices and federal, state, and local requirements, including Title 40 of the Code of Federal Regulations - Part 112 (Oil Pollution Prevention).
- A.2 This document pertains to Company personnel and Company and non-company facilities. The spill prevention and control requirements in this Policy and Procedure are Federally mandated guidelines for oil pollution prevention. The Company policy is to also apply these standards, where appropriate, to facilities containing hazardous substances. This is a discretionary application of the standards; however, variations from the standards should be approved by the responsible Director.

B. CONTENTS

C. POLICY

- C.1 General
- C.2 Bulk Storage Tanks
- C.3 Facility Drainage
- C.4 Transfer Operations, Pumping, and In-Plant/Station Process
- C.5 Facility Tank Car and Tank Truck Loading/Unloading Rack

D. PROCEDURE

- D.1 Identifying, Containing and Initial Reporting of a Discharge or Spill of a Hazardous or Toxic Substance
- D.2 Submitting Written Notification of a Discharge or Spill

ATTACHMENT A: Discharge or Spill Containment Procedures and Materials

C. POLICY

C.1 GENERAL

- C.1.1 All Company facilities which could discharge or spill oil or hazardous substances which may affect natural resources or present an imminent and substantial danger to the public health or welfare including, but not limited to fish, shellfish, wildlife, shorelines, and beaches are subject to the provisions of this document.
- C.1.2 Hazardous Substance, for purposes of this procedure, is defined as any chemical or material that has or should have a Material Safety Data Sheet (MSDS); however, hazardous substances are further defined by the following environmental statutes:
 - a. Section 101 (N) and Section 102 of the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA)
 - b. Section 307(a) and Section 311 (b)(2)(A) of the Clean Water Act
 - c. Section 3001 of the Solid Waste Act (excluding items suspended by Congress)
 - d. Section 112 of the Clean Air Act
 - e. Section 7 of the Toxic Substance Control Act

Supersedes Policy and Procedure 12.10.020 dated July 7, 1989.

OPERATIONS

Manual O & M Procedure	Department	
Section Safety/General	Tab 10	Document No. 21.10.020
Effective Date 6-16-93	Issue No. 1	Page No. 2 of 6

Subject of Title

DISCHARGES OR SPILLS OF OIL OR HAZARDOUS SUBSTANCES; Preventing, Controlling and Reporting of

- C.1.3 The term hazardous substance does not include petroleum, including crude oil or any fraction thereof, which is not otherwise specifically listed or designated as a hazardous substance in the first sentence of this paragraph, and the term does not include natural gas, natural gas liquids, liquefied natural gas or synthetic gas usable for fuel (or mixtures of natural gas and such synthetic gas).
- C.1.4 Oil, for the purpose of this document, means oil of any kind or in any form, including but not limited to petroleum, fuel oil, Y grade, mixed products, sludge, oil refuse, and oil mixed with wastes other than dredged spoil (earth and rock). LPG (propane, butane, ethane) are not considered to be oil.
- C.1.5 Facilities which could discharge or spill oil or hazardous substances into a watercourse must comply with the required federal, state, or local laws and regulations. A discharge includes but is not limited to any spilling, leaking, pumping, pouring, emitting, emptying, or dumping. A watercourse is any perennial or intermittent river, stream, gully, wash, lake, or standing body of water capable of collecting or transporting an oil or hazardous substance.
- C.1.6 Facilities which are subject to the requirements stated in this policy are as follows:
- a. Non-Transportation Related Facilities
 - (1) Storage or drip tanks and other aboveground containers (excluding pressurized or inline process vessels) having a capacity in excess of 660 gallons for each single container or an aggregate capacity of 1,321 gallons or more for multiple containers.
 - (2) Underground storage facilities having a total capacity in excess of 42,000 gallons.
 - b. Transportation Related Facilities
 - (1) All vehicles, pipeline facilities, loading/unloading facilities, and other mobile facilities which transport oil or hazardous substances.
- C.1.7 Each Company location which has facilities subject to paragraph C.1.1 shall have a site specific Spill Prevention Control and Countermeasure Plan (SPCC Plan) which identifies all facilities subject to 40 CFR 112. The plan shall identify all hazardous substance storage vessels at the facility and the spill prevention measures in place to control discharges or spills. This plan shall also identify all regulatory agencies that must be notified in case of a spill.
- C.1.8 The facility supervisor is responsible for spill prevention. His/her duties include, but are not limited to, the following:
- a. Instructing personnel in the operation and maintenance of equipment to prevent the discharge of oil.
 - b. Conduct briefings for operating personnel at intervals frequent enough to assure adequate understanding of the Spill Plan at that facility.
 - c. Briefings should highlight and describe known discharges or spills, and recently developed precautionary measures.
- C.1.9 Each individual facility is checked by the supervisor or designee to determine the potential for discharges or spills of oil or hazardous substances in harmful quantities that violate water quality standards or which may cause a film, sheen, or discoloration on the surface of water. All facilities which have the potential for discharging or spilling harmful quantities of oil or hazardous substances into a watercourse are required to have the following preventive measures:
- a. Examination of all tanks, valves and fittings, at least annually, to determine any maintenance requirements.

OPERATIONS

Manual O & M Procedure	Department	
Section Safety/General	Tab 10	Document No. 21.10.020
Effective Date 6-11-93	Issue No. 1	Page No. 3 of 6

Subject of Title

DISCHARGES OR SPILLS OF OIL OR HAZARDOUS SUBSTANCES; Preventing, Controlling and Reporting of

- b. All tank batteries should, as far as practicable, have a secondary means of containment for the entire contents of the largest single tank plus sufficient freeboard in the containment facility to allow for precipitation.
- c. A annual monitoring and inspection program to prevent accidental spills or discharges into watercourses. This includes annual inspection for faulty systems and monitoring line valves and liquid pipelines for leaks or blowouts.

C.1.10 Any field drainage ditches, road ditches, traps, sumps, or skimmers should be inspected at annual scheduled intervals for accumulation of liquid hydrocarbons or other hazardous substances which may have escaped from small leaks. Any such accumulations should be removed.

C.2 BULK STORAGE TANKS

C.2.1 A tank should not be used for storage of oil or hazardous substances unless the material and construction of the tank is compatible with the material stored and conditions of storage such as pressure and temperature. Buried storage tanks must be protected from corrosion by coatings, cathodic protection, or other methods compatible with local soil conditions. Aboveground tanks should be subject to visual inspection for system integrity.

C.2.2 The facility supervisor should evaluate level monitoring requirements to prevent tank overflow.

C.2.3 Leaks which result in loss of oil or hazardous substances from tank seams, gaskets, rivets and bolts sufficiently large to cause accumulation of oil or hazardous substances in diked areas should be promptly corrected.

C.2.4 Mobile or portable oil or hazardous substances storage tanks should be positioned or located to prevent the contents from reaching a watercourse. The mobile facilities should be located so their support structure will not be undermined by periodic flooding or washout.

C.3 FACILITY DRAINAGE

C.3.1 Make provisions for drainage from diked storage areas where necessary in areas with high precipitation levels. Drainage from dike areas should be restrained by valves or other means to prevent a discharge or spill. Diked areas should be emptied by pumps or ejectors which are manually activated. Valves used for the drainage of diked areas should be of manual, open-and-closed design.

C.3.2 Rain water may be drained from diked areas providing drainage water does not contain oil or hazardous substances that may cause a harmful discharge. Drain valves must be closed following drainage of diked areas.

C.3.3 When possible, drainage systems from undiked areas should flow into ponds, lagoons, or catchment basins designed to retain oil or hazardous substances or return the substances to the facility. Any drainage system which is not designed to allow flow into ponds, lagoons, or catchment basins should be equipped with a diversion system that could, in the event of a discharge or spill, contain the oil or hazardous substances on the Site.

C.3.4 The principal means of containing discharges or spills is the use of dikes which are constructed wherever regulated quantities of oil or hazardous substances have the potential of reaching a watercourse. The construction of dikes must meet the following requirements:

- a. Capacity must be at least equivalent to the storage capacity of the largest tank of the battery plus sufficient freeboard to allow for precipitation, or displacement by foreign materials.
- b. Small dikes for temporary containment are constructed at valves where potential leaking of oil or hazardous substances may occur.

OPERATIONS

Manual O & M Procedure	Department	
Section Safety/General	Tab 10	Document No. 21.10.020
Effective Date 10-10-93	Issue No. 1	Page No. 4 of 6

Subject of Title

DISCHARGES OR SPILLS OF OIL OR HAZARDOUS SUBSTANCES; Preventing, Controlling and Reporting of

- c. Any dike three feet or higher should have a minimum cross section of two feet at the top.

C.3.5 Other means of containment or spill control include, but are not limited to:

- a. Berms or retaining walls;
- b. Curbing;
- c. Culverting, gutters, or other drainage systems;
- d. Weirs, booms, or other barriers;
- e. Spill diversion ponds or retention ponds;
- f. Sorbent materials

C.4 TRANSFER OPERATIONS, PUMPING, AND IN-PLANT/STATION PROCESS

C.4.1 Aboveground valves and pipelines should be examined annually by operating personnel to determine whether there are any leaks from flange joints, expansion joints, valve glands and bodies, catch pans, pipeline supports, valve locks, and metal surfaces.

C.5 FACILITY TANK CAR AND TANK TRUCK LOADING/UNLOADING RACK

C.5.1 Rack area drainage which does not flow into a catchment basin or treatment facility designed to handle spills should have a quick drainage system for use in tank truck loading and unloading areas. The containment system should have a maximum capacity of any single compartment of a truck loaded or unloaded in the station.

C.5.2 Aboveground piping that has potential for damage by vehicles entering the Site should be protected by logically placed warning signs or by concrete-filled pipe barriers.

C.5.3 Loading and unloading areas should be provided with an interlocked warning light, grounding shutdown, physical barrier system, or warning signs to prevent vehicular departure before complete disconnect of flexible or fixed transfer lines. All drains and outlets of any truck should be closely examined for leakage prior to filling and departure. All drains and outlets which may allow leakage should be tightened, adjusted, or replaced to prevent liquid leakage while in transit.

NOTE: LPG loading facilities and remote field loading of condensate are exempt from the C.5 requirements of this document.

D. PROCEDURE

D.1 IDENTIFYING, CONTAINING AND INITIAL REPORTING OF A DISCHARGE OR SPILL OF OIL OR HAZARDOUS SUBSTANCE

Any Employee

D.1.1 Upon noticing a discharge or spill of an oil or hazardous substance in any quantity initiates immediate containment procedures and notifies facility supervisor.

NOTE: Refer to Attachment A for containment procedures.

Facility Supervisor

D.1.2 Contacts Gas Control and responsible Director immediately by telephone and provides the following information:

- a. Name of company facility and/or location of facility and nature of discharge or spill
- b. Description and quantity of emission or substance discharged
- c. Name, title, and telephone number of person initially reporting the discharge or spill and person reporting to Gas Control
- d. Action taken or being taken to mitigate and correct discharge or spill
- e. Water bodies or streams involved
- f. Time and duration of discharge or spill
- g. Outside involvement during discharge or spill (public government agencies, etc. See Emergency Operating Procedure Manuals)

WILLIAMS FIELD SERVICES COMPANY
 ONE OF THE WILLIAMS COMPANIES 
OPERATIONS

Manual O & M Procedure	Department	
Section Safety/General	Tab 10	Document No. 21.10.020
Effective Date 10-16-93	Issue No. 1	Page No. 5 of 6

Subject of Title
 DISCHARGES OR SPILLS OF OIL OR HAZARDOUS SUBSTANCES; Preventing, Controlling and Reporting of

Gas Control Personnel

D.1.3 Advises Environmental Services departments immediately by telephone concerning the incident including any incidents reported by persons not employed with the Company.

NOTE: If Gas Control is contacted by a person not employed with the Company, the necessary information is obtained as indicated in D.1.2 and the Supervisor and Environmental Services are immediately contacted to begin containment and clean-up of the discharge or spill.

D.1.4 If Environmental Services cannot be contacted, notifies Director over Environmental Services.

Facility Supervisor

D.1.5 Coordinates containment and clean-up of discharge or spill, keeping the responsible Director informed.

D.1.6 If the discharge or spill is too large for Company personnel to contain, contacts qualified local contractors for assistance. (See Emergency Operating Procedure Manuals tab #11, contractors with available equipment and services).

D.1.7 Advises Environmental Services by telephone if emergency containment or clean-up assistance from a state agency or a response team from the U.S. Coast Guard is required.

Environmental Services

D.1.8 Contacts Legal Department (and Right-of-Way Department, if appropriate) and assesses reporting requirements to state and federal agencies. (See Emergency Operating Procedure Manuals).

D.1.9 Makes appropriate contacts with U.S. Coast Guard and state agencies when necessary.

D.1.10 If spill is significant, dispatches Environmental Specialist to scene to oversee cleanup and reporting responsibilities.

D.2 SUBMITTING WRITTEN NOTIFICATION OF A DISCHARGE OR SPILL

Facility Supervisor

D.2.1 Completes a written description of the incident as soon as possible after initial notification is given, which should include the following:

- a. Time and date of discharge or spill
- b. Facility name and location
- c. Type of material spilled
- d. Quantity of material spilled
- e. Area affected
- f. Cause of spill
- g. Special circumstances
- h. Corrective measures taken
- i. Description of repairs made
- j. Preventative measures taken to prevent recurrence.

D.2.2 Forwards the completed report to Environmental Services and a copy to Legal Department. Retains a copy for future reference.

NOTE: Environmental Services, in coordination with the Legal Department, submits written reports to government agencies.

OPERATIONS

Manual O & M Procedure	Department	
Section Safety/General	Tab 10	Document No. 21.10.020
Effective Date 10-14-93	Issue No. 1	Page No. 6 of 6

Subject of Title

DISCHARGES OR SPILLS OF OIL OR HAZARDOUS SUBSTANCES; Preventing, Controlling and Reporting of

ATTACHMENT A

Discharge or Spill Containment Procedures and Materials

Type of Facility where the Discharge or Spill occurs	Containment Procedures	Material Used for Containment
A. Oil Pipeline (as defined in C.1.4)	<ol style="list-style-type: none"> 1. Closes appropriate block valves. 2. Contains discharge or spill by: ditching covering, applying sorbents, constructing an earthen dam, or burning. 3. If burning is required, obtains approval from the appropriate state air quality control government agencies before burning. 	<ol style="list-style-type: none"> 1. Straw 2. Loose Earth 3. Oil Sorbent - 3M Brand 4. Plain Wood Chips 5. Sorb - Oil Chips Banta Co. 6. Sorb - Oil Swabs - Banta Co. 7. Sorb - Oil Mats - Banta Co. 8. Or Equivalent Materials.
B. Vehicle	<ol style="list-style-type: none"> 1. Contains discharge or spill by: ditching, covering surface with dirt, constructing earthen dams, applying sorbents, or burning. 2. Notifies immediately the Compliance and Safety Department and if there is any imminent danger to local residents; notifies immediately the highway patrol or local police officials. 3. If burning is required, obtains approval from the appropriate state air quality control government agencies before burning. <p>NOTE: Any vehicle carrying any hazardous or toxic substance will carry a shovel or other ditching device to contain a spill. If the vehicle has sufficient room, sorbent materials should also be carried.</p>	
C. Bulk Storage Tanks or any other Facilities	<ol style="list-style-type: none"> 1. Contains discharge or spill by: ditching, covering, applying sorbents, constructing an earthen dam, or burning. 2. If burning is required, obtains approval from the appropriate state air quality control government agencies before burning. 	

Appendix

4

3.0

Site Characteristics

The Middle Mesa Compressor Station is located in the Southeast quarter of the Southwest quarter of Section 10, Township 31 North, Range 7 West in San Juan County, New Mexico. The elevation of the station is 6,600 feet.

Shallow groundwater associated with alluvium beneath the Navajo Reservoir elevation 6,100 feet, is the closest source of groundwater, approximately 2 1/2 miles downgradient (south) of the station.

The nearest water well on record is located approximately 7 miles southwest of the station in Section 32, Township 31 North, Range 8 West. The water bearing strata in this well is an unconfined sandstone aquifer in the Nacimiento formation located between 5,334 and 4,622 feet in elevation, starting at 938 feet deep. The specific conductance measured at this well was 14,000 umhos in April, 1975 and 13,000 umhos in August, 1975 (USGS 1984 open file report 84-608).

Soils are a silty clay. Vegetation is juniper and sagebrush with approximately 50% cover.

Appendix

5

WILLIAMS FIELD SERVICES COMPANY 
ONE OF THE WILLIAMS COMPANIES

P.O. BOX 58900
SALT LAKE CITY, UTAH 84158-0900
801-583-8800

August 28, 1990

Mr. Roger Anderson
New Mexico Oil Conservation Division
P.O. Box 2088
Santa Fe, New Mexico 87501

Dear Mr. Anderson:

Notification is hereby provided, upon your request, of our intent to construct five (5) new field compressor sites in the San Juan Basin. Facilities at each site will consist of skid mounted 1000 hp field compressors, a field dehydrator and 3-70 barrel (or smaller) storage tanks (for lube oil, wastewater and used oil). The location of each site is provided below:

Horse Canyon (11 units)	NE 1/4, NE 1/4, Sec. 27, T-30-N, R-9-W
Manzanares (4 units)	NE 1/4, NW 1/4, Sec. 33, T-30-N, R-8-W
Pump Mesa (6 units)	SW 1/4, SE 1/4, Sec. 14, T-31-N, R-8-W
Middle Mesa (7 units)	SE 1/4, SW 1/4, Sec. 10, T-31-N, R-7-W
Simms Mesa (7 units)	NW 1/4, NE 1/4, Sec. 22, T-30-N, R-7-W

Wastewater and used oil will be collected directly into a tank. Spill containment dikes will surround all tanks.

There will be no discharge from these field compressor sites, therefore a discharge plan should not be required. We will begin the earthwork at these locations on September 3, 1990 and the compressor units must be in operation by November 23, 1990 due to contractual obligations.

I will contact you before September 14, 1990 to verify your concurrence with our interpretation that discharge plans are not required. If you need additional information or can respond to this notification in the meantime, please do not hesitate to contact me at (801) 584-6730.

Sincerely,



Sandy Fishler
Environmental Services


SF/pm

0008



STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION

GARREY CARRUTHERS
GOVERNOR

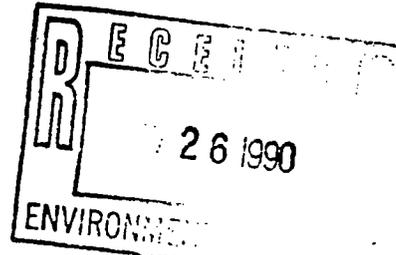

POST OFFICE BOX 2088
STATE LAND OFFICE BUILDING
SANTA FE, NEW MEXICO 87504
(505) 827-5800

November 20, 1990

CERTIFIED MAIL -
RETURN RECEIPT NO. P-327-278-306

Ms. Sandy Fisher
Williams Field Services Company
P. O. Box 58900
Salt Lake City, Utah 84158-0900

RE: Discharge Plan Requirement

Dear Ms. Fisher:

Under the provisions of the Water Quality Control Commission (WQCC) Regulations, you are hereby notified that the filing of discharge plans is required for the following compressor stations:

1. Horse Canyon
NE/4 NE/4, Section 27, Township 30 North, Range 9 West
San Juan County, New Mexico
2. Manzanares
NE/4 NW/4, Section 33, Township 30 North, Range 8 West
San Juan County, New Mexico
3. Pump Mesa
SW/4 SE/4, Section 14, Township 31 North, Range 8 West
San Juan County, New Mexico
4. Middle Mesa
SE/4 SW/4, Section 10, Township 31 North, Range 7 West
San Juan County, New Mexico
5. Simms Mesa
NW/4 NE/4, Section 22, Township 30 North, Range 7 West
Rio Arriba County, New Mexico


Ms. Sandy Fisher
November 20, 1990
Page -2-

This notification of discharge plan requirement is pursuant to Sections 3-104 and 3-106 of the WQCC Regulations. The discharge plan, defined in Section 1.101.P. of the WQCC Regulations, should cover all discharges of effluent or leachate at the plant site or adjacent to the plant site. Included in the application should be plans for controlling spills and accidental discharges at the facility (including detection of leaks in buried underground tanks and/or piping).

A copy of the regulations is enclosed for your convenience. Also enclosed is a copy of an OCD guide to the preparation of discharge plans for gas processing plants. The guidelines are presently being revised to include berming of tanks, curbing and paving of process areas susceptible to leaks or spills and the disposition of any solid wastes. Three copies of each discharge plan application should be submitted.

If there are any questions on this matter, please feel free to call David Boyer at 827-5812, or Roger Anderson at 827-5884 as they have the assigned responsibility for review of all discharge plans.

Sincerely,

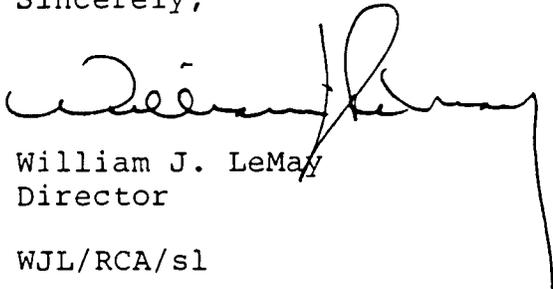

William J. LeMay
Director

WJL/RCA/sl

Enclosure

cc: OCD Aztec District Office

file

WILLIAMS FIELD SERVICES COMPANY 
ONE OF THE WILLIAMS COMPANIES

P.O. BOX 58900
SALT LAKE CITY, UTAH 84158-0900
801-583-8800

March 12, 1991

Mr. Roger Anderson
New Mexico Oil Conservation Division
State Land Office Building
Santa Fe, NM 87504

RE: Middle Mesa Compressor Station JW-64

Dear Mr. Anderson:

Williams Field Services requests authorization to operate the Middle Mesa Compressor Station while the New Mexico Oil Conservation Division is reviewing the Discharge Plan. The discharge plan is currently under development. There are two (2) dehydrators temporarily in place at the site. These should be in service by April 1, 1991. The permanent installation may be in service some time around August 1, 1991.

Please do not hesitate to contact me at (801) 584-6730 if there are any questions or concerns with this request.

Sincerely,



Sandy Fishler
Environmental Specialist

SF/pm

0054

WILLIAMS FIELD SERVICES COMPANY 
ONE OF THE WILLIAMS COMPANIES

P.O. BOX 58900
SALT LAKE CITY, UTAH 84158-0900
801-583-8800

April 17, 1991

Mr. Roger Anderson
New Mexico Oil Conservation Division
Land Office Building
Santa Fe, NM 87504-2088

RE: Middle Mesa Compressor Station - JW64

Dear Mr. Anderson:

The Discharge Plan for the Middle Mesa Compressor Station is hereby submitted.

Please call me at (801) 584-6730 if you have any questions or comments regarding this.

Sincerely,



Sandy Fishler
Environmental Specialist

SF/pm

attachment

0062

WILLIAMS FIELD SERVICES COMPANY 
ONE OF THE WILLIAMS COMPANIES

P.O. BOX 58900
SALT LAKE CITY, UTAH 84158-0900
801-583-8800

June 5, 1991

Mr. Roger Anderson
New Mexico Oil Conservation Division
Land Office Building
P.O. Box 2088
Santa Fe, NM 87504-2088


RE: Horse Canyon JW-61
Manzanares JW-62
Pump Mesa JW-63
Middle Mesa JW-64

Dear Mr. Anderson:

Revised site plans are enclosed to replace Figure 2 in the Discharge Plans for Horse Canyon, Manzanares, Pump Mesa, and Middle Mesa Compressor Stations. The revision to Figure 2 depicts underground piping for process fluids, per your request.

Please call me at (801) 584-6730 if there are questions or comments regarding this submittal.

Sincerely,



Sandy Fishler
Environmental Specialist

SF/pm

attachment(s)

0069

WILLIAMS FIELD SERVICES COMPANY 

ONE OF THE WILLIAMS COMPANIES

P.O. BOX 58900

SALT LAKE CITY, UTAH 84158-0900

801-583-8800

FAX: (801) 584-6483

February 17, 1993

Mr. Roger Anderson
New Mexico Oil Conservation Division
State Land Office Building
310 Old Santa Fe Trail
Santa Fe, New Mexico 87504

Re: Manzanares System C.D.P. Facility Expansion - San Juan and Rio Arriba Counties

Dear Mr. Anderson:

The attached table summarizes the anticipated current and future expansion of the Williams Field Services' Manzanares Gathering System C.D.P.'s, and the corresponding increase in waste fluids which will be generated at these locations. Although new compressors and/or dehydrators are being added at these sites, no additional bulk storage for waste liquids (used oil, waste water, etc.) will be installed above that which is currently located at the facilities.

Williams Field Services believes that the addition of these units will result in insignificant increases in the fluids handled at the specific C.D.P.'s. Please review this table and advise me of any Discharge Plan modifications which you determine will be necessary.

Thank you for your attention to this matter.

Sincerely,

Carol Revelt

Carol Revelt
Environmental Specialist

Attachment

cc: D. Compton, 10309
J. West, MND

WILLIAMS FIELD SERVICES - MANZANARES GATHERING SYSTEM
CENTRAL DELIVERY POINT EXPANSION/MODIFICATION

<u>D.P. Name</u>	<u>Location</u>	<u>Discharge Permit #</u>	<u>Original # Compressors</u>	<u>Additional Compressors</u>	<u>Anticipated Additional Waste-Oil Generated</u>	<u>Original # Dehydrators</u>	<u>Additional Dehydrators</u>	<u>Anticipated Additional Waste Water Generated</u>
1-6 No. 2	Sec. 10, 29N, 6W Rio Arriba County	GW-121	5	2	250 gal/quarter	5	2	30 gal/day
1-6 No. 4	Sec. 19, 29N, 6W Rio Arriba County	GW-122	4	3	375 gal/quarter	2	2	30 gal/day
1-6 No. 1	Sec. 1, 30N, 6W Rio Arriba County	GW-118	5	4	500 gal/quarter	5	4	60 gal/day
2-7 No. 1	Sec. 34, 32N, 7W San Juan County	GW-117	4	---	---	2	1	15 gal/day
2-8 No. 2	Sec. 27, 32N, 8W San Juan County	GW-111	4	---	---	2	1	15 gal/day
2-8 No. 3	Sec. 9, 31N, 8W San Juan County	GW-116	4	2	250 gal/quarter	2	1	15 gal/day
edar Hill	Sec. 28, 32N, 10W San Juan County	GW-87	5	1	125 gal/quarter	3	3	45 gal/day
orse Canyon	Sec. 27, 30N, 9W San Juan County	GW-61	14	---	---	9	1	15 gal/day
iddle Mesa	Sec. 10, 31N, 7W San Juan County	GW-64	7	---	---	4	3	45 gal/day
ump Mesa	Sec. 14, 31N, 8W San Juan County	GW-63	6	6	750 gal/quarter	4	4	60 gal/day
ims Mesa	Sec. 22, 30N, 7W Rio Arriba County	GW-68	7	---	---	5	1	15 gal/day

Σ = 7



STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION




BRUCE KING
GOVERNOR

ANITA LOCKWOOD
CABINET SECRETARY

March 3, 1993

POST OFFICE BOX 2088
STATE LAND OFFICE BUILDING
SANTA FE, NEW MEXICO 87504
(505) 827-5800

CERTIFIED MAIL
RETURN RECEIPT NO. P-111-334-304

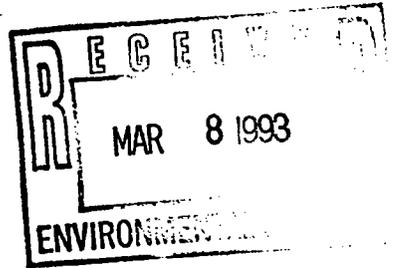

Ms. Carol Revelt
Environmental Specialist
Williams Field Services Company
P.O. Box 58900
Salt Lake City, Utah

**Re: Discharge Plan Modifications
Manzanares Gathering System
San Juan County, New Mexico
Rio Arriba County, New Mexico**

Dear Ms. Revelt:

The Oil Conservation Division (OCD) has received your letter dated February 17, 1993 requesting a determination on Williams Field Services' proposed modifications of existing compressor facilities as to what effect this would have on the existing discharge plans. The discharge plan modifications were submitted pursuant to Section 3-109.F. of the New Mexico Water Quality Control Commission (WQCC) Regulations.

Pursuant to WQCC Regulation 3-109.F. the modification to the previously approved discharge plans are hereby approved. The OCD has determined that these modifications are minor, therefore, public notice was not issued and the required flat rate fee for modification of a discharge plan is waived. However, the regulations require that a fifty (50) dollar filing fee be paid for each of the eleven specified facilities. The filing fee for the discharge plan modifications are due upon receipt of this letter.

Please make checks payable to: **NMED-Water Quality Management** and addressed to the OCD Santa Fe Office.


Ms. Carol Revelt
March 3, 1993
Page 2

The approved modifications are to the following facilities:

(GW-121) San Juan 29-6 No.2 C.D.P. Compressor Station
(GW-122) San Juan 29-6 No.4 C.D.P. Compressor Station
(GW-118) San Juan 31-6 No.1 C.D.P. Compressor Station
(GW-117) San Juan 32-7 No.1 C.D.P. Compressor Station
(GW-111) San Juan 32-8 No.2 C.D.P. Compressor Station
(GW-116) San Juan 32-8 No.2 C.D.P. Compressor Station
(GW-87) Cedar Hill Compressor Station
(GW-61) Horse Canyon Compressor Station
(GW-64) Middle Mesa Compressor Station
(GW-63) Pump Mesa Compressor Station
(GW-68) Sims Mesa Compressor Station

If you have any question you can contact the Environmental Bureau at (505) 827-5812.

Sincerely,

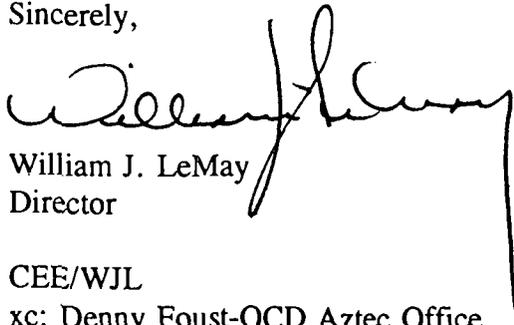

William J. LeMay
Director

CEE/WJL
xc: Denny Foust-OCD Aztec Office
11 Discharge Plan files

file

WILLIAMS FIELD SERVICES 
ONE OF THE WILLIAMS COMPANIES

P.O. Box 58900
Salt Lake City, UT 84158-0900
(801) 584-7033
FAX: (801) 584-6483

April 7, 1994

Mr. Roger Anderson
New Mexico Oil Conservation Division
State Office Building
310 Old Santa Fe Trail
Santa Fe, NM 87504

Re: Proposed Work Plan - Middle Mesa Condensate Contaminated Soils

Dear Mr. Anderson:

As we discussed on the telephone today, I am submitting a report and a proposed work plan for the soil that was removed from our Middle Mesa Compressor Station. The soil was dumped in error by Consolidated Contractors at the San Juan County Landfill. The report was prepared by Cindy Gray of On Site Technologies. Her report summarizes the incident and provides a proposed work plan for your approval.

Please review the information provided and if possible, provide your written concurrence. If any additional information is needed, please call me at (801) 584-6999.

Sincerely,



H. Lee Bauerle
Environmental Specialist

xc: Denny Faust OCD/Aztec

Facsimile Cover Sheet

To: Mr. Lee Bauerle
Company: Williams Field Services
Phone: (801)584-6999
Fax: (801)584-7751

From: Cynthia A. Sluyter-Gray
Company: On Site Technologies, LTD.
Phone: (505) 325-8786
Fax: (505) 327-1496

Date: 04/06/94

**Pages Including this
cover page: Six**

Comments:

The following is the report regarding the condensate spill at Middle Mesa and a narrative concerning the errant truck. The last paragraph on the second page contains the information for the workplan proposal which needs to be sent from Williams Field Services to Roger Anderson at NMOCU Santa Fe with a copy to Denny Foust at NMOCU Aztec. Verbal approval was given by Mr. Anderson to me at the Four Corners Oil & Gas Conference 3/31 but the request needs to come from Williams Field Services. He will then provide a written approval. His FAX number in Santa Fe is (505) 827-5741.

Please call me if you have any questions or concerns. Thank you.

Cindy



April 4, 1994

Williams Field Services
Manzanares District
Attn.: Mr. Jim Jackson
P. O. Box 215
Bloomfield, NM 87413

On Site Job Number 4-1082
Middle Mesa CDP
Condensate Spill Cleanup

Dear Mr. Jackson:

This letter is intended to provide information regarding the condensate spill to which we responded March 22, 1994 at the Williams Field Services Middle Mesa CDP. We were notified of the occurrence by Mr. Charlie Price of Williams Field Services and arrangements were made to meet Mr. Price and a crew from Pine River Enterprises at the Middle Mesa CDP on March 22, 1994 to begin the cleanup. Appropriate notifications to New Mexico Oil Conservation Division were made by Williams Field Services personnel. It was determined that the contaminated soil should be classified as Exempt Oilfield Waste and arrangements were made by On Site Technologies for the acceptance of the soil by the Tierra Environmental Landfarm.

Sphag Sorb industrial absorbent was applied to the free product present on the surface inside the tank berm. Approximately ten cubic yards of soils and absorbent material were excavated and removed from the bermed area around the condensate tank and stockpiled on plastic until transportation for disposal could be arranged. During the excavation process, a PhotoVac MicroTip Photo Ionization Detector was used to determine the extent of the spill by checking for the volatile components of condensate. Field notes, field testing results, and a rough site map locating the tested areas are attached to this letter. Excavation was discontinued when acceptable readings on the PID were reached. However, visual observation of the underlying soils indicated the probable presence of another spill, assumed to be lube oil due to the lack of volatiles response on the PID. The probable lube oil spill will be discussed in a separate report. A sample was taken from the removed and stockpiled material for laboratory analysis for Total Petroleum Hydrocarbons using EPA Method 418.1. The laboratory results and Chain of Custody are also attached to this letter.

Consolidated Constructors of Farmington, New Mexico was hired by On Site Technologies to transport the condensate-contaminated materials from the stockpile at Middle Mesa CDP to the Tierra Environmental Landfarm at Crouch Mesa with the permission of the New Mexico Oil Conservation Division. On March 23, 1994, the materials were loaded by Pine River Enterprises into a single Consolidated Constructors dump truck. However, the driver hauled the materials, in error, to the San Juan County Regional Landfill on Crouch Mesa. Also in error, the landfill operator allowed the truck to enter and dump. The compactor then processed the material with other solid waste already present in the working face. Realizing the error, the landfill operator, Waste Management, isolated the area and notified On Site Technologies and the New Mexico Solid Waste Bureau. On Site notified both New Mexico Oil

FAX: (505) 327-1496 • 24 HR. -- (505) 327-7105 • OFF.: (505) 325-8786

3005 NORTH RIDGE DRIVE - SUITE F - P. O. BOX 2606 - FARMINGTON, NEW MEXICO 87499

Conservation Division and Tierra Environmental Landfarm as well as Williams Field Services.

After viewing the situation within the hour on March 23 and discussing it with Mr. Roger Anderson of the NMOCD, On Site Technologies instructed Consolidated Constructors to immediately load the contaminated materials and the embedded solid waste in a transport trailer, cover it, and haul it to a secure area for safekeeping until a solution could be proposed to and approved by the NMOCD. The trailer with approximately twenty cubic yards of contaminated materials and solid waste was taken to Consolidated Constructors' fenced equipment yard in Farmington, New Mexico by early afternoon the same day that the error occurred.

Consolidated Constructors have acknowledged their responsibility for the problem and willingness to cooperate in the execution of an NMOCD approved workplan. Several options have been discussed with Mr. Roger Anderson and Mr. Denny Foust of NMOCD, Mr. Lee Bauerle of Williams Field Services, and Mr. Stan Kozimer of Consolidated Constructors as well as the Tierra Environmental Landfarm.

A proposed workplan needs to be submitted by Williams Field Services as the waste generator to Mr. Roger Anderson of NMOCD in Santa Fe with a copy to Mr. Denny Foust of NMOCD in Aztec for approval. The action option which appears to be most cost effective and can be executed in a timely fashion is for Consolidated Constructors to build a lined berm, placing the trailer in it. The material can then be slowly removed from the trailer using an auger-type material handler. The non-soil waste material will then be sorted out by hand for separate disposal. It is also important that Mr. Denny Foust of NMOCD, Mr. Phil Nobis of Tierra Environmental Landfarm, and Mrs. Cindy Gray of On Site Technologies be notified and have the opportunity to examine the material after sorting and prior to transportation to the Tierra Landfarm. Consolidated Constructors has been advised of the proposed workplan and has agreed to cooperate entirely.

If you, Mr. West, or Mr. Bauerle have any questions or need additional information regarding the proposed workplan or this report, please feel free to contact me at any time.


Respectfully submitted,



Cynthia A. Gray
Project Supervisor
On Site Technologies, Ltd

attach. x 3

FAX copy to Mr. Lee Bauerle
Williams Field Services
801-584-7751

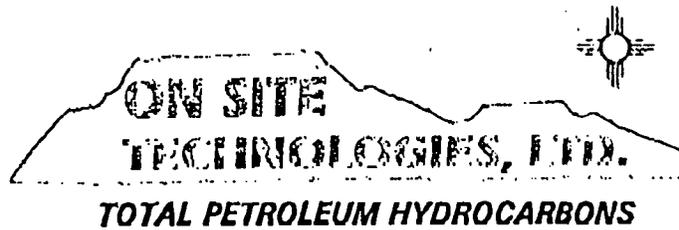

Attn: *Cindy Gray*
 Company: *On Site Technologies*
 Address: *3005 Northridge Drive Ste F*
 City, State: *Farmington, NM 87499*

Date: *4/5/94*
 Lab ID: *1466*
 Sample No. *1246*
 Job No. *4-1082*

Project Name: *Williams Field Service Job No.4-1082*
 Project Location: *Sample Off Plastic to be Hauled*
 Sampled by: *JL* Date: *3/22/94*
 Analyzed by: *JL* Date: *3/24/94*
 Type of Sample: *Soil*

Laboratory Analysis

Laboratory Identification	Sample Identification	Total Petroleum Hydrocarbons
<i>1246-1465</i>	<i>Williams Field Service Job No.4-1082 Sample Off Plastic to be Hauled</i>	<i>82300 mg/kg</i>

Method - EPA Method 418.1 Total Petroleum Hydrocarbons

Approved by: *[Signature]*

Date: *4/5/94*



CHAIN OF CUSTODY RECORD

№ 1465

Date: 3/23/94

Page 1 of 1

657 W. Maple • P. O. Box 2606 • Farmington, NM 87499
 LAB: (505) 325-5667 • FAX: (505) 325-6256

Purchase Order No.:		Reference No.: <u>4-1082</u>		Name		Title	
SEND INVOICE TO	Name		Company		Mailing Address		
	Company: <u>William Field Service</u>		Dept.		City, State, Zip		
	Address: <u>P.O. Box 2606 Farmington, NM</u>		City, State, Zip		Telephone No.		Telefax No.
	City, State, Zip						
Special Instructions:				ANALYSIS REQUESTED			
Sampler: <u>JL Little</u>							
SAMP. IDENTIFICATION		DATE/TIME SAMP. ED.	COMPOSITE/ GRAB.	PRESERVATIVES	T.P.H.		Remarks (max 1)
<u>1240-1465 Clean Sample #1 surface</u>		<u>3/22/94</u>	<u>G</u>	<u>4°C</u>			
<u>1241-1465 Clean Sample #2 surface</u>		<u>3/22/94</u>	<u>G</u>	<u>4°C</u>			
<u>1242-1465 Clean Sample #3 surface</u>		<u>3/22/94</u>	<u>G</u>	<u>4°C</u>			
<u>1243-1465 Clean Sample #4 interior down</u>		<u>3/22/94</u>	<u>G</u>	<u>4°C</u>			
<u>1244-1465 Clean Sample #2 interior down</u>		<u>3/22/94</u>	<u>G</u>	<u>4°C</u>			
<u>1245-1465 Clean Sample #3 interior down</u>		<u>3/22/94</u>	<u>G</u>	<u>4°C</u>			
<u>1246-1465 Sample of plastic water tank</u>		<u>3/22/94</u>	<u>G</u>	<u>4°C</u>			✓
<u>1247-1465 N.W. Corner outside down clean</u>		<u>3/22/94</u>	<u>G</u>	<u>4°C</u>			
<u>1248-1465 N.W. Corner outside down after rain</u>		<u>3/22/94</u>	<u>G</u>	<u>4°C</u>			✓
Relinquished by: <u>[Signature]</u>		Date/Time: <u>3/23/94 8:00</u>		Received by: <u>[Signature]</u>		Date/Time: <u>3/23/94 8:00</u>	
Relinquished by:		Date/Time:		Received by:		Date/Time:	
Relinquished by:		Date/Time:		Received by:		Date/Time:	
Method of Shipment:				Rush	5 Working Days	10 Working Days	Sampling Location:
Authorized by: <u>[Signature]</u>		Date: <u>3/23/94</u>					
(Client Signature Must Accompany Request)							

ON SITE TECH. LTD.



STATE OF NEW MEXICO

ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT

OIL CONSERVATION DIVISION



BRUCE KING
GOVERNOR

April 26, 1994

POST OFFICE BOX 2088
STATE LAND OFFICE BUILDING
SANTA FE, NEW MEXICO 87504
(505) 827-5800

ANITA LOCKWOOD
CABINET SECRETARY

CERTIFIED MAIL
RETURN RECEIPT NO. P-667-242-163

Mr. H. Lee Bauerle, Environmental Specialist
Williams Field Services
P.O. Box 58900
Salt Lake City, Utah 84158-0900

RE: Proposed Work Plan
Middle Mesa Compressor Station
San Juan County, New Mexico

Dear Mr. Bauerle:

The Oil Conservation Division (OCD) has received your proposed work plan, dated April 7, 1994, for the transport and disposal of the contaminated soils removed from the above referenced facility.

Based on the information provided, the work plan is approved. Please be advised that approval of this plan does not relieve you of liability should your operation result in actual pollution of surface or ground waters or the environment actionable under other laws and/or regulations.

If you have any questions please call me at (505) 827-5812.

Sincerely:

Roger C. Anderson
Environmental Bureau Chief

xc: Denny Foust- Aztec

OIL CONSERVATION DIVISION

October 18, 1995

CERTIFIED MAIL
RETURN RECEIPT NO. Z-765-963-079

Ms. Leigh E. Gooding
 Williams Field Services
 P.O. Box 58900, M.S. 2G1
 Salt Lake City, Utah 84158-0900

**RE: Discharge Plan GW-64 Renewal
 Middle Mesa CDP
 San Juan County, New Mexico**

Dear Ms. Gooding:

On June 6, 1991, the groundwater discharge plan, GW-64, for the Williams Field Services CDP located in SE/4 SW/4, Section 10, Township 31 North, Range 7 West, NMPM, San Juan County, New Mexico, will expire on June 5, 1996. The plan was approved by the Director of the New Mexico Oil Conservation Division (OCD). This discharge plan was required and submitted pursuant to Water Quality Control Commission (WQCC) regulations and was approved for a period of five years.

If your facility continues to have potential or actual effluent or leachate discharges and you wish to continue operation, you must renew your discharge plan. If Williams Field Services submits an application for renewal at least 120 days before the discharge plan expires (on or before February 5, 1996), then the existing approved discharge plan for the same activity shall not expire until the application for renewal has been approved or disapproved. The OCD is reviewing discharge plan submittals and renewals carefully and the review time can extend for several weeks to months. Please indicate whether you have made, or intend to make, any changes in your system, and if so, please include these modifications in your application for renewal.

The discharge plan renewal application for the Middle Mesa CDP is subject to the WQCC Regulations 3-114 discharge plan fee. Every billable facility submitting a discharge plan renewal will be assessed a fee equal to the filing fee of fifty (50) dollars plus a flat fee of \$690 for Compressor Stations over 3,000 horsepower.

The (50) dollar filing fee is to be submitted with the discharge plan renewal application and is nonrefundable. The flat fee for an approved discharge plan renewal may be paid in a single payment due at the time of approval, or in equal annual installments over the duration of the discharge plan - with the first payment due at the time of approval. Please make all checks payable to: **NMED-Water Quality Management** and addressed to the OCD Santa Fe Office.

Ms. Leigh Gooding
October 18, 1995
Page 2

Please submit the original and one copy to the OCD Santa Fe Office and one copy to the OCD Aztec District Office. Note that the completed and signed application form must be submitted with your discharge plan renewal request. The following information is included: Application form, Guidelines, and WQCC regulations.

If you no longer have any actual or potential discharges a discharge plan is not needed, please notify this office. If you have any questions regarding this matter, please do not hesitate to contact Patricio W. Sanchez at (505) 827-7156.

Sincerely,



Roger C. Anderson
Environmental Bureau Chief

RCA/pws

xc: Mr. Denny Foust

DISCHARGE PLAN
FOR MIDDLE MESA
COMPRESSOR STATION

6w-64

Williams Field Services

April 1991

APR 11 1991

OIL CONSERVATION DIVISION
RECEIVED

1.0 GENERAL INFORMATION

1.1 Legally Responsible Party

Williams Field Services
Middle Mesa Compressor Station
P.O. Box 58900, M.S. 10368
Salt Lake City, Utah 84158-0900
(801) 584-6730

Contact Person

Sandy Fishler
Environmental Specialist
(801) 584-6730
Address, Same as Above

1.2 Location of Discharge

The Middle Mesa Compressor Station is located in the SE 1/4, SW 1/4 of Section 10, Township 31 North, Range 7 West, San Juan County, New Mexico. A vicinity map is attached (Navajo Dam, NM topographic map) as Exhibit 1. A site plan is provided as Exhibit 2. The cleared site for this Compressor Station is approximately 3.0 acres.

1.3 Type of Natural Gas Operation


The Middle Mesa Compressor Station will provide metering, compression, and dehydration services to various producers for the gathering of coal seam methane gas (Fruitland Coal Formation) on a contract basis for ultimate delivery through the WFS Milagro Plant (CO₂ removal) near Bloomfield, New Mexico.

Seven (7) 895 horse power (site), skid mounted, self contained, natural gas fired lean-burn compressor units and four (4) skid mounted, self contained glycol dehydrators are planned for this site.

This facility is classified as a field compressor station; there will be no formal office or other support facilities not essential to field compression.

1.4 Affirmation

I hereby certify that I am familiar with the information contained in and submitted with this application and that such information is true, accurate and complete to the best of my knowledge and belief.

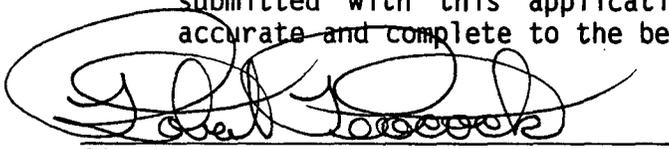

Signature

Robert Peacock

Name

12 APRIL 1991

Date

Project Manager

Title

2.0 GENERAL PROCESSES

2.1 Process Fluids

Normal operating mode for the Middle Mesa compressor station is expected sometime around September 1, 1991. Material Safety Data Sheets for glycol and oil used in the equipment are provided in Appendix A. Table 1 lists the sources and planned disposition of liquid wastes with approximations of the quantity and quality type. Once a sufficient amount of representative waste is generated at a typical field compressor station in the region, Williams Field Services will obtain a grab sample for chemical analysis as listed below. The samples will be collected directly at the source. Sampling and analytical techniques will conform with standard methods referenced in WQCC 107.B.

<u>Sample</u>	<u>Parameters</u>
Washdown Wastewater	TDS, pH, BETX, As, Ba, Cd, Cr, Pb, Hg, TOX.
Used Motor Oil	As, Cd, Cr, Pb, TOX, Flash Point

Additional Chemicals listed in WQCC 1-101.44 and 3-103 are not expected to be present in any process fluids or in the coal seam gas transported at the Middle Mesa Compressor Station.

2.2 Spill/Leak Prevention and Housekeeping Procedures

Production Operators, Incorporated has been contracted to operate and maintain the Middle Mesa Compressor Station. The facility will be inspected several times per week at a minimum and a POI operator is also on call 24 hours per day, 7 days per week, 52 weeks per year. The facility is remotely monitored for equipment malfunction. Production Operators must comply with Williams' spill response procedures.

Environmental Protection is a contractual obligation as follows:

POLLUTION/HAZARDOUS WASTE. POI shall take all necessary precautions to control pollution of any kind resulting from POI's operation of the Compression Equipment (Pollution). At POI's sole cost, all hazardous substances, hazardous wastes and oil will be managed to prevent contamination of property and associated surface and groundwater resources.

POI will comply with all applicable spill reporting and recordkeeping requirements of federal, state and local laws and regulations pertaining to hazardous substances, hazardous wastes and oil. POI shall be responsible for all costs related to the cleanup and disposal of contaminated material as well as personal or property damage resulting from such contamination on said property. Hazardous wastes will be properly stored and disposed of in accordance with applicable state and federal laws and regulations.

TABLE 1

Sources and Disposition of
Process Fluids

<u>Source</u>	<u>Disposition</u>	<u>Quantity</u>	<u>Quality Type</u>	<u>Additives</u>
Compressor Engines	Collected Separately in tank	875 gal each quarter	Used Motor Oil	None
Glycol Re-generation	Collected Separately in Evaporation Standpipe	60 gpd	Distilled Water	Triethylene Glycol
Gas Inlet Separator	Collected Separately in Blowdown Tank	trace, available for upsets	High TDS Water	None
Washdown water	Collected separately in tank	Intermittent	Rainwater, tapwater with traces of used motor oil & TEG	Soap

Spill control measures for tanks on saddle racks consist of a drip pan beneath each tank and piping from the tank vent to the drip pan. Liquids in the drip pan drain via a closed piping system into the washdown water tank.

The compressor skid drip containment will be extended along the catwalk adjacent to the oil filter on each compressor unit to contain spillage during maintenance activities.

William's corporate policy and procedure for the controlling and reporting of Discharges or Spills of Oil or Hazardous Substances is provided in Appendix B. Significant spills and leaks will be reported to the NMOCD pursuant to Rule 116 using the OCD form (see Appendix B).

Spill containment dikes around tanks will contain 1 1/3 volume of the largest vessel.

Surface runoff is diverted around the site by the use of drainage ditches (see Exhibit 2). Surface runoff within the site drains by sheet flow to the south and east.

All pressure vessels on site have been tested in accordance with the requirement of the ASME Boiler and Pressure Vessel Code. All interconnecting gas piping on site has been tested in accordance with the requirements of the ASME Code for Pressure Piping, B31.8 Gas Transmission and Distribution Piping Systems.

2.3

Disposal of Waste Fluids

The disposition of waste fluids is described in Table 1 of section 2.1.

Used motor oil is collected in a closed piping system from each individual unit to a common above ground collection tank and trucked from the site by an EPA registered used oil marketer or recycler.

Distilled water vapor which condenses within the steam line of the glycol regeneration process is collected separately in a standpipe adjacent to each dehydrator. The water drains from the standpipe into a closed piping system directly to the wastewater storage tank and disposed of at a commercial facility authorized by the NMOCD.

Washdown wastewater from engine deck plates will be collected in a closed piping system directly to the wastewater storage tank and disposed of at a commercial facility authorized by the NMOCD.

Porta pottys present at this facility will be serviced under a contract requiring proper sewage disposal in accordance with applicable laws and regulations.

3.0

Site Characteristics

The Middle Mesa Compressor Station is located in the Southeast quarter of the Southwest quarter of Section 10, Township 31 North, Range 7 West in San Juan County, New Mexico. The elevation of the station is 6,600 feet.

Shallow groundwater associated with alluvium beneath the Navajo Reservoir elevation 6,100 feet, is the closest source of groundwater, approximately 2 1/2 miles downgradient (south) of the station.

The nearest water well on record is located approximately 7 miles southwest of the station in Section 32, Township 31 North, Range 8 West. The water bearing strata in this well is an unconfined sandstone aquifer in the Nacimiento formation located between 5,334 and 4,622 feet in elevation, starting at 938 feet deep. The specific conductance measured at this well was 14,000 umhos in April, 1975 and 13,000 umhos in August, 1975 (USGS 1984 open file report 84-608).

Soils are a silty clay. Vegetation is juniper and sagebrush with approximately 50% cover.

EXHIBIT "A"
MATERIAL SAFETY DATA SHEETS



MOBIL OIL CORPORATION MATERIAL SAFETY DATA BULLETIN

REVISED: 01/12/89

***** I. PRODUCT IDENTIFICATION *****
 MOBIL PEGASUS 485

SUPPLIER: MOBIL OIL CORP.	HEALTH EMERGENCY TELEPHONE: (212) 883-4411
CHEMICAL NAMES AND SYNONYMS: PET. HYDROCARBONS AND ADDITIVES	TRANSPORT EMERGENCY TELEPHONE: (800) 424-9300 (CHEMTREC)
USE OR DESCRIPTION: INDUSTRIAL LUBRICANT	PRODUCT TECHNICAL INFORMATION: (800) 662-4525

***** II. TYPICAL CHEMICAL AND PHYSICAL PROPERTIES *****

APPEARANCE: ASTM 5.0 LIQUID ODCR: MILD PH: NA
 VISCOSITY AT 100 F, SUS: 650.0 AT 40 C, CS: 72.0
 VISCOSITY AT 210 F, SUS: 70.0 AT 100 C, CS: 13.0
 FLASH POINT F(C): 480(249) (ASTM D-92)
 MELTING POINT F(C): NA POUR POINT F(C): 10(-12)
 BOILING POINT F(C): > 600(316)
 RELATIVE DENSITY, 15/4 C: 0.89 SOLUBILITY IN WATER: NEGLIGIBLE
 VAPOR PRESSURE-MM HG 20C: < .1

NA=NOT APPLICABLE NE=NOT ESTABLISHED D=DECOMPOSES
 FOR FURTHER INFORMATION, CONTACT YOUR LOCAL MARKETING OFFICE.

***** III. INGREDIENTS *****

	WT PCT (APPROX)	EXPOSURE LIMITS MG/M3	SOURCES PPM	(AND NOTES)
POTENTIALLY HAZARDOUS INGREDIENTS:				
NONE				

OTHER INGREDIENTS:
 REFINED MINERAL OILS >90
 ADDITIVES AND/OR OTHER INGREDIENTS. <10

SEE SECTION XII FOR COMPONENT REGULATORY INFORMATION.

SOURCES: A-ACGIH-TLV, A*-SUGGESTED-TLV, M-MOBIL, O-OSHA, S-SUPPLIER
 NOTE: LIMITS SHOWN FOR GUIDANCE ONLY. FOLLOW APPLICABLE REGULATIONS.

***** IV. HEALTH HAZARD DATA *****
 --- INCLUDES AGGRAVATED MEDICAL CONDITIONS, IF ESTABLISHED ---
 EFFECTS OF OVEREXPOSURE: NOT EXPECTED TO BE A PROBLEM.

***** V. EMERGENCY AND FIRST AID PROCEDURES *****
 --- FOR PRIMARY ROUTES OF ENTRY ---

EYE CONTACT: FLUSH WITH WATER.
 SKIN CONTACT: WASH CONTACT AREAS WITH SOAP AND WATER.
 INHALATION: NOT EXPECTED TO BE A PROBLEM.
 INGESTION: NOT EXPECTED TO BE A PROBLEM. HOWEVER, IF GREATER THAN 1/2 LITER (PINT) INGESTED, IMMEDIATELY GIVE 1 TO 2 GLASSES OF WATER AND CALL A PHYSICIAN, HOSPITAL EMERGENCY ROOM OR POISON CONTROL CENTER FOR ASSISTANCE. DO NOT INDUCE VOMITING OR GIVE ANYTHING BY MOUTH TO AN UNCONSCIOUS PERSON.

Mobil

MOBIL PEGASUS 485

605816

PAGE 2 OF 5

***** VI. FIRE AND EXPLOSION HAZARD DATA *****

FLASH POINT F(C): 480(249) (ASTM D-92)

FLAMMABLE LIMITS. LEL: .6 UEL: 7.0

EXTINGUISHING MEDIA: CARBON DIOXIDE, FOAM, DRY CHEMICAL AND WATER FOG.

SPECIAL FIRE FIGHTING PROCEDURES: WATER OR FOAM MAY CAUSE FROTHING.

USE WATER TO KEEP FIRE EXPOSED CONTAINERS COOL. WATER SPRAY MAY BE

USED TO FLUSH SPILLS AWAY FROM EXPOSURE. FOR FIRES IN ENCLOSED

AREAS, FIREFIGHTERS MUST USE SELF-CONTAINED BREATHING APPARATUS.

PREVENT RUNOFF FROM FIRE CONTROL OR DILUTION FROM ENTERING STREAMS

OR DRINKING WATER SUPPLY.

UNUSUAL FIRE AND EXPLOSION HAZARDS: NONE

NFPA HAZARD ID: HEALTH: 0, FLAMMABILITY: 1, REACTIVITY: 0

***** VII. REACTIVITY DATA *****

STABILITY (THERMAL, LIGHT, ETC.): STABLE

CONDITIONS TO AVOID: EXTREME HEAT

INCOMPATIBILITY (MATERIALS TO AVOID): STRONG OXIDIZERS

HAZARDOUS DECOMPOSITION PRODUCTS: CARBON MONOXIDE.

HAZARDOUS POLYMERIZATION: WILL NOT OCCUR

***** VIII. SPILL OR LEAK PROCEDURE *****

ENVIRONMENTAL IMPACT: REPORT SPILLS AS REQUIRED TO APPROPRIATE

AUTHORITIES. U. S. COAST GUARD REGULATIONS REQUIRE IMMEDIATE

REPORTING OF SPILLS THAT COULD REACH ANY WATERWAY INCLUDING

INTERMITTENT DRY CREEKS. REPORT SPILL TO COAST GUARD TOLL FREE

NUMBER 800-424-8802.

PROCEDURES IF MATERIAL IS RELEASED OR SPILLED: ADSORB ON FIRE RETARDANT

TREATED SAWDUST, DIATOMACEOUS EARTH, ETC. SHOVEL UP AND DISPOSE OF

AT AN APPROPRIATE WASTE DISPOSAL FACILITY IN ACCORDANCE WITH

CURRENT APPLICABLE LAWS AND REGULATIONS, AND PRODUCT

CHARACTERISTICS AT TIME OF DISPOSAL.

WASTE MANAGEMENT: PRODUCT IS SUITABLE FOR BURNING IN AN ENCLOSED,

CONTROLLED BURNER FOR FUEL VALUE OR DISPOSAL BY SUPERVISED

INCINERATION. SUCH BURNING MAY BE LIMITED PURSUANT TO THE RESOURCE

CONSERVATION AND RECOVERY ACT. IN ADDITION, THE PRODUCT IS

SUITABLE FOR PROCESSING BY AN APPROVED RECYCLING FACILITY OR CAN BE

DISPOSED OF AT ANY GOVERNMENT APPROVED WASTE DISPOSAL FACILITY.

USE OF THESE METHODS IS SUBJECT TO USER COMPLIANCE WITH APPLICABLE

LAWS AND REGULATIONS AND CONSIDERATION OF PRODUCT CHARACTERISTICS

AT TIME OF DISPOSAL.

***** IX. SPECIAL PROTECTION INFORMATION *****

EYE PROTECTION: NO SPECIAL EQUIPMENT REQUIRED.

SKIN PROTECTION: NO SPECIAL EQUIPMENT REQUIRED. HOWEVER, GOOD PERSONAL

HYGIENE PRACTICES SHOULD ALWAYS BE FOLLOWED.

RESPIRATORY PROTECTION: NO SPECIAL REQUIREMENTS UNDER ORDINARY

CONDITIONS OF USE AND WITH ADEQUATE VENTILATION.

VENTILATION: NO SPECIAL REQUIREMENTS UNDER ORDINARY CONDITIONS OF USE

AND WITH ADEQUATE VENTILATION.

***** X. SPECIAL PRECAUTIONS *****

NO SPECIAL PRECAUTIONS REQUIRED.



MOBIL PEGASUS 485

605816

PAGE 4 OF 5

***** XII. REGULATORY INFORMATION *****
GOVERNMENTAL INVENTORY STATUS: ALL COMPONENTS REGISTERED IN ACCORDANCE WITH TSCA.

D.O.T. SHIPPING NAME: NOT APPLICABLE

D.O.T. HAZARD CLASS: NOT APPLICABLE

US OSHA HAZARD COMMUNICATION STANDARD: PRODUCT ASSESSED IN ACCORDANCE WITH OSHA 29 CFR 1910.1200 AND DETERMINED NOT TO BE HAZARDOUS.

RCRA INFORMATION: THE UNUSED PRODUCT, IN OUR OPINION, IS NOT SPECIFICALLY LISTED BY THE EPA AS A HAZARDOUS WASTE (40 CFR, PART 261D); DOES NOT EXHIBIT THE HAZARDOUS CHARACTERISTICS OF IGNITABILITY, CORROSIVITY, OR REACTIVITY, AND IS NOT FORMULATED WITH THE METALS CITED IN THE EP TOXICITY TEST. HOWEVER, USED PRODUCT MAY BE REGULATED.

U.S. SUPERFUND AMENDMENTS AND REAUTHORIZATION ACT (SARA) TITLE III: THIS PRODUCT CONTAINS NO "EXTREMELY HAZARDOUS SUBSTANCES".

SARA (302) REPORTABLE HAZARD CATEGORIES: NONE

THIS PRODUCT CONTAINS NO CHEMICALS REPORTABLE UNDER SARA (313) TOXIC RELEASE PROGRAM.

THE FOLLOWING PRODUCT INGREDIENTS ARE CITED ON THE LISTS BELOW:

CHEMICAL NAME CAS NUMBER LIST CITATIONS
*** NO REPORTABLE INGREDIENTS ***

--- KEY TO LIST CITATIONS ---

- 1 - OSHA 2, 2 - ACGIH, 3 - IARC, 4 - NTP, 5 - NCI,
- 6 - EPA CARC, 7 - NFPA 49, 8 - NFPA 325M, 9 - DOT HMT, 10 - CA RTK,
- 11 - IL RTK, 12 - MA RTK, 13 - MN RTK, 14 - NJ RTK, 15 - MI 293,
- 16 - FL RTK, 17 - PA RTK, 18 - CA P65.

--- NTP, IARC, AND OSHA INCLUDE CARCINOGENIC LISTINGS ---

NOTE: MOBIL PRODUCTS ARE NOT FORMULATED TO CONTAIN PCBs.

INFORMATION GIVEN HEREIN IS OFFERED IN GOOD FAITH AS ACCURATE, BUT WITHOUT GUARANTEE. CONDITIONS OF USE AND SUITABILITY OF THE PRODUCT FOR PARTICULAR USES ARE BEYOND OUR CONTROL; ALL RISKS OF USE OF THE PRODUCT ARE THEREFORE ASSUMED BY THE USER AND WE EXPRESSLY DISCLAIM ALL WARRANTIES OF EVERY KIND AND NATURE, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE IN RESPECT TO THE USE OR SUITABILITY OF THE PRODUCT. NOTHING IS INTENDED AS A RECOMMENDATION FOR USES WHICH INFRINGE VALID PATENTS OR AS EXTENDING LICENSE UNDER VALID PATENTS. APPROPRIATE WARNINGS AND SAFE HANDLING PROCEDURES SHOULD BE PROVIDED TO HANDLERS AND USERS.

PREPARED BY: MOBIL OIL CORPORATION
ENVIRONMENTAL AFFAIRS AND TOXICOLOGY DEPARTMENT, PRINCETON, NJ
FOR FURTHER INFORMATION, CONTACT:
MOBIL OIL CORPORATION, PRODUCT FORMULATION AND QUALITY CONTROL
3225 GALLOWES ROAD, FAIRFAX, VA 22037 (703) 849-3265

Mobil

MOBIL PEGASUS 485

605816

PAGE 5 OF 5

 FOR MOBIL USE ONLY: (FILL NO: RN1022D1001) MCN: , MHC: 1* 1* NA 0*
 O*, MPPEC: , PPEC: , US83-002 APPROVE 08/23/83



MATERIAL SAFETY DATA SHEET

I. MATERIAL IDENTIFICATION

Name: Antifreeze/Coolant, Conoco
 Conoco Product Code: 2110
 Synonyms: Ethylene Glycol
 Manufacturer: Conoco Inc.
 Address: P.O. Box 1267, Ponca City, OK 74603

CAS Registry No.: Mixture;
 Major components may be some
 combination of 107-21-1
 Transportation Emergency No.:
 (800) 424-9300 (Chemtrec)
 Product Information No.:
 (405) 767-6000

II. HAZARDOUS INGREDIENTS

HAZARD DATA

Hazard Determination:
 Health Effect Properties:
 Ethylene glycol Toxic to nervous system, kidney and liver.

Physical Effect Properties:
 Product/Mixture: None. Not Applicable.

III. PHYSICAL DATA

Appearance and Odor:	Fluorescent green liquid; mild glycol odor.		
Boiling Point (Deg.F)	320	Specific Gravity (H ₂ O=1)	1.125
Vapor Pressure (mmHg)	0.05	% Volatile (by volume)	Not Applicable
Vapor Density (Air=1)	2.14	Evaporation Rate (=1)	Not Applicable
Solubility in Water	Completely		

IV. REACTIVITY DATA

Stable: X Unstable:

Hazardous Decomposition Products: Carbon dioxide, carbon monoxide, vapors of ethylene glycol.

Conditions To Avoid: Strong oxidizing agents.

Hazardous Polymerization: Will not occur.

72-62-7820-D1

MATERIAL SAFETY DATA SHEET

ETHYLENE GLYCOL

SECTION V-HEALTH HAZARD DATA (CONTINUED)

IF IN EYES, FLUSH WITH LARGE AMOUNTS OF WATER, LIFTING UPPER AND LOWER LIDS OCCASIONALLY, GET MEDICAL ATTENTION.

IF SWALLOWED, IMMEDIATELY DRINK TWO GLASSES OF WATER AND INDUCE VOMITING BY EITHER DRIVING SUGAR SYRUP OR BY PLACING FINGER AT BACK OF THROAT. NEVER GIVE ANYTHING BY MOUTH TO AN UNCONSCIOUS PERSON. GET MEDICAL ATTENTION IMMEDIATELY.

IF BREATHED, IF AFFECTED, REMOVE INDIVIDUAL TO FRESH AIR. IF BREATHING IS DIFFICULT, ADMINISTER OXYGEN. IF BREATHING HAS STOPPED, GIVE ARTIFICIAL RESPIRATION, KEEP PERSON WARM, QUIET, AND GET MEDICAL ATTENTION.

PRIMARY ROUTE(S) OF ENTRY:

INHALATION
INGESTION

SECTION VI-REACTIVITY DATA

HAZARDOUS POLYMERIZATION: CANNOT OCCUR

STABILITY: STABLE

INCOMPATIBILITY: AVOID CONTACT WITH, STRONG OXIDIZING AGENTS.

SECTION VII-SPILL OR LEAK PROCEDURES

STEPS TO BE TAKEN IN CASE MATERIAL IS RELEASED OR SPILLED:

SMALL SPILL: ABSORB LIQUID ON PAPER, VERMICULITE, FLOOR ABSORBENT, OR OTHER ABSORBENT MATERIAL AND TRANSFER TO HOOD.

LARGE SPILL: ELIMINATE ALL IGNITION SOURCES (FLARES, FLAMES, INCLUDING WILD LIGHTS, ELECTRICAL SPARKS). PERSONS NOT WEARING PROTECTIVE EQUIPMENT SHOULD BE EXCLUDED FROM AREA OF SPILL UNTIL CLEAN-UP HAS BEEN COMPLETED. STOP SPILL AT SOURCE, DIKE AREA OF SPILL TO PREVENT SPREADING, PUMP LIQUID TO SALVAGE TANK. REMAINING LIQUID MAY BE TAKEN UP ON SAND, CLAY, EARTH, FLOOR ABSORBENT OR OTHER ABSORBENT MATERIAL AND SHOVELED INTO CONTAINERS.

WASTE DISPOSAL METHOD:

SMALL SPILL: ALLOW VOLATILE PORTION TO EVAPORATE IN HOOD. ALLOW SUFFICIENT TIME FOR VAPOR TO COMPLETELY CLEAR HOOD DUCT WORK. DISPOSE OF REMAINING MATERIAL IN ACCORDANCE WITH APPLICABLE REGULATIONS.

LARGE SPILL: DESTROY BY LIQUID INCINERATION IN ACCORDANCE WITH APPLICABLE REGULATIONS.

SECTION VIII-PROTECTIVE EQUIPMENT TO BE USED

RESPIRATORY PROTECTION: IF TLV OF THE PRODUCT OR ANY COMPONENT IS EXCEEDED, A NIOSH/MSHA JOINTLY APPROVED AIR SUPPLIED RESPIRATOR IS ADVISED IN ABSENCE OF PROPER ENVIRONMENTAL CONTROL. OSHA REGULATIONS ALSO PERMIT OTHER NIOSH/MSHA RESPIRATORS UNDER SPECIFIED CONDITIONS. (SEE YOUR SAFETY EQUIPMENT SUPPLIER). ENGINEERING OR ADMINISTRATIVE CONTROLS SHOULD BE IMPLEMENTED TO REDUCE EXPOSURE.

VENTILATION: PROVIDE SUFFICIENT MECHANICAL (GENERAL AND/OR LOCAL EXHAUST) VENTILATION TO MAINTAIN EXPOSURE BELOW TLV(S).

PROTECTIVE GLOVES: WEAR RESISTANT GLOVES SUCH AS, NITRILE RUBBER

EYE PROTECTION: CHEMICAL SPLASH GOGGLES IN COMPLIANCE WITH OSHA REGULATIONS ARE ADVISED; HOWEVER, OSHA REGULATIONS ALSO PERMIT OTHER TYPE SAFETY GLASSES. (CONSULT YOUR SAFETY EQUIPMENT SUPPLIER)

OTHER PROTECTIVE EQUIPMENT: TO PREVENT REPEATED OR PROLONGED SKIN CONTACT, WEAR IMPERVIOUS CLOTHING AND BOOTS.

SECTION IX-SPECIAL PRECAUTIONS OR OTHER COMMENTS

CONTAINERS OF THIS MATERIAL MAY BE HAZARDOUS WHEN EMPYIED, SINCE EMPYIED CONTAINERS RETAIN PRODUCT RESIDUES (VAPOR, LIQUID, AND/OR SOLID), ALL HAZARD PRECAUTIONS GIVEN IN THIS DATASHEET MUST BE OBSERVED.

ETHYLENE GLYCOL HAS BEEN SHOWN TO PRODUCE DOMC-RELATED TERATOGENIC EFFECTS IN RATS AND MICE WHEN GIVEN BY GAVAGE OR IN DRINKING WATER AT HIGH CONCENTRATIONS, WHILE THERE IS NO CURRENTLY AVAILABLE INFORMATION TO SUGGEST THAT ETHYLENE GLYCOL HAS CAUSED EARLY DEFECTS IN HUMANS. IT IS RECOMMENDED THAT EVERY EFFORT SHOULD BE MADE TO PREVENT THE INGESTION OF ANY ETHYLENE GLYCOL AND TO KEEP PERSONNEL EXPOSURE BELOW THE ACTION TLV.

OVEREXPOSURE TO COMPONENTS HAS APPARENTLY BEEN FOUND TO CAUSE THE FOLLOWING EFFECTS IN LABORATORY ANIMALS, KIDNEY DAMAGE

OVEREXPOSURE TO COMPONENTS HAS BEEN SUGGESTED AS A CAUSE OF THE FOLLOWING EFFECTS IN HUMANS, LIVER ABNORMALITIES

EXHIBIT "B"
SPILL CONTROL PROCEDURES



Manual Policy and Procedure		
Section Operating & Maint.	Tab 10	Document No 12.10.020
Effective Date JUL 07 1989	Issue No 5	Page No 1 of 10

Subject or Title

DISCHARGES OR SPILLS OF OIL OR HAZARDOUS SUBSTANCES: Preventing, Controlling and Reporting of

A. PURPOSE AND SCOPE

- *A.1 To establish the policy and procedure for preventing, controlling, and reporting of spills or discharges of oil or hazardous substances to the environment in accordance with Company practices and federal, state, and local requirements, including Title 40 of the Code of Federal Regulations - Part 112 (Oil Pollution Prevention).
- *A.2 The spill prevention and control requirements in this Policy and Procedure are Federally mandated guidelines for oil pollution prevention. The Company policy is to also apply these standards, where appropriate, to facilities containing hazardous substances. This is a discretionary application of the standards; however, variations from the standards should be approved by the Area Manager.

B. CONTENTS

C. POLICY

- C.1 General
- C.2 Bulk Storage Tanks
- C.3 Facility Drainage
- C.4 Transfer Operations, Pumping, and In-Plant Process
- C.5 Facility Tank Car and Tank Truck Loading/Unloading Rack

D. PROCEDURE

- D.1 Identifying, Containing and Initial Reporting of a Discharge or Spill of a Hazardous or Toxic Substance
- D.2 Submitting Written Notification of a Discharge or Spill

ATTACHMENT A: Discharge or Spill Containment Procedures and Materials
 ATTACHMENT B: Contractors Available for Discharge or Spill Containment
 ATTACHMENT C: Agencies Requiring Notification

C. POLICY

C.1 GENERAL

- *C.1.1 All Company facilities which could discharge or spill oil or hazardous substances which may affect natural resources or present an imminent and substantial danger to the public health or welfare including, but not limited to fish, shellfish, wildlife, shorelines, and beaches are subject to the provisions of this document.
- **C.1.2 Hazardous Substance, for purposes of this procedure, is defined as any chemical or material that has or should have a Material Safety Data Sheet (MSDS); however, hazardous substances are further defined by the following environmental statutes:
 - a. Section 101 (N) and Section 102 of the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA);
 - b. Section 307(a) and Section 311 (b)(2)(A) of the Clean Water Act;
 - c. Section 3001 of the Solid Waste Act (excluding items suspended by Congress);
 - d. Section 112 of the Clean Air Act;
 - e. Section 7 of the Toxic Substance Control Act;

*Revised
 **Added

Supersedes Division Policy and Procedure 12.10.020 dated October 10, 1985

Approval (Page 1 Only) <i>[Signature]</i>	Approval (Page 1 Only) <i>Bernie B-M Culligan</i>	Approval (Page 1 Only) <i>[Signature]</i>
--	--	--



Manual		
Policy and Procedure		
Section	Tab	Document No
Operating & Maint.	10	12.10.020
Effective Date	Issue No	Page No
JUL 07 1989	5	2 of 10

Subject or Title

DISCHARGES OR SPILLS OF OIL OR HAZARDOUS SUBSTANCES; Preventing, Controlling and Reporting of

The term hazardous substance does not include petroleum, including crude oil or any fraction thereof, which is not otherwise specifically listed or designated as a hazardous substance in the first sentence of this paragraph, and the term does not include natural gas, natural gas liquids, liquefied natural gas or synthetic gas usable for fuel (or mixtures of natural gas and such synthetic gas).

****C.1.3** Oil, for the purpose of this document, means oil of any kind or in any form, including but not limited to petroleum, fuel oil, Y grade, mixed products, sludge, oil refuse, and oil mixed with wastes other than dredged spoil (earth and rock). LPG (propane, butane, ethane) are not considered to be oil.

***C.1.4** Facilities which could discharge or spill oil or hazardous substances into a watercourse must comply with the required federal, state, or local laws and regulations. A discharge includes but is not limited to any spilling, leaking, pumping, pouring, emitting, emptying, or dumping. A watercourse is any perennial or intermittent river, stream, gully, wash, lake, or standing body of water capable of collecting or transporting an oil or hazardous substance.

***C.1.5** Facilities which are subject to the requirements stated in this policy are as follows:

a. Non-Transportation Related Facilities

- (1) Storage or drip tanks and other aboveground containers (excluding pressurized or inline process vessels) having a capacity in excess of 660 gallons for each single container or an aggregate capacity of 1,321 gallons or more for multiple containers.
- (2) Underground storage facilities having a total capacity in excess of 42,000 gallons.

b. Transportation Related Facilities

- (1) All vehicles, pipeline facilities, loading/unloading facilities, and other mobile facilities which transport oil or hazardous substances.

****C.1.6** Each Northwest Pipeline location which has facilities subject to paragraph C.1.1 shall have a site specific Spill Prevention Control and Countermeasure Plan (SPCC Plan) which identifies all facilities subject to 40 CFR 112. The plan will also identify all hazardous substance storage vessels at the facility and the spill prevention measures in place to control discharges or spills.

C.1.7 The District Superintendent is responsible for spill prevention. These duties include, but are not limited to, the following:

- a. Instructing personnel in the operation and maintenance of equipment to prevent the discharge of oil.
- b. Conducting briefings for operating personnel in sufficient intervals to assure adequate understanding of the Spill Plan at that facility. Briefings should highlight and describe known discharges or spills, and recently developed precautionary measures.

***C.1.8** Each individual facility should be inspected, at least annually, by the District Superintendent or designee to determine the potential for discharges or spills of oil or hazardous substances. These inspection reports must be retained for three years. All facilities which have the potential for discharging or spilling oil or hazardous substances into a watercourse are required to have the following preventive measures:

*Revised
**Added

Supersedes Division Policy and Procedure 12.10.020 dated October 10, 1985

Approval (Page 1 Only)

Approval (Page 1 Only)

Approval (Page 1 Only)



Manual Policy and Procedure		
Section Operating & Maint.	Tab 10	Document No 12.10.020
Effective Date JUL 07 1989	Issue No 5	Page No 3 of 10

Subject or Title
DISCHARGES OR SPILLS OF OIL OR HAZARDOUS SUBSTANCES: Preventing, Controlling and Reporting of

- a. Examination of all tanks, valves and fittings, at least annually, to determine any maintenance requirements.
- b. All tank batteries should, as far as practical, have a secondary means of containment for the entire contents of the largest single tank plus sufficient freeboard in the containment facility to allow for precipitation.
- c. A careful monitoring and inspection program to prevent accidental spills or discharges into watercourses. This includes regular inspection for faulty systems and monitoring line valves and liquid pipelines for leaks or blowouts.

C.1.9 Any field drainage ditches, road ditches, traps, sumps, or skimmers should be inspected at regularly scheduled intervals for accumulation of liquid hydrocarbons or other hazardous substances which may have escaped from small leaks. Any such accumulations should be removed.

C.2 BULK STORAGE TANKS

- *C.2.1 A tank should not be used for storage of oil or hazardous substances unless the material and construction of the tank is compatible with the material stored and conditions of storage such as pressure and temperature. Buried storage tanks must be protected from corrosion by coatings, cathodic protection, or other methods compatible with local soil conditions. Aboveground tanks should be subject to visual inspection for system integrity.
- **C.2.2 The District Superintendent should evaluate level monitoring requirements to prevent tank overflow.
- *C.2.3 Leaks which result in loss of oil or hazardous substances from tank seams, gaskets, rivets and bolts sufficiently large to cause accumulation of oil or hazardous substances in diked areas should be promptly corrected.
- *C.2.4 Mobile or portable oil or hazardous substances storage tanks should be positioned or located to prevent the contents from reaching a watercourse. The mobile facilities should be located so their support structure will not be undermined by periodic flooding or washout.

C.3 FACILITY DRAINAGE

- C.3.1 Provisions should be made for drainage from diked storage areas where necessary in areas with high precipitation levels. Drainage from dike areas should be restrained by valves or other means to prevent a discharge or spill. Diked areas should be emptied by pumps or ejectors which are manually activated. Valves used for the drainage of diked areas should be of manual design.
- *C.3.2 Rain water may be drained from diked areas providing drainage water does not contain oil or hazardous substances that may cause a harmful discharge. Drain valves must be closed following drainage of diked areas.
- *C.3.3 When possible, plant drainage systems from undiked areas should flow into ponds, lagoons, or catchment basins designed to retain oil or hazardous substances or return the substances to the facility. Any plant drainage system which is not designed to allow flow into ponds, lagoons, or catchment basins should be equipped with a diversion system that could, in the event of a discharge or spill, contain the oil or hazardous substances on the Site.
- *C.3.4 The principal means of containing discharges or spills is the use of dikes which are constructed wherever regulated quantities of oil or hazardous substances have the

*Revised
**Added

Supersedes Division Policy and Procedure 12.10.020 dated October 10, 1985

Approval (Page 1 Only)	Approval (Page 1 Only)	Approval (Page 1 Only)
------------------------	------------------------	------------------------



Manual		
Policy and Procedure		
Section	Tab	Document No
Operating & Maint.	10	12.10.020
Effective Date	Issue No	Page No
JUL 07 1989	5	4 OF 10

Subject or Title

DISCHARGES OR SPILLS OF OIL OR HAZARDOUS SUBSTANCES; Preventing, Controlling and Reporting of

potential of reaching a watercourse. The construction of dikes must meet the following requirements:

- a. Capacity must be at least equivalent to the storage capacity of the largest tank of the battery plus sufficient freeboard to allow for precipitation, or displacement by foreign materials.
- b. Small dikes for temporary containment should be constructed at valves where leaking of oil or hazardous substances develop.
- c. Any dike three feet or higher should have a minimum cross section of two feet at the top.

Other means of containment or spill control include, but are not limited to:

- a. Berms or retaining walls;
- b. Curbing;
- c. Culverting, gutters, or other drainage systems;
- d. Weirs, booms, or other barriers;
- e. Spill diversion ponds or retention ponds;
- f. Sorbent materials

C.4 TRANSFER OPERATIONS, PUMPING, AND IN-PLANT PROCESS

- *C.4.1 Aboveground valves and pipelines should be examined regularly by operating personnel to determine whether there are significant leaks from flange joints, expansion joints, valve glands and bodies, catch pans, pipeline supports, valve locks, and metal surfaces.

C.5 FACILITY TANK CAR AND TANK TRUCK LOADING/UNLOADING RACK

- C.5.1 Rack area drainage which does not flow into a catchment basin or treatment facility designed to handle spills should have a quick drainage system for use in tank truck loading and unloading areas. The containment system should have a maximum capacity of any single compartment of a tank car or truck loaded or unloaded in the plant.
- *C.5.2 Aboveground piping that has potential for damage by vehicles entering the Site should be protected by logically placed warning signs or by concrete-filled pipe barriers.
- *C.5.3 Loading and unloading areas should be provided with an interlocked warning light, grounding shutdown, physical barrier system, or warning signs to prevent vehicular departure before complete disconnect of flexible or fixed transfer lines. All drains and outlets of any tank car or truck should be closely examined for leakage prior to filling and departure. All drains and outlets which may allow leakage should be tightened, adjusted, or replaced to prevent liquid leakage while in transit.

D. PROCEDURE

- *D.1 IDENTIFYING, CONTAINING AND INITIAL REPORTING OF A DISCHARGE OR SPILL OF OIL OR HAZARDOUS SUBSTANCE

Any Employee

- *D.1.1 Upon noticing a discharge or spill of an oil or hazardous substance in any quantity initiates immediate containment procedures and notifies District Superintendent.

NOTE: Refer to Attachment A for containment procedures.

*Revised
**Added

Supersedes Division Policy and Procedure 12.10.020 dated October 10, 1985

Approval (Page 1 Only)

Approval (Page 1 Only)

Approval (Page 1 Only)



Manual Policy and Procedure		
Section Operating & Maint.	Tab 10	Document No 12.10.020
Effective Date JUL 07 1989	Issue No 5	Page No 5 Of 10

Subject or Title

DISCHARGES OR SPILLS OF OIL OR HAZARDOUS SUBSTANCES: Preventing, Controlling and Reporting of

District Superintendent

- D.1.2 Contacts Gas Dispatch and Area Manager immediately by telephone and provides the following information:
- a. Name of company facility and/or location of facility and nature of discharge or spill
 - b. Description and quantity of substance discharged
 - c. Name, title, and telephone number of person initially reporting the discharge or spill and person reporting to Gas Dispatch
 - d. Action taken or being taken to mitigate and correct discharge or spill
 - e. Water bodies or streams involved
 - f. Time and duration of discharge or spill
 - g. Outside involvement during discharge or spill (public government agencies, etc.)

Gas Dispatch Personnel

- *D.1.3 Advises the responsible Area Manager and Environmental Services departments immediately by telephone concerning the incident including any incidents reported by persons not employed with the Company.

NOTE: If Gas Dispatch is contacted by a person not employed with the Company, the necessary information is obtained as indicated in D.1.2 and the Area Manager and Environmental Services are immediately contacted to begin containment, reporting and clean-up of the discharge or spill.

- *D.1.4 If Environmental Services cannot be contacted, notifies Barry Swartz, Director, Transmission Services.

Area Manager

- D.1.5 Coordinates containment and clean-up of discharge or spill with the District Superintendent.
- D.1.6 If the discharge or spill is too large for Company personnel to contain, contacts qualified local contractors for assistance. See Attachment 8.
- D.1.7 Advises Environmental Services by telephone if emergency containment or clean-up assistance from a state agency or a response team from the U.S. Coast Guard is required.

Environmental Services

- **D.1.8 Contacts Legal Department (and Right-of-Way Department, if appropriate) and assesses reporting requirements to state and federal agencies.
- **D.1.9 Makes appropriate contacts with U.S. Coast Guard and state agencies when necessary.
- **D.1.10 If spill is significant, dispatches Environmental Specialist to scene to oversee cleanup and reporting responsibilities.

*Revised
**Added

Supercedes Division Policy and Procedure 12.10.020 dated October 10, 1985

Approval (Page 1 Only)

Approval (Page 1 Only)

Approval (Page 1 Only)



Manual		
Policy and Procedure		
Section	Tab	Document No
Operating & Maint.	10	12.10.020
Effective Date	Issue No	Page No
JUL 07 1989	5	6 of 10

Subject or Title

DISCHARGES OR SPILLS OF OIL OR HAZARDOUS SUBSTANCES; Preventing, Controlling and Reporting of

D.2 SUBMITTING WRITTEN NOTIFICATION OF A DISCHARGE OR SPILL

District Superintendent

D.2.1 Completes a written description of the incident as soon as possible after initial notification is given, which should include the following:

- a. Time and date of discharge or spill
- b. Facility name and/or spill location
- c. Type of material spilled
- d. Quantity of material spilled
- e. Area affected
- f. Cause of spill
- g. Special circumstances
- h. Corrective measures taken
- i. Description of repairs made
- j. Preventative measures taken to prevent recurrence.

D.2.2 Forwards the completed report to Environmental Services and a copy to Legal departments. Retains a copy for future reference.

NOTE: Environmental Services, in coordination with the Legal Department, submits written reports to government agencies.

*Revised
**Added

Supersedes Division Policy and Procedure 12.10.020 dated October 10, 1985

Approval (Page 1 Only)	Approval (Page 1 Only)	Approval (Page 1 Only)
------------------------	------------------------	------------------------



Manual		
Policy and Procedure		
Section	Tab	Document No
Operating & Maint.	10	12.10.020
Effective Date	Issue No	Page No
JUL 07 1989	5	7 Of 10

Subject or Title

DISCHARGES OR SPILLS OF OIL OR HAZARDOUS SUBSTANCES: Preventing, Controlling and Reporting of

ATTACHMENT A

Discharge or Spill Containment Procedures and Materials

Type of Facility where the Discharge or Spill occurs	Containment Procedures	Material Used for Containment
A. Oil Pipeline (as defined in C.1.3)	<ol style="list-style-type: none"> 1. Closes appropriate block valves. 2. Contains discharge or spill by: ditching covering, applying sorbents, constructing 3. If burning is required, obtains approval from the appropriate state air quality control government agencies before burning. 	<ol style="list-style-type: none"> 1. Straw 2. Loose Earth 3. Oil Sorbent - 3M Brand 4. Plain Wood Chips 5. Sorb - Oil Chips - Banta Co. 6. Sorb - Oil Swabs - Banta, Co. 7. Sorb - Oil Mats - Banta Co.
B. Vehicle	<ol style="list-style-type: none"> 1. Contains discharge or spill by: ditching covering surface with dirt, constructing earthen dams, applying sorbents, or burning. 2. Notifies immediately the Compliance and Safety Department and if there is any imminent danger to local residents notifies immediately the highway patrol or local police officials. 3. If burning is required, obtains approval from the appropriate state air quality control government agencies before burning. <p>**NOTE: Any vehicle carrying any hazardous or toxic substance will carry a shovel or other ditching device to contain a spill. If the vehicle has sufficient room, sorbent materials should also be carried.</p>	
C. Bulk Storage Tanks or any other Facilities	<ol style="list-style-type: none"> 1. Contains discharge or spill by: ditching, covering, applying sorbents, constructing an earthen dam, or burning. 2. If burning is required, obtains approval from the appropriate state air quality control government agencies before burning. 	

*Revised
**Added

Supersedes Division Policy and Procedure 12.10.020 dated October 10, 1985

Approval (Page 1 Only)	Approval (Page 1 Only)	Approval (Page 1 Only)
------------------------	------------------------	------------------------



Manual Policy and Procedure		
Section Operating & Maint.	Tab 10	Document No 12.10.020
Effective Date JUL 07 1989	Issue No 5	Page No 8 Of 10

Subject or Title

DISCHARGES OR SPILLS OF OIL OR HAZARDOUS SUBSTANCES: Preventing, Controlling and Reporting of

ATTACHMENT B

*Contractors Available for Discharge or Spill Containment

COLORADO		
Contractor Name	Address	Telephone Number
G. R. Spencer Contractors	2200 East 114th Avenue, Suite 209 Thornton, CO 80233	303-484-2616
Ecology and Environment, Inc. (Mike Peceny)	1776 South Jackson Street Denver, CO 80210	303-757-4984
John Bunning Transfer	2473 Commerce Blvd. Grand Junction, CO 80505	303-245-5631
Smith Welding and Construction Company, Inc.	P.O. Box 1834 880 25 Road Grand Junction, CO 81502	303-242-4306
Western Engineers, Inc.	2150 U.S. 6 and 50 Grand Junction, CO 81505	303 242-5202
W. C. Streigel, Inc.	P.O. Box 860 17030 State Hwy 64 Rangely, CO 81648	303-675-8444 303-675-8749
IDAHO		
Contractor Name	Address	Telephone Number
Envirosafe Services of Idaho	1602 West Franklin Boise, Idaho	208-384-1500
NEW MEXICO		
Contractor Name	Address	Telephone Number
Four-Four (Burney Strunk)	P.O. Box 821 Farmington, NM 87401	505-327-6041 505-632-2680 (eves.)
Four-Way Co., Inc.	4816 East Main Farmington, NM 87401	505-327-0401
P & A Construction	Bloomfield, NM	505-632-8061
Rosenbaum Construction	Box 2308 Aztec Highway Farmington, NM 87401	505-325-6367
OREGON		
Contractor Name	Address	Telephone Number
Pegasus Waste Management	30250 S.W. Parkway Avenue Wilsonville, OR 97070	503-682-5802
Riedel Environmental Services, Inc. Portland, OR 97203	Foor of N. Portsmouths Emergency: 800-334-0004	503-286-4656
		Available for all NWP locations)

*Revised
**Added

Supersedes Division Policy and Procedure 12.10.020 dated October 10, 1985

Approval (Page 1 Only)

Approval (Page 1 Only)

Approval (Page 1 Only)



Manual		
Policy and Procedure		
Section	Tab	Document No
Operating & Maint.	10	12.10.020
Effective Date	Issue No	Page No
JUL 07 1989	5	10 Of 10

Subject or Title
DISCHARGES OR SPILLS OF OIL OR HAZARDOUS SUBSTANCES: Preventing, Controlling and Reporting of

ATTACHMENT C

Agencies Requiring Notification

State of Colorado
 Water Quality Control Division (business hours) 1-303-331-4570
 (night) 1-303-370-9395

State of Idaho
 State Emergency Services Division 1-800-632-8000
 Emergency and Poison Control Center (Outside Idaho) 1-208-334-2241

State of New Mexico
 Department of Environmental Improvement 1-505-827-9329

State of Oregon
 Emergency Services Division 1-800-452-0311
 (Outside Oregon). 1-503-378-4124

State of Utah
 Environmental Health - Emergency Response (24 hour). 1-801-538-6333

State of Washington
 Department of Ecology (24 hour). 1-206-753-2353

State of Wyoming
 Water Quality Div. - Dept. of Environmental Quality . (24 hour) . : -307-777-7781

United States Coast Guard 1-800-424-8802

****NOTE:** If a spill or discharge is the result of a vehicular accident the Highway Patrol or local police officials should be immediately notified. If imminent danger to local residents exists, state and/or local agencies; and available Company personnel should be used to notify the residents immediately.

*Revised
 **Added

Supercedes Division Policy and Procedure 12.10.020 dated October 10, 1985

Approval (Page 1 Only)	Approval (Page 1 Only)	Approval (Page 1 Only)
------------------------	------------------------	------------------------



Manual Policy and Procedure		
Section Operating & Maint.	Tab 10	Document No 12.10.020
Effective Date JUL 07 1989	Issue No 5	Page No 9 of 10

Subject or Title

DISCHARGES OR SPILLS OF OIL OR HAZARDOUS SUBSTANCES; Preventing, Controlling and Reporting of

ATTACHMENT B (Continued)

Contractors Available for Discharge or Spill Containment

UTAH		
Contractor Name	Address	Telephone Number
A. L. Berna Construction	P.O. Box 8 Moab, UT 84532	801-259-5361
JBCO	Wagner Subdivision Moab, UT 84532	801-259-5316 801-259-8952
North American Environmental, Inc. (PCB Cleanup Work)	P.O. Box 1181 Bldg. G-9, Freeport Center Clearfield, UT 84016	801-776-0878
Ted Miller Company	3809 South 300 West Salt Lake City, UT 84115	801-268-1093

WASHINGTON		
Contractor Name	Address	Telephone Number
CES ChemPro, Inc.	3400 East Marginal Ways Seattle, WA 98134	206-682-4849 Emergency Phone Number
North American Environmental, Inc.	2432 East 11th Street Tacoma, WA 98421	206-272-9988
Northwest Enviroservice	P.O. Box 24443 Seattle, WA	206-622-1090
Oil Spill Service, Inc.	P.O. Box 548 Kirkland, WA 98033	206-823-6500

WYOMING		
Contractor Name	Address	Telephone Number
Eiden Construction & Roustabout Service	Marbleton, WY	307-276-3413
Flint Engineering and Const. Co. (Mike Kovern)	Box 807 Evanston, WY 82930	307-789-9396
Martin's Roustabout	Big Piney, WY (Martin Douglas)	307-276-3625 or 307-276-3626
Persh's Water Service	Big Piney, WY (Persh Punteney)	307-276-3210
Skyline Construction	Big Piney, WY (Rod Bennett)	307-276-3383

*Revised
**Added

Supersedes Division Policy and Procedure 12.10.020 dated October 10, 1985

Approval (Page 1 Only)	Approval (Page 1 Only)	Approval (Page 1 Only)
------------------------	------------------------	------------------------

RULE 116

NOTIFICATION OF FIRE, BREAKS, LEAKS, SPILLS, AND BLOWOUTS

The Division shall be notified of any fire, break, leak, spill, or blowout occurring at any injection or disposal facility or at any oil or gas drilling, producing, transporting, or processing facility in the State of New Mexico by the person operating or controlling such facility.

"Facility," for the purpose of this rule, shall include any oil or gas well, any injection or disposal well, and any drilling or workover well; any pipeline through which crude oil, condensate, casinghead or natural gas, or injection or disposal fluid (gaseous or liquid) is gathered, piped, or transported (including field flow-lines and lead-lines but not including natural gas distribution systems); any receiving tank, holding tank, or storage tank, or receiving and storing receptacle into which crude oil, condensate, injection or disposal fluid, or casinghead or natural gas is produced, received, or stored; any injection or disposal pumping or compression station including related equipment; any processing or refining plant in which crude oil, condensate, or casinghead or natural gas is processed or refined; any tank or drilling pit or slush pit associated with oil or gas well or injection or disposal well drilling operations or any tank, storage pit, or pond associated with oil or gas production or processing operations or with injection or disposal operations and containing hydrocarbons or hydrocarbon waste or residue, salt water, strong caustics or strong acids, or other deleterious chemicals or harmful contaminants.

Notification of such fire, break, leak, spill, or blowout shall be in accordance with the provisions set forth below:

1. Well Blowouts. Notification of well blowouts and/or fires shall be "immediate notification" described below. ("Well blowout" is defined as being loss of control over and subsequent eruption of any drilling or workover well, or the rupture of the casing, casinghead, or wellhead or any oil or gas well or injection or disposal well, whether active or inactive, accompanied by the sudden emission of fluids, gaseous or liquid, from the well.)
2. "Major" Breaks, Spills, or Leaks. Notification of breaks, spills, or leaks of 25 or more barrels or crude oil or condensate, or 100 barrels or more of salt water, none of which reached a watercourse or enters a stream or lake, breaks, spills, or leaks in which one or more barrels of crude oil or condensate or 25 barrels or more of salt water does reach a watercourse or enters a stream or lake; and breaks, spills, or leaks of hydrocarbons or hydrocarbon waste or residue, salt water, strong caustics or strong acids, gases, or other deleterious chemicals or harmful contaminants of any magnitude which may with reasonable probability endanger human health or result in substantial damage to property, shall be "immediate notification" described below.

3. "Minor" Breaks, Spills, or Leaks. Notification of breaks, spills, or leaks of 5 barrels or more but less than 25 barrels of crude oil or condensate, or 25 barrels or more but less than 100 barrels of salt water, none of which reaches a watercourse or enters a stream or lake, shall be "subsequent notification" described below.
4. Gas Leaks and Gas Line Breaks. Notification of gas leaks from any source or of gas pipeline breaks in which natural or casinghead gas of any quantity has escaped or is escaping which may with reasonable probability endanger human health or result in substantial damage to property shall be "immediate notification" described below. Notification of gas pipeline breaks or leaks in which the loss is estimated to be 1000 or more MCF of natural or casinghead gas but in which there is no danger to human health nor of substantial damage to property shall be "subsequent notification" described below.
5. Tank Fires. Notification of fires in tanks or other receptacles caused by lightning or any other cause, if the loss is, or it appears that the loss will be, 25 or more barrels of crude oil or condensate, or fires which may with reasonable probability endanger human health or result in substantial damage to property, shall be "immediate notification" as described below. If the loss is, or it appears that the loss will be at least 5 barrels but less than 25 barrels, notification shall be "subsequent notification" described below.
6. Drilling Pits, Slush Pits, and Storage Pits and Ponds. Notification of breaks and spills from any drilling pit, slush pit, or storage pit or pond in which any hydrocarbon or hydrocarbon waste or residue, strong caustic or strong acid, or other deleterious chemical or harmful contaminant endangers human health or does substantial surface damage, or reaches a watercourse or enters a stream or lake in such quantity as may with reasonable probability endanger human health or result in substantial damage to such watercourse, stream, or lake, or the contents thereof, shall be "immediate notification" as described below. Notification of breaks or spills of such magnitude as to not endanger human health, cause substantial surface damage, or result in substantial damage to any watercourse, stream, or lake, or the contents thereof, shall be "subsequent notification" described below, provided however, no notification shall be required where there is no threat of any damage resulting from the break or spill.

IMMEDIATE NOTIFICATION. "Immediate Notification" shall be as soon as possible after discovery and shall be either in person or by telephone to the district office of the Division district in which the incident occurs, or if the incident occurs after normal business hours, to the District Supervisor, the Oil and Gas Inspector, or the Deputy Oil and Gas Inspector. A complete written report ("Subsequent Notification") of the incident shall also be submitted in duplicate to the appropriate district office of the Division within ten days after discovery of the incident.

SUBSEQUENT NOTIFICATION. "Subsequent Notification" shall be a complete written report of the incident and shall be submitted in duplicate to the district office of the Division district in which the incident occurred within ten days after discovery of the incident.

CONTENT OF NOTIFICATION. All reports of fires, breaks, leaks, spills, or blowouts, whether verbal or written, shall identify the location of the incident by quarter-quarter, section, township, and range, and by distance and direction from the nearest town or prominent landmark so that the exact site of the incident can be readily located on the ground. The report shall specify the nature and quantity of the loss and also the general conditions prevailing in the area, including precipitation, temperature, and soil conditions. The report shall also detail the measures that have been taken and are being taken to remedy the situation reported.

WATERCOURSE, for the purpose of this rule, is defined as any lake-bed or gully, draw, stream bed, wash, arroyo, or natural or man-made channel through which water flows or has flowed.

State of New Mexico
Energy and Minerals Department


OIL CONSERVATION DIVISION
P.O. Box 2088
Santa Fe, New Mexico 87504

NOTIFICATION OF FIRE, BREAKS, SPILLS, LEAKS, AND BLOWOUTS

Name of Operator				Address			
Report of	Fire	Break	Spill	Leak	Blowout	Other*	
Type of Facility	Drig Well	Prod Well	Tank Btty	Pipe Line	Gaso Pint	Oil Rfy	Other*
Name of Facility							
Location of Facility (Quarter/Quarter Section or Footage Description)				Sec.	Twp.	Rge.	County
Distance and Direction From Nearest Town or Prominent Landmark							
Date and Hour of Occurrence				Date and Hour of Discovery			
Was Immediate Notice Given?	Yes	No	Not Required	If Yes, To Whom			
By Whom				Date and Hour			
Type of Fluid Lost				Quantity of Loss	_____ BO _____ BW	Volume Recovered	_____ BO _____ BW
Did Any Fluids Reach a Watercourse?	Yes	No	Quantity				
If Yes, Describe Fully**							
Describe Cause of Problem and Remedial Action Taken**							
Describe Area Affected and Cleanup Action Taken**							
Description of Area	Farming	Grazing	Urban	Other*			
Surface Conditions	Sandy	Sandy Loam	Clay	Rocky	Wet	Dry	Snow
Describe General Conditions Prevailing (Temperature, Precipitation, Etc.)**							
I Hereby Certify That the Information Above is True and Complete to the Best of My Knowledge and Belief							
Signed		Title		Date			

*Specify

**Attach Additional Sheets if Necessary

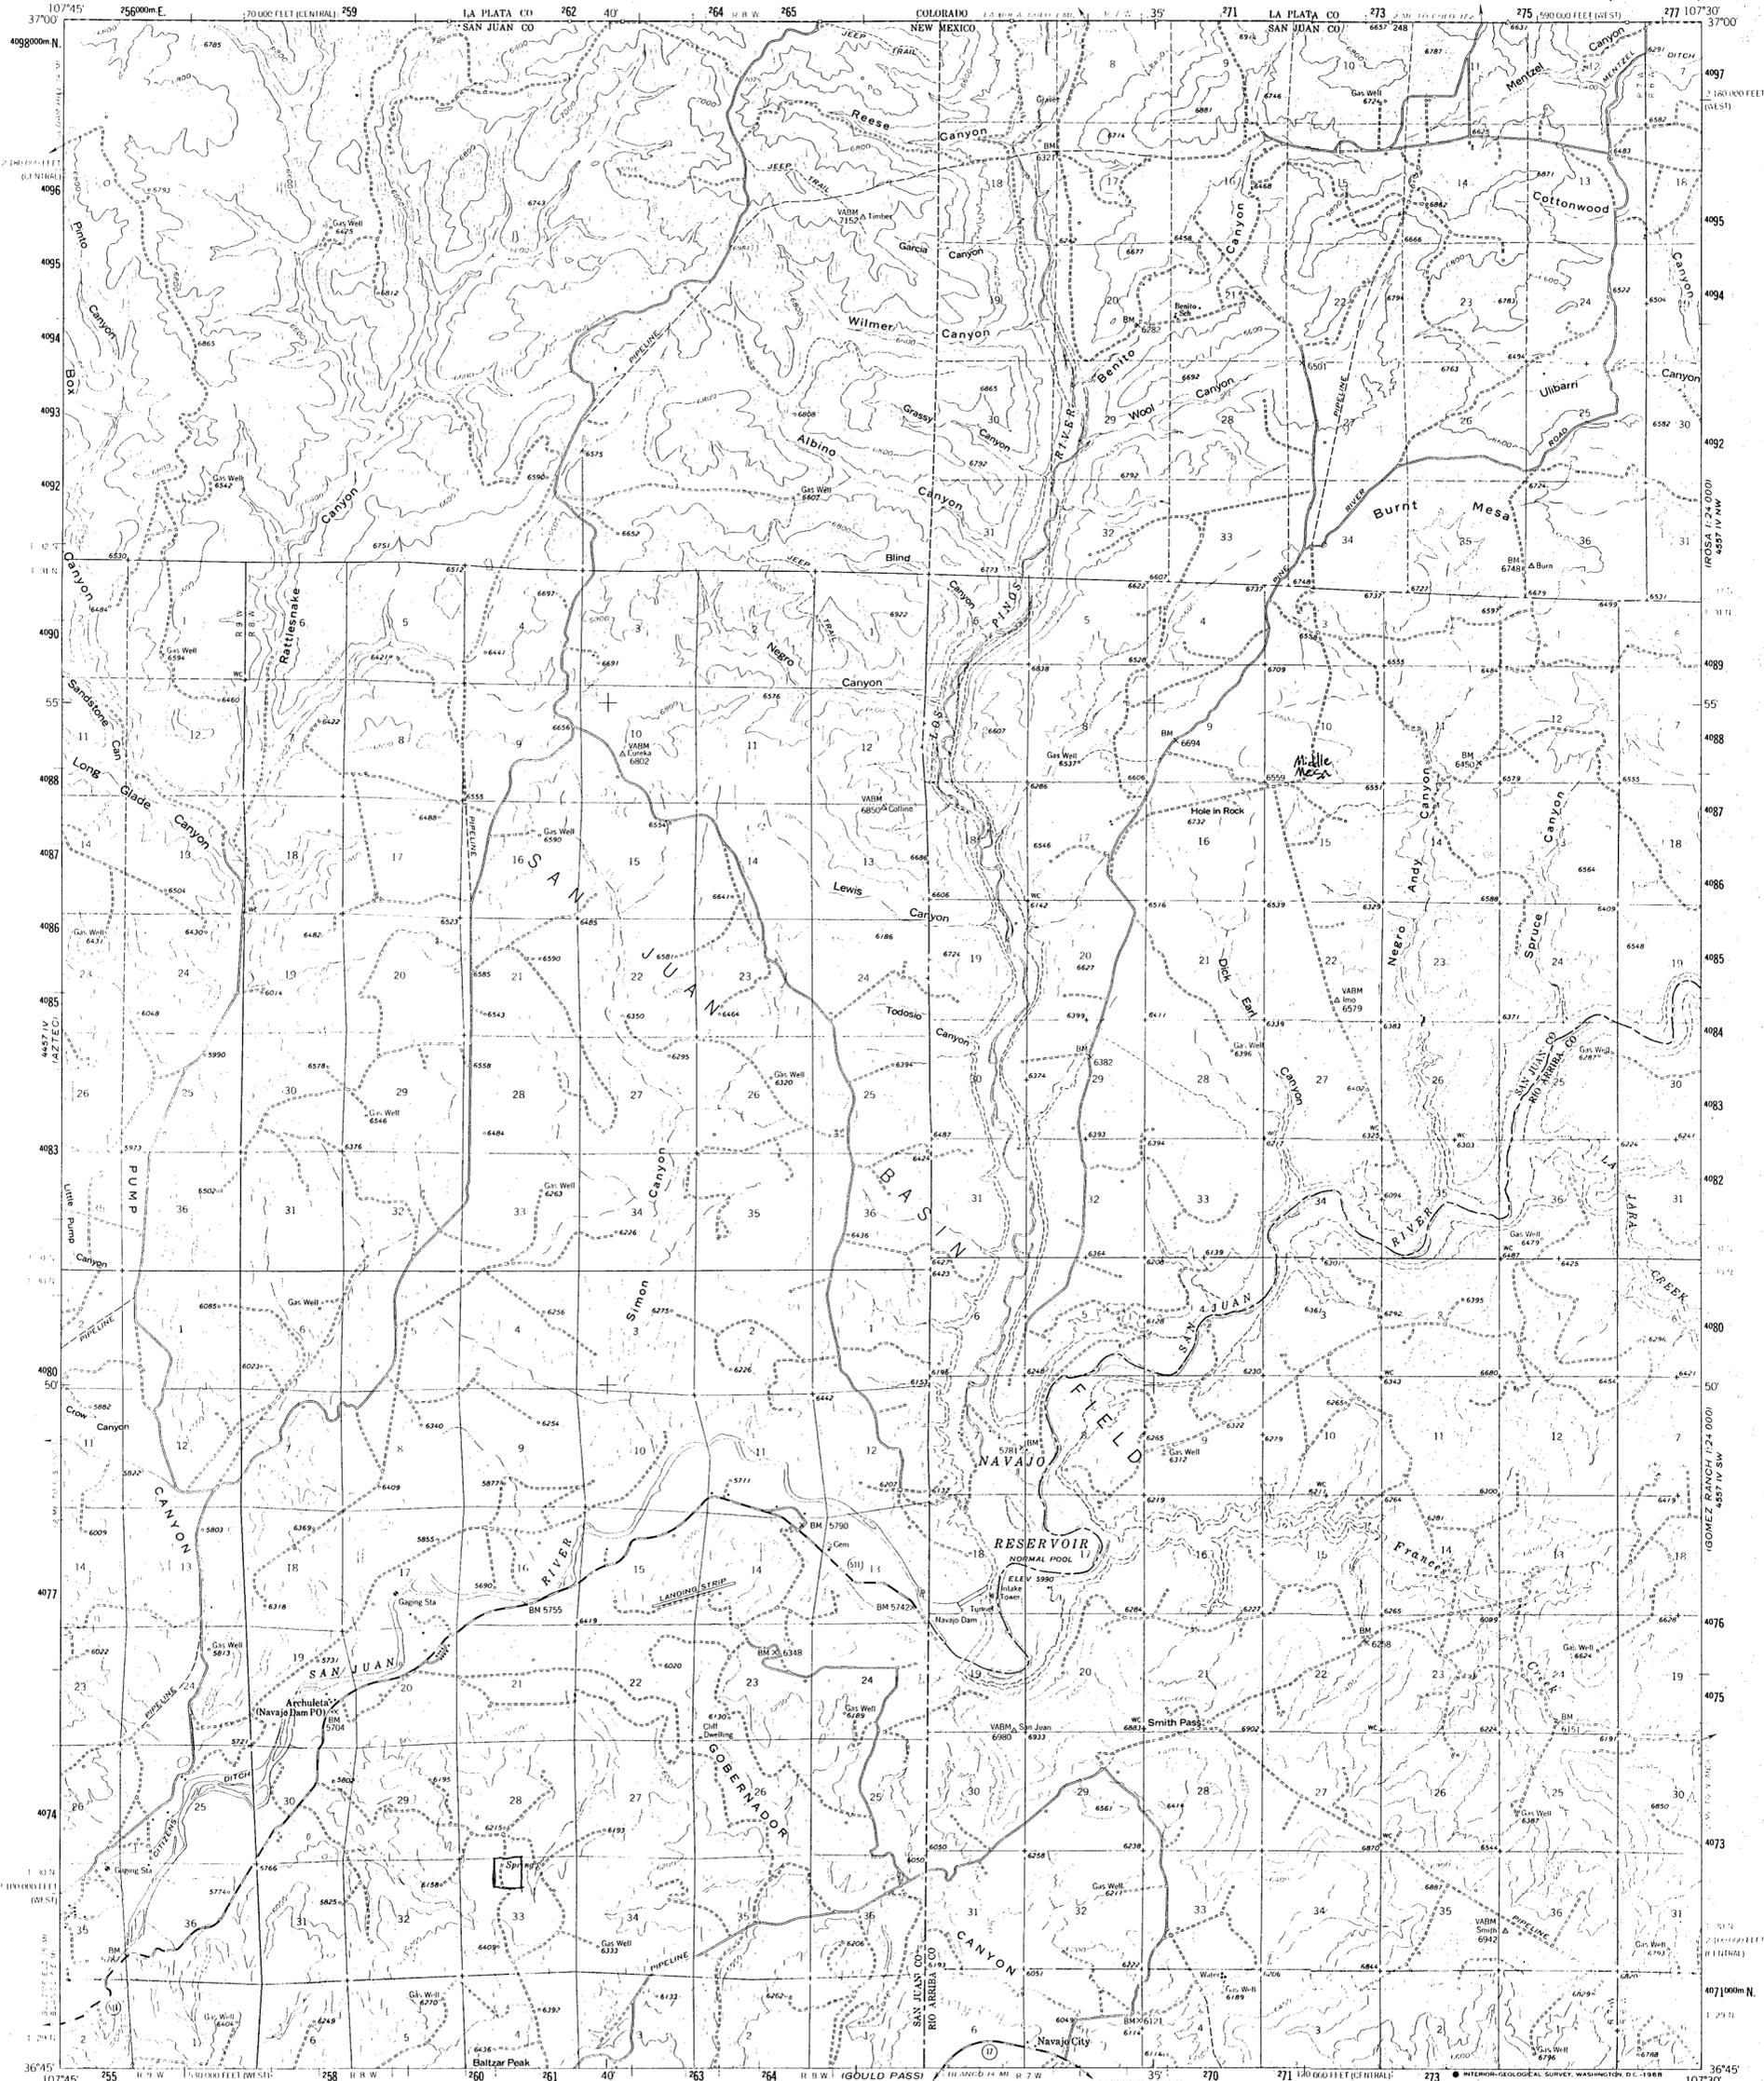

Mapped, edited, and published by the Geological Survey

Control by USGS and USC&GS
East half compiled in 1959 from 1:24,000 scale maps dated 1954. West half topography by photogrammetric methods from aerial photographs taken 1955. Field checked 1959.

Polyconic projection. 1927 North American datum
10,000-foot grid based on New Mexico coordinate system, west and central zones
1000 meter Universal Transverse Mercator grid ticks, zone 13, shown in blue

Blue hatching indicates area to be submerged by Navajo Reservoir at elevation 5990 feet
Area covered by dashed light blue pattern is subject to controlled inundation to 6101 feet



ROAD CLASSIFICATION
Medium-duty ——— Light-duty ———
Unimproved dirt - - - - -

State Route
The east half of this area also covered by 7.5 minute 1:24,000 scale maps. Bound Mar. 1954 and Dec. 1954.

NAVAJO DAM, N. MEX.
N3645-W10730/15

1959

AMS 4457 I-SERIES V781

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225 OR WASHINGTON, D. C. 20242
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

Thomas J. Smithson being duly sworn declares and says that he is National Advertising manager of the Albuquerque Journal, and that this newspaper is duly qualified to publish legal notices or advertisements within the meaning of Section 3, Chapter 167, Session Laws of 1937, and that payment therefore has been made or assessed as court costs; that the notice, a copy of which is hereto attached, was published in said paper in the regular daily edition,

for.....¹.....times, the first publication being on the.....².....day of.....May....., 1991, and the subsequent consecutive publications on....., 1991.

Thomas J. Smithson
Sworn and subscribed to before me, a Notary Public in and for the County of Bernalillo and State of New Mexico, this²..... day of.....May....., 1991.

PRICE.....\$51.68.....

Statement to come at end of month.

CLA-22-A (R-12/91)

ACCOUNT NUMBER.....C 81184.....

BERNARDETTE CITY
12-18-93

**NOTICE OF PUBLICATION
STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION**

Notice is hereby given that pursuant to New Mexico Water Quality Control Commission Regulations, the following discharge plan applications have been submitted to the Director of the Oil Conservation Division, State Land Office Building, P.O. Box 2088, Santa Fe, New Mexico 87504-2088, Telephone (505) 827-5800:

(GW-61) Williams Field Services, Robert Peacock, Project Manager, P.O. Box 58900, Salt Lake City, Utah 84158-0900, has submitted a discharge plan application for its proposed Horse Canyon compressor station located in the NE/4 NE/4, Section 27, Township 30 North, Range 9 West, NMPM, San Juan County, New Mexico. Approximately 115 gallons per day of washdown water and used oil will be stored in an above ground steel tank within a bermed area prior to transport to a state approved recycling contractor. Groundwater most likely to be affected by any spill, leak or other accidental discharge to the surface is at a depth of approximately 380 feet with a total dissolved solids concentration of approximately 3150 mg/l. The discharge plan application addresses how spills, leaks and other accidental discharges to the surface will be managed.

(GW-62) Williams Field Services, Robert Peacock, Project Manager, P.O. Box 58900, Salt Lake City, Utah 84158-0900, has submitted a discharge plan application for its proposed Manzanares compressor station located in the SE/4 SW/4, Section 28, Township 30 North, Range 8 West, NMPM, San Juan County, New Mexico. Approximately 35 gallons per day of washdown water and used oil will be stored in an above ground steel tank sited within a bermed area prior to transport to a state approved recycling contractor or an OCD approved offsite disposal facility. Groundwater most likely to be affected by any spill, leak or other accidental discharge to the surface is at a depth of approximately 115 feet with a total dissolved solids concentration of approximately 910 mg/l. The discharge plan application addresses how spills, leaks and other accidental discharges to the surface will be managed.

(GW-63) Williams Field Services, Robert Peacock, Project Manager, P.O. Box 58900, Salt Lake City, Utah 84158-0900, has submitted a discharge plan application for its proposed Pump Mesa compressor station located in the SE/4 SE/4, Section 14, Township 31 North, Range 8 West, NMPM, San Juan County, New Mexico. Approximately 70 gallons per day of washdown water and used oil will be stored in an above ground steel tank sited within a bermed area prior to transport to a state approved recycling contractor or an OCD approved offsite disposal facility. Groundwater most likely to be affected by any spill, leak or other accidental discharge to the surface is at a depth of approximately 938 feet with a total dissolved solids concentration of approximately 9800 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.

(GW-64) Williams Field Services, Robert Peacock, Project Manager, P.O. Box 58900, Salt Lake City, Utah 84158-0900, has submitted a discharge plan application for its proposed Middle Mesa compressor station located in the SE/4 SW/4, Section 10, Township 31 North, Range 7 West, NMPM, San Juan County, New Mexico. Approximately 70 gallons per day of washdown water and used oil will be stored in an above ground steel tank sited within a bermed area prior to transport to a state approved recycling contractor or an OCD approved offsite disposal facility. Groundwater most likely to be affected by any spill, leak or other accidental discharge to the surface is at a depth of approximately 940 feet with a total dissolved solids concentration of approximately 900 mg/l. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

(GW-77) Meridian Oil Inc., Darryl W. Hill, Plant and Pipeline Manager, P.O. Box 4289, Farmington, New Mexico 87499-4289, has submitted a discharge plan application for its proposed Middle Mesa compressor station located in the NW/4, Section 15 and the SW/4, Section 10, Township 31 North, Range 7 West, NMPM, San Juan County, New Mexico. Approximately 450 gallons per day of washdown water and produced water will be stored in an above ground steel tank sited within a bermed area prior to transport to an OCD approved disposal facility. Groundwater most likely to be affected by any spill, leak or other accidental discharge to the surface is at a depth of approximately 25 feet with a total dissolved solids concentration of approximately 1500 mg/l. The discharge plan addresses how spills, leaks or other accidental discharges to the surface will be managed.

Any interested person may obtain further information from the Oil Conservation Division and may submit

STATE OF NEW MEXICO,
County of San Juan:

CHRISTINE HILL being duly sworn, says: "That she is the NATIONAL AD MANAGER of the Farmington Daily Times, a daily newspaper of general circulation published in English in Farmington, said county and state, and that the hereto attached LEGAL NOTICE

was published in a regular and entire issue of the said Farmington Daily Times, a daily newspaper duly qualified for the purpose within the meaning of Chapter 167 of the 1937 Session Laws of the State of New Mexico for ONE consecutive (days) (//////) on the same day as follows:

First Publication WEDNESDAY, MAY 1, 1991

Second Publication _____

Third Publication _____

Fourth Publication _____

and that payment therefore in the amount of \$ 74.24 has been made.

Christine Hill

Subscribed and sworn to before me this 10th day of MAY, 1991.

Connie Andrae

Notary Public, San Juan County,
New Mexico

My Comm expires: JULY 3, 1993

**NOTICE OF PUBLICATION
STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL
RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION**

Notice is hereby given that pursuant to New Mexico Water Quality Control Commission Regulations, the following discharge plan applications have been submitted to the Director of the Oil Conservation Division, State Land Office Building, P. O. Box 2088, Santa Fe, New Mexico 87504-2088, Telephone 505-827-5800:

(GW-61)-Williams Field Services, Robert Peacock, Project Manager, P. O. Box 58900, Salt Lake City, Utah 84158-0900, has submitted a discharge plan application for its proposed Horse Canyon compressor station located in the NE/4 NE 1/4, Section 27, Township 30 North, Range 9 West, NMPM, San Juan County, New Mexico. Approximately 115 gallons per day of washdown water and used oil will be stored in the above ground steel tank sited within a bermed area prior to transport to a state approved recycling contractor or an OCD approved offsite disposal facility. Groundwater most likely to be affected by any spill, leak or other accidental discharge to the surface is at a depth of approximately 380 feet with a total dissolved solids concentration of approximately 3150 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.

(GW-62)-Williams Field Services, Robert Peacock, Project Manager, P. O. Box 58900, Salt Lake City, Utah 84158-0900, has submitted a discharge plan application for its proposed Manzanares compressor station located in the SE/4 SW 1/4, Section 28, Township 30 North, Range 8 West, NMPM, San Juan County, New Mexico. Approximately 35 gallons per day of washdown water and used oil will be stored in an above ground steel tank sited within a bermed area prior to transport to a state approved recycling contractor or an OCD approved offsite disposal facility. Groundwater most likely to be affected by any spill, leak or other accidental discharge to the surface is at a depth of approximately 115 feet with a total dissolved solids concentration of approximately 910 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.

(GW-63)-Williams Field Services, Robert Peacock, Project Manager, P. O. Box 58900, Salt Lake City, Utah 84158-0900, has submitted a discharge plan application for its proposed Pump Mesa compressor station located in the SE/4 SE/4, Section 14, Township 31 North, Range 8 West, NMPM, San Juan County, New Mexico. Approximately 70 gallons per day of washdown water and used oil will be stored in an above ground steel tank sited within a bermed area prior to transport to a state approved recycling contractor or an OCD approved offsite disposal facility. Groundwater most likely to be affected by any spill, leak or other accidental discharge to the surface is at a depth of approximately 938 feet with a total dissolved solids concentration of approximately 9800 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.

(GW-64)-Williams Field Services, Robert Peacock, Project Manager, P. O. Box 58900, Salt Lake City, Utah 84158-0900, has submitted a discharge plan application for its proposed Middle Mesa compressor station located in the SE/4 SW/4, Section 10, Township 31 North, Range 7 West, NMPM, San Juan County, New Mexico. Approximately 70 gallons per day of washdown water and used oil will be stored in an above ground steel tank sited within a bermed area prior to transport to a state approved recycling contractor or an OCD approved offsite disposal facility. Groundwater most likely to be affected by any spill, leak or other accidental discharge to the surface is at a depth of approximately 940 feet with a total dissolved solids concentration of approximately 900 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.

(GW-77)-Meridian Oil Inc., Danny W. Hill, Plant and Pipeline Manager, P. O. Box 4289, Farmington, New Mexico 87499-4289, has submitted a discharge plan application for proposed Middle Mesa compressor station located in the NW/4, Section 15 and the SW/4, Section 10, Township 31 North, Range 7 West, NMPM, San Juan County, New Mexico. Approximately 450 gallons per day of washdown water and produced water will be stored in an above ground steel tank sited within a bermed area prior to transport to an OCD approved disposal facility. Groundwater most likely to be affected by any spill, leak or other accidental discharge to the surface is at a depth of approximately 25 feet with a total dissolved solids concentration of approximately 1500 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.

Any interested person may obtain further information from the Oil Conservation Division and may submit written comments to the Director of the Oil Conservation Division at the address given above. The discharge plan application may be viewed at the above address between 8:00 a. m. and 5:00 p. m., Monday through Friday. Prior to ruling on any proposed discharge plan or its modification, the Director of the Oil Conservation Division shall allow at least thirty (30) days after the date of publication of this notice during which comments may be submitted to him and public hearing may be requested by any interested person. Requests for public hearing shall set forth the reasons why a hearing should be held. A hearing will be held if the Director determines that the Director will approve based on information will

WILLIAMS FIELD SERVICES COMPANY
ONE OF THE WILLIAMS COMPANIES

LAND CONSERVATION DIVISION
RECEIVED

P.O. BOX 58900
SALT LAKE CITY, UTAH 84158-0900
801-583-8800

'91 APR 22 AM 9 05

April 17, 1991

Mr. Roger Anderson
New Mexico Oil Conservation Division
Land Office Building
Santa Fe, NM 87504-2088

RE: Middle Mesa Compressor Station - JW64

Dear Mr. Anderson:

The Discharge Plan for the Middle Mesa Compressor Station is hereby submitted.

Please call me at (801) 584-6730 if you have any questions or comments regarding this.

Sincerely,



Sandy Fishler
Environmental Specialist

SF/pm

attachment

0062



STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION

GARREY CARRUTHERS
GOVERNOR

POST OFFICE BOX 2088
STATE LAND OFFICE BUILDING
SANTA FE, NEW MEXICO 87504
(505) 827-5800

November 20, 1990

CERTIFIED MAIL -
RETURN RECEIPT NO. P-327-278-306

Ms. Sandy Fisher
Williams Field Services Company
P. O. Box 58900
Salt Lake City, Utah 84158-0900

RE: Discharge Plan Requirement

Dear Ms. Fisher:

Under the provisions of the Water Quality Control Commission (WQCC) Regulations, you are hereby notified that the filing of discharge plans is required for the following compressor stations:

1. Horse Canyon
NE/4 NE/4, Section 27, Township 30 North, Range 9 West
San Juan County, New Mexico
2. Manzanares
NE/4 NW/4, Section 33, Township 30 North, Range 8 West
San Juan County, New Mexico
3. Pump Mesa
SW/4 SE/4, Section 14, Township 31 North, Range 8 West
San Juan County, New Mexico
4. Middle Mesa
SE/4 SW/4, Section 10, Township 31 North, Range 7 West
San Juan County, New Mexico
5. Simms Mesa
NW/4 NE/4, Section 22, Township 30 North, Range 7 West
Rio Arriba County, New Mexico


Ms. Sandy Fisher
November 20, 1990
Page -2-

This notification of discharge plan requirement is pursuant to Sections 3-104 and 3-106 of the WQCC Regulations. The discharge plan, defined in Section 1.101.P. of the WQCC Regulations, should cover all discharges of effluent or leachate at the plant site or adjacent to the plant site. Included in the application should be plans for controlling spills and accidental discharges at the facility (including detection of leaks in buried underground tanks and/or piping).

A copy of the regulations is enclosed for your convenience. Also enclosed is a copy of an OCD guide to the preparation of discharge plans for gas processing plants. The guidelines are presently being revised to include berming of tanks, curbing and paving of process areas susceptible to leaks or spills and the disposition of any solid wastes. Three copies of each discharge plan application should be submitted.

If there are any questions on this matter, please feel free to call David Boyer at 827-5812, or Roger Anderson at 827-5884 as they have the assigned responsibility for review of all discharge plans.

Sincerely,

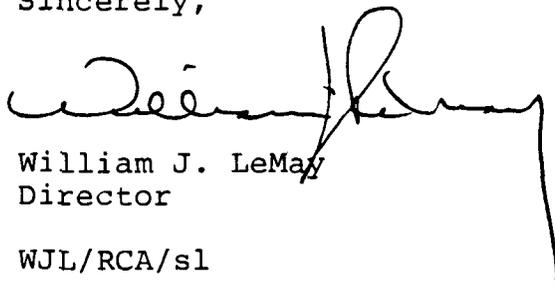

William J. LeMay
Director

WJL/RCA/sl

Enclosure

cc: OCD Aztec District Office

WILLIAMS FIELD SERVICES COMPANY
ONE OF THE WILLIAMS COMPANIES 

RECEIVED

P.O. BOX 58900
SALT LAKE CITY, UTAH 84158-0900
801-583-8800

AUG 31 1990

OIL CONSERVATION DIV.
SANTA FE

August 28, 1990

Mr. Roger Anderson
New Mexico Oil Conservation Division
P.O. Box 2088
Santa Fe, New Mexico 87501

Dear Mr. Anderson:

Notification is hereby provided, upon your request, of our intent to construct five (5) new field compressor sites in the San Juan Basin. Facilities at each site will consist of skid mounted 1000 hp field compressors, a field dehydrator and 3-70 barrel (or smaller) storage tanks (for lube oil, wastewater and used oil). The location of each site is provided below:


Horse Canyon (11 units)	NE 1/4, NE 1/4, Sec. 27, T-30-N, R-9-W
Manzanares (4 units)	NE 1/4, NW 1/4, Sec. 33, T-30-N, R-8-W
Pump Mesa (6 units)	SW 1/4, SE 1/4, Sec. 14, T-31-N, R-8-W
Middle Mesa (7 units)	SE 1/4, SW 1/4, Sec. 10, T-31-N, R-7-W
Simms Mesa (7 units)	NW 1/4, NE 1/4, Sec. 22, T-30-N, R-7-W

Wastewater and used oil will be collected directly into a tank. Spill containment dikes will surround all tanks.

There will be no discharge from these field compressor sites, therefore a discharge plan should not be required. We will begin the earthwork at these locations on September 3, 1990 and the compressor units must be in operation by November 23, 1990 due to contractual obligations.

I will contact you before September 14, 1990 to verify your concurrence with our interpretation that discharge plans are not required. If you need additional information or can respond to this notification in the meantime, please do not hesitate to contact me at (801) 584-6730.

Sincerely,



Sandy Fishler
Environmental Services

SF/pm

0008



STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION

BRUCE KING
GOVERNOR

March 18, 1991

POST OFFICE BOX 2088
STATE LAND OFFICE BUILDING
SANTA FE, NEW MEXICO 87504
(505) 827-5800

CERTIFIED MAIL
RETURN RECEIPT NO. P-327-278-107

Ms. Sandy Fishler
Environmental Specialist
Williams Field Services
P. O. Box 58900
Salt Lake City, Utah 84158-0990

RE: Authorization to Discharge

Dear Ms. Fishler:

The Oil Conservation Division (OCD) has received your requests dated March 12, 1991 for authorization to discharge for 120 days without an approved discharge plan for the following five (5) new compressor stations:

1. Horse Canyon - NE/4 NE/4, Section 27, Township 30 North, Range 9 West, San Juan County, New Mexico
2. Manzanares - NE/4 NW/4, Section 33, Township 30 North, Range 8 West, San Juan County, New Mexico
3. Pump Mesa - SW/4 SE/4, Section 14, Township 31 North, Range 8 West, San Juan County, New Mexico
4. Middle Mesa - SE/4 SW/4, Section 10, Township 31 North, Range 7 West, San Juan County, New Mexico
5. Simms Mesa - NW/4 NE/4, Section 22, Township 30 North, Range 7 West, San Juan County, New Mexico

This authorization will allow start-up, testing and operation of the stations while the discharge plan applications are being reviewed.

Ms. Sandy Fishler
March 18, 1991
Page -2-

Pursuant to Water Quality Control Commission (WQCC) Regulations 3-106.B. and for good cause shown, you are hereby authorized to discharge at the five compressor stations listed above without an approved discharge plan for a period not to exceed 120 day commencing on the start-up date of each station. Notify this office of the actual dates of start-up.

During the 120 day period, processing of the discharge plan application will continue. Since the 120 day period can not be extended, timely submittal of any OCD-requested information will ensure that permitting is concluded prior to the expiration date.

If you have any questions, please contact David Boyer at (505) 827-5812 or Roger Anderson at (505) 827-5884.

Sincerely,

A handwritten signature in cursive script that reads "William J. LeMay". The signature is written in dark ink and is positioned above the typed name and title.

William J. LeMay
Director

WJL/RCA/sl

cc: OCD Aztec Office