

GW - 188-3

**GENERAL
CORRESPONDENCE**

YEAR(S):

2005-1995

NOTICE OF PUBLICATION

**STATE OF
NEW MEXICO
ENERGY, MINERALS
AND NATURAL
RESOURCES
DEPARTMENT
OIL CONSERVATION
DIVISION**

Notice is hereby given that pursuant to New Mexico Water Quality Control Commission Regulations, the following discharge plan application has been submitted to the Director of the Oil Conservation Division, 2040 South Pacheco, Santa Fe, New Mexico 87505. Telephone (505) 827-7131:

(GW-188-1) Enterprise Products Operating, L.P., Mr. Shiver J. Nolan, Senior Compliance Administrator, P.O. Box 4324, Houston, TX 77210-4324, has submitted a renewal application for the previously approved discharge plan for their Hart Canyon #1 facility, located in the NE/4 of Section 29, Township 31 North, Range 10 West, NMPM, San Juan County, New Mexico. The total discharge will be about 552 gallons/day. This fluid will consist of oil and water and will be discharged to closed top storage tanks on site. Hydrocarbons will be separated from the water and recycled. The wastewater will then be disposed of by evaporation at an approved OCD facility. Groundwater most likely to be affected by a spill, leak or accidental discharge to the surface is at a depth of approximately 50 feet with a total dissolved solids concentration of approximately 1,500 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.

(GW-188-2) Enterprise Products Operating, L.P., Mr. Shiver J. Nolan, Senior Compliance Administrator, P.O. Box 4324, Houston, TX 77210-4324,

has submitted a renewal application for the previously approved discharge plan for their Hart Canyon #2 facility, located in the SE/4 of Section 29, Township 30 North, Range 9 West, NMPM, San Juan County, New Mexico. The total discharge will be about 552 gallons/day. This fluid will consist of oil and water and will be discharged to closed top storage tanks on site. Hydrocarbons will be separated from the water and recycled. The wastewater will then be disposed of by evaporation at an approved OCD facility. Groundwater most likely to be affected by a spill, leak or accidental discharge to the surface is at a depth of approximately 50 feet with a total dissolved solids concentration of approximately 1,500 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.

(GW-188-3) Enterprise Products Operating, L.P., Mr. Shiver J. Nolan, Senior Compliance Administrator, P.O. Box 4324, Houston, TX 77210-4324, has submitted a renewal application for the previously approved discharge plan for their Hart Canyon #3 facility, located in the NW/4 of Section 8, Township 31 North, Range 9 West, NMPM, San Juan County, New Mexico. The total discharge will be about 552 gallons/day. This fluid will consist of oil and water and will be discharged to closed top storage tanks on site. Hydrocarbons will be separated from the water and recycled. The wastewater will then be disposed of by evaporation at an approved OCD facility. Groundwater most likely to be affected by a spill, leak or accidental discharge to the surface is at a depth of approximately 50 feet with a total dissolved

solids concentration of approximately 1,500 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.

Any interested person may obtain further information from the Oil Conservation Division and may submit written comments to the Director of the Oil Conservation Division at the address given above. The discharge plan application may be viewed at the above address between 8:00 a.m. and 4:00 p.m., Monday through Friday. Prior to ruling on any proposed discharge plan or its modification, the Director of the Oil Conservation Division shall allow at least thirty (30) days after the date of publication of this notice during which comments may be submitted to him and a public hearing may be requested by any interested person. Requests for a public hearing shall set forth the reasons why a hearing should be held. A hearing will be held if the Director determines there is significant public interest.

If no public hearing is held, the Director will approve or disapprove the proposed plan based on information available. If a public hearing is held, the director will approve or disapprove the proposed plan based on information in the plan and information submitted at the hearing.

GIVEN under the Seal of New Mexico Oil Conservation Commission at Santa Fe, New Mexico, on this 21st day of July 2005.

STATE OF
NEW MEXICO
OIL CONSERVATION
DIVISION

SEAL

MARK E. FESMIRE,
P.E., Director
Legal #77464
Pub. July 27, 2005

SF New Mexico

AFFIDAVIT OF PUBLICATION

Ad No. 52039

**STATE OF NEW MEXICO
County of San Juan:**

CONNIE PRUITT, being duly sworn says:
That she is the ADVERTISING MANAGER of
THE DAILY TIMES, a daily newspaper of
general circulation published in English at
Farmington, said county and state, and that
the hereto attached Legal Notice was
published in a regular and entire issue of the
said DAILY TIMES, a daily newspaper duly
qualified for the purpose within the meaning of
Chapter 167 of the 1937 Session Laws of the
State of New Mexico for publication and
appeared in the Internet at The Daily Times
web site on the following day(s):

Tuesday, July 26, 2005.

And the cost of the publication is \$93.60.

Connie Pruitt

ON 7/26/05 CONNIE PRUITT
appeared before me, whom I know personally
to be the person who signed the above
document.

Wynell Corey
My Commission Expires November 17, 2008.

COPY OF PUBLICATION

918 Legals

NOTICE OF PUBLICATION

**STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION**

Notice is hereby given that pursuant to New Mexico Water Quality Control Commission Regulations, the following discharge plan application has been submitted to the Director of the Oil Conservation Division, 2040 South Pacheco, Santa Fe, New Mexico 87505, Telephone (505) 827-7131:

(GW-188-1) Enterprise Products Operating, L.P., Mr. Shiver J. Nolan, Senior Compliance Administrator, P.O. Box 4324, Houston, TX 77210-4324, has submitted a renewal application for the previously approved discharge plan for their Hart Canyon #1 facility, located in the NE/4 of Section 29, Township 31 North, Range 10 West, NMPM, San Juan County, New Mexico. The total discharge will be about 552 gallons/day. This fluid will consist of oil and water and will be discharged to closed top storage tanks on site. Hydrocarbons will be separated from the water and recycled. The wastewater will then be disposed of by evaporation at an approved OCD facility. Groundwater most likely to be affected by a spill, leak or accidental discharge to the surface is at a depth of approximately 50 feet with a total dissolved solids concentration of approximately 1,500 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.

(GW-188-2) Enterprise Products Operating, L.P., Mr. Shiver J. Nolan, Senior Compliance Administrator, P.O. Box 4324, Houston, TX 77210-4324, has submitted a renewal application for the previously approved discharge plan for their Hart Canyon #2 facility, located in the SE/4 of Section 29, Township 30 North, Range 9 West, NMPM, San Juan County, New Mexico. The total discharge will be about 552 gallons/day. This fluid will consist of oil and water and will be discharged to closed top storage tanks on site. Hydrocarbons will be separated from the water and recycled. The wastewater will then be disposed of by evaporation at an approved OCD facility. Groundwater most likely to be affected by a spill, leak or accidental discharge to the surface is at a depth of approximately 50 feet with a total dissolved solids concentration of approximately 1,500 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.

(GW-188-3) Enterprise Products Operating, L.P., Mr. Shiver J. Nolan, Senior Compliance Administrator, P.O. Box 4324, Houston, TX 77210-4324, has submitted a renewal application for the previously approved discharge plan for their Hart Canyon #3 facility, located in the NW/4 of Section 8, Township 31 North, Range 9 West, NMPM, San Juan County, New Mexico. The total discharge will be about 552 gallons/day. This fluid will consist of oil and water and will be discharged to closed top storage tanks on site. Hydrocarbons will be separated from the water and recycled. The wastewater will then be disposed of by evaporation at an approved OCD facility. Groundwater most likely to be affected by a spill, leak or accidental discharge to the surface is at a depth of approximately 50 feet with a total dissolved solids concentration of approximately 1,500 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.

Any interested person may obtain further information from the Oil Conservation Division and may submit written comments to the Director of the Oil Conservation Division at the address given above. The discharge plan application may be viewed at the above address between 8:00 a.m. and 4:00 p.m., Monday through Friday. Prior to ruling on any proposed discharge plan or its modification, the Director of the Oil Conservation Division shall allow at least thirty (30) days after the date of publication of this notice during which comments may be submitted to him and a public hearing may be requested by any interested person. Requests for a public hearing shall set forth the reasons why a hearing should be held. A hearing will be held if the Director determines there is significant public interest.

If no public hearing is held, the Director will approve or disapprove the proposed plan based on information available. If a public hearing is held, the director will approve or disapprove the proposed plan based on information in the plan and information submitted at the hearing.

GIVEN under the Seal of New Mexico Oil Conservation Commission at Santa Fe, New Mexico, on this 21st day of July 2005.

STATE OF NEW MEXICO
OIL CONSERVATION DIVISION

SEAL

MARK E. FESMIRE, P.E., Director

Legal No. 52039 published in The Daily Times, Farmington, New Mexico on Tuesday, July 26, 2005.

NOTICE OF PUBLICATION

STATE OF NEW MEXICO ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT OIL CONSERVATION DIVISION

Notice is hereby given that pursuant to New Mexico Water Quality Control Commission Regulations, the following discharge plan application has been submitted to the Director of the Oil Conservation Division, 2040 South Pacheco, Santa Fe, New Mexico 87505, Telephone (505) 827-7131:

(GW-188-1) Enterprise Products Operating, L.P., Mr. Shiver J. Nolan, Senior Compliance Administrator, P.O. Box 4324, Houston, TX 77210-4324, has submitted a renewal application for the previously approved discharge plan for their Hart Canyon #1 facility, located in the NE/4 of Section 29, Township 31 North, Range 10 West, NMPM, San Juan County, New Mexico. The total discharge will be about 552 gallons/day. This fluid will consist of oil and water and will be discharged to closed top storage tanks on site. Hydrocarbons will be separated from the water and recycled. The wastewater will then be disposed of by evaporation at an approved OCD facility. Groundwater most likely to be affected by a spill, leak or accidental discharge to the surface is at a depth of approximately 50 feet with a total dissolved solids concentration of approximately 1,500 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.

(GW-188-2) Enterprise Products Operating, L.P., Mr. Shiver J. Nolan, Senior Compliance Administrator, P.O. Box 4324, Houston, TX 77210-4324, has submitted a renewal application for the previously approved discharge plan for their Hart Canyon #2 facility, located in the SE/4 of Section 29, Township 30 North, Range 9 West, NMPM, San Juan County, New Mexico. The total discharge will be about 552 gallons/day. This fluid will consist of oil and water and will be discharged to closed top storage tanks on site. Hydrocarbons will be separated from the water and recycled. The wastewater will then be disposed of by evaporation at an approved OCD facility. Groundwater most likely to be affected by a spill, leak or accidental discharge to the surface is at a depth of approximately 50 feet with a total dissolved solids concentration of approximately 1,500 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.

(GW-188-3) Enterprise Products Operating, L.P., Mr. Shiver J. Nolan, Senior Compliance Administrator, P.O. Box 4324, Houston, TX 77210-4324, has submitted a renewal application for the previously approved discharge plan for their Hart Canyon #3 facility, located in the NW/4 of Section 8, Township 31 North, Range 9 West, NMPM, San Juan County, New Mexico. The total discharge will be about 552 gallons/day. This fluid will consist of oil and water and will be discharged to closed top storage tanks on site. Hydrocarbons will be separated from the water and recycled. The wastewater will then be disposed of by evaporation at an approved OCD facility. Groundwater most likely to be affected by a spill, leak or accidental discharge to the surface is at a depth of approximately 50 feet with a total dissolved solids concentration of approximately 1,500 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.

Any interested person may obtain further information from the Oil Conservation Division and may submit written comments to the Director of the Oil Conservation Division at the address given above. The discharge plan application may be viewed at the above address between 8:00 a.m. and 4:00 p.m., Monday through Friday. Prior to ruling on any proposed discharge plan or its modification, the Director of the Oil Conservation Division shall allow at least thirty (30) days after the date of publication of this notice during which comments may be submitted to him and a public hearing may be requested by any interested person. Requests for a public hearing shall set forth the reasons why a hearing should be held. A hearing will be held if the Director determines there is significant public interest.

If no public hearing is held, the Director will approve or disapprove the proposed plan based on information available. If a public hearing is held, the director will approve or disapprove the proposed plan based on information in the plan and information submitted at the hearing.

GIVEN under the Seal of New Mexico Oil Conservation Commission at Santa Fe, New Mexico, on this 21st day of July 2005.

STATE OF NEW MEXICO
OIL CONSERVATION DIVISION

S E A L

MARK E. FESMIRE, P.E., Director

ACKNOWLEDGEMENT OF RECEIPT
OF CHECK/CASH

I hereby acknowledge receipt of check No. [REDACTED] dated 6-15-05,
or cash received on 7-21-05 in the amount of \$ 300.00
from ENTERPRISE PRODUCTS OPERATING, L.P.
for GW-188-1, 188-2 AND 188-3

Submitted by: _____ Date: _____
(Facility Name) (DP No.)

Submitted to ASD by: ED MARTIN Date: 7-21-05

Received in ASD by: _____ Date: _____

Filing Fee New Facility _____ Renewal _____
Modification _____ Other _____
(specify)

Organization Code 521.07 Applicable FY 2001

To be deposited in the Water Quality Management Fund.

Full Payment or Annual Increment _____

THE FACE OF THIS DOCUMENT CONTAINS SECURITY PRINTING.



ENTERPRISE PRODUCTS OPERATING L.P.
P.O. BOX 4324
HOUSTON, TEXAS 77210

BANK ONE, NA

56-1544/441



DATE

15-JUN-05

PAY EXACTLY

AMOUNT

Three Hundred And No/100 Dollars

\$*****300.00

PAY TO THE
ORDER OF

STATE OF NEW MEXICO
NATURAL RESOURCES DEPT
WATER QUALITY MGMNT FUND
1220 SOUTH ST FRANCIS DR
SANTA FE, NM 87505
United States

REGULAR ACCOUNT
VOID AFTER 180 DAYS

W. Randolph Fisher



Enterprise Products

7004 1160 0007 2370 5711
Return Receipt Requested

P.O. Box 4324 Houston, Texas 77210-4324 713.880.6500
2727 North Loop West Houston, Texas 77008-1044 www.epplp.com

June 20, 2005

RECEIVED
JUN 20 2005
OIL CONSERVATION
DIVISION

Mr. Roger Anderson
New Mexico Energy Minerals and
Natural Resources Department
Oil Conservation Division
1220 South Saint Francis Drive
Santa Fe, New Mexico 87505

**RE: Discharge Plan Application/Discharge Plan Renewals
Hart Canyon #1, Hart Canyon #2, Hart Canyon #3**

Dear Mr. Anderson:

Enclosed for you re review and handling are the Discharge Plan Renewals for the subject facilities. Also enclosed is Enterprise's check in the amount of \$300 to cover the fees associated with filing.

Should you have questions or need additional information, please contact Mr. David Hall, our consultant for this matter at 505-599-2119 or Mr. Doug Jordan, Environmental Manager-Mid-Stream Systems at 713-880-6629.

Yours truly,

Shiver J. Nolan
Senior Compliance Administrator

/sjn

enclosures

copy to: Denny Foust, District III
David Hall, Farmington

PUBLIC NOTICE

Notice of Discharge Plan Renewal Application Hart Canyon #3 Compressor Station

Pursuant to the requirements of the New Mexico Water Control Commission Regulation Title 20, Chapter 6, Part 2 – Ground and Surface Water Protection, Enterprise Field Services, LLC, P.O. Box 4324, Houston, Texas 77210-4324 announces the intent to apply to the New Mexico Oil Conservation Division to renew the Discharge Plan for the Hart Canyon #1 compressor station, Permit Number GW-188-3. Enterprise expects to submit the permit renewal application in June 2005.

The facility is located in Section 8, Township 31 North, Range 9 West, in San Juan County, approximately 12 miles northeast of Aztec, New Mexico. The station provides natural gas compression and treating services.

The Discharge Permit provides plans and procedures for the handling and disposing of various materials used and generated at the facility. The facility does not discharge any waste or wastewater to surface or subsurface waters. All wastes generated are temporarily stored in tanks or containers with secondary containment and shipped off-site to an NMOCD approved facility for recycling or disposal. In the case of an accidental discharge, risk to groundwater is expected to be minimal. Depth to groundwater in the area is greater than 50 feet and the Total Dissolved Solids concentration of the groundwater is expected to be between 200 and 20,000 parts per million.

Comments or inquiries regarding this permit renewal application may be directed to:

Director of the Oil Conservation Division
1220 South Saint Francis Drive
Santa Fe, New Mexico 87505
(505) 476-3440

Please refer to the company and site name in this notice when making inquiries since the NMOCD may not have received the application at the time of this notice.

ENTERPRISE FIELD SERVICES, LLC
HART CANYON NO. 3 COMPRESSION STATION:
DISCHARGE PLAN RENEWAL, GW-188-3

(Addendum to 3B-1 Discharge Plan GW-188)

Revised May 2005

Prepared for:

NEW MEXICO OIL CONSERVATION DIVISION

1220 South Saint Francis Drive

Santa Fe, New Mexico 87505

Enterprise Products Operating L.P.
P. O. Box 4324
Houston, Texas 77210-4324

Table of Contents

ITEM 1: TYPE OF OPERATION.....	1
ITEM 2: OPERATOR/LEGALLY RESPONSIBLE PARTY AND LOCAL REPRESENTATIVE.....	1
ITEM 3: LOCATION OF FACILITY AND LANDOWNER	2
ITEM 4: LANDOWNER	2
ITEM 5: FACILITY DESCRIPTION	2
ITEM 6: MATERIALS STORED AND USED	2
ITEM 7: SOURCES AND QUANTITIES OF EFFLUENT AND WASTE SOLIDS.....	4
ITEM 8: LIQUID AND SOLID WASTE COLLECTION, STORAGE, AND DISPOSAL.....	5
ITEM 9: PROPOSED MODIFICATIONS	5
ITEM 10: INSPECTION, MAINTENANCE, AND REPORTING.....	5
ITEM 11: SPILL PREVENTION AND REPORTING PROCEDURES	6
ITEM 12: SITE CHARACTERISTICS	6
ITEM 13: OTHER COMPLIANCE INFORMATION	6

Item 1: Type of Operation

Indicate the major operational purpose of the facility. If the facility is a compressor station, include the total combined site rated horsepower.

The Hart Canyon #3 Compressor Station compresses low-pressure gas from San Juan Field lines to a 16-inch line. Enterprise Field Services, LLC (EFS) is the owner and Enterprise Products Operating, L.P. (EPOLP) is the operator of the compressor facility. The total site rated horsepower is 1020.

The site includes the following equipment:

- One gas compressor suction scrubber
- One engine-driven compressor (site rated at 1020 HP)
- One fuel gas filter/separator
- One 200-gal lube oil tank
- One 500-gal lube oil tank
- One 500-gal ethylene glycol tank
- One 500-gal methanol tank
- One 450-bbl hydrocarbon condensate/produced water tank (exempt waste)
- One 24-bbl used oil tank (nonexempt waste)
- One 24-bbl wastewater tank (nonexempt waste)

EPOLP installs, maintains, and operates all the auxiliary equipment and tanks at the compressor station. EPOLP is responsible for hauling and disposing the waste oil, waste filters, wash down water, condensate, and field liquids.

Item 2: Operator/Legally Responsible Party and Local Representative

Name of operator or legally responsible party and local representative.

Legally Responsible Party:

Terry L. Hurlburt
Vice President & General Manager-Operations
Enterprise Products Operating, L.P.
P.O. Box 4324
Houston, TX 77210-4324
(713) 803-8298

Local Representative:

Joe Velasquez
Director, San Juan Operations
Enterprise Products Operating L.P.
614 Reilly Ave.
Farmington, NM 87401
(505) 599-2200
24 hour – (800) 203-1347

Station Operator:

Enterprise Products Operating, L.P.
P.O. Box 4324
Houston, Texas 77210
(713) 880-6595

Item 3: Location of Facility and Landowner

Give a legal description of the location and county. Attach a large-scale topographic map.

The compressor station is located in the NE ¼ of Sec. 8, T-31-N, R-9-W, San Juan County, New Mexico, upstream from the 3B-1 Compressor Site. The site is approximately 12 miles northeast of Aztec, New Mexico.

The NMOCD has a topographic map of the site in their Hart Canyon #3 file. The topographic map is found in Tab A of the Revised May 1996 Discharge Plan (GW-188-3) for this site.

Item 4: Landowner

Provide the name, telephone number and the landowner of the facility.

United States Government
Department of the Interior
Bureau of Land Management
1235 La Plata Highway
Farmington, NM 87401
505-599-8900

Item 5: Facility Description

Provide a description of the facility with a diagram indicating location of fences, pits, dikes, and tanks on the facility.

Tab B of the Revised May 1996 Discharge Plan (GW-188-3) contains a plot plan, which shows the locations of fences, gates, foundations, tanks, and equipment. The facility layout has not changed significantly since that plot plan was produced.

Plate 1 of the Revised Plan GW-188-1 dated July 26, 2000 is a process flow diagram of the natural gas and wastewater streams.

Natural gas enters the site from the San Juan Field lines via both underground and aboveground piping. The gas passes through the compressor scrubber, where liquids are removed from the natural gas, and the compressor, where the gas pressure is increased. The gas is then transferred to the 16-inch line.

Item 6: Materials Stored and Used

Provide a description of all materials stored and used at the facility

Two single-wall welded-steel tanks are used to store lube oil. These tanks are a 200-gallon tank mounted above the compressor, and a 500-gallon (make-up oil) tank next to the compressor skid.

Five-hundred-gallon aboveground storage tanks (ASTs) are used to store methanol and ethylene glycol (Table 1).

Table 1. Raw materials stored and used on site.

Tank Contents	Type of Tank	Tank Capacity (gallons)
Lube Oil	Single-wall welded-steel AST	200
Lube Oil	Single-wall welded-steel AST	500
Ethylene glycol	AST	500
Methanol	AST	500

There is no chemical or drum storage area. Drums used to collect engine-cooling water or waste oil are removed from the site at the end of each working day.

Used oil from the compressor engine is transported to the Kutz Separator facility (Discharge Plan # GW-049-1) or temporarily stored in a 24-bbl AST.

Liquid hydrocarbon condensate and produced water from the inlet scrubber and fuel/gas filter separator are temporarily stored in a 450-bbl tank. Wastewater and precipitation from the compressor is temporarily stored in a 24-bbl tank (Table 2).

Table 2. Liquid Waste Storage Before Offsite Disposal.

Tanks Contents	Type of Tank	Tank Capacity (bbl)
Hydrocarbon condensate and produced water	Single-wall welded-steel AST	450
Wash water and precipitation	Double-wall welded-steel partially below-grade tank	24
Waste Oil	Single-wall welded-steel AST	24

Item 7: Sources and Quantities of Effluent and Waste Solids

Provide a description of present sources of effluent and waste solids. Average quality and volume of wastewater must be included.

Plate 1 of the Revised Plan GW-188-1 dated July 26, 2000 provides a visual representation of wastewater generation, storage, and disposition at the site. The facility process has not changed significantly since that plate was produced.

The exempt waste stream consists of condensate and produced water from the scrubber and fuel/gas filter separator. The exempt waste stream flows from these sources under pressure to a 450-bbl AST. The scrubber generates approximately 10 bbl of condensate and produced water per month. The exempt waste from the fuel/gas filter separator is minimal (Table 3).

The nonexempt waste stream consists of water, oil, coolant, and soaps generated by precipitation and compressor wash down. The wastewater is captured on the compressor skid and drains to a 24-bbl partially below-grade tank. EPOLP generates approximately 6-bbl of nonexempt wastewater per month (Table 3).

Table 3. Source, Quantity, and Disposition of Wastewater.

Source	Characteristics	Exempt or Nonexempt	Quantity (bbl/month)	Temporary Storage Unit
Scrubbers	Condensate and produced water	Exempt	10	450-bbl tank
Fuel/gas filter separator	Condensate and produced water	Exempt	<0.1	450-bbl tank
Compressor (storm water)	Water, oil and coolant	Nonexempt	2.5	24-bbl tank
Compressor (wash)	Water, oil, coolant and soap	Nonexempt	3.5	24-bbl tank

Oil filters and fuel filters are the only solid wastes generated at the site. EPOLP replaces approximately one compressor oil filter and three compressor-engine oil filters every two months. Fuel/gas separator filters are replaced as needed. The filters are disposed of in the Crouch Mesa Landfill (Table 4).

Table 4. Source, Quantity, and Disposition of Used Filters.

Source/Type	Type	Filters/2 mos.	Disposal
Compressor	oil	1	Crouch Mesa Landfill
Compressor engine	oil	3	Crouch Mesa Landfill
Fuel/gas filter separator	fuel	As needed	Crouch Mesa Landfill

Item 8: Liquid and Solid Waste Collection, Storage, and Disposal

Provide a description of current liquid and solid waste collection/treatment/disposal procedures.

EPOLP performs no on-site disposal. EPOLP transports all wastewater and waste solids to off-site disposal facilities.

As reflected in Item 7 (above), condensate and produced water from the scrubber drain via pressurized underground lines to a 450-bbl tank for exempt waste. Precipitation and wash water from the compressor skid drain via gravity flow to a 24-bbl tank for nonexempt wastewater.

The hydrocarbon fraction from the 450-bbl condensate and produced-water tank is transported to the Giant Refinery in Bloomfield, NM for recycling. Triple S Trucking Company of Aztec and/or Industrial Mechanical Inc. of Farmington take the water fraction of the exempt waste to the Kutz Separator facility (Discharge Plan # GW-049-1) for additional hydrocarbon recovery and separation. Non-exempt wastewater from wash downs and rainwater events will also be transported to the Kutz Separator.

Oil and fuel filters are disposed of in the Crouch Mesa Landfill. EPOLP generates no other solid wastes. The compressor station is unmanned and does not generate domestic or any hazardous solid wastes.

Item 9: Proposed Modifications

Provide a description of proposed modifications to existing collection, treatment, and disposal systems.

As part of the current San Juan Optimization Project, Hart Canyon #3 will be taken out of service, dismantled, and certain equipment relocated to a new compressor facility, the Wright compressor station, prior to the end of 2005. It is expected the existing Hart Canyon #3 compressor station will still be operational after the current discharge plan expiration of August 2005, and therefore, this plan is being submitted for renewal. A discharge plan for the new Wright compressor station will be submitted for approval before being placed in service.

Item 10: Inspection, Maintenance, and Reporting

Provide a routine inspection and maintenance plan to ensure permit compliance

All material storage tanks are within berms that contain a volume one-third more than the tank contents. All ASTs are on gravel pads or placed on an elevated stand so leaks can be visually detected.

EPOLP employees visit the site on a regular basis. The compressor, all related equipment, the storage tanks, and berms are inspected for leaks and spills.

All underground piping carrying waste liquids are hydrostatically tested at a minimum of three pounds over operating pressure for a minimum of four hours every five years.

Item 11: Spill Prevention and Reporting Procedures

See Discharge Plan #GW-188 (3B-1 Compressor Station), Item XI

Item 12: Site Characteristics

See Discharge Plan #GW-188 (3B-1 Compressor Station), Item XII

Item 13: Other Compliance Information

Provide a facility closure plan and other information as is necessary to demonstrate compliance with any other OCD rules, regulations, and orders.

EPOLP will take all reasonable and necessary measures to prevent exceeding New Mexico water quality standards (20 NMAC 6.2.3103) should they choose to permanently close the facility. Closure measures will include removal or closure in place of all underground piping and equipment. All tanks will be emptied. No potentially toxic materials or effluents will remain on site. All potential sources of toxic pollutants will be inspected. If contaminated soil is discovered, all necessary reporting under NMOCD Rule 116 and 20 NMAC 6.2.1203 will be made and clean-up activities will commence. Post-closure maintenance and monitoring plans would not be necessary unless contamination is encountered.



Enterprise Products Operating, LP
614 Reilly Avenue
Farmington, NM 87401

RECEIVED

DEC 15 2004

OIL CONSERVATION
DIVISION

Mr. Roger Anderson
New Mexico Oil Conservation Division
1220 S. St. Francis
Santa Fe, NM 87505

RE: Change of Ownership

Dear Roger:

This is to notify you of the change of ownership for the El Paso Field Services Co. facilities in the San Juan Basin area, in and near Farmington, NM. A list of the effected facilities, along with the Discharge Permit numbers, is attached. These plants and compressor stations are now owned by GulfTerra Energy Partners, L.P. ("GulfTerra"). GulfTerra is no longer affiliated with El Paso Corp.. It is now a subsidiary of Enterprise Products Partners, L.P. ("Enterprise"). All the GulfTerra facilities are operated by Enterprise Products Operating, L.P.

All local contact information as listed in the Discharge Plans is still current. However, Mr. E. Randal West is no longer the Responsible Party for the facilities. The new Legally Responsible Party for all the GulfTerra/Enterprise locations is:

Mr. Terry Hurlburt
Vice President
Enterprise Products Operating, L.P.
2727 North Loop West
Houston, TX 77008.

If you need any additional information regarding the change of ownership, please call me at (505) 599-2256.

Sincerely yours,

David Bays, REM
Principal Environmental Scientist

Cc: Mr. Denny Foust – NMOCD – Aztec, NM

New Mexico Discharge Permit Numbers

Permit Number	Facility Name
GW-189	Angel Peak Plant
GW-212	Ballard Plant
GW-049	Blanco Plant
GW-71	Chaco Plant
GW-186	Kutz Plant
GW-049-1	Kutz Separator
GW-188-1	Hart Canyon #1 Station
GW0188-2	Hart Canyon #2 Station
GW-188-3	Hart Canyon #3 Station
GW-211	Largo Plant
GW-209	Lindrith Plant
GW-301	Manzanares Station
GW-298	Martinez Canyon Station
GW-303	Navajo City Station
GW-302	Potter Canyon Station
Gw-317	Rattlesnake Plant
GW-304	Turley Station
GW-153	2B-3A Station
GW-154	2B-3B Station
GW-188	3B-1 Station

Martin, Ed

From: Martin, Ed
Sent: Thursday, March 01, 2001 10:49 AM
To: 'David Bays'
Subject: Discharge Plans and General Info.

Just a reminder that the following facilities' discharge plans will need to be renewed this year:

- GW-232 Trunk A Compressor expired 2/5/2001
- GW-071-1 Ballard Hydrocarbon Recovery Unit expires 5/9/2001
- GW-049-1 Kutz Recovery Unit expires 6/17/2001
- GW-242 Burton Flats South Compressor expires 8/9/2001

This is a 95 hp compressor in Eddy County operated or formerly operated by Compressor Systems, Inc.

GW-241 Burton Flats North Compressor expires 8/9/2001

This is an 810 hp compressor in Eddy County operated or formerly operated by Compressor Systems, Inc.

GW-247 Whiting Compressor Station expires 9/5/2001

GW-246 Axis #2 Compressor Station expires 9/5/2001

GW-265 Texaco Bilbrey expires 11/25/2001

This is a compressor station in Lea County. Last renewal for this facility was signed by Sandra Miller.

GW-267 Bass James Compressor Station expires 12/10/2001

This is a compressor station in Eddy County. Last renewal for this facility was signed by Sandra Miller.

Also, please send me documentation as to the operational changes that will be made to improve housekeeping at the following facilities:

- GW-212 Ballard Compressor Station
- GW-189 Angel Peak Compressor Station
- GW-186 Kutz 2 Compressor Station
- GW-188-1 Hart Canyon #1 Compressor Station
- GW-188 3B-1 Compressor Station
- GW-188-2 Hart Canyon #2 Compressor Station
- GW-188-3 Hart Canyon #3 Compressor Station

NOTICE OF PUBLICATION

STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION

Notice is hereby given that pursuant to New Mexico Water Quality Control Commission Regulations, the following discharge plan application has been submitted to the Director of the Oil Conservation Division, 2040 South Pacheco, Santa Fe, New Mexico 87505, Telephone (505) 827-7131:

(GW-188-1) El Paso Field Services Company, Mr. David Bays, Senior Environmental Scientist, 614 Reilly Avenue, Farmington, New Mexico 87401, has submitted a renewal application for the previously approved discharge plan for their Hart Canyon #1 facility, located in the NE/4 of Section 29, Township 31 North, Range 10 West, NMPM, San Juan County, New Mexico. The total discharge will be about 552 gallons/day. This fluid will consist of oil and water and will be discharged to closed top storage tanks on site. Hydrocarbons will be separated from the water and recycled. The wastewater will then be disposed of by evaporation at an approved OCD facility. Groundwater most likely to be affected by a spill, leak or accidental discharge to the surface is at a depth of approximately 60 feet with a total dissolved solids concentration of approximately 1,500 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.

(GW-188-2) El Paso Field Services Company, Mr. David Bays, Senior Environmental Scientist, 614 Reilly Avenue, Farmington, New Mexico 87401, has submitted a renewal application for the previously approved discharge plan for their Hart Canyon #2 facility, located in the SE/4 of Section 29, Township 30 North, Range 9 West, NMPM, San Juan County, New Mexico. The total discharge will be about 552 gallons/day. This fluid will consist of oil and water and will be discharged to closed top storage tanks on site. Hydrocarbons will be separated from the water and recycled. The wastewater will then be disposed of by evaporation at an approval OCD facility. Groundwater most likely to be affected by a spill, leak or concentration of approximately 1,500 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.

(GW-188-3) El Paso Field Services Company, Mr. David Bays, Senior Environmental Scientist, 614 Reilly Avenue, Farmington, New Mexico 87401, has submitted a renewal application for the previously approved discharge plan for their Hart Canyon #3 facility, located in the NW/4 of Section 8, Township 31 North, Range 9 West, NMPM, San Juan County, New Mexico. The total discharge will be about 552 gallons/day. This fluid will consist of oil and water and will be discharged to closed top storage tanks on site. Hydrocarbons will be separated from the water and recycled. The wastewater will then be disposed by evaporation at an approval OCD facility. Groundwater most likely to be affected by a spill, leak or accidental discharge to the surface is at a depth of approximately 50 feet with with a total dissolved solids concentration of approximately 1,500 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.

Any interested person may obtain further information from the Oil Conservation Division and may submit written comments to the Director of the Oil Conservation Division at the address given above. The discharge plan application may be viewed at the above address between 8:00 a.m. and 4:00 p.m., Monday through Friday. Prior to ruling on any proposed discharge plan or its modification, the Director of the Oil Conservation Division shall allow at least thirty (30) days after the date of publication of this notice during which comments may be submitted to him and a public hearing may be requested by any interested person. Requests for a public hearing shall set for the reasons why a hearing should be held. A hearing will be held if the Director determines there is significant public interest.

If no public hearing is held, the Director will approve or disapprove the proposed plan based on information available. If a public hearing is held, the director will approve or disapprove the proposed plan based on information in the plan and information submitted at the hearing.

GIVEN under the Seal of New Mexico Oil Conservation Commission at Santa Fe, New Mexico, on this 4th day of August 2000.

STATE OF NEW MEXICO
OIL CONSERVATION DIVISION

/s/ Roger Cullander
Roger Cullander
for LORI WROTENBERY, Director

S E A L

Legal No. 43211 published in The Daily Times, Farmington, New Mexico, Friday, August 11, 2000.

THE SANTA FE
NEW MEXICAN
Founded 1849

AUG 11 2000

NM OIL CONSERVATION DIVISION
ATTN: DONNA DOMINGUEZ
2040 S. PACHECO ST.
SANTA FE, NM 87504-0276

AD NUMBER: 164434 ACCOUNT: 56689
LEGAL NO: 67886 P.O.#: 00199000278
322 LINES 1 time(s) at \$ 141.94
AFFIDAVITS: 5.25
TAX: 9.20
TOTAL: 156.39

AFFIDAVIT OF PUBLICATION

STATE OF NEW MEXICO
COUNTY OF SANTA FE

I, B. Runn being first duly sworn declare and say that I am Legal Advertising Representative of THE SANTA FE NEW MEXICAN, a daily newspaper published in the English language, and having a general circulation in the Counties of Santa Fe and Los Alamos, State of New Mexico and being a Newspaper duly qualified to publish legal notices and advertisements under the provisions of Chapter 167 on Session Laws of 1937; that the publication #67886 a copy of which is hereto attached was published in said newspaper 1 day(s) between 08/10/2000 and 08/10/2000 and that the notice was published in the newspaper proper and not in any supplement; the first publication being on the 10 day of August, 2000 and that the undersigned has personal knowledge of the matter and things set forth in this affidavit.

/s/ Betsy Runn
LEGAL ADVERTISEMENT REPRESENTATIVE

Subscribed and sworn to before me on this
10 day of August A.D., 2000

Notary Laura E. Harding
Commission Expires 11/23/03

NOTICE OF PUBLICATION

**STATE OF NEW MEXICO
ENERGY, MINERALS AND
NATURAL RESOURCES
DEPARTMENT
OIL CONSERVATION
DIVISION**

Notice is hereby given that pursuant to New Mexico Water Quality Control Commission Regulations, the following discharge plan application has been submitted to the Director of the Oil Conservation Division, 2040 South Pacheco, Santa Fe, New Mexico 87505, Telephone (505) 827-7131.

(GW-188-1) El Paso Field Services Company, Mr. David Bays, Senior Environmental Scientist, 614 Reilly Avenue, Farmington, New Mexico 87401, has submitted a renewal application for the previously approved discharge plan for their Hart Canyon #1 facility, located in the NE/4 of Section 29, Township 31 North, Range 10 West, NMPM, San Juan County, New Mexico. The total discharge will be about 552 gallons/day. This fluid will consist of oil and water and will be discharged to closed top storage tanks on site. Hydrocarbons will be separated from the water and recycled. The wastewater will then be disposed of by evaporation at an approved OCD facility. Groundwater most likely to be affected by a spill, leak or accidental discharge to the surface is at a depth of approximately 50 feet with a total dissolved solids concentration of approximately 1,500 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.

(GW-188-2) El Paso Field Services Company, Mr.

David Bays, Senior Environmental Scientist, 614 Reilly Avenue, Farmington, New Mexico 87401, has submitted a renewal application for the previously approved discharge plan for their Hart Canyon #2 facility, located in the SE/4 of Section 29, Township 30 North, Range 9 West, NMPM, San Juan County, New Mexico. The total discharge will be about 552 gallons/day. This fluid will consist of oil and water and will be discharged to closed top storage

tanks on site. Hydrocarbons will be separated from the water and recycled. The wastewater will then be disposed of by evaporation at an approved OCD facility. Groundwater most likely to be affected by a spill, leak or accidental discharge to the surface is at a depth of approximately 50 feet with a total dissolved solids concentration of approximately 1,500 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.

(GW-188-3) El Paso Field Services Company, Mr. David Bays, Senior Environmental Scientist, 614 Reilly Avenue, Farmington, New Mexico 87401, has submitted a renewal application for the previously approved discharge plan for their Hart Canyon #3 facility, located in the NW/4 of Section 8, Township 31 North, Range 9 West, NMPM, San Juan County, New Mexico. The total discharge will be about 552 gallons/day. This fluid will consist of oil and water and will be discharged to closed top storage tanks on site. Hydrocarbons will be separated from the water and recycled.

The wastewater will

then be disposed of by evaporation at an approved OCD facility. Groundwater most likely to be affected by a spill, leak or accidental discharge to the surface is at a depth of approximately 50 feet with a total dissolved solids concentration of approximately 1,500 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.

Any interested person may obtain further information from the Oil Conservation Division and may submit written comments to the Director of the Oil Conservation Division at the address given above. The discharge plan application may be viewed at the above address between 8:00 a.m. and 4:00 p.m. Monday through Friday. Prior to ruling on any proposed discharge plan or its modification, the Director of the Oil Conservation Division shall allow at least thirty (30) days after the date of publication of this notice during which comments may be submitted to him and public hearing may be requested by any interested person. Requests for public hearing shall set forth the reasons why a hearing shall be held. A hearing will be held if the Director determines there is significant public interest. If no hearing is held, the Director will approve or disapprove the plan based on the information available. If a public hearing is held, the Director will approve the plan based on the information in the plan and information presented at the hearing.

GIVEN under the Seal of New Mexico Conservation Commission at Santa Fe, New Mexico, on this 4th day of August, 2000.

STATE OF NEW MEXICO
OIL CONSERVATION
DIVISION
LORI WROTENBERY,
Director

Legal #67886
Pub. August 10, 2000



NEW MEXICO ENERGY, MINERALS and NATURAL RESOURCES DEPARTMENT

GARY E. JOHNSON
Governor
Jennifer A. Salisbury
Cabinet Secretary

Lori Wrotenbery
Director
Oil Conservation Division

NOTICE OF PUBLICATION

STATE OF NEW MEXICO ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT OIL CONSERVATION DIVISION

Notice is hereby given that pursuant to New Mexico Water Quality Control Commission Regulations, the following discharge plan application has been submitted to the Director of the Oil Conservation Division, 2040 South Pacheco, Santa Fe, New Mexico 87505, Telephone (505) 827-7131:

(GW-188-1) El Paso Field Services Company, Mr. David Bays, Senior Environmental Scientist, 614 Reilly Avenue, Farmington, New Mexico 87401, has submitted a renewal application for the previously approved discharge plan for their Hart Canyon #1 facility, located in the NE/4 of Section 29, Township 31 North, Range 10 West, NMPM, San Juan County, New Mexico. The total discharge will be about 552 gallons/day. This fluid will consist of oil and water and will be discharged to closed top storage tanks on site. Hydrocarbons will be separated from the water and recycled. The wastewater will then be disposed of by evaporation at an approved OCD facility. Groundwater most likely to be affected by a spill, leak or accidental discharge to the surface is at a depth of approximately 50 feet with a total dissolved solids concentration of approximately 1,500 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.

(GW-188-2) El Paso Field Services Company, Mr. David Bays, Senior Environmental Scientist, 614 Reilly Avenue, Farmington, New Mexico 87401, has submitted a renewal application for the previously approved discharge plan for their Hart Canyon #2 facility, located in the SE/4 of Section 29, Township 30 North, Range 9 West, NMPM, San Juan County, New Mexico. The total discharge will be about 552 gallons/day. This fluid will consist of oil and water and will be discharged to closed top storage tanks on site. Hydrocarbons will be separated from the water and recycled. The wastewater will then be disposed of by evaporation at an approved OCD facility. Groundwater most likely to be affected by a spill, leak or accidental discharge to the surface is at a depth of approximately 50 feet with a total dissolved solids concentration of approximately 1,500 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.


✓ (GW-188-3) El Paso Field Services Company, Mr. David Bays, Senior Environmental Scientist, 614 Reilly Avenue, Farmington, New Mexico 87401, has submitted a renewal application for the previously approved discharge plan for their Hart Canyon #3 facility, located in the NW/4 of Section 8, Township 31 North, Range 9 West, NMPM, San Juan County, New Mexico. The total discharge will be about 552 gallons/day. This fluid will consist of oil and water and will be discharged to closed top storage tanks on site. Hydrocarbons will be separated from the water and recycled. The wastewater will then be disposed of by evaporation at an approved OCD facility. Groundwater most likely to be affected by a spill, leak or accidental discharge to the surface is at a depth of approximately 50 feet with a total dissolved solids concentration of approximately 1,500 mg/l. The discharge plan addresses how spills, leaks and other accidental discharges to the surface will be managed.

Any interested person may obtain further information from the Oil Conservation Division and may submit written comments to the Director of the Oil Conservation Division at the address given above. The discharge plan application may be viewed at the above address between 8:00 a.m. and 4:00 p.m., Monday through Friday. Prior to ruling on any proposed discharge plan or its modification, the Director of the Oil Conservation Division shall allow at least thirty (30) days after the date of publication of this notice during which comments may be submitted to him and a public hearing may be requested by any interested person. Requests for a public hearing shall set forth the reasons why a hearing should be held. A hearing will be held if the Director determines there is significant public interest.

If no public hearing is held, the Director will approve or disapprove the proposed plan based on information available. If a public hearing is held, the director will approve or disapprove the proposed plan based on information in the plan and information submitted at the hearing.

GIVEN under the Seal of New Mexico Oil Conservation Commission at Santa Fe, New Mexico, on this *4th day of August 2000*.

STATE OF NEW MEXICO
OIL CONSERVATION DIVISION

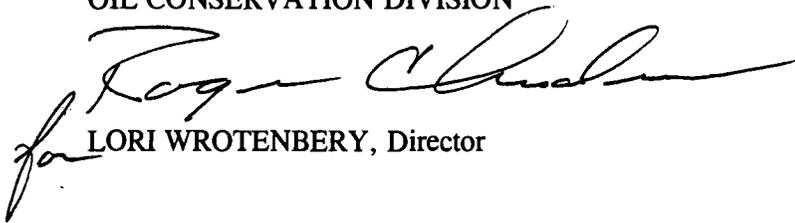

LORI WROTENBERY, Director

SEAL



NEW MEXICO ENERGY, MINERALS and NATURAL RESOURCES DEPARTMENT

GARY E. JOHNSON
Governor
Jennifer A. Salisbury
Cabinet Secretary

Lori Wrotenbery
Director
Oil Conservation Division

August 4, 2000

Mr. David Bays, REM
El Paso Field Services
614 Reilly Avenue
Farmington, New Mexico 87401

Dear Mr. Bays:

We have received discharge plan renewals for the following:

GW-188-1	Hart Canyon No. 1 Compressor Station
GW-188-2	Hart Canyon No. 2 Compressor Station
GW-188-3	Hart Canyon No. 3 Compressor Station

All appears to be in order and we are in the process of posting public notices concerning the renewal request.

We have not received any of the fees associated with these renewals. Fees due and payable prior to approval are:

GW-188-1	Filing fee of \$50.00 and flat fee of \$690.00
GW-188-2	Filing fee of \$50.00 and flat fee of \$690.00
✓GW-188-3	Filing fee of \$50.00 and flat fee of \$345.00

If you have any questions please do not hesitate to call me in Santa Fe at 827-7151.

Sincerely,

Ed Martin
Environmental Bureau

GW-188-3

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 South First, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
2040 South Pacheco, Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources
Oil Conservation Division
2040 South Pacheco
Santa Fe, NM 87505

Revised March 17, 1999
Submit Original
Plus 1 Copy
to Santa Fe
1 Copy to Appropriate
District Office

**DISCHARGE PLAN APPLICATION FOR SERVICE COMPANIES, GAS PLANTS,
REFINERIES, COMPRESSOR, AND CRUDE OIL PUMP STATIONS**
(Refer to the OCD Guidelines for assistance in completing the application)

New Renewal Modification

1. Type: Compressor Station (Hart Canyon #3), site rated horse power is 1020.

2. Operator: El Paso Field Services, Farmington, NM 87401

Address: 614 Reilly Ave., Farmington, NM 87401

Contact Person: Joe Velasques Phone: (505)-599-2219

3. Location: NE/4 Section 8 Township 31 Range 9
Submit large scale topographic map showing exact location.

4. Attach the name, telephone number and address of the landowner of the facility site.
See revised Discharge Plan GW-188-3

5. Attach the description of the facility with a diagram indicating location of fences, pits, dikes and tanks on the facility.
See revised Discharge Plan GW-188-3

6. Attach a description of all materials stored or used at the facility.
See revised Discharge Plan GW-188-3

7. Attach a description of present sources of effluent and waste solids. Average quality and daily volume of waste water must be included. **See revised Discharge Plan GW-188-3**

8. Attach a description of current liquid and solid waste collection/treatment/disposal procedures.
See revised Discharge Plan GW-188-3

9. Attach a description of proposed modifications to existing collection/treatment/disposal systems.
See revised Discharge Plan GW-188-3

10. Attach a routine inspection and maintenance plan to ensure permit compliance.
See revised Discharge Plan GW-188-3

11. Attach a contingency plan for reporting and clean-up of spills or releases.
See revised Discharge Plan GW-188-3

12. Attach geological/hydrological information for the facility. Depth to and quality of ground water must be included. **See revised Discharge Plan GW-188-3**
13. Attach a facility closure plan, and other information as is necessary to demonstrate compliance with any other OCD rules, regulations and/or orders. **See revised Discharge Plan GW-188-3**
14. CERTIFICATION I hereby certify that the information submitted with this application is true and correct to the best of my knowledge and belief.

Name: **See revised Discharge Plan GW-188-3**

Title: _____

Signature: _____

Date: _____

R.T. HICKS CONSULTANTS, LTD.

4665 Indian School NE

Suite 106

Albuquerque, NM 87110

505.266.5004

Fax: 505.266.7738

July 27, 2000

Mr. Jack Ford
New Mexico Oil Conservation Division
2040 South Pacheco
Santa Fe, New Mexico 87505


RE: Hart Canyon #3 Compressor Station

Dear Mr. Ford:

On behalf of El Paso Field Services (EPFS), R. T. Hicks Consultants is pleased to submit this revised Discharge Plan for the Hart Canyon #3 Compressor Station. This compressor station provides compression for natural gas lines in San Juan County, New Mexico.

The revised Discharge Plan describes the procedures EPFS will follow in order to manage waste at the compressor station. The format of the document follows that of a Discharge Application form.

Sincerely,
R. T. Hicks Consultants Ltd.



John Ayarbe
Hydrogeologist

Atch:
Discharge Plan, Discharge Plan Application

Cc:
David Bays (EPFS), Denny Foust (NMOCD, District III)

EL PASO NATURAL GAS COMPANY HART
CANYON NO. 3 COMPRESSION STATION:
DISCHARGE PLAN RENEWAL, GW-188-3

(Addendum to 3B-1 Discharge Plan GW-188)

Revised July 2000

Prepared for:

NEW MEXICO OIL CONSERVATION DIVISION

2040 S. Pacheco

Santa Fe, New Mexico 87505

El Paso Natural Gas Company
1001 Louisiana Street
Houston, Texas 77002
(713) 757-2131

Table of Contents

ITEM 1: TYPE OF OPERATION.....	1
ITEM 2: OPERATOR/LEGALLY RESPONSIBLE PARTY AND LOCAL REPRESENTATIVE.....	1
ITEM 3: LOCATION OF FACILITY AND LANDOWNER.....	2
ITEM 4: LANDOWNER.....	2
ITEM 5: FACILITY DESCRIPTION.....	2
ITEM 6: MATERIALS STORED AND USED	3
ITEM 7: SOURCES AND QUANTITIES OF EFFLUENT AND WASTE SOLIDS	4
ITEM 8: LIQUID AND SOLID WASTE COLLECTION, STORAGE, AND DISPOSAL.....	5
ITEM 9: PROPOSED MODIFICATIONS.....	5
ITEM 10: INSPECTION, MAINTENANCE, AND REPORTING.....	5
ITEM 11: SPILL PREVENTION AND REPORTING PROCEDURES	6
ITEM 12: SITE CHARACTERISTICS.....	6
ITEM 13: OTHER COMPLIANCE INFORMATION	6

Item 1: Type of Operation

Indicate the major operational purpose of the facility. If the facility is a compressor station, include the total combined site rated horsepower.

The Hart Canyon #3 Compressor Station compresses low-pressure gas from San Juan Field lines to a 16-inch line. El Paso Field Services Company (EPFS) is the owner and operator of the compressor facility. The total combined site rated horsepower 1020.

The site includes the following equipment:

- One gas compressor suction scrubber
- One engine-driven compressor (site rated at 1020 HP)
- One fuel gas filter/separator
- One 200-gal lube oil tank
- One 500-gal lube oil tank
- One 500-gal ethylene glycol tank
- One 500-gal methanol tank
- One 450-bbl hydrocarbon condensate/produced water tank (exempt waste)
- One 24-bbl used oil tank (nonexempt waste)
- One 24-bbl wastewater tank (nonexempt waste)

EPFS installs, maintains, and operates all the auxiliary equipment and tanks at the compressor station. EPFS is responsible for hauling and disposing the waste oil, waste filters, wash down water, condensate, and field liquids.

Item 2: Operator/Legally Responsible Party and Local Representative

Name of operator or legally responsible party and local representative.

Legally Responsible Party:

Robert Cavner
El Paso Field Services
1001 Louisiana Street
Houston, TX 77002
(713) 757-2131

Local Representative:

Joe Velasquez
Manager, North Complex
El Paso Field Services
614 Reilly Ave.
Farmington, NM 87401
(505) 599-2219
24 hour – (800) 203-1347

Station Operator:

El Paso Field Services
614 Reilly Ave.
Farmington, New Mexico 87401
(505) 325-2841

Item 3: Location of Facility and Landowner

Give a legal description of the location and county. Attach a large-scale topographic map.

The compressor station is located in the NE ¼ of Sec. 8, T-31-N, R-9-W, San Juan County, New Mexico, upstream from the 3B-1 Compressor Site. The site is approximately 12 miles northeast of Aztec, New Mexico.

The NMOCD has a topographic map of the site in their Hart Canyon #3 file. The topographic map is found in Tab A of the Revised May 1996 Discharge Plan (GW-188-3) for this site.

Item 4: Landowner

Provide the name, telephone number and the landowner of the facility.

United States Government
Department of the Interior
Bureau of Land Management
1235 La Plata Highway
Farmington, NM 87401
505-599-8900

Item 5: Facility Description

Provide a description of the facility with a diagram indicating location of fences, pits, dikes, and tanks on the facility.

Tab B of the Revised May 1996 Discharge Plan (GW-188-3) contains a plot plan, which shows the locations of fences, gates, foundations, tanks, and equipment. The facility layout has not changed significantly since that plot plan was produced.

Plate 1 is a process flow diagram of the natural gas and wastewater streams.

Natural gas enters the site from the San Juan Field lines via both underground and aboveground piping. The gas passes through the compressor scrubber, where liquids are removed from the natural gas, and the compressor, where the gas pressure is increased. The gas is then transferred to the EPFS's 16-inch line.

Item 6: Materials Stored and Used

Provide a description of all materials stored and used at the facility

Two single-wall welded-steel tanks are used to store lube oil. These tanks are a 200-gallon tank mounted above the compressor, and a 500-gallon (make-up oil) tank next to the compressor skid. Five-hundred-gallon aboveground storage tanks (ASTs) are used to store methanol and ethylene glycol (Table 1).

Table 1. Raw materials stored and used on site.

Tank Contents	Type of Tank	Tank Capacity (gallons)
Lube Oil	Single-wall welded-steel AST	200
Lube Oil	Single-wall welded-steel AST	500
Ethylene glycol	AST	500
Methanol	AST	500

There is no chemical or drum storage area. Drums used to collect engine-cooling water or waste oil are removed from the site at the end of each working day.

Used oil from the compressor engine is temporarily stored in a 24-bbl AST.

Liquid hydrocarbon condensate and produced water from the inlet scrubber and fuel/gas filter separator are temporarily stored in a 450-bbl tank. Wastewater and precipitation from the compressor is temporarily stored in a 24-bbl tank (Table 2).

Table 2. Liquid Waste Storage Before Offsite Disposal.

Tanks Contents	Type of Tank	Tank Capacity (bbl)
Hydrocarbon condensate and produced water	Single-wall welded-steel AST	450
Wash water and precipitation	Double-wall welded-steel partially below-grade tank	24
Waste Oil	Single-wall welded-steel AST	24

Item 7: Sources and Quantities of Effluent and Waste Solids

Provide a description of present sources of effluent and waste solids. Average quality and volume of wastewater must be included.

Plate 1 provides a visual representation of wastewater generation and storage at the site.

The exempt waste stream consists of condensate and produced water from the scrubber and fuel/gas filter separator. The exempt waste stream flows from these sources under pressure to a 450-bbl AST. The scrubber generates approximately 10 bbl of condensate and produced water per month. The exempt waste from the fuel/gas filter separator is minimal (Table 3).

The nonexempt waste stream consists of water, oil, coolant, and soaps generated by precipitation and compressor wash down. The wastewater is captured on the compressor skid and drains to a 24-bbl partially below-grade tank. EPFS generates approximately 6-bbl of nonexempt wastewater per month (Table 3).

Table 3. Source, Quantity, and Disposition of Wastewater.

Source	Characteristics	Exempt or Nonexempt	Quantity (bbl/month)	Temporary Storage Unit
Scrubbers	Condensate and produced water	Exempt	10	450-bbl tank
Fuel/gas filter separator	Condensate and produced water	Exempt	< 0.1	450-bbl tank
Compressor (storm water)	Water, oil and coolant	Nonexempt	2.5	24-bbl tank
Compressor (wash)	Water, oil, coolant and soap	Nonexempt	3.5	24-bbl tank

Oil filters and fuel filters are the only solid wastes generated at the site. EPFS replaces approximately three compressor oil filters and one compressor-engine fuel filter each month. Fuel/gas separator filters are replaced as needed. The filters are disposed of in the Crouch Mesa Landfill (Table 4).

Table 4. Source, Quantity, and Disposition of Used Filters.

Source/Type	Type	Filters/mo.	Disposal
Compressor	oil	1	Crouch Mesa Landfill
Compressor engine	fuel	3	Crouch Mesa Landfill
Fuel/gas filter separator	fuel	As needed	Crouch Mesa Landfill

Item 8: Liquid and Solid Waste Collection, Storage, and Disposal

Provide a description of current liquid and solid waste collection/treatment/disposal procedures.

EPFS performs no on-site disposal. EPFS transports all wastewater and waste solids to off-site disposal facilities.

As reflected in Item 7 (above), condensate and produced water from the scrubber drain via pressurized underground lines to a 450-bbl tank for exempt waste. Precipitation and wash water from the compressor skid drain via gravity flow to a 24-bbl tank for nonexempt wastewater.

The hydrocarbon fraction from the 450-bbl condensate and produced-water tank is transported to the Giant Refinery in Bloomfield, NM for recycling. The Dawn Trucking Company of Farmington takes the water fraction of the exempt waste to the EPFS Kutz Separator facility (Discharge Plan # GW-049-1) for additional hydrocarbon recovery and separation.

Key Energy transports nonexempt wastewater to the Key Energy disposal facility. If needed, Three Rivers Trucking is used as an alternative transporter.

Oil and fuel filters are disposed of in the Crouch Mesa Landfill. EPFS generates no other solid wastes. The compressor station is unmanned and does not generate domestic or any hazardous solid wastes.

Item 9: Proposed Modifications

Provide a description of proposed modifications to existing collection, treatment, and disposal systems.

Currently, EPFS has no planned modifications for this site.

Item 10: Inspection, Maintenance, and Reporting

Provide a routine inspection and maintenance plan to ensure permit compliance

All material storage tanks are within berms that contain a volume one-third more than the tank contents. All ASTs are on gravel pads or placed on an elevated stand so leaks can be visually detected.

EPFS employees visit the site on a regular basis. The compressor, all related equipment, the storage tanks, and berms are inspected for leaks and spills.

All underground piping carrying waste liquids are hydrostatically tested at a minimum of three pounds over operating pressure for a minimum of four hours every five years.

Item 11: Spill Prevention and Reporting Procedures

See Discharge Plan #GW-188 (3B-1 Compressor Station), Item XI

Item 12: Site Characteristics

See Discharge Plan #GW-188 (3B-1 Compressor Station), Item XII


Item 13: Other Compliance Information

Provide a facility closure plan and other information as is necessary to demonstrate compliance with any other OCD rules, regulations, and orders.

EPFS will take all reasonable and necessary measures to prevent exceeding New Mexico water quality standards (20 NMAC 6.2.3103) should they choose to permanently close the facility. Closure measures will include removal or closure in place of all underground piping and equipment. All tanks will be emptied. No potentially toxic materials or effluents will remain on site. All potential sources of toxic pollutants will be inspected. If contaminated soil is discovered, all necessary reporting under NMOCD Rule 116 and 20 NMAC 6.2.1203 will be made and clean-up activities will commence. Post-closure maintenance and monitoring plans would not be necessary unless contamination is encountered.

Affirmation

I hereby certify that I am familiar with the information contained in and submitted with this discharge plan for the Hart Canyon #3 Compressor Station and that all information is true, accurate, and complete to the best of my knowledge and belief.



David Bays, REM
Principal Environmental Scientist

Date: July 5, 2000

PLATES

Hart Canyon #3: Compressor with Suction Scrubber

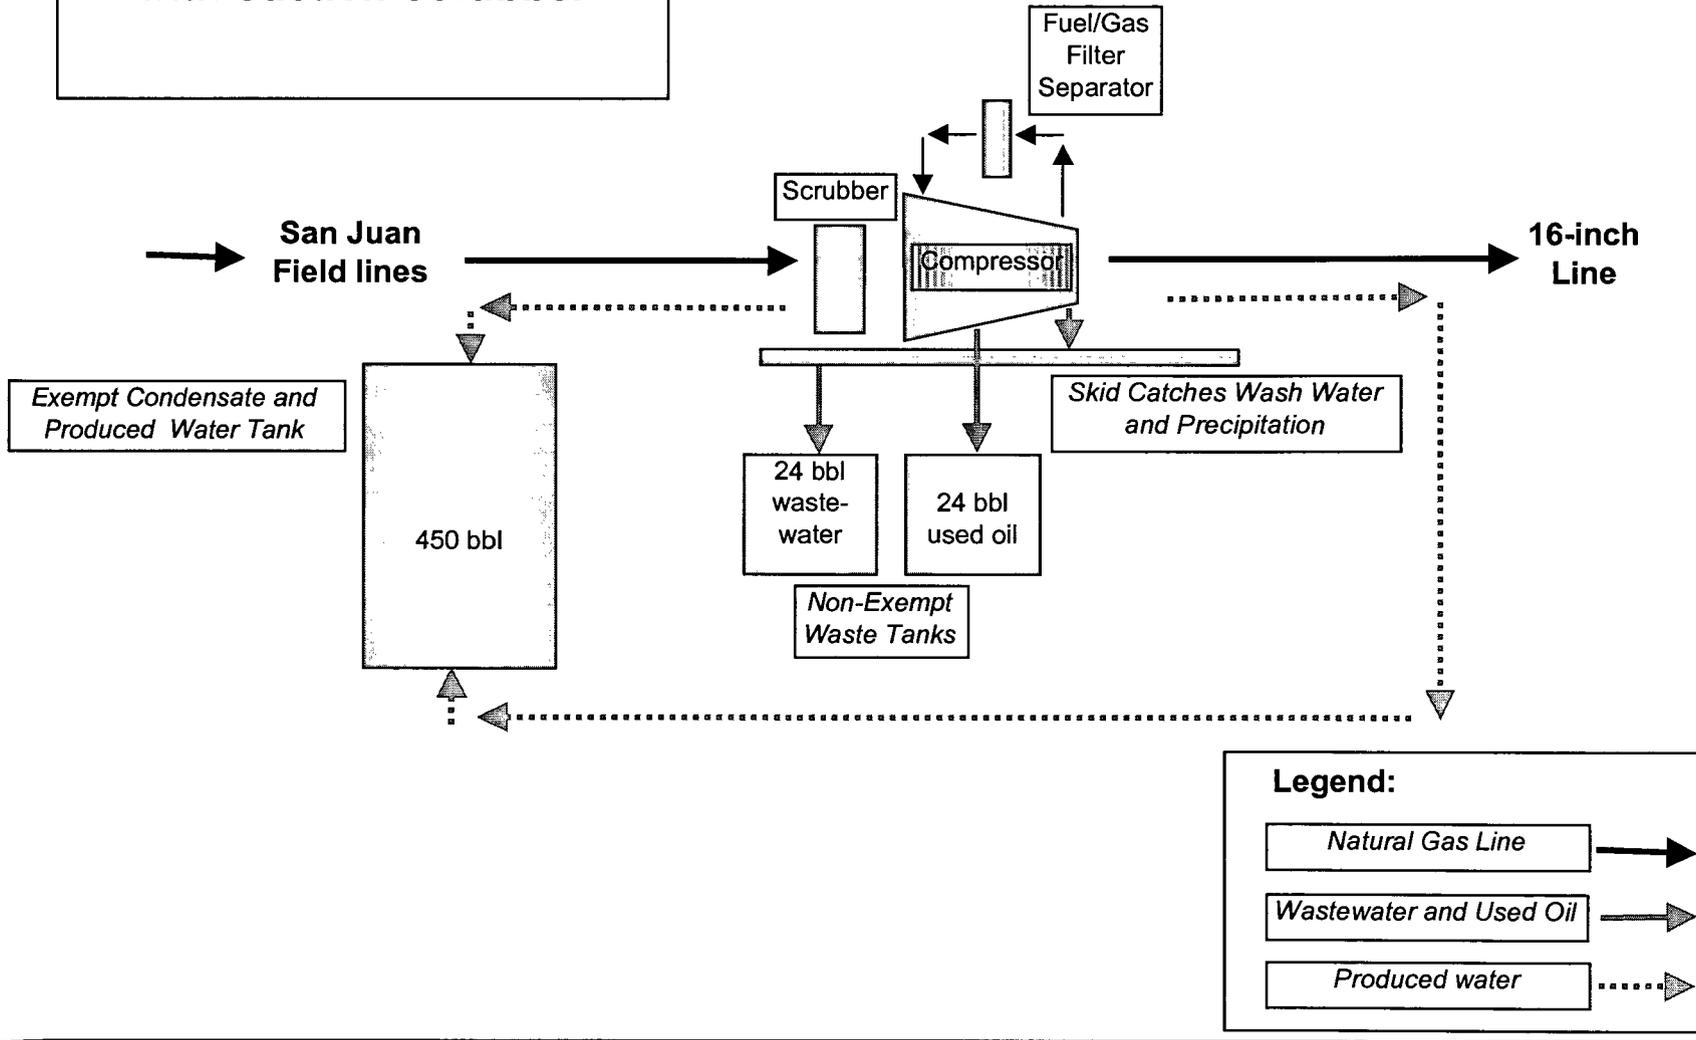


Plate 1: Process Map of the Hart #3 Compressor Station



NEW MEXICO ENERGY, MINERALS
& NATURAL RESOURCES DEPARTMENT

Jennifer A. Salisbury
CABINET SECRETARY

Oil Conservation Div.
Environmental Bureau
2040 S. Pacheco
Santa Fe, NM 87505

February 24, 2000

CERTIFIED MAIL
RETURN RECEIPT NO. Z-142-564-959

Mr. David Bays, REM
El Paso Field Services
614 Reilly Avenue
Farmington, New Mexico 87401

RE: Discharge Plan Renewal Notice for El Paso Field Services Facilities

Dear Mr. Bays:

El Paso Field Services has the following discharge plans which expire during the current calendar year.

GW-189 expires 6/5/2000 – Angel Peak Compressor Station

GW-188 expires 6/5/2000 - 3B-1 Compressor Station

GW-188-1 expires 8/3/2000 – Hart Canyon No. 1 Compressor Station

GW-188-2 expires 8/3/2000 – Hart Canyon No. 2 Compressor Station

GW-188-3 expires 8/3/2000 – Hart Canyon No. 3 Compressor Station

WQCC 3106.F. If the holder of an approved discharge plan submits an application for discharge plan renewal at least 120 days before the discharge plan expires, and the discharger is not in violation of the approved discharge plan on the date of its expiration, then the existing approved discharge plan for the same activity shall not expire until the application for renewal has been approved or disapproved. A discharge plan continued under this provision remains fully effective and enforceable. An application for discharge plan renewal must include and adequately address all of the information necessary for evaluation of a new discharge plan. Previously submitted materials may be included by reference provided they are current, readily available to the secretary and sufficiently identified to be retrieved. [12-1-95]

The discharge plan renewal application for each of the above facilities is subject to WQCC Regulation 3114. Every billable facility submitting a discharge plan renewal will be assessed a fee equal to the filing fee of \$50.00 plus a flat fee equal to one-half of the original flat fee for gas processing facilities. The \$50.00 filing fees are to be submitted with the discharge plan renewal applications and are nonrefundable.

Mr. David Bays, REM
February 24, 2000
Page 2

Please make all checks payable to: **NMED-Water Quality Management** and addressed to the OCD Santa Fe Office. Please submit the original discharge plan renewal application and one copy to the OCD Santa Fe Office and one copy to the OCD Aztec District Office. **Note that the completed and signed application form must be submitted with your discharge plan renewal request.** (Copies of the WQCC regulations and discharge plan application form and guidelines are enclosed to aid you in preparing the renewal application. A complete copy of the regulations is also available on OCD's website at www.emnrd.state.nm.us/ocd/).

If any of the above sited facilities no longer has any actual or potential discharges and a discharge plan is not needed, please notify this office. If the El Paso Field Services has any questions, please do not hesitate to contact me at (505) 827-7152.

Sincerely,



Roger C. Anderson
Oil Conservation Division

cc: OCD Aztec District Office



STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT

OIL CONSERVATION DIVISION

2040 S. PACHECO
SANTA FE, NEW MEXICO 87505
(505) 827-7131

June 25, 1996

CERTIFIED MAIL
RETURN RECEIPT NO. P-594-835-148

Mr. David Bays
Sr. Environmental Scientist
EPFS
P.O. Box 4990
Farmington, NM 87499

**RE: Minor Modification
GW-188-1 and GW-188-3**

Dear Mr. Bays:

The New Mexico Oil Conservation Division (OCD) has received EPFS letter dated June 10, 1996 requesting the addition of a 500 gallon steel lubricating oil storage tank at the Hart Canyon No. 1 (GW-188-1) and the Hart Canyon No. 3 (GW-188-3) compressor stations. The EPFS request is considered a minor modification to the above referenced discharge plan and public notice will not be issued. **The requested minor modification is hereby approved**, with the following conditions:

1. **Above Ground Tanks**: All above ground tanks which contain fluids other than fresh water must be bermed to contain a volume of one-third more than the total volume of the largest tank or of all interconnected tanks. All new facilities or modifications to existing facilities must place the tank on an impermeable type pad.
2. **Above Ground Saddle Tanks**: Above ground saddle tanks must have impermeable pad and curb type containment unless they contain fresh water or fluids that are gases at atmospheric temperature and pressure.
3. **Tank Labeling**: All tanks should be clearly labeled to identify their contents and other emergency information necessary if the tank were to rupture, spill, or ignite.

The Application for modification was submitted pursuant to Water Quality Control Commission (WQCC) Regulation 3107.C and is approved pursuant to WQCC Regulation 3109.

Mr. David Bays
EPFS
June 25, 1996
Page No. 2

Please note that "When a plan has been approved, discharges must be consistent with the terms and conditions of the plan". Pursuant to Section 3107.C EPFS is required to notify the Director of any facility expansion, production increase or process modification that would result in a significant modification in the discharge of potential ground water contaminants.

Note, that OCD approval does not relieve EPFS of liability should EPFS operation's result in contamination of surface waters, ground waters or the environment.

If you have any questions please feel free to call Pat Sanchez at (505)-827-7156.

Sincerely,



Roger C. Anderson
Environmental Bureau Chief

P 594 835 148

US Postal Service
Receipt for Certified Mail
No Insurance Coverage Provided.
Do not use for International Mail (See reverse)

Sent to EPFS - David Bays	
Street & Number P.O. Box 4990	
Post Office, State, & ZIP Code FARMINGTON, NM 87499	
Postage	\$
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt Showing to Whom & Date Delivered	
Return Receipt Showing to Whom, Date, & Addressee's Address	
TOTAL Postage & Fees	\$
Postmark or Date	

PS Form 3800 April 1995

XC: Mr. Denny Foust - Environmental Geologist

EL PASO NATURAL GAS COMPANY

HART CANYON NO. 3 STATION

DISCHARGE PLAN GW-188-3

(Addendum to 3B-1 Discharge Plan GW-188)

Revised May 1996

RECEIVED

JUN 13 1996

Environmental Bureau
Oil Conservation Division

Prepared for:

NEW MEXICO OIL CONSERVATION
DIVISION

2040 S. Pacheco

Santa Fe, New Mexico 87505

El Paso Natural Gas Company
100 N. Stanton
El Paso, Texas 79901
(915) 541-2600

Engine/Compressor

A 1085 HP (site rated at 1020 HP) engine driven compressor will be installed on the site. The compressor/engine is mounted on a common skid to be installed on a concrete foundation one foot above grade. The skid is constructed to contain incidental drips, spills and rain water, which are drained to a 24 bbl. double walled steel, below grade Oily Water Tank. Additionally, a drain will be attached to the packing vent to allow for oil collection should sufficient oil leak across the seals. This liquid will also be discharged into the Oily Water Tank. The amount of liquids draining from the skid is estimated to be 10 gallons per month.

Fuel Gas Filter/Separator

Fuel will be supplied from the compressor discharge line. A fuel gas filter/separator will be installed at the inlet of the fuel gas line. The volume of liquid from the fuel gas filter, a mixture of hydrocarbons and water, is estimated to be less than 1 gallon per month and will be discharged into the Hydrocarbon Liquids Tank. The volume of liquids will vary depending the quality of the gas.

B. Lubricating Oil, Waste Lubricating Oil and Used Engine Oil Filters


One 500 gallon portable lubricating oil storage tank and one 200 gallon elevated lubricating oil makeup tank are located adjacent to the compressor skid. Used oil will be drained from the engine and compressor into a 24 bbl. double walled steel, below grade Used Oil Tank. The volume of used oil generated is estimated to be less than 100 gallon per month. For the Material Safety Data Sheet for the lubricating oil, see Discharge Plan GW-188, Tab D.

One compressor oil filter will be replaced every month. Three engine oil filters will be replaced every month. The engine oil filters will be allowed to completely drain and then be transported to the Crouch Mesa Landfill for disposal.

The fuel gas filter will be replaced as needed depending on the quality of the gas. The fuel gas filter will be allowed to drain and will be completely free of any liquids prior to disposal at the Crouch Mesa Landfill. EPNG will be responsible for disposal of the fuel filters.

C. Vessel Summary

- 1) Hydrocarbon Liquids Tank - Approximately 4800 barrels of hydrocarbon liquids and water per year.
- 2) Oily Water Tank - Only incidental oil and water from leaks, and rain water.
- 3) Used Oil Tank - Approximately 100 gallons of used lube oil per month.

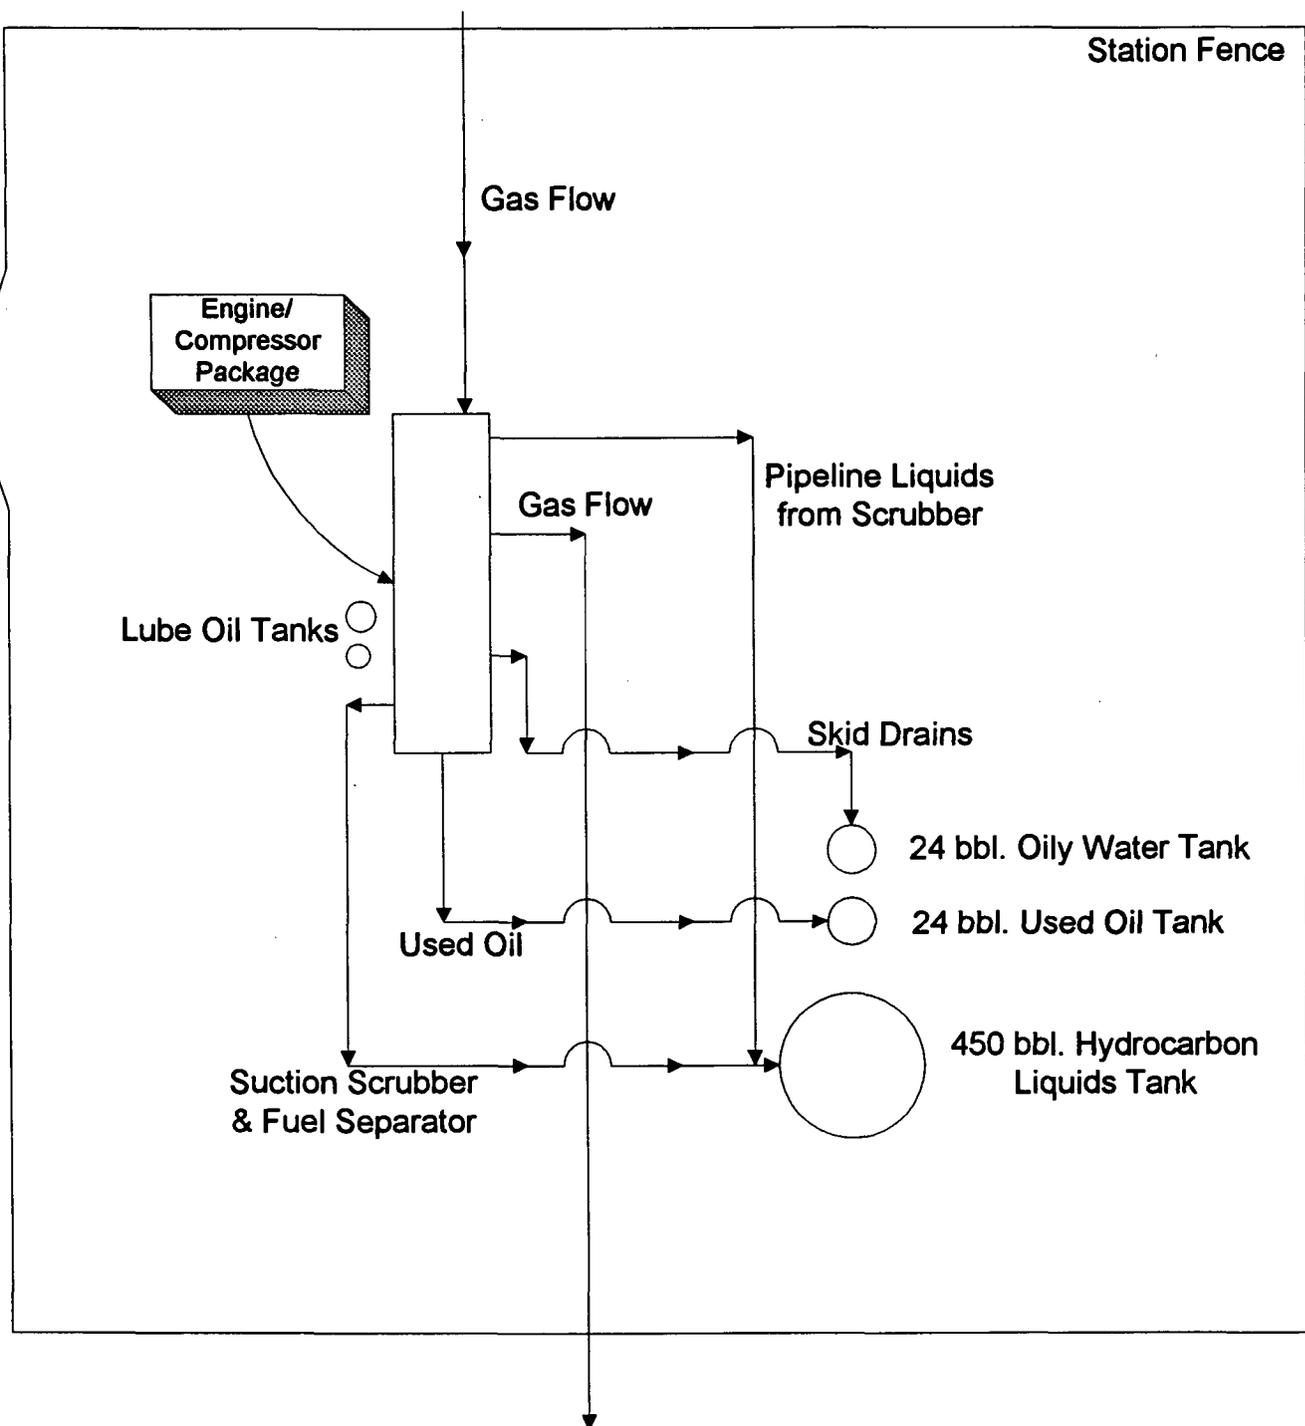

Note: This schematic is not to scale, and may not reflect final relative equipment locations.

El Paso Natural Gas Co.
Hart Canyon #3 Station



OIL CONSERVATION DIVISION
RECEIVED FARMINGTON, NEW MEXICO 87499

'96 JAN 8 AM 8 52

January 5, 1996

Mr. Roger Anderson
New Mexico Oil Conservation Division
2040 S. Pacheco
Santa Fe, NM 87505

Dear Mr. Anderson:

Effective January 1, 1996, the El Paso Natural Gas Co. Field Services Division was "spun down" into a separate company. All gathering operations in the San Juan Basin, Permian Basin, and Anadarko Basin are now part of El Paso Field Services Company.

This is to inform you that the following facilities, formerly owned by El Paso Natural Gas Co., are now owned by El Paso Field Services Company:

Discharge Plan Number	Facility Name
GW-189	Angel Peak Plant
GW-212	Ballard Plant
GW-232	Carlsbad Trunk A Station
GW-186	Kutz Plant
GW-211	Largo Plant
GW-209	Lindrith Plant
GW-188	3-B1 Plant
GW-188-1	Hart Canyon #1 Station
GW-188-2	Hart Canyon #2 Station
GW-188-3	Hart Canyon #3 Station
GW-153	2B-3A Station
GW-154	2B-3B
GW-154	3B-3B

In addition, the Blanco Plant, Discharge Plan GW-049, and the Chaco Plant, Discharge Plan GW-071, are both still owned by El Paso Natural Gas Co., but are to be operated by El Paso Field Services Co. The individual contact names on file in the current Discharge Plans are still correct for all facilities, only the owner and/or operator company name has changed.

If you have any questions, or need additional information, please call me at (505) 599-2256.

Sincerely yours,

David Bays, REM
Sr. Environmental Scientist

cc: Denny Foust - NMOCD - Aztec, NM
S. D. Miller/P. J. Marquez

NOTICE OF PUBLICATION

JUL - 5 1995
7036
USFWS - NMESSE

**STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION**

Notice is hereby given that pursuant to New Mexico Water Quality Control Commission Regulations, the following discharge plan applications have been submitted to the Director of the Oil Conservation Division, 2040 South Pacheco, Santa Fe, New Mexico 87505, Telephone (505) 827-7131:

(GW-188-1) - EL PASO NATURAL GAS Company, Mr. David Bays, (505)-599-2256, 100 N. Stanton, El Paso, Texas, 79901 has submitted a Discharge plan application for their Hart Canyon No. 1 facility located in the NE/4, Section 29, Township 31 North, Range 10 West, NMPM, San Juan County, New Mexico. The total discharge will be about 552 gallons/day; This fluid will consist of oil and water and will be discharged to closed top storage tanks on the sight-hydrocarbon phase will be separated from the water and recycled. The waste water will then disposed of by evaporation at an approved OCD facility evaporation pond. Groundwater most likely to be affected by a spill, leak, or accidental discharge to the surface is at a depth of approximately 50 feet with a total dissolved solids concentration of approximately 1,500 mg/L. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

(GW-188-2) - EL PASO NATURAL GAS Company, Mr. David Bays, (505)-599-2256, 100 N. Stanton, El Paso, Texas, 79901 has submitted a Discharge plan application for their Hart Canyon No. 2 facility located in the SE/4, Section 29, Township 30 North, Range 9 West, NMPM, San Juan County, New Mexico. The total discharge will be about 552 gallons/day; This fluid will consist of oil and water and will be discharged to closed top storage tanks on the sight-hydrocarbon phase will be separated from the water and recycled. The waste water will then disposed of by evaporation at an approved OCD facility evaporation pond. Groundwater most likely to be affected by a spill, leak, or accidental discharge to the surface is at a depth of approximately 50 feet with a total dissolved solids concentration of approximately 1,500 mg/L. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.


(GW-188-3) - EL PASO NATURAL GAS Company, Mr. David Bays, (505)-599-2256, 100 N. Stanton, El Paso, Texas, 79901 has submitted a Discharge plan application for their Hart Canyon No. 3 facility located in the NW/4, Section 8, Township 31 North, Range 9 West, NMPM, San Juan County, New Mexico. The total discharge will be about 552 gallons/day; This fluid will consist of oil and water and will be discharged to closed top storage tanks on the sight-hydrocarbon phase will be separated from the water and recycled. The waste water will then disposed of by evaporation at an approved OCD facility evaporation pond. Groundwater most likely to be affected by a spill, leak, or accidental discharge to the surface is at a depth of approximately 50 feet with a total dissolved solids concentration of approximately 1,500 mg/L. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

Any interested person may obtain further information from the Oil Conservation Division and may submit written comments to the Director of the Oil Conservation Division at the address given above. The discharge plan application may be viewed at the above address between 8:00 a.m. and 4:00 p.m., Monday through Friday. Prior to ruling on any proposed discharge plan or its modification, the Director of the Oil Conservation Division shall allow at least thirty (30) days after the date of publication of this notice during which comments may be submitted to him and public hearing may be requested by any interested person. Requests for public hearing shall set forth the reasons why a hearing should be held. A hearing will be held if the Director determines there is significant public interest.

If no public hearing is held, the Director will approve or disapprove the proposed plan based on information available. If a public hearing is held, the director will approve or disapprove the proposed plan based on information in the plan and information submitted at the hearing.

GIVEN under the Seal of New Mexico Oil Conservation Commission at Santa Fe, New Mexico, on this 26th day of June, 1995.

STATE OF NEW MEXICO
OIL CONSERVATION DIVISION

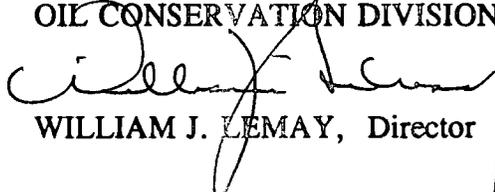
WILLIAM J. LEMAY, Director

S E A L

<p align="center">NO EFFECT FINDING</p> <p>The described action will have no effect on listed species, wetlands, or other important wildlife resources.</p> <p>Date <u>July 10, 1995</u></p> <p>Consultation # <u>CW950CD1</u></p> <p>Approved by </p> <p align="center">U.S. FISH and WILDLIFE SERVICE NEW MEXICO ECOLOGICAL SERVICES FIELD OFFICE ALBUQUERQUE, NEW MEXICO</p>
--

AFFIDAVIT OF PUBLICATION

No. 35006

STATE OF NEW MEXICO

County of San Juan:

ROBERT LOVETT being duly sworn says: That he is the Classified Manager of THE DAILY TIMES, a daily newspaper of general circulation published in English at Farmington, said county and state, and that the hereto attached Legal Notice was published in a regular and entire issue of the said DAILY TIMES, a daily newspaper duly qualified for the purpose within the meaning of Chapter 167 of the 1937 Session Laws of the State of New Mexico for publication on the following day(s):

Saturday, July 1, 1995

and the cost of publication was: \$88.10

Robert Lovett

On 7/1/95 ROBERT LOVETT appeared before me, whom I know personally to be the person who signed the above document.

William J. Lemay, Jr.

My Commission Expires March 21, 1998

COPY OF PUBLICATION

Legals



NOTICE OF PUBLICATION
STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION

Notice is hereby given that pursuant to New Mexico Water Quality Control Commission Regulation the following discharge plan applications have been submitted to the Director of the Oil Conservation Division, 2040 South Pacheco, Santa Fe, New Mexico 87505, Telephone (505) 827-7131:

(GW-188-1) - EL PASO NATURAL GAS Company, Mr. David Bays, (505) 599-2256, 100 N. Stanton, El Paso, Texas, 79901 has submitted a Discharge plan application for their Hart Canyon No. 1 facility located in the NE/4, Section 29, Township 31 North, Range 10 West, NMPM, San Juan County, New Mexico. The total discharge will be about 552 gallons/day; This fluid will consist of oil and water and will be discharged to closed top storage tanks on the slight-hydrocarbon phase will be separated from the water and recycled. The waste water will then disposed of by evaporation at an approved OCD facility evaporation pond. Groundwater most likely to be affected by a spill, leak, or accidental discharge to the surface is at a depth of approximately 50 feet with a total dissolved solids concentration of approximately 1,500 mg/L. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

(GW-188-2) - EL PASO NATURAL GAS Company, Mr. David Bays, (505) 599-2256, 100 N. Stanton, El Paso, Texas, 79901 has submitted a Discharge plan application for their Hart Canyon No. 2 facility located in the SE/4, Section 29, Township 30 North, Range 9 West, NMPM, San Juan County, New Mexico. The total discharge will be about 552 gallons/day; This fluid will consist of oil and water and will be discharged to closed top storage tanks on the slight-hydrocarbon phase will be separated from the water and recycled. The waste water will then disposed of by evaporation at an approved OCD facility evaporation pond. Groundwater most likely to be affected by a spill, leak, or accidental discharge to the surface is at a depth of approximately 50 feet with a total dissolved solids concentration of approximately 1,500 mg/L. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

(GW-188-3) - EL PASO NATURAL GAS Company, Mr. David Bays, (505) 599-2256, 100 N. Stanton, El Paso, Texas, 79901 has submitted a Discharge plan application for their Hart Canyon No. 3 facility located in the NW/4, Section 8, Township 31 North, Range 9 West, NMPM, San Juan County, New Mexico. The total discharge will be about 552 gallons/day; This fluid will consist of oil and water and will be discharged to closed top storage tanks on the slight-hydrocarbon phase will be separated from the water and recycled. The waste water will then disposed of by evaporation at an approved OCD facility evaporation pond. Groundwater most likely to be affected by a spill, leak, or accidental discharge to the surface is at a depth of approximately 50 feet with a total dissolved solids concentration of approximately 1,500 mg/L. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

Any interested person may obtain further information from the Oil Conservation Division and may submit written comments to the Director of the Oil Conservation Division at the address given above. The discharge plan application may be viewed at the above address between 8:00 a.m. and 4:00 p.m., Monday through Friday. Prior to ruling on any proposed discharge plan or its modification, the Director of the Oil Conservation Division shall allow at least thirty (30) days after the date of publication of this notice during which comments may be submitted to him and public hearing may be requested by any interested person. Requests for public hearing shall set forth the reason why a hearing should be held. A hearing will be held if the Director determines there is significant public interest.

If no public hearing is held, the Director will approve or disapprove the proposed plan based on information available. If a public hearing is held, the director will approve or disapprove the proposed plan based on information in the plan and information submitted at the hearing.

GIVEN under the Seal of New Mexico Oil Conservation Commission at Santa Fe, New Mexico, this 26th day of June, 1995.

STATE OF NEW MEXICO
OIL CONSERVATION DIVISION

/s/ William J. Lemay, Jr.
WILLIAM J. LEMAY, JR.

NOTICE OF PUBLICATION

**STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION**

Notice is hereby given that pursuant to New Mexico Water Quality Control Commission Regulations, the following discharge plan applications have been submitted to the Director of the Oil Conservation Division, 2040 South Pacheco, Santa Fe, New Mexico 87505, Telephone (505) 827-7131:

(GW-188-1) - EL PASO NATURAL GAS Company, Mr. David Bays, (505)-599-2256, 100 N. Stanton, El Paso, Texas, 79901 has submitted a Discharge plan application for their Hart Canyon No. 1 facility located in the NE/4, Section 29, Township 31 North, Range 10 West, NMPM, San Juan County, New Mexico. The total discharge will be about 552 gallons/day; This fluid will consist of oil and water and will be discharged to closed top storage tanks on the sight-hydrocarbon phase will be separated from the water and recycled. The waste water will then disposed of by evaporation at an approved OCD facility evaporation pond. Groundwater most likely to be affected by a spill, leak, or accidental discharge to the surface is at a depth of approximately 50 feet with a total dissolved solids concentration of approximately 1,500 mg/L. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

(GW-188-2) - EL PASO NATURAL GAS Company, Mr. David Bays, (505)-599-2256, 100 N. Stanton, El Paso, Texas, 79901 has submitted a Discharge plan application for their Hart Canyon No. 2 facility located in the SE/4, Section 29, Township 30 North, Range 9 West, NMPM, San Juan County, New Mexico. The total discharge will be about 552 gallons/day; This fluid will consist of oil and water and will be discharged to closed top storage tanks on the sight-hydrocarbon phase will be separated from the water and recycled. The waste water will then disposed of by evaporation at an approved OCD facility evaporation pond. Groundwater most likely to be affected by a spill, leak, or accidental discharge to the surface is at a depth of approximately 50 feet with a total dissolved solids concentration of approximately 1,500 mg/L. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.


(GW-188-3) - EL PASO NATURAL GAS Company, Mr. David Bays, (505)-599-2256, 100 N. Stanton, El Paso, Texas, 79901 has submitted a Discharge plan application for their Hart Canyon No. 3 facility located in the NW/4, Section 8, Township 31 North, Range 9 West, NMPM, San Juan County, New Mexico. The total discharge will be about 552 gallons/day; This fluid will consist of oil and water and will be discharged to closed top storage tanks on the sight-hydrocarbon phase will be separated from the water and recycled. The waste water will then disposed of by evaporation at an approved OCD facility evaporation pond. Groundwater most likely to be affected by a spill, leak, or accidental discharge to the surface is at a depth of approximately 50 feet with a total dissolved solids concentration of approximately 1,500 mg/L. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

Any interested person may obtain further information from the Oil Conservation Division and may submit written comments to the Director of the Oil Conservation Division at the address given above. The discharge plan application may be viewed at the above address between 8:00 a.m. and 4:00 p.m., Monday through Friday. Prior to ruling on any proposed discharge plan or its modification, the Director of the Oil Conservation Division shall allow at least thirty (30) days after the date of publication of this notice during which comments may be submitted to him and public hearing may be requested by any interested person. Requests for public hearing shall set forth the reasons why a hearing should be held. A hearing will be held if the Director determines there is significant public interest.

If no public hearing is held, the Director will approve or disapprove the proposed plan based on information available. If a public hearing is held, the director will approve or disapprove the proposed plan based on information in the plan and information submitted at the hearing.

GIVEN under the Seal of New Mexico Oil Conservation Commission at Santa Fe, New Mexico, on this 26th day of June, 1995.

STATE OF NEW MEXICO
OIL CONSERVATION DIVISION

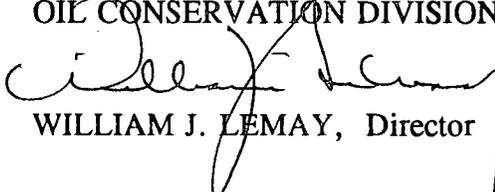

WILLIAM J. LEMAY, Director

S E A L



P. O. Box 4990
FARMINGTON, NEW MEXICO 87499

Certified Mail, Receipt No. P 645 521 859

June 16, 1995

William J. LeMay, Director
New Mexico Oil Conservation Division
2040 S. Pacheco
Santa Fe, NM 87505

RECEIVED

JUN 26 1995

Environmental Bureau
Oil Conservation Division

Re: New Discharge Plans
Hart Canyon Stations Numbers 1, 2, and 3
San Juan County, NM

Dear Mr. LeMay:

El Paso Natural Gas Company is proposing to construct three new compressor stations in the Hart Canyon area, upstream from our 3B-1 Station (Discharge Plan GW-188). The new stations will consist of reciprocating engine and compressor units along with normal ancillary station equipment. We currently anticipate that the new stations will go on line on October 1, 1995.

I have enclosed two copies of the Discharge Plan application for each new facility, along with three checks for the required \$50.00 filing fee per site. A copy of this plan has also been sent to the NMOCD Aztec District office for their review.

For any additional information needed, please contact me at the above address, or at (505) 599-2256.

Sincerely yours,

A handwritten signature in cursive script that reads 'David Bays'.

David Bays, REM
Sr. Environmental Scientist

cc: Denny Foust, Aztec

EL PASO NATURAL GAS COMPANY

HART CANYON NO. 3 STATION

DISCHARGE PLAN GW-188-3

(Addendum to 3B-1 Discharge Plan GW-188)

June 1995

RECEIVED

JUN 26 1995

Environmental Bureau
Oil Conservation Division

Prepared for:

NEW MEXICO OIL CONSERVATION
DIVISION

2040 S. Pacheco

Santa Fe, New Mexico 87505

El Paso Natural Gas Company

100 N. Stanton

El Paso, Texas 79901

(915) 541-2600

This Discharge Plan has been prepared in accordance with Oil Conservation Division " Guidelines for the Preparation of Ground Water Discharge Plans at Natural Gas Processing Plants ".

I. Type of Operation

El Paso Natural Gas Company (EPNG) proposes to install one 1085 Horsepower (site rated at 1020 Horsepower) Caterpillar G3516 reciprocating engine and compressor. The compressor will compress low pressure San Juan Field lines (100 psig design pressure) to an existing line (16" 250 psig design pressure).

El Paso Natural Gas Company is the owner and will operate the compressor facility.

II. Operator/Legally Responsible Party and Local Representative

See Discharge Plan GW-188, Section II.

III. Location of Facility

The proposed facility is located in the NW/4 of Sec. 8, T-31-N, R-9-W, San Juan County, New Mexico, and is upstream from the 3B-1 Station. A topographic map is under Tab A. The site is located approximately 12 miles northeast of Aztec, New Mexico.

IV. Landowner

United States Government
Department of the Interior
Bureau of Land Management
1235 La Plata Highway
Farmington, NM 87401

V. Facility Description

A plot plan of the facility indicating location of fences, gates, foundations, and equipment on the facility is attached at Tab B.

VI. Sources, and Quantities of Effluent

A. Equipment

Gas Compressor Suction Scrubber

The Gas Compressor Suction Scrubber is located on the Engine/Compressor skid. Liquids removed by this vessel will be discharged to the 450 bbl. Condensate Tank. The discharge from this scrubber is estimated to be less than 10 gallons per month.

Engine/Compressor

A 1085 HP (site rated at 1020 HP) engine driven compressor will be installed on the site. The compressor/engine is mounted on a common skid to be installed on a concrete foundation one foot above grade. The skid is constructed to contain incidental drips, spills and rain water, which are drained to a 24 bbl. double walled steel, below grade Oily Water Tank. Additionally, a drain will be attached to the packing vent to allow for oil collection should sufficient oil leak across the seals. This liquid will also be discharged into the Oily Water Tank. The amount of liquids draining from the skid is estimated to be 10 gallons per month.

Fuel Gas Filter/Separator

Fuel will be supplied from the compressor discharge line. A fuel gas filter/separator will be installed at the inlet of the fuel gas line. The volume of liquid from the fuel gas filter, a mixture of hydrocarbons and water, is estimated to be less than 1 gallon per month and will be discharged into the Hydrocarbon Liquids Tank. The volume of liquids will vary depending the quality of the gas.

B. Lubricating Oil, Waste Lubricating Oil and Used Engine Oil Filters

A 200 gallon elevated lubricating oil makeup tank is located adjacent to the compressor skid. Used oil will be drained from the engine and compressor into a 24 bbl. double walled steel, below grade Used Oil Tank. The volume of used oil generated is estimated to be less than 100 gallon per month. For the Material Safety Data Sheet for the lubricating oil, see Discharge Plan GW-188, Tab D.

One compressor oil filter will be replaced every month. Three engine oil filters will be replaced every month. The engine oil filters will be allowed to completely drain and then be transported to the Crouch Mesa Landfill for disposal.

The fuel gas filter will be replaced as needed depending on the quality of the gas. The fuel gas filter will be allowed to drain and will be completely free of any liquids prior to disposal at the Crouch Mesa Landfill. EPNG will be responsible for disposal of the fuel filters.

C. Vessel Summary

- 1) Hydrocarbon Liquids Tank - Approximately 4800 barrels of hydrocarbon liquids and water per year.
- 2) Oily Water Tank - Only incidental oil and water from leaks, and rain water.
- 3) Used Oil Tank - Approximately 100 gallons of used lube oil per month.

D. Engine Cooling Water

There will not be a cooling water surge tank associated with this engine. A contractor will be responsible to check and add coolant as needed each week. A mixture of ethylene glycol and water will be used as coolant. If it is necessary to drain the cooling water system for maintenance or repairs, the cooling water will be drained into steel drums or a small tank mounted on a pickup truck. After maintenance and/or repairs, the cooling water will be placed back into the cooling system. Since this is a closed system, no operational discharge is expected. For the Material Safety Data Sheet for the ethylene glycol, see Discharge Plan GW-188, Tab D.

VII. Transfer and Storage of Process Fluids and Effluent

A. Summary Information

<u>Source</u>	<u>Onsite Collection</u>
Inlet Slug Catcher	450 bbl. Hydrocarbon Liquids Tank
Gas Compressor Suction Scrubber	450 bbl. Hydrocarbon Liquids Tank
Engine/Compressor Oil	24 bbl. Used Oil Tank
Fuel Gas Filter Separator	450 bbl. Hydrocarbon Liquids Tank
Floor/Skid Drains	24 bbl. Oily Water Tank

B. Water and Wastewater Schematic

The plot plan at Tab B indicated the location of the wastewater system components.

C. Specifications

Pipelines - All wastewater piping to both the 450 bbl. Hydrocarbon Liquids Tank, the 24 bbl. Oily-Water Tank, and the 24 bbl. Used Oil Tank is below ground.

D. Fluids Disposal and Storage Tanks

The hydrocarbons from the 450 bbl. and 24 bbl. storage tanks will be recycled. The water fraction from the tanks will be separated and either discharged into a lined pond at EPNG's Kutz Separator, or disposed in a manner consistent with OCD regulations.

E. Prevention of Unintentional and Inadvertent Discharges

All storage tanks for fluids other than fresh water are bermed to contain a volume one and one-half times greater than the largest tank volume. All above ground tanks will be placed on a gravel pad or placed on an elevated stand so that leaks can be visually detected. The below grade 24 bbl. tanks will be constructed of double walled steel and the interstitial space will be inspected weekly.

There will be no chemical or drum storage area. Drums utilized to contain engine cooling water, or waste oil will be removed from the site at the end of each working day.


XIII. Affirmation

I here by certify that I am familiar with the information contained in and submitted with this discharge plan for the 3B-1 Compressor Station, and that such information is true, accurate, and complete to the best of my knowledge and belief.

David Bays

David Bays, REM
Sr. Environmental Scientist

Date: June 9, 1995

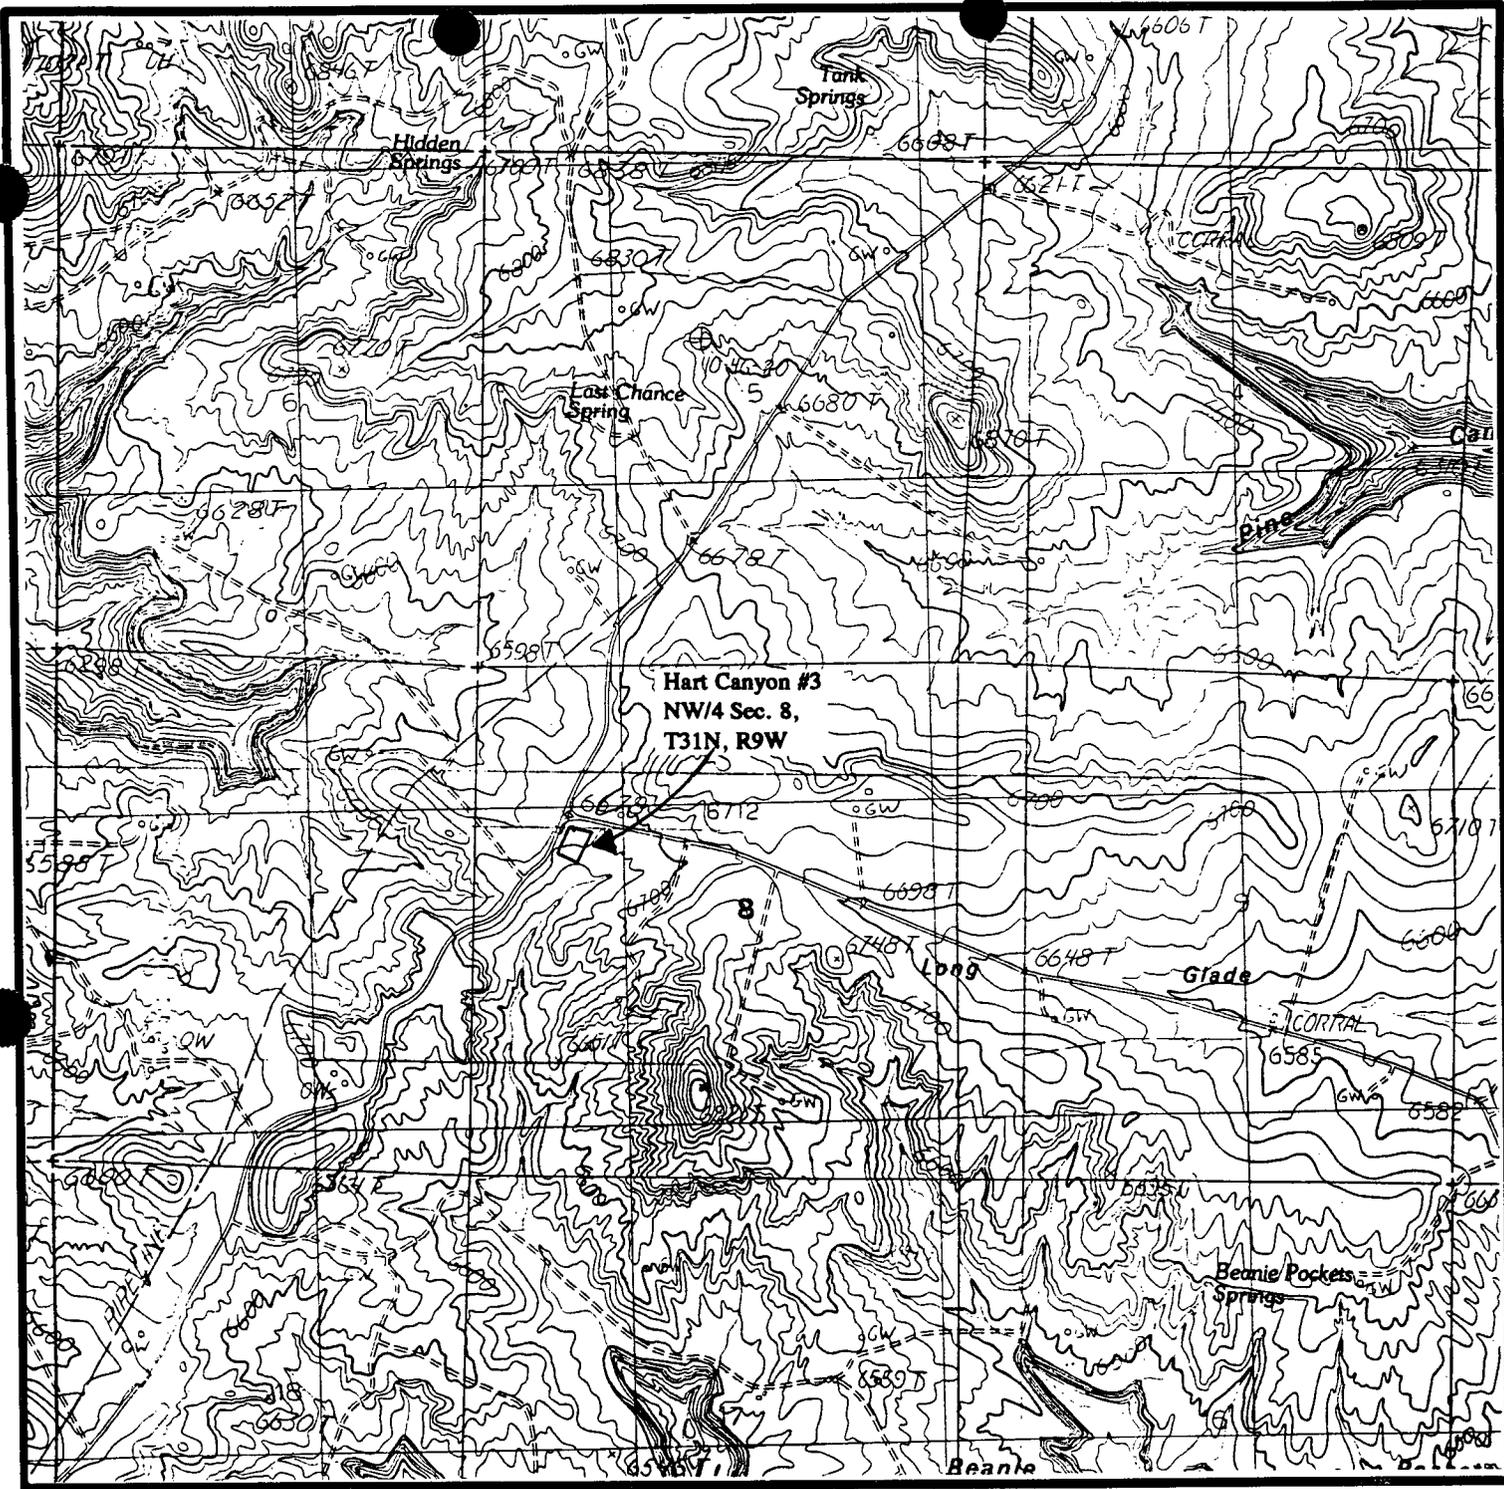


Hart Canyon #3
NW/4 Sec. 8,
T31N, R9W





Quadrangle Location

Mount Nebo Quadrangle
7.5 Minute Series Quadrangle
Prepared for: Hart Canyon No. 3 Discharge Plan

SCALE 1:24 000

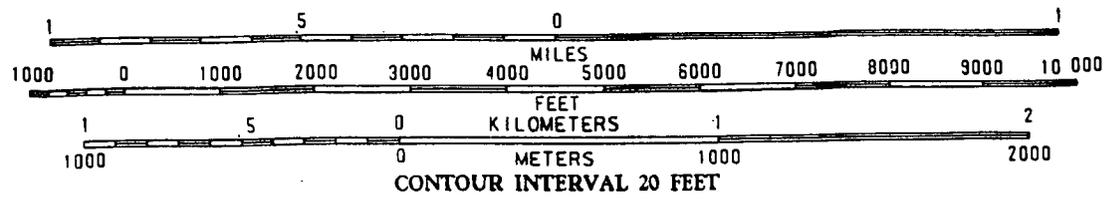

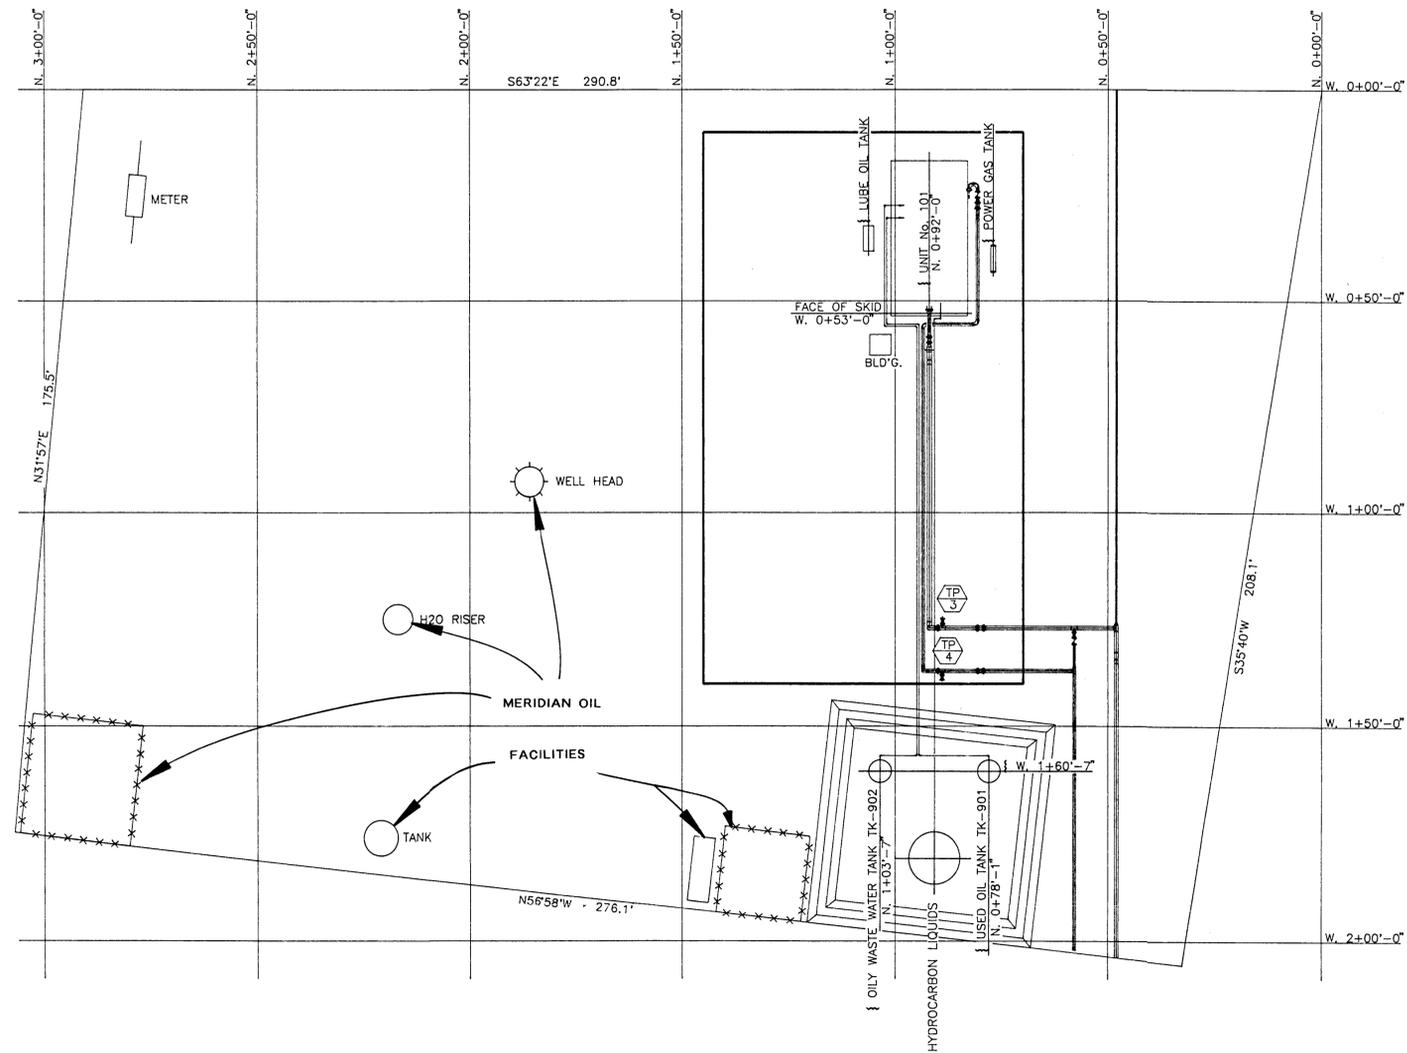

REVISED FOR CLIENT APPROVAL

APPROVAL

APPROVED AS NOTED-REVISE AND PROCEED

REVISE AND RESUBMIT

NOT APPROVED

SEE LETTER OF TRANSMITTAL

BY: _____

DATE: _____

NO.	DATE	BY	DESCRIPTION	W.O.	APP.	PRT.	SEP.	DATE	TO	W.O.
C	6/13/95	BLE	REVISED FOR CLIENT APPROVAL							
D	5/95	BLE	REVISED FOR CLIENT APPROVAL							
A	4/95	BLE	FOR CLIENT APPROVAL							

ENG. RECORD	DATE
DRAFTING	
DESIGN	
COMPUTER GRAPHICS	BLE 4/7/95
CHECKED	
PROJECT APPROVAL	
DESIGN APPROVAL	
COMPUTER SAVE NAME	203



PLOT PLAN
HART CANYON #3 SITE

SCALE: 1"=20'

W.O.: _____

DWG. NO. 00-203

REV. C