

OIL CONSERVATION DIVISION

P. O. BOX 2088
SANTA FE, NEW MEXICO 87501

Form O-103
Revised 10-1-78

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	
FILE	<input checked="" type="checkbox"/>
U.S.O.S.	
LAND OFFICE	
OPERATOR	

5a. Indicate Type of Lease
 State Fee

5. STATE OIL & Gas Lease No.

MINOR NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR A PERMITS TO DRILL OR TO REFINISH OR PLUG BACK TO A DIFFERENT RESERVOIR. FOR SUCH USES, USE FORM O-102 FOR PERMITS OR FORM O-104 FOR PERMITS TO REFINISH OR PLUG BACK TO A DIFFERENT RESERVOIR.)

1. OIL WELL GAS WELL OTHER Carbon Dioxide well

2. Name of Operator
Amerada Hess Corporation

3. Address of Operator
Drawer D, Monument, New Mexico 88265

4. Location of well:
 UNIT LETTER G 1980 FEET FROM THE North LINE AND 1980 FEET FROM
 THE East LINE, SECTION 4 TOWNSHIP 29-N RANGE 31-E N.M.P.M.

10. Field and Pool, or District
Wildcat

12. County
Union

15. Elevation (Show whether DF, RT, GR, etc.)
6049' GR


16. Check Appropriate Box To Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input type="checkbox"/>	REMEDIAL WORK <input checked="" type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	OTHER <input type="checkbox"/>	CASING TEST AND CEMENT JOBS <input type="checkbox"/>	
		OTHER <input type="checkbox"/>	

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

May 19 - 24, 1981

Ran tbg., checked top of fill @ 999'. Set pkr. @ 755' w/cement retainer @ 736'. Tested csg. to 1000# & tbg. to 2500#. Held OK. Squeezed 7" csg. perf. fr. 849'-999' w/400 sks. cement. Max press. 600#. Min. 0. Pulled pkr. & tbg. Ran bit & drld. cement fr. 821' to 999' & firm sand to 1012'. Ran pkr. set @ 755'. Tested 7" csg. perf. fr. 849'-999' w/1000# for 30 min. Held OK. Drld. cement fr. 1014'-1138'. Attempted to clean out to 1157'. Hole sluffed off w/bit plugging. Checked fluid level w/swab. No fluid entry. CI. Evaluating.

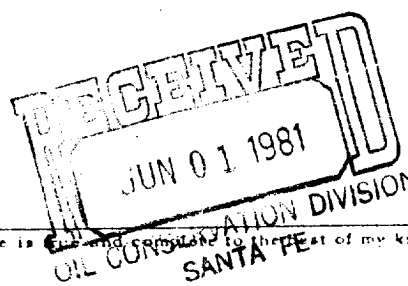

18. I hereby certify that the information above is true and correct to the best of my knowledge and belief.

SIGNED: Q. C. Wheeler TITLE: Production Clerk DATE: 5-26-81

APPROVED BY: Carl Ulvog TITLE: SENIOR PETROLEUM GEOLOGIST DATE: 6/5/81

CONDITIONS OF APPROVAL, IF ANY:

OIL CONSERVATION DIV.

MAY 27 '81

RECEIVED