District I 1625 N. French Dr., Hobbs. NM 88240 District II 1301 W. Grand Avenue, Artesia. NM 88210 District III 1000 Rio Brazos Road. Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

## State of New Mexico Energy, Minerals and Natural Resources

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 For drilling and production facilities, submit to appropriate NMOCD District Office.

For downstream facilities, submit to Santa Fe

office.

Form C-144

March 12, 2004

## Pit or Below-Grade Tank Registration or Closure

Is pit or below-grade tank covered by a "general plan"? Yes \( \subseteq No \) \( \subsete \)

Operator: Marathon Oil Company Telephone: 7132963254 e-mail address: mfmicl@marathonoil.com

Address: P.O. Box 3128 Houston, Tx. 77253

Facility or well name: IH Unit Gas Com #56 API #: 30-015-32878 U/L or Qtr/Qtr M Sec 21 T 215 R 248

County: Etichy Latitude Longitude NAD: 1927 1983 Surface Owner Federal State Print Follows: Double-walled, with leak detection? Yes If not, explain with prot.

Pit Type: Drilling Production Disposal Double-walled, with leak detection? Yes If not, explain with prot.

Double-walled, with leak detection? Yes If not, explain with prot.

Depth to ground water (vertical distance from bottom of pit to seasonal high water elevation of ground water.)

Wellhead protection area. (Less than 200 feet from a private domestic water source, or less than 1000 feet from all other water sources.)

No (0 points) X


Lined X Unlimited	Double-walled, with leak detection? Yes If not, explain who not.  RECERTESIN 000	
Liner type: Synthetic Thickness Clay Volume bbl		137 000
Depth to ground water (vertical distance from bottom of pit to seasonal high water elevation of ground water.)	Less than 50 feet 50 feet or more, but less than 100 feet 100 feet or more	(20 points) (10 points) ( 0 points)
Wellhead protection area. (Less than 200 feet from a private domestic water source, or less than 1000 feet from all other water sources.)	Yes No	(20 points) ( 0 points) <b>X</b>
Distance to surface water: (horizontal distance to all wetlands, playas, irrigation canals, ditches, and perennial and ephemeral watercourses.)	Less than 200 feet 200 feet or more, but less than 1000 feet 1000 feet or more  Ranking Score (Total Points)	(20 points) (10 points) ( 0 points)
If this is a pit closure: (1) attach a diagram of the facility showing the pit's relationship to other equipment and tanks. (2) Indicate disposal location:  onsite X offsite If offsite, name of facility		
been/will be constructed or closed according to NMOCD guidelines \( \mathbb{X} \), a general permit \( \mathbb{I} \), or an (attached) alternative OCD-approved plan \( \mathbb{I} \).  Date: \( \textit{07-01-04} \)  Printed Name/Title: \( \textit{Mike Mick} \)  Adv. Sr. Eng. Tech  Your certification and NMOCD approval of this application/closure does not relieve the operator of liability should the contents of the pit or tank contaminate ground water or otherwise endanger public health or the environment. Nor does it relieve the operator of its responsibility for compliance with any other federal, state, or local laws and/or regulations.		
Approval:   Date: 1/9/04  Printed Name/Title Mike Bratcher Compliance Officer Signature: 96h Apoll-		

## Additional Information- Indian Hills Unit GC# 56

## General

The Indian Hills Unit GC # 56 SL is located on Federal lands and Federal subsurface. The applied for pit will be constructed with-in the original pit area, with no new surface disturbances. Approx. size 120'x 120' x 4'.

- Topsoil will be stripped and stockpiled for use as the final cover of fill at the time of closure.
- Contents removed from old pit will be stockpiled on a liner to prevent soil contamination.
- A 20 mil. Liner will be installed. Padding will be added if necessary. Liner will be anchored per OCD's guidelines. OCD will be contacted 24 hrs. prior to liner installation.
- All necessary steps will be taken to prevent liner damage.
- Marathon will used a combination of produced and freshwater during drilling, anticipated chloride content of drilling fluids 10,000 ppm.
- Pit Area will be fence, work access will remain open during operations, closed once rig operations cease.
- All fluids will be removed from pit in a timely manner after operations cease.
- OCD will be contacted when pit closure commences.
- Closure of pit will be performed as per current OCD guidelines for onsite encapsulation. The liner edges shall be folded over the contents and a 40 mil liner shall be installed on top. A min. of 3 foot of clean soil shall be spread over encapsulated pit contents. Stockpiled top soil shall be spread and contoured. Pit area will be re-seeded and re-vegetation promoted.

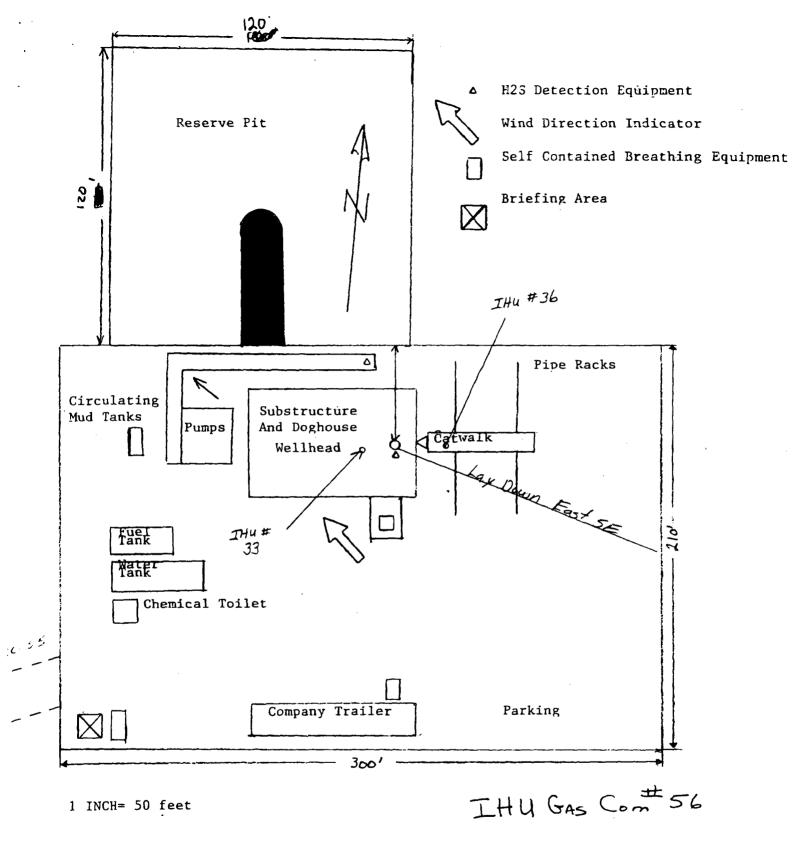

Prevailing Wind Direction Southwest