Submit 3 Copies To Appropriate District Office

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
May 27, 2004

WELL API NO.
30-015-24704

5. Indicate Type of Lease
STATE ☐   FEE ☒

6. State Oil & Gas Lease No.

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒   Gas Well ☐   Other ☐

RECEIVED

JUL 1 9 2004

OCD-ARTESIA

7. Lease Name or Unit Agreement Name
Bonnie YM

8. Well Number
1

2. Name of Operator
Yates Petroleum Corporation

9. OGRID Number
025575

3. Address of Operator
105 S. 4th Street, Artesia, NM 88210

10. Pool name or Wildcat
Penasco Draw SA-Yeso Assoc.

4. Well Location
Unit Letter N : 990 feet from the South line and 2310 feet from the West line

Section 26 Township 18S Range 25E NMPM Eddy County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3486'GR

Pit or Below-grade Tank Application ☐ or Closure ☐

Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water ____ N/A ____

Pit Liner Thickness: _____ mil   Below-Grade Tank: Volume _____ bbls;   Construction Material _____

---

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒		REMEDIAL WORK ☐ ALTERING CASING ☐	
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐		COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDON ☐	
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐		CASING/CEMENT JOB ☐	
OTHER: ☐		OTHER: ☐	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Yates Petroleum Corporation plans to plug and abandon this well as follows:
1. MIRU all safety equipment necessary.
2. Set a CIBP at 2098' and cap with 35' cement.
3. Pull a CBL to determine the true TOC, calculated TOC at +/-108' from surface. If the TOC is inside the 8-5/8" casing, set at 1090'. Load hole with plugging mud and set a 25 sx plug from 1040'-1140', across the intermediate casing shoe. WOC and tag reset plug if necessary.
4. If the TOC is inside the 13-3/8" casing, set at 395'. Load hole with plugging mud and set a 25 sx plug from 345'-445', across the surface casing shoe. WOC and tag reset plug if necessary.
5. Perforate 25' above the TOC. Tie on to the 5-1/2" casing and attempt to establish circulation. Calculate a cement volume necessary to circulate cement to surface without displacing cement out of the 5-1/2" casing. This will leave the 5-1/2" casing and the 8-5/8" annulus full of cement.
6. WOC 24 hrs and tag plug. Set marker and reclaimed location as per regulations.

NOTE: Yates Petroleum Corporation will use steel pits and no earth pits

---

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE _Tina Huerta_   TITLE Regulatory Compliance Supervisor   DATE July 15, 2004

Type or print name Tina Huerta   E-mail address: tinah@ypcnm.com   Telephone No. 505-748-1471

For State Use Only
APPROVED BY: _Phil Hawkins_   TITLE _Field Inspector_   DATE 7/21/04
Conditions of Approval (if any):

WELL NAME: Bonnie YM No. 1   **FIELD:**

LOCATION: 990' FSL & 2,310' FWL Sec 26-18S-25E   Eddy County   NM

GL: 3,486'   **ZERO:**   **KB:** 3,494'

SPUD DATE: 12/08/83   **COMPLETION DATE:** 12/16/83

COMMENTS: API No. 30-015-24704

CASING PROGRAM

13-3/8" 68# K55 ST&C	395'
8-5/8" 24# K55 ST&C	1,090'
5.5" 14# J55 ST&C	3,250'

17-1/2" Hole

12-1/4" Hole

7-7/8" Hole

Not to Scale

13-3/8" @ 395'
w/ 400 sx (circ)

8-5/8" @ 1,090'
w/ 600 sx 1"ed to surface w\ 30 sx.

3,206'

5.5" @ 3,250'
w/ 550 sx

TD 3,250'

Before

Tops:
San Andres   709'
Yeso   2,020'

Potential:
1/17/84 20 BOPD
Current Production: 1 BOPM, 0 MCFM & 2 BWPM
Cummulative: 5,243 BO, 21,647 MCF & 7,724 BW

Perfs: 2,148' – 3,163'
Acidized w\ 9000 gallons
Fraced w\ 80,000 gal. linear gel and 190,000 # of Sand.

WELL NAME: Bonnie YM No. 1 **FIELD**: _____

LOCATION: 990' FSL & 2,310' FWL Sec 26-18S-25E   Eddy County   NM

GL: 3,486'   **ZERO**: _____   **KB**: 3,494'

SPUD DATE: 12/08/83   **COMPLETION DATE**: 12/16/83
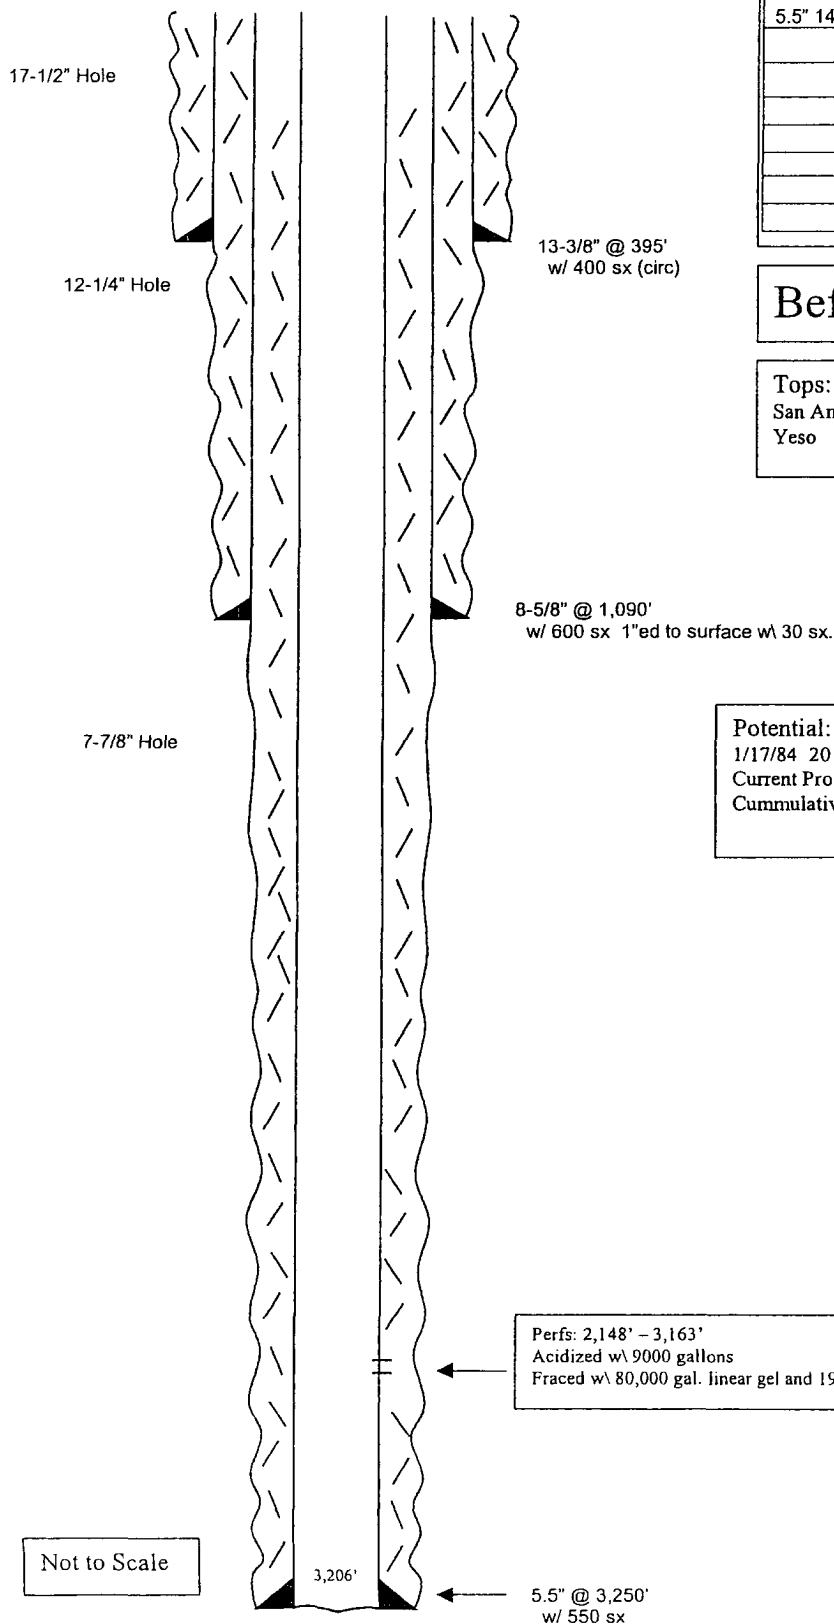
COMMENTS: API No. 30-015-24704

CASING PROGRAM

13-3/8" 68# K55 ST&C	395'
8-5/8" 24# K55 ST&C	1,090'
5.5" 14# J55 ST&C	3,250'

Est. TOC 108" on 5.5" csg.

17-1/2" Hole

perf. above cement top and circ. cmt. to surface.

13-3/8" @ 395' w/ 400 sx (circ)

12-1/4" Hole

25 sx plug from 345' – 445', across Surf. Casing Shoe

After

8-5/8" @ 1,090' w/ 600 sx 1"ed to surface w\ 30 sx.

25 sx plug from 1,040' – 1,140', across Int. Casing Shoe

7-7/8" Hole

Tops:
San Andres   709'
Yeso   2,020'

Potential:
1/17/84 20 BOPD
Current Production: 1 BOPM, 0 MCFM & 2 BWPM
Cummulative: 5,243 BO, 21,647 MCF & 7,724 BW

CIBP w\ 35' cement @ 2,098'

Perfs: 2,148' – 3,163'
Acidized w\ 9000 gallons
Fraced w\ 80,000 gal. linear gel and 190,000 # of Sand.

Not to Scale

3,206'

5.5" @ 3,250' w/ 550 sx

TD 3,250'