


Submit To Appropriate District Office State Lease - 6 copies Fee Lease - 5 copies <u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 <u>District II</u> 1301 W. Grand Avenue, Artesia, NM 88210 <u>District III</u> 1000 Rio Brazos Rd., Aztec, NM 87410 <u>District IV</u> 1220 S. St. Francis Dr., Santa Fe, NM 87505		State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505		Form C-105 Revised June 10, 2003	
				WELL API NO. 30-015-33664	
				5. Indicate Type of Lease STATE ☒ FEE ☐	
				State Oil & Gas Lease No. VO-5920	
WELL COMPLETION OR RECOMPLETION REPORT AND LOG					
1a. Type of Well: OIL WELL ☒ GAS WELL ☐ DRY ☐ OTHER _____				7. Lease Name or Unit Agreement Name	
b. Type of Completion: NEW ☒ WORK ☐ DEEPEN ☐ PLUG ☐ DIFF. WELL OVER BACK RESVR. ☐ OTHER _____				SLY HAWK STATE	
2. Name of Operator MARBOB ENERGY CORPORATION				8. Well No. 1	
3. Address of Operator PO BOX 227, ARTESIA, NM 88211-0227				9. Pool name or Wildcat WILLOW LAKE; DELAWARE, SW	
4. Well Location Unit Letter H : 2590 Feet From The NORTH Line and 990 Feet From The EAST Line Section 3 Township 25S Range 28E NMPM EDDY County					
10. Date Spudded 10/30/04	11. Date T.D. Reached 11/14/04	12. Date Compl. (Ready to Prod.) 12/13/04	13. Elevations (DF& RKB, RT, GR, etc.) 2995' GL	14. Elev. Casinghead	
15. Total Depth 6934'	16. Plug Back T.D. 6921'	17. If Multiple Compl. How Many Zones?	18. Intervals Drilled By	Rotary Tools 0 - 6934'	Cable Tools
19. Producing Interval(s), of this completion - Top, Bottom, Name 5250' - 6900' DELAWARE				20. Was Directional Survey Made YES	
21. Type Electric and Other Logs Run NONE			22. Was Well Cored NO		
23. CASING RECORD (Report all strings set in well)					
CASING SIZE	WEIGHT LB./FT.	DEPTH SET	HOLE SIZE	CEMENTING RECORD	AMOUNT PULLED
9 5/8"	36#	824'	12 1/4"	650 SX	NONE RECEIVED
5 1/2"	17#	6935'	7 7/8"	1475 SX, CIRC	NONE
					JAN 06 2005
					OCC ARTESIA
24. LINER RECORD					
SIZE	TOP	BOTTOM	SACKS CEMENT	SCREEN	
25. TUBING RECORD					
SIZE	DEPTH SET	PACKER SET			
2 7/8"	4344'				
26. Perforation record (interval, size, and number) 5250' - 6900' (24 SHOTS)			27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC. DEPTH INTERVAL AMOUNT AND KIND MATERIAL USED 5250'-6900' ACDZ W/ 9500 GAL NEFE 7.5% HCL		
28. PRODUCTION					
Date First Production 12/15/04	Production Method (<i>Flowing, gas lift, pumping - Size and type pump</i>) PUMPING			Well Status (<i>Prod. or Shut-in</i>) PROD	
Date of Test 12/18/04	Hours Tested 24	Choke Size	Prod'n For Test Period	Oil - Bbl 81	Gas - MCF 3
				Water - Bbl. 14	Gas - Oil Ratio
Flow Tubing Press.	Casing Pressure	Calculated 24-Hour Rate	Oil - Bbl.	Gas - MCF	Water - Bbl.
					Oil Gravity - API - (<i>Corr.</i>)
29. Disposition of Gas (<i>Sold, used for fuel, vented, etc.</i>) SOLD					Test Witnessed By LENDELL HAWKINS
30. List Attachments DEVIATION SURVEY, GYROSCOPIC SURVEYS					
31. I hereby certify that the information shown on both sides of this form as true and complete to the best of my knowledge and belief					
Signature 		Printed Name DIANA J. CANNON Title PRODUCTION ANALYST		Date 1/5/05	
E-mail Address PRODUCTION@MARBOB.COM					

INSTRUCTIONS

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well. It shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 25 through 29 shall be reported for each zone. The form is to be filed in quintuplicate except on state land, where six copies are required. See Rule 1105.

INDICATE FORMATION TOPS IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE

Southeastern New Mexico		Northwestern New Mexico	
T. Anhy	T. Canyon	T. Ojo Alamo	T. Penn. "B"
T. Salt	T. Strawn	T. Kirtland-Fruitland	T. Penn. "C"
B. Salt	T. Atoka	T. Pictured Cliffs	T. Penn. "D"
T. Yates	T. Miss	T. Cliff House	T. Leadville
T. 7 Rivers	T. Devonian	T. Menefee	T. Madison
T. Queen	T. Silurian	T. Point Lookout	T. Elbert
T. Grayburg	T. Montoya	T. Mancos	T. McCracken
T. San Andres	T. Simpson	T. Gallup	T. Ignacio Otzte
T. Glorieta	T. McKee	Base Greenhorn	T. Granite
T. Paddock	T. Ellenburger	T. Dakota	T.
T. Blinberry	T. Gr. Wash	T. Morrison	T.
T. Tubb	T. Delaware Sand 2570'	T. Todilto	T.
T. Drinkard	T. Bone Springs	T. Entrada	T.
T. Abo	T.	T. Wingate	T.
T. Wolfcamp	T.	T. Chinle	T.
T. Penn	T.	T. Permian	T.
T. Cisco (Bough C)	T.	T. Penn "A"	T.

OIL OR GAS SANDS OR ZONES

No. 1, from.....to.....

No. 2, from.....to.....

No. 3, from.....to.....

No. 4, from.....to.....

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from.....to.....feet.....
 No. 2, from.....to.....feet.....
 No. 3, from.....to.....feet.....

LITHOLOGY RECORD (Attach additional sheet if necessary)

From	To	Thickness In Feet	Lithology

From	To	Thickness In Feet	Lithology

L & M DRILLING, INC.

OIL WELL DRILLING CONTRACTORS

PO BOX 1370 ARTESIA, NEW MEXICO 88211-1370
(505) 746-4405 746-3518 748-2205

November 17, 2004

NOV 19 2004

Marbob Energy Corporation
PO Drawer 227
Artesia, NM 88211-0227

RE: Sly Hawk State #1
2590' FNL & 990' FEL
Sec. 3, T25S, R28E
Eddy County, New Mexico


Gentlemen:

The following is a Deviation Survey for the above captioned well.

DEPTH	DEVIATION	DEPTH	DEVIATION	DEPTH	DEVIATION
246'	3/4°	1544'	1°	2414'	2°
419'	1/4°	1642'	3/4°	2503'	1 1/2°
627'	1°	1698'	1/2°	2566'	1 3/4°
869'	3°	1733'	3/4°	2663'	1 3/4°
940'	3 1/4°	1795'	1/2°	2724'	1 1/2°
1054'	2 1/4°	1858'	1°	2815'	1°
1147'	1 1/2°	1921'	1 1/4°	2847'	1 1/2°
1210'	1 1/4°	2071'	3/4°	2998'	1°
1273'	1 1/4°	2106'	1 1/4°	3122'	1/2°
1304'	1 1/2°	2167'	1 3/4°	3248'	1/2°
1396'	1°	2228'	1 3/4°	3401'	1/2°
1424'	1 3/4°	2291'	2 3/4°	3556'	1/4°
1485'	1 1/4°	2353'	2 1/2°	3714'	1/4°

The remainder were directionally drilled and supplied by another company.



Very truly yours,



Eddie C. LaRue
Vice President


STATE OF NEW MEXICO }
COUNTY OF EDDY }

The foregoing was acknowledged before me this 17th day of November, 2004.

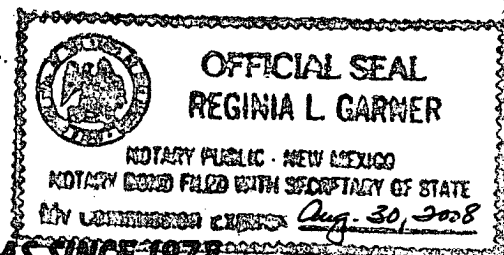
Notary Public

04-11-97

SERVING SOUTHEAST NEW MEXICO AND WEST TEXAS SINCE 1978

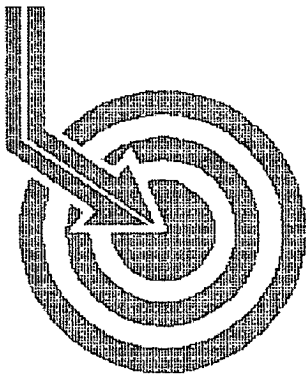

Scientific Drilling

MARBOB ENERGY

Field: Sly Hawk
Site: Eddy County, NM
Well: Sly Hawk State#1
Wellpath: VH - Job #32K1104688
Survey: 11/07/04


This survey is correct to the best of my knowledge
and is supported by actual field data.

Bucky Skarston.....Company Representative

Notorized this date 20th of December, 2004.

Deborah Sue Bynum

Notary Signature
County of Midland
State of Texas

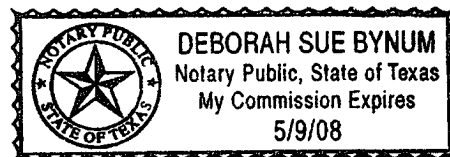




Scientific Drilling International Survey Report

Company: MARBOB ENERGY	Date: 12/20/2004	Time: 08:24:13	Page: 1
Field: Sly Hawk	Co-ordinate(NE) Reference:	Site: Eddy County, NM, Grid North	
Site: Eddy County, NM	Vertical (TVD) Reference:	SITE 0.0	
Well: Sly Hawk State#1	Section (VS) Reference:	Well (0.00N,0.00E,8.31Azi)	
Wellpath: VH - Job #32K1104688	Survey Calculation Method:	Minimum Curvature	Db: Sybase

Survey: 11/07/04 KSRG 0'-4328'	Start Date: 11/7/2004
Company: Scientific Drilling Internatio	Engineer: Foster/Guebara/Rowe
Tool: Keeper;Keeper Gyro	Tied-to: From Surface


Survey

MD ft	Incl deg	Azim deg	TVD ft	VS ft	N/S ft	E/W ft	DLS deg/100ft	ClsD ft	ClsA deg
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.0	0.00
100.0	0.09	100.35	100.0	0.0	0.0	0.1	0.09	0.1	100.35
200.0	0.41	353.84	200.0	0.3	0.3	0.1	0.45	0.3	19.43
300.0	0.58	347.56	300.0	1.2	1.2	0.0	0.18	1.2	358.47
400.0	0.64	1.64	400.0	2.2	2.2	-0.1	0.16	2.2	356.81
500.0	0.74	24.04	500.0	3.4	3.4	0.2	0.29	3.4	2.61
600.0	0.75	350.56	600.0	4.6	4.6	0.3	0.43	4.6	3.84
700.0	2.57	33.67	699.9	7.3	7.1	1.4	2.09	7.3	11.48
800.0	3.06	20.27	799.8	11.9	11.5	3.6	0.82	12.1	17.46
900.0	3.04	31.75	899.7	16.9	16.3	5.9	0.61	17.3	20.06
1000.0	2.40	27.89	999.6	21.4	20.4	8.3	0.66	22.0	22.21
1100.0	1.88	21.82	1099.5	24.9	23.7	9.9	0.57	25.7	22.64
1200.0	1.28	358.88	1199.4	27.6	26.4	10.5	0.86	28.4	21.69
1300.0	0.92	309.54	1299.4	29.1	28.0	9.9	0.98	29.7	19.38
1400.0	1.06	323.91	1399.4	30.2	29.3	8.7	0.28	30.5	16.53
1500.0	1.06	312.24	1499.4	31.4	30.6	7.5	0.22	31.5	13.69
1600.0	1.07	306.48	1599.4	32.3	31.8	6.0	0.11	32.4	10.73
1700.0	0.83	258.64	1699.4	32.5	32.2	4.6	0.80	32.5	8.07
1800.0	0.76	260.60	1799.4	32.1	32.0	3.2	0.08	32.1	5.71
1900.0	0.96	225.92	1899.4	31.2	31.3	1.9	0.55	31.3	3.55
2000.0	1.01	225.48	1999.3	29.9	30.1	0.7	0.05	30.1	1.35
2100.0	1.14	199.02	2099.3	28.2	28.5	-0.2	0.51	28.5	359.51
2200.0	1.62	182.68	2199.3	25.8	26.2	-0.6	0.62	26.2	358.61
2300.0	2.37	156.51	2299.2	22.6	22.9	0.1	1.16	22.9	0.31
2400.0	2.40	156.04	2399.1	19.1	19.1	1.8	0.04	19.1	5.39
2500.0	1.76	177.29	2499.1	15.8	15.6	2.7	0.99	15.8	9.89
2600.0	1.57	185.23	2599.0	13.0	12.7	2.7	0.30	13.0	11.86
2700.0	1.00	213.22	2699.0	10.8	10.6	2.1	0.83	10.8	11.01
2800.0	0.98	219.92	2799.0	9.3	9.2	1.0	0.12	9.3	6.42
2900.0	0.62	224.09	2899.0	8.1	8.2	0.1	0.37	8.2	0.80
3000.0	0.61	226.25	2999.0	7.3	7.4	-0.6	0.02	7.5	355.02
3100.0	0.57	226.61	3099.0	6.4	6.7	-1.4	0.04	6.9	348.24
3200.0	0.39	229.68	3199.0	5.8	6.1	-2.0	0.18	6.5	341.80
3300.0	0.33	237.03	3299.0	5.3	5.8	-2.5	0.08	6.3	336.38
3400.0	0.19	234.34	3399.0	5.0	5.5	-2.9	0.14	6.2	332.25
3500.0	0.22	239.61	3499.0	4.8	5.3	-3.2	0.03	6.2	328.96
3600.0	0.42	245.26	3599.0	4.5	5.1	-3.7	0.20	6.3	323.92
3700.0	0.31	237.04	3699.0	4.1	4.8	-4.3	0.12	6.4	318.29
3800.0	0.42	279.66	3799.0	3.9	4.7	-4.8	0.28	6.7	314.06
3900.0	0.16	86.58	3899.0	4.0	4.8	-5.1	0.58	6.9	313.20
4000.0	0.23	22.03	3999.0	4.2	4.9	-4.8	0.22	6.9	315.59
4100.0	0.58	284.38	4099.0	4.4	5.3	-5.3	0.65	7.4	314.99
4200.0	0.57	308.54	4199.0	4.7	5.7	-6.1	0.24	8.4	312.84
4300.0	0.32	235.88	4299.0	4.8	5.8	-6.8	0.56	8.9	310.86
4328.0	0.69	240.43	4327.0	4.7	5.7	-7.0	1.33	9.0	309.37



**Scientific
Drilling**


Field: Sly Hawk
Site: Eddy County, NM
Well: Sly Hawk State#1
Wellpath: VH - Job #32K1104688
Survey: 11/07/04



GT/M
Azimuths to Grid North
True North: 0.00°
Magnetic North: 0.00°

Magnetic Field
Strength: 0nT
Dip Angle: 0.00°
Date: 12/19/2004
Model: igrf2000

South(-)/North(+) [5ft/in]

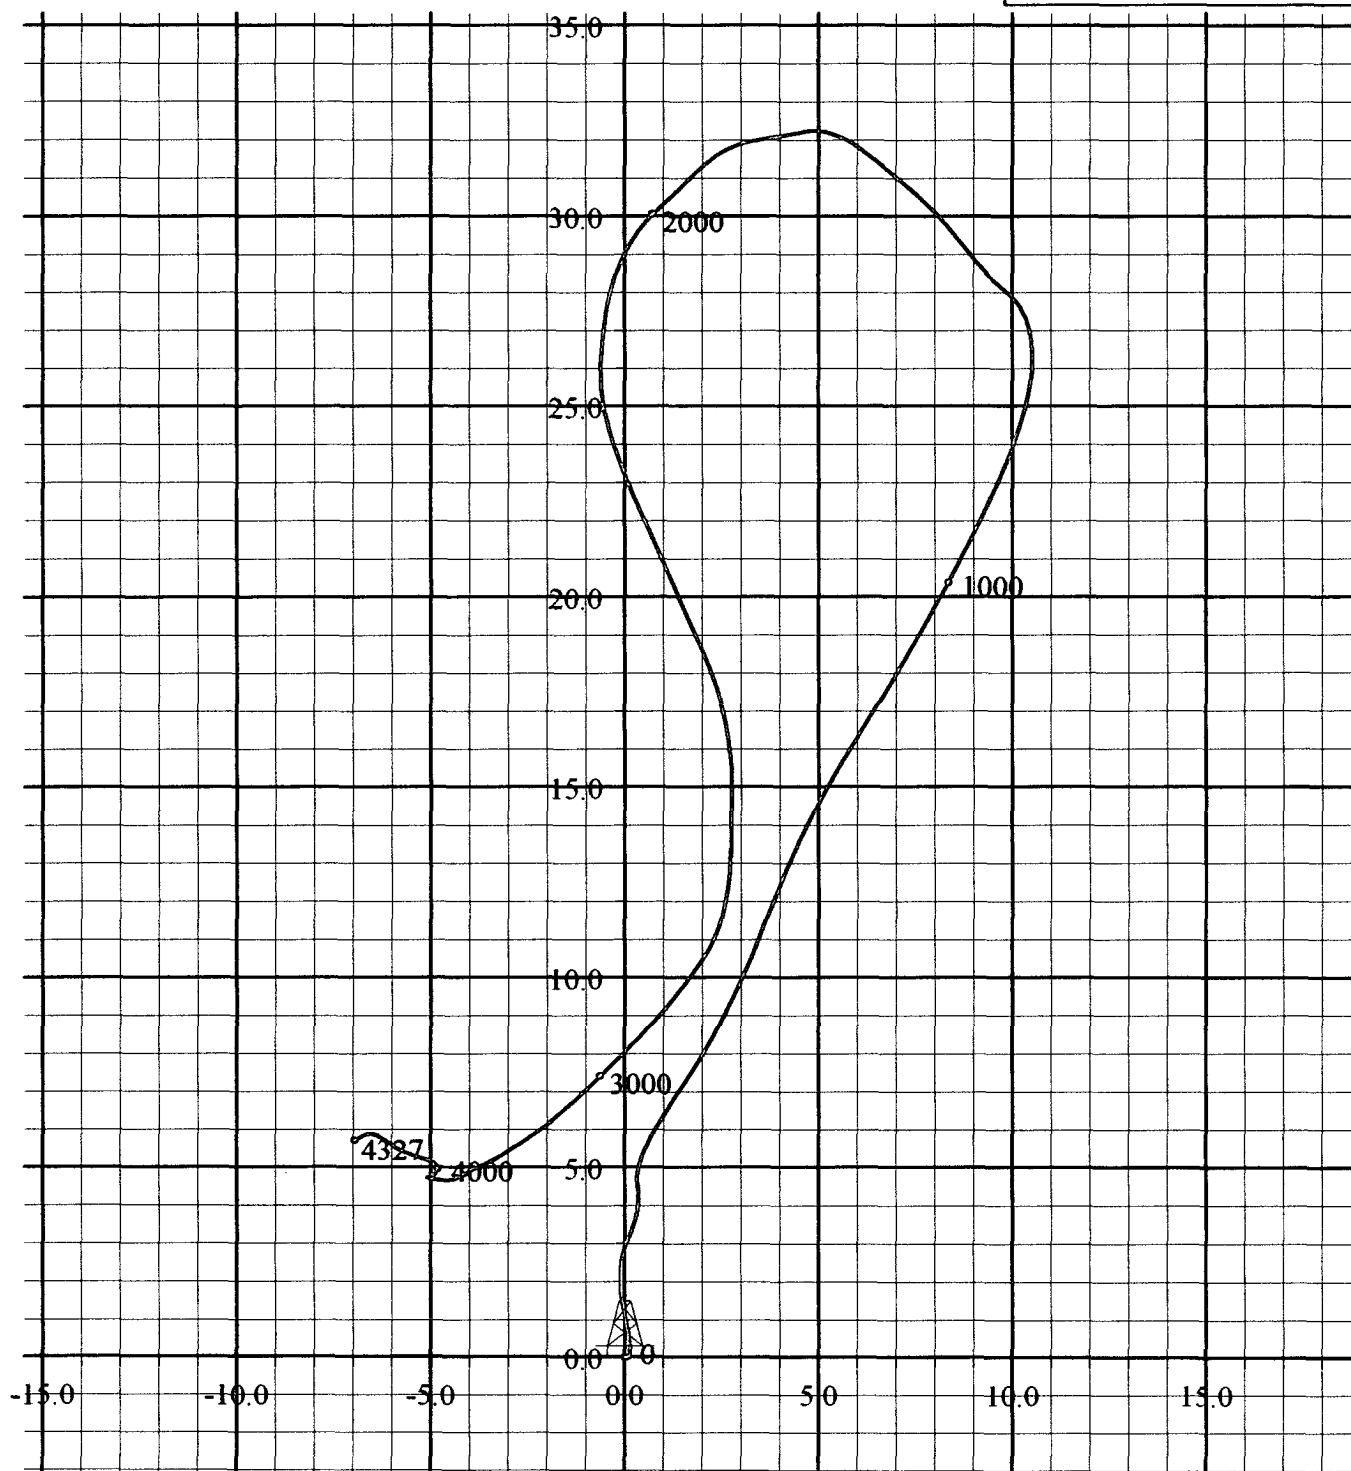

West(-)/East(+) [5ft/in]

PathFinder

Survey Report

Company: Marbob Energy	Date: 11/17/2004	Time: 17:12:42	Page: 1
Field: Sly Hawk State #1	Co-ordinate(NE) Reference: Well: Sly Hawk State #1, True North		
Site: Section 3, T-25S, R-28E	Vertical (TVD) Reference: SITE 0.0		
Well: Sly Hawk State #1	Section (VS) Reference: Well (0.00N,0.00E,8.31Azi)		
Wellpath: Original Hole	Survey Calculation Method: Minimum Curvature	Db: Sybase	

Field: Sly Hawk State #1
Eddy County, New Mexico

Map System: US State Plane Coordinate System 1927
Geo Datum: NAD27 (Clarke 1866)
Sys Datum: Mean Sea Level

Map Zone: New Mexico, Eastern Zone
Coordinate System: Well Centre
Geomagnetic Model: igrf2000

Site: Section 3, T-25S, R-28E
Eddy County, New Mexico

Site Position:	Northing: 421770.70 ft	Latitude: 32 9 33.440 N
From: Geographic	Easting: 581728.73 ft	Longitude: 104 4 9.230 W
Position Uncertainty: 0.00 ft		North Reference: True
Ground Level: 2994.00 ft		Grid Convergence: 0.14 deg

Well: Sly Hawk State #1	Slot Name:
Well Position: +N/-S 0.00 ft	Latitude: 32 9 33.440 N
+E/-W 0.00 ft	Longitude: 104 4 9.230 W
Position Uncertainty: 0.00 ft	

Wellpath: Original Hole	Drilled From: Surface
Current Datum: SITE	Tie-on Depth: 0.00 ft
Magnetic Data: 10/7/2004	Above System Datum: Mean Sea Level
Field Strength: 49364 nT	Declination: 8.80 deg
Vertical Section: Depth From (TVD)	Mag Dip Angle: 60.28 deg
ft	+N/-S
	ft
0.00	0.00
	0.00
	8.31

Survey: PathFinder MWD Surveys	Start Date: 11/8/2004
Company: PathFinder Energy Services	Engineer: Ron McIntyre
Tool:	Tied-to: User Defined

Survey: PathFinder MWD Surveys

MD ft	Incl deg	Azim deg	TVD ft	+N/-S ft	+E/-W ft	VS ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	Tool/Comment
4328.00	0.69	240.43	4326.95	5.72	-6.97	4.65	0.00	0.00	0.00	
4417.00	2.55	355.00	4415.92	7.43	-7.61	6.25	3.26	2.09	128.73	
4448.00	5.80	2.38	4446.84	9.68	-7.60	8.48	10.60	10.48	23.81	
4479.00	9.41	4.67	4477.56	13.77	-7.33	12.57	11.68	11.65	7.39	
4510.00	13.19	5.81	4507.95	19.82	-6.77	18.63	12.21	12.19	3.68	
4541.00	17.15	6.60	4537.87	27.88	-5.88	26.74	12.79	12.77	2.55	
4571.00	21.10	7.22	4566.20	37.64	-4.70	36.56	13.18	13.17	2.07	
4602.00	25.32	8.36	4594.69	49.74	-3.03	48.78	13.69	13.61	3.68	
4634.00	28.67	10.03	4623.20	64.07	-0.70	63.30	10.73	10.47	5.22	
4665.00	31.30	11.70	4650.05	79.28	2.23	78.77	8.90	8.48	5.39	
4696.00	34.12	11.79	4676.13	95.68	5.64	95.49	9.10	9.10	0.29	
4725.00	37.64	12.05	4699.62	112.31	9.15	112.45	12.15	12.14	0.90	
4757.00	41.59	12.49	4724.27	132.24	13.49	132.80	12.37	12.34	1.37	
4788.00	45.11	12.23	4746.81	153.02	18.04	154.03	11.37	11.35	-0.84	
4819.00	48.63	11.44	4768.00	175.16	22.68	176.60	11.51	11.35	-2.55	
4850.00	52.32	10.56	4787.72	198.63	27.24	200.48	12.10	11.90	-2.84	
4880.00	55.84	10.56	4805.32	222.51	31.69	224.76	11.73	11.73	0.00	
4911.00	58.56	10.56	4822.11	248.13	36.46	250.79	8.77	8.77	0.00	
4942.00	61.20	10.82	4837.67	274.47	41.44	277.58	8.55	8.52	0.84	
4973.00	64.28	10.12	4851.86	301.57	46.44	305.11	10.14	9.94	-2.26	
5003.00	67.27	8.98	4864.17	328.54	50.98	332.46	10.55	9.97	-3.80	
5034.00	70.70	8.27	4875.29	357.15	55.31	361.40	11.27	11.06	-2.29	
5065.00	73.78	7.92	4884.74	386.38	59.47	390.91	9.99	9.94	-1.13	
5096.00	76.24	9.15	4892.76	415.99	63.91	420.86	8.81	7.94	3.97	

PathFinder

Survey Report

Company: Marbob Energy Field: Sly Hawk State #1 Site: Section 3, T-25S, R-28E Well: Sly Hawk State #1 Wellpath: Original Hole	Date: 11/17/2004 Time: 17:12:42 Page: 2 Co-ordinate(NE) Reference: Well: Sly Hawk State #1, True North Vertical (TVD) Reference: SITE 0.0 Section (VS) Reference: Well (0.00N,0.00E,8.31Azi) Survey Calculation Method: Minimum Curvature Db: Sybase
--	--


Survey: PathFinder MWD Surveys

MD ft	Incl deg	Azim deg	TVD ft	+N/-S ft	+E/-W ft	VS ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	Tool/Comment
5127.00	78.96	9.33	4899.42	445.87	68.78	451.13	8.79	8.77	0.58	
5158.00	82.48	8.98	4904.41	476.07	73.64	481.71	11.41	11.35	-1.13	
5189.00	85.21	8.10	4907.74	506.54	78.22	512.53	9.25	8.81	-2.84	
5221.00	85.65	7.74	4910.29	538.14	82.61	544.43	1.77	1.37	-1.12	
5250.00	86.26	7.83	4912.33	566.80	86.53	573.35	2.13	2.10	0.31	
5280.00	87.05	7.83	4914.08	596.47	90.61	603.30	2.63	2.63	0.00	
5311.00	88.29	7.92	4915.34	627.15	94.86	634.27	4.01	4.00	0.29	
5341.00	88.55	7.92	4916.17	656.85	98.99	664.26	0.87	0.87	0.00	
5403.00	88.64	7.74	4917.69	718.26	107.43	726.24	0.32	0.15	-0.29	
5465.00	89.34	8.27	4918.78	779.64	116.06	788.23	1.42	1.13	0.85	
5528.00	89.78	8.10	4919.27	842.00	125.03	851.23	0.75	0.70	-0.27	
5589.00	90.04	8.10	4919.36	902.39	133.63	912.23	0.43	0.43	0.00	
5651.00	89.96	7.74	4919.36	963.80	142.17	974.23	0.59	-0.13	-0.58	
5683.00	90.04	7.57	4919.36	995.51	146.43	1006.22	0.59	0.25	-0.53	
5746.00	90.04	7.22	4919.32	1057.99	154.54	1069.22	0.56	0.00	-0.56	
5809.00	90.31	7.39	4919.13	1120.48	162.55	1132.21	0.51	0.43	0.27	
5871.00	89.69	7.48	4919.13	1181.95	170.58	1194.20	1.01	-1.00	0.15	
5933.00	89.08	7.31	4919.79	1243.44	178.56	1256.19	1.02	-0.98	-0.27	
5996.00	88.90	7.48	4920.90	1305.90	186.66	1319.17	0.39	-0.29	0.27	
6059.00	88.99	7.66	4922.06	1368.34	194.96	1382.15	0.32	0.14	0.29	
6122.00	88.46	7.57	4923.47	1430.77	203.31	1445.13	0.85	-0.84	-0.14	
6184.00	88.90	7.31	4924.89	1492.23	211.33	1507.11	0.82	0.71	-0.42	
6245.00	88.64	7.22	4926.20	1552.73	219.05	1568.08	0.45	-0.43	-0.15	
6302.00	89.60	8.19	4927.08	1609.21	226.69	1625.07	2.39	1.68	1.70	
6369.00	89.69	7.92	4927.49	1675.54	236.08	1692.07	0.42	0.13	-0.40	
6432.00	90.13	7.92	4927.59	1737.94	244.76	1755.07	0.70	0.70	0.00	
6495.00	90.31	7.74	4927.35	1800.35	253.34	1818.07	0.40	0.29	-0.29	
6557.00	89.87	7.39	4927.25	1861.81	261.50	1880.06	0.91	-0.71	-0.56	
6620.00	90.04	6.95	4927.30	1924.32	269.36	1943.05	0.75	0.27	-0.70	
6838.00	89.34	6.69	4928.48	2140.77	295.25	2160.97	0.34	-0.32	-0.12	
6935.00	89.34	6.69	4929.60	2237.11	306.55	2257.92	0.00	0.00	0.00	

Marbob Energy

Sly Hawk State #1
Eddy County, New Mexico
Final Plot / Surveys
Rig: L & M #1

SITE DETAILS
Section 3, T-25S, R-28E
Eddy County, New Mexico
Site Centre Latitude: 32°09'33.440N
Longitude: 104°04'09.230W
Ground Level: 2994.00
Positional Uncertainty: 0.00
Convergence: 0.14


Azimuths to True North
Magnetic North: 8.80°
Magnetic Field
Strength: 49364nT
Dip Angle: 60.28°
Date: 10/7/2004
Model: igr2000

