


Submit To Appropriate District Office State Lease - 6 copies Fee Lease - 5 copies District I 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Rd., Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505	State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505	Form C-105 Revised June 10, 2003					
		WELL API NO. 30-005-63541					
		5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>					
		State Oil & Gas Lease No.					
WELL COMPLETION OR RECOMPLETION REPORT AND LOG							
1a. Type of Well: OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> DRY <input type="checkbox"/> OTHER _____		7. Lease Name or Unit Agreement Name <div style="text-align: center; font-size: 1.2em;">Moonlight Fee</div>					
b. Type of Completion: NEW <input checked="" type="checkbox"/> WORK <input type="checkbox"/> DEEPEN <input type="checkbox"/> PLUG <input type="checkbox"/> DIFF. WELL OVER <input type="checkbox"/> BACK RESVR. <input type="checkbox"/> OTHER RECEIVED							
2. Name of Operator Nadel and Gussman Permian, L.L.C.		8. Well No. <div style="text-align: center; font-size: 1.2em;">1</div>					
3. Address of Operator 601 N. Marienfeld, Suite 508, Midland, TX 79707		9. Pool name or Wildcat Lost Lake					
4. Well Location Unit Letter <u> F </u> : <u> 1500 </u> Feet From The <u> North </u> Line and <u> 1500 </u> Feet From The <u> West </u> Line Section <u> 12 </u> Township <u> 9S </u> Range <u> 29E </u> NMPM Chaves County							
10. Date Spudded 12/18/04	11. Date T.D. Reached 1/19/05	12. Date Compl. (Ready to Prod.) 2/25/05	13. Elevations (DF& RKB, RT, GR, etc.) 4006' KB	14. Elev. Casinghead 4006'			
15. Total Depth 8752'	16. Plug Back T.D. 8700'	17. If Multiple Compl. How Many Zones?	18. Intervals Drilled By Rotary Tools 100%	Cable Tools			
19. Producing Interval(s), of this completion - Top, Bottom, Name 8660'-8670' Atoka			20. Was Directional Survey Made Yes				
21. Type Electric and Other Logs Run CNDL, DLL			22. Was Well Cored No				
23. CASING RECORD (Report all strings set in well)							
CASING SIZE	WEIGHT LB./FT.	DEPTH SET	HOLE SIZE	CEMENTING RECORD	AMOUNT PULLED		
13 3/8"	48#	338'	17 1/2"	400 sx Circ.			
8 5/8"	32#	3496'	11"	1050 sx Circ.			
5 1/2"	17# N-80	8741'		735 sx			
24. LINER RECORD SIZE TOP BOTTOM SACKS CEMENT SCREEN			25. TUBING RECORD SIZE DEPTH SET PACKER SET				
			26. Perforation record (interval, size, and number) 8660'-8670' MD, 6 SPF 60 holes				
			27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC. DEPTH INTERVAL AMOUNT AND KIND MATERIAL USED 8660'-8670' 1500 gals 7.5% HCL 8660'-8670' 29,500 lbs 20/40 inter prop, 45,000 gals 140 tons CO2				
28. PRODUCTION							
Date First Production 2/25/05		Production Method (Flowing, gas lift, pumping - Size and type pump) Flowing		Well Status (Prod. or Shut-in) Producing			
Date of Test 3/6/05	Hours Tested 24	Choke Size 48/64	Prod'n For Test Period	Oil - Bbl 0	Gas - MCF 247	Water - Bbl. 1	Gas - Oil Ratio
Flow Tubing Press. 115	Casing Pressure 115	Calculated 24-Hour Rate	Oil - Bbl.	Gas - MCF	Water - Bbl.	Oil Gravity - API - (Corr.)	
29. Disposition of Gas (Sold, used for fuel, vented, etc.) Sold					Test Witnessed By Lee Ledbetter		
30. List Attachments Wellbore schematic, Deviation Report, Set of Logs							
31. I hereby certify that the information shown on both sides of this form as true and complete to the best of my knowledge and belief							
Signature 		Printed Name Kem McCready		Title Operations Engineer		Date	
E-mail Address: kemm@naguss.com							

INSTRUCTIONS

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well. It shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 25 through 29 shall be reported for each zone. The form is to be filed in quintuplicate except on state land, where six copies are required. See Rule 1105.

INDICATE FORMATION TOPS IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE

Southeastern New Mexico		Northwestern New Mexico	
T. Anhy	T. Canyon 7846'	T. Ojo Alamo	T. Penn. "B"
T. Salt	T. Strawn 8088'	T. Kirtland-Fruitland	T. Penn. "C"
B. Salt	T. Atoka Lime 8422'	T. Pictured Cliffs	T. Penn. "D"
T. Yates 1287'	T. Morrow 8666'	T. Cliff House	T. Leadville
T. 7 Rivers	T. Devonian	T. Menefee	T. Madison
T. Queen	T. Silurian	T. Point Lookout	T. Elbert
T. Grayburg	T. Montoya	T. Mancos	T. McCracken
T. San Andres 2475'	T. Simpson	T. Gallup	T. Ignacio Otzte
T. Glorieta 2798'	T. McKee	Base Greenhorn	T. Granite
T. Paddock	T. Ellenburger	T. Dakota	T.
T. Blinebry	T. Gr. Wash	T. Morrison	T.
T. Tubb 5306'	T. Delaware Sand	T. Todilto	T.
T. Drinkard	T. Bone Springs	T. Entrada	T.
T. Abo 6060'	T. Morrow C.	T. Wingate	T.
T. Wolfcamp 7040'	T. Chester	T. Chinle	T.
T. Penn	T. Atoka Clastics	T. Permian	T.
T. Cisco (Shale) 7610'	L. Morrow	T. Penn "A"	T.

OIL OR GAS SANDS OR ZONES

No. 1, from.....to..... No. 3, from.....to.....
 No. 2, from.....to..... No. 4, from.....to.....

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from.....to..... feet.....
 No. 2, from.....to..... feet.....
 No. 3, from.....to..... feet.....


LITHOLOGY RECORD (Attach additional sheet if necessary)

From	To	Thickness In Feet	Lithology	From	To	Thickness In Feet	Lithology
3570	6270	700'	SD, DOL, SH, ANH				
6270	6760	490'	DOL, SH, LM				
6760	7090	330'	DOL, SH, ANH, CH				
7090	7550	460'	CH, LM, SH				
7550	8480	930'	LM, SH				
8480	8752	272'	LM, SH, SD				

NADEL AND GUSSMAN PERMIAN

**NGP MOONLIGHT FEE #1
RE-ENTRY OF CONCHO O'BRIEN #2
1500' FN & WL, Unit F, Sec 12-9S-29E, Chaves County, NM
API # 30 - 005 - 63541**

Elev: 4006'

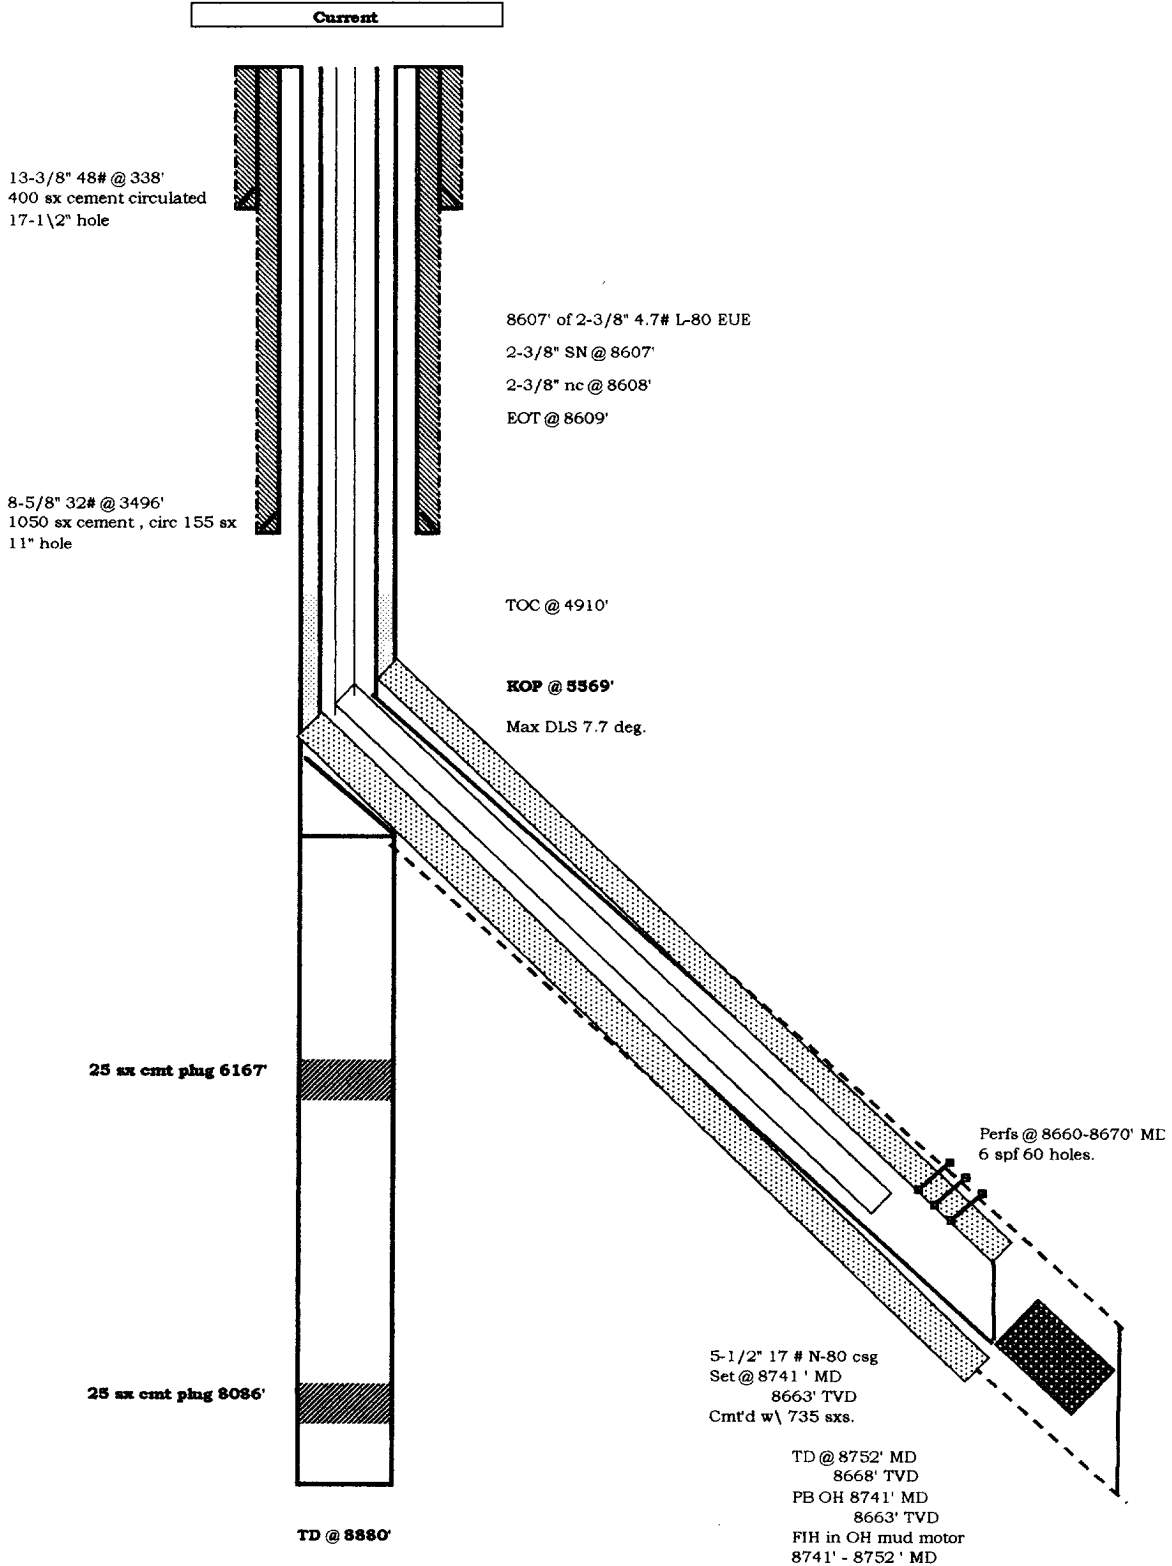

PathFinder
Survey Report

Company: Nadel & Gussman	Date: 1/20/2005	Time: 15:38:31	Page: 1
Field: Moonlight Fee #1	Co-ordinate(NE) Reference: Well: Moonlight Fee #1, True North		
Site: Sec 12, T-9S, R-29E	Vertical (TVD) Reference: SITE 0.0		
Well: Moonlight Fee #1	Section (VS) Reference: Well (0.00N,0.00E,113.21Azi)		
Wellpath: Moonlight Fee #1	Survey Calculation Method: Minimum Curvature	Db: Sybase	

Field: Moonlight Fee #1 Chaves County, New Mexico USA	Map Zone: New Mexico, Eastern Zone
Map System: US State Plane Coordinate System 1927	Coordinate System: Well Centre
Geo Datum: NAD27 (Clarke 1866)	Geomagnetic Model: igrf2000
Sys Datum: Mean Sea Level	

Site: Sec 12, T-9S, R-29E

Site Position:	Northing: 847489.21 ft	Latitude: 33 19 44.900 N
From: Geographic	Easting: 620420.08 ft	Longitude: 103 56 20.700 W
Position Uncertainty: 0.00 ft		North Reference: True
Ground Level: 4006.00 ft		Grid Convergence: 0.22 deg

Well: Moonlight Fee #1 Build & Hold	Slot Name:
Well Position: +N/-S 0.00 ft	Northing: 847489.21 ft
+E/-W 0.00 ft	Easting: 620420.08 ft
Position Uncertainty: 0.00 ft	
	Latitude: 33 19 44.900 N
	Longitude: 103 56 20.700 W

Wellpath: Moonlight Fee #1	Drilled From: Surface
Current Datum: SITE	Tie-on Depth: 0.00 ft
Magnetic Data: 12/1/2004	Above System Datum: Mean Sea Level
Field Strength: 50083 nT	Declination: 8.83 deg
Vertical Section: Depth From (TVD)	Mag Dip Angle: 61.40 deg
	+E/-W Direction
	deg
0.00	0.00
0.00	113.21

Survey: Gyro Survey	Start Date: 12/22/2004
Company: Gyrodata	Engineer: Ron McIntyre
Tool:	Tied-to: From Surface

Survey: Gyro Survey

MD ft	Incl deg	Azim deg	TVD ft	+N/-S ft	+E/-W ft	VS ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	Tool/Comment
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
94.40	0.97	38.71	94.40	0.62	0.50	0.21	1.03	1.03	0.00	
282.50	0.98	38.75	282.47	3.12	2.50	1.07	0.01	0.01	0.02	
470.60	0.94	39.88	470.54	5.56	4.50	1.94	0.02	-0.02	0.60	
658.70	0.98	43.19	658.62	7.92	6.59	2.94	0.04	0.02	1.76	
846.90	0.82	42.85	846.79	10.08	8.61	3.94	0.09	-0.09	-0.18	
1035.00	0.82	42.71	1034.87	12.05	10.43	4.84	0.00	0.00	-0.07	
1223.10	0.59	65.28	1222.96	13.45	12.23	5.94	0.19	-0.12	12.00	
1411.20	0.56	83.82	1411.05	13.95	14.02	7.39	0.10	-0.02	9.86	
1599.30	0.66	82.61	1599.14	14.19	16.01	9.12	0.05	0.05	-0.64	
1787.50	0.91	73.66	1787.32	14.75	18.52	11.21	0.15	0.13	-4.76	
1975.60	0.89	73.95	1975.40	15.57	21.36	13.49	0.01	-0.01	0.15	
2163.70	0.71	83.46	2163.48	16.11	23.92	15.63	0.12	-0.10	5.06	
2351.80	0.48	84.61	2351.57	16.32	25.86	17.34	0.12	-0.12	0.61	
2539.90	0.59	100.86	2539.66	16.21	27.59	18.97	0.10	0.06	8.64	
2728.10	0.41	97.91	2727.85	15.93	29.21	20.57	0.10	-0.10	-1.57	
2916.20	0.38	77.23	2915.95	15.98	30.49	21.72	0.08	-0.02	-10.99	
3104.30	0.32	51.81	3104.05	16.44	31.51	22.48	0.09	-0.03	-13.51	
3292.40	0.10	344.25	3292.15	16.92	31.88	22.63	0.16	-0.12	-35.92	
3480.50	0.12	294.46	3480.24	17.16	31.65	22.33	0.05	0.01	-26.47	
3668.70	0.16	304.37	3668.44	17.39	31.26	21.87	0.02	0.02	5.27	
3856.80	0.05	2.05	3856.54	17.62	31.04	21.59	0.07	-0.06	30.66	
4044.90	0.09	350.58	4044.64	17.85	31.02	21.48	0.02	0.02	-6.10	
4233.00	0.33	63.57	4232.74	18.24	31.48	21.75	0.17	0.13	38.80	

PathFinder
Survey Report

Company: Nadel & Gussman	Date: 1/20/2005	Time: 15:38:31	Page: 2
Field: Moonlight Fee #1	Co-ordinate(NE) Reference:	Well: Moonlight Fee #1, True North	
Site: Sec 12, T-9S, R-29E	Vertical (TVD) Reference:	SITE 0.0	
Well: Moonlight Fee #1	Section (VS) Reference:	Well (0.00N,0.00E,113.21Azi)	
Wellpath: Moonlight Fee #1	Survey Calculation Method:	Minimum Curvature	Db: Sybase

Survey: Gyro Survey

MD ft	Incl deg	Azim deg	TVD ft	+N/-S ft	+E/-W ft	VS ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	Tool/Comment
4421.10	0.16	38.39	4420.84	18.68	32.13	22.17	0.10	-0.09	-13.39	
4609.30	0.18	37.07	4609.04	19.13	32.47	22.31	0.01	0.01	-0.70	
4797.40	0.09	357.29	4797.14	19.51	32.64	22.31	0.07	-0.05	-21.15	
4892.00	0.08	349.02	4891.74	19.65	32.63	22.24	0.02	-0.01	-8.74	
4986.60	0.19	4.31	4986.34	19.87	32.63	22.16	0.12	0.12	16.16	
5081.20	0.27	4.93	5080.94	20.25	32.66	22.04	0.08	0.08	0.66	
5175.80	0.23	352.08	5175.54	20.66	32.65	21.87	0.07	-0.04	-13.58	
5270.40	0.22	355.75	5270.14	21.03	32.61	21.69	0.02	-0.01	3.88	
5365.00	0.64	10.30	5364.73	21.73	32.69	21.48	0.46	0.44	15.38	
5459.60	0.19	7.85	5459.33	22.40	32.81	21.32	0.48	-0.48	-2.59	
5554.20	0.40	2.07	5553.93	22.89	32.84	21.16	0.22	0.22	-6.11	
5664.80	0.33	18.47	5664.53	23.58	32.96	21.00	0.11	-0.06	14.83	
5743.40	0.37	41.86	5743.13	23.98	33.20	21.06	0.19	0.05	29.76	
5775.10	0.52	61.34	5774.83	24.13	33.39	21.18	0.67	0.47	61.45	

Pathfinder

Survey Report

Page 1
Job No: JWT-0412-0175-WTWT
Date: 1/20/2005
Time: 3:25 pm
Wellpath ID: moonligh
Date Created: 12/21/2004
Last Revision: 1/20/2005

Calculated using the Minimum Curvature Method
Computed using PDS VER2.2.6
Vertical Section Plane: 113.21 deg.

Survey Reference: WELLHEAD
Vertical Section Reference: WELLHEAD
Closure Reference: WELLHEAD
TVD Reference: WELLHEAD

NADEL AND GUSSMAN
MOONLIGHT FEE #1
CHAVES CO., NM
RIG: NABORS #142

DECL: 8.83° EAST TO TRUE
KBH = 17' ROTARY TO GROUND

PATHFINDER OFFICE SUPERVISOR:
PATRICK COLLINS
PATHFINDER FIELD ENGINEERS:
CODY MEBANE

Measured Depth (ft)	Incl (deg.)	Drift Dir. (deg.)	TVD (ft)	Course Length (ft)	Vertical Section (ft)	TOTAL Rectangular Offsets (ft)		Closure Dist. (ft)	Dir. (deg.)	DLS (dg/100ft)
TIED INTO GYRO-DATA @ 5554' MD										
5554.17	0.40	2.07	5553.90	0.00	21.14	22.89 N	32.82 E	40.01@	55.11	0.00
THE FOLLOWING ARE PATHFINDER MWD SURVEYS										
5569.00	0.62	89.78	5568.73	14.83	21.20	22.94 N	32.90 E	40.11@	55.11	4.88
5585.00	0.97	92.15	5584.73	16.00	21.40	22.94 N	33.12 E	40.25@	55.30	2.20
5617.00	1.85	100.85	5616.72	32.00	22.16	22.83 N	33.90 E	40.87@	56.04	2.82
5648.00	3.25	103.58	5647.69	31.00	23.52	22.53 N	35.25 E	41.83@	57.41	4.53
5678.00	5.36	109.55	5677.60	30.00	25.75	21.86 N	37.39 E	43.32@	59.69	7.18
5709.00	7.12	114.21	5708.42	31.00	29.12	20.59 N	40.51 E	45.44@	63.06	5.90
5740.00	8.88	116.85	5739.11	31.00	33.43	18.72 N	44.40 E	48.18@	67.14	5.80
5770.00	10.11	117.73	5768.70	30.00	38.36	16.45 N	48.80 E	51.48@	71.37	4.13
5802.00	10.55	119.66	5800.18	32.00	44.08	13.69 N	53.83 E	55.54@	75.73	1.75
5833.00	10.64	119.92	5830.65	31.00	49.74	10.86 N	58.77 E	59.77@	79.53	0.33
5865.00	10.64	121.15	5862.10	32.00	55.60	7.86 N	63.86 E	64.34@	82.98	0.71
5897.00	10.90	121.68	5893.54	32.00	61.52	4.74 N	68.97 E	69.13@	86.07	0.87
5929.00	11.43	120.63	5924.94	32.00	67.65	1.54 N	74.27 E	74.28@	88.81	1.77
5960.00	12.31	119.22	5955.27	31.00	73.98	1.64 S	79.80 E	79.81@	91.18	2.99
5992.00	13.01	117.90	5986.49	32.00	80.97	4.99 S	85.96 E	86.10@	93.32	2.37
6024.00	13.63	117.29	6017.63	32.00	88.32	8.41 S	92.49 E	92.87@	95.19	1.99
6055.00	14.25	115.79	6047.72	31.00	95.77	11.74 S	99.17 E	99.86@	96.75	2.31
6118.00	14.95	115.27	6108.69	63.00	111.64	18.58 S	113.50 E	115.01@	99.30	1.13
6182.00	14.16	116.14	6170.63	64.00	127.71	25.56 S	128.00 E	130.52@	101.29	1.28
6243.00	13.98	118.17	6229.80	61.00	142.50	32.32 S	141.19 E	144.84@	102.89	0.86
6274.00	13.72	119.66	6259.90	31.00	149.88	35.91 S	147.68 E	151.95@	103.67	1.42
6305.00	13.81	119.57	6290.01	31.00	157.21	39.55 S	154.10 E	159.09@	104.40	0.30
6336.00	13.81	118.96	6320.11	31.00	164.57	43.17 S	160.55 E	166.26@	105.05	0.47
6368.00	14.07	117.81	6351.17	32.00	172.25	46.84 S	167.33 E	173.77@	105.64	1.19

Pathfinder Survey Report

Page 2
Date: 1/20/2005
Wellpath ID: moonligh

Measured Depth (ft)	Incl (deg.)	Drift Dir. (deg.)	TVD (ft)	Course Length (ft)	Vertical Section (ft)	TOTAL		Closure		DLS (dg/100ft)
						Rectangular (ft)	Offsets (ft)	Dist. (ft)	Dir. (deg.)	
6399.00	14.25	117.20	6381.23	31.00	179.81	50.34 S	174.06 E	181.19@	106.13	0.75
6430.00	15.21	117.20	6411.21	31.00	187.68	53.94 S	181.07 E	188.94@	106.59	3.10
6461.00	15.56	117.11	6441.10	31.00	195.88	57.69 S	188.39 E	197.03@	107.03	1.13
6493.00	16.00	116.32	6471.89	32.00	204.57	61.61 S	196.16 E	205.61@	107.43	1.53
6525.00	16.80	114.91	6502.59	32.00	213.59	65.51 S	204.31 E	214.56@	107.78	2.79
6555.00	17.32	113.24	6531.27	30.00	222.39	69.10 S	212.35 E	223.31@	108.02	2.38
6587.00	17.06	112.98	6561.84	32.00	231.85	72.81 S	221.04 E	232.73@	108.23	0.85
6619.00	16.53	113.95	6592.48	32.00	241.09	76.49 S	229.53 E	241.94@	108.43	1.87
6649.00	16.00	115.27	6621.28	30.00	249.49	79.99 S	237.17 E	250.29@	108.64	2.15
6682.00	15.56	116.41	6653.03	33.00	258.46	83.90 S	245.24 E	259.20@	108.89	1.63
6712.00	16.00	116.41	6681.90	30.00	266.60	87.53 S	252.55 E	267.29@	109.11	1.47
6744.00	16.36	116.06	6712.63	32.00	275.51	91.47 S	260.55 E	276.14@	109.34	1.17
6807.00	16.36	113.86	6773.08	63.00	293.24	98.95 S	276.63 E	293.80@	109.68	0.98
6869.00	16.00	113.60	6832.63	62.00	310.52	105.91 S	292.45 E	311.03@	109.91	0.59
6932.00	14.86	113.95	6893.36	63.00	327.28	112.66 S	307.79 E	327.76@	110.10	1.82
6995.00	14.86	114.47	6954.25	63.00	343.43	119.29 S	322.52 E	343.86@	110.30	0.21
7059.00	15.65	114.83	7015.99	64.00	360.27	126.31 S	337.83 E	360.67@	110.50	1.24
7121.00	15.52	115.72	7075.71	62.00	376.91	133.42 S	352.89 E	377.27@	110.71	0.44
7185.00	14.95	115.76	7137.46	64.00	393.71	140.73 S	368.04 E	394.03@	110.93	0.89
7247.00	14.95	115.92	7197.37	62.00	409.69	147.70 S	382.44 E	409.97@	111.12	0.07
7310.00	15.30	114.45	7258.18	63.00	426.12	154.69 S	397.31 E	426.36@	111.27	0.82
7371.00	15.74	111.99	7316.96	61.00	442.44	161.12 S	412.31 E	442.67@	111.34	1.30
7432.00	16.36	109.99	7375.58	61.00	459.29	167.16 S	428.05 E	459.53@	111.33	1.36
7495.00	15.83	109.73	7436.11	63.00	476.72	173.09 S	444.48 E	476.99@	111.28	0.85
7557.00	16.09	109.46	7495.72	62.00	493.74	178.81 S	460.54 E	494.04@	111.22	0.44
7619.00	15.56	111.66	7555.37	62.00	510.62	184.74 S	476.37 E	510.94@	111.20	1.29
7683.00	15.21	114.65	7617.08	64.00	527.60	191.41 S	491.98 E	527.90@	111.26	1.35
7746.00	16.00	114.21	7677.76	63.00	544.54	198.42 S	507.41 E	544.83@	111.36	1.27
7807.00	16.00	114.39	7736.40	61.00	561.35	205.34 S	522.73 E	561.62@	111.45	0.08
7870.00	15.74	114.39	7796.99	63.00	578.58	212.45 S	538.42 E	578.82@	111.53	0.41
7934.00	15.30	117.99	7858.66	64.00	595.67	220.00 S	553.79 E	595.89@	111.67	1.65
8012.00	14.86	119.57	7933.98	78.00	615.86	229.76 S	571.57 E	616.03@	111.90	0.77
8087.00	14.68	118.96	8006.50	75.00	634.88	239.11 S	588.25 E	634.99@	112.12	0.32
8179.00	15.04	117.02	8095.42	92.00	658.39	250.18 S	609.09 E	658.47@	112.33	0.67
8209.00	14.77	117.11	8124.41	30.00	666.09	253.69 S	615.96 E	666.16@	112.38	0.90
8286.00	13.81	113.60	8199.03	77.00	685.07	261.84 S	633.12 E	685.13@	112.47	1.68
8350.00	14.42	112.45	8261.10	64.00	700.68	267.94 S	647.48 E	700.73@	112.48	1.05
8412.00	16.62	113.07	8320.83	62.00	717.26	274.37 S	662.78 E	717.32@	112.49	3.56
8476.00	16.53	113.77	8382.17	64.00	735.52	281.62 S	679.53 E	735.58@	112.51	0.34
8538.00	16.00	113.16	8441.69	62.00	752.89	288.54 S	695.46 E	752.94@	112.53	0.90
8599.00	14.77	112.89	8500.50	61.00	769.07	294.87 S	710.35 E	769.12@	112.54	2.02
8663.00	14.77	114.91	8562.39	64.00	785.38	301.48 S	725.27 E	785.43@	112.57	0.80
STRAIGHT LINE PROJECTION TO BIT @ 8752'MD										
8752.00	14.77	114.91	8648.45	89.00	808.06	311.03 S	745.85 E	808.10@	112.64	0.00