

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico

Energy Minerals and Natural Resources

Department

Oil Conservation Division

1220 South St. Francis Dr.

NMOC D ARTESIA Santa Fe, NM 87505

Form C-144 CLEZ
July 21, 2008

For closed-loop systems that only use above ground steel tanks or haul-off bins and propose to implement waste removal for closure, submit to the appropriate NMOC District Office.

Closed-Loop System Permit or Closure Plan Application

(that only use above ground steel tanks or haul-off bins and propose to implement waste removal for closure)

Type of action: ☒ Permit ☐ Closure

Instructions: Please submit one application (Form C-144 CLEZ) per individual closed-loop system request. For any application request other than for a closed-loop system that only use above ground steel tanks or haul-off bins and propose to implement waste removal for closure, please submit a Form C-144.

Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.

1. Operator: OXY USA Inc OGRID #: 16696

Address: PO BOX 50250 - Midland, TX 79710

Facility or well name: Cedar Canyon 16-1H

API Number: 30-015-39856 OCD Permit Number: NA 212536

U/L or Qtr/Qtr M Section 16 Township 24S Range 29E, NMPM County: Eddy

Center of Proposed Design: Latitude N 32.212358° Longitude 103.995374° NAD: ☒ 1927 ☐ 1983

Surface Owner: ☐ Federal ☒ State ☐ Private ☐ Tribal Trust or Indian Allotment

2. ☒ Closed-loop System: Subsection H of 19.15.17.11 NMAC

Operation: ☒ Drilling a new well ☐ Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent) ☐ P&A

☒ Above Ground Steel Tanks or ☒ Haul-off Bins

3. Signs: Subsection C of 19.15.17.11 NMAC

☒ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers

☒ Signed in compliance with 19.15.3.103 NMAC

4. Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC

Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.

☒ Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC

☒ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC

☐ Closure Plan (Please complete Box 5) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC

☐ Previously Approved Design (attach copy of design) API Number: _____

☐ Previously Approved Operating and Maintenance Plan API Number: _____

5. Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17.13.D NMAC)

Instructions: Please identify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if more than two facilities are required.

Disposal Facility Name: Control Recovery Inc. Disposal Facility Permit Number: R9166

Disposal Facility Name: Sundance Landfill Disposal Facility Permit Number: NM-01-003

Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future service and operations?

☐ Yes (If yes, please provide the information below) ☒ No

Required for impacted areas which will not be used for future service and operations:

☐ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC


☐ Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC

☐ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

Operator Application Certification:

I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.

Name (Print): Douglas Muir Title: Drilling Engineer

Signature:  Date: 23-Jan-2012

-mail address: douglas.muir@oxy.com Telephone: (713) 366-5852

7. **OCD Approval:** ☒ Permit Application (including closure plan) ☐ Closure Plan (only)

OCD Representative Signature: R. Dade Approval Date: 02/17/2012

Title: Asst. Supv. OCD Permit Number: 212536

8. **Closure Report (required within 60 days of closure completion):** Subsection K of 19.15.17.13 NMAC

Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.

☐ Closure Completion Date: _____

9. **Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only:**

Instructions: Please identify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities were utilized.

Disposal Facility Name: _____ Disposal Facility Permit Number: _____

Disposal Facility Name: _____ Disposal Facility Permit Number: _____

Were the closed-loop system operations and associated activities performed on or in areas that *will not* be used for future service and operations?

☐ Yes (If yes, please demonstrate compliance to the items below) ☐ No

Required for impacted areas which will not be used for future service and operations:

- ☐ Site Reclamation (Photo Documentation)
☐ Soil Backfilling and Cover Installation
☐ Re-vegetation Application Rates and Seeding Technique

10.

Operator Closure Certification:

I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.

Name (Print): _____ Title: _____

Signature: _____ Date: _____

e-mail address: _____ Telephone: _____




New Mexico Drilling Daily Circulating System Inspection
For Closed Loop Systems

Wellname:		Permit #:		Rlg Mobe Date:	
County:				Rlg Demobe Date:	

Inspection Date	Time	By Whom	Any drips or leaks from steel tanks, lines or pumps not contained?* Explain.	Has any hazardous waste been disposed of in system?

All circulating systems to be inspected DAILY during drilling operations.
*Any leak of the steel tanks, lines or pumps shall be reported to the NMOCD and repaired within 48 hours.

BILL OF MATERIAL			LENGTH	WEIGHT
ITEM	QTY.	DESCRIPTION		

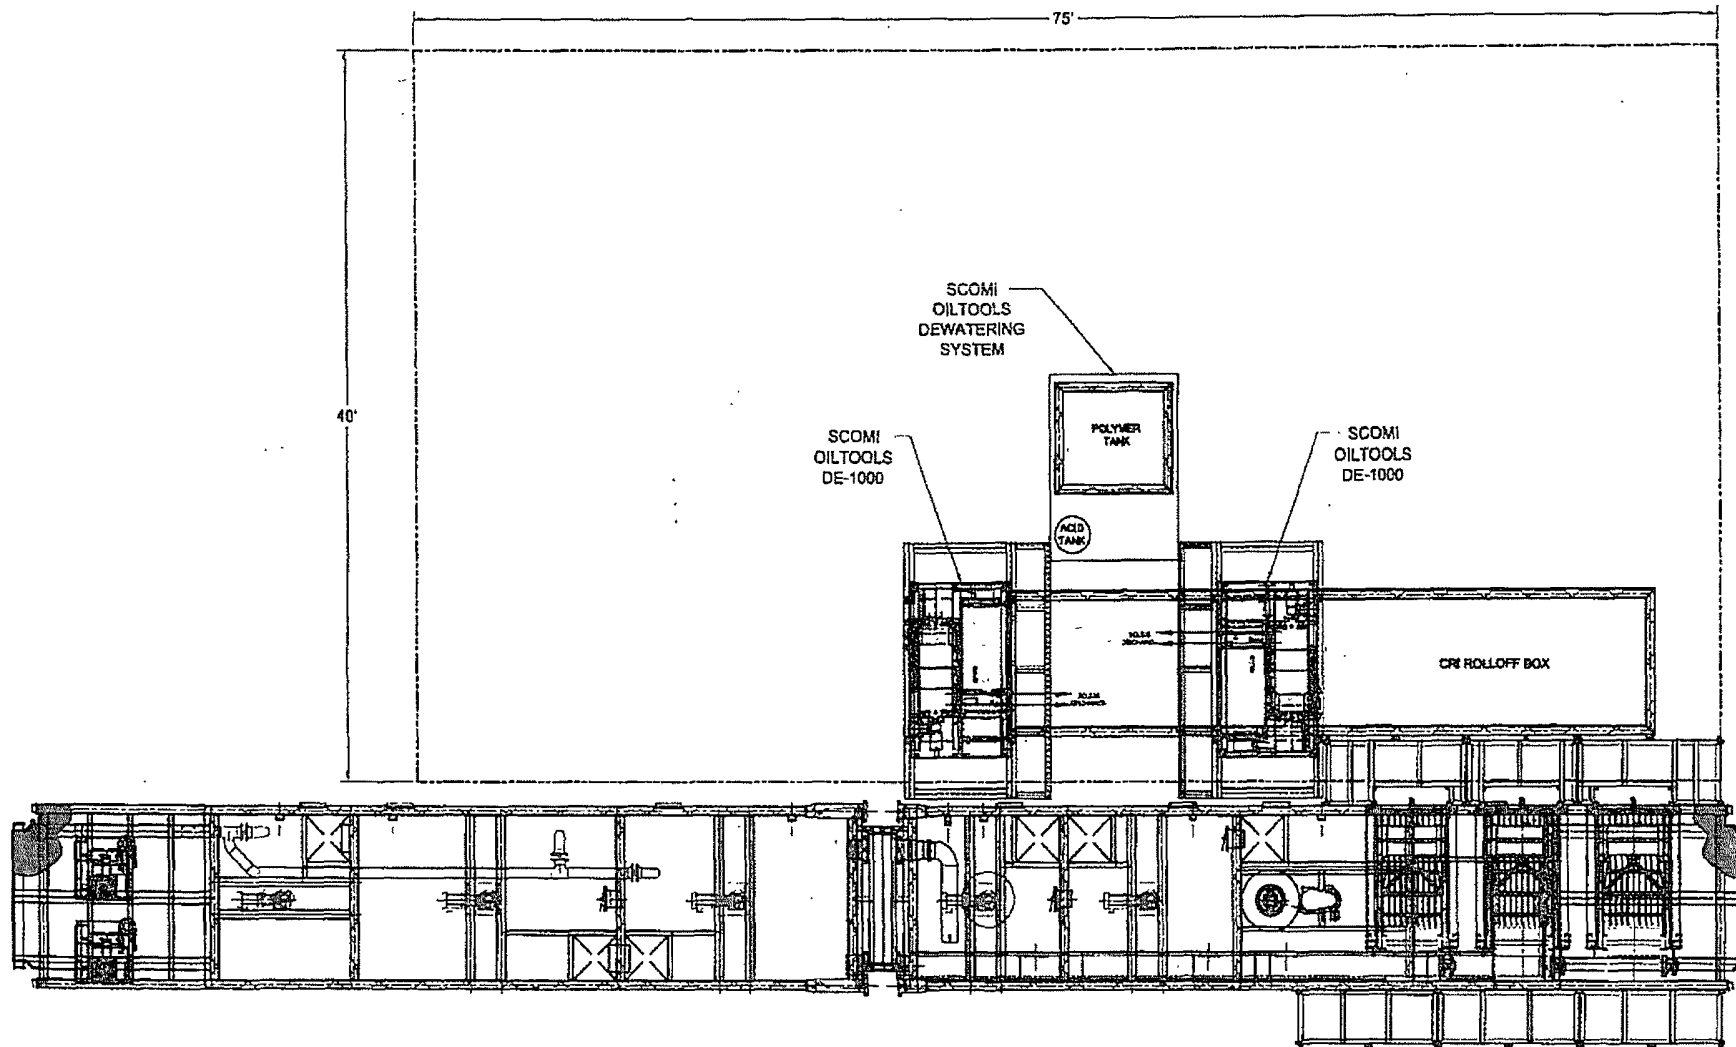

				1. ALL STRUCTURAL MATERIAL SHALL BE ASTM - A36. 2. ALL PIPE SHALL BE 40 MATERIAL SA 105 DI. 18 3. ALL FLANGES SHALL BE SCRF, 150# DI MATERIAL SA 105. 4. ALL FITTINGS SCRF, 40 MATERIAL SHALL BE SA 254 DI. WPS. 5. TANK FABRICATION SHALL BE IN ACCORDANCE WITH API-650.				7.2 CLOSED LOOP SYSTEM BASIC LAYOUT AND TIE IN OXY - H&P - FLEX RIGS / PG 1 OF 2				Scomi 871 E. Sun Southern Parkway East, Suite 204, Birmingham, Texas 77008 PHONE: (713) 822-0010, (713) 822-0000																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
The design, information and disclosure on this drawing or copies are the exclusive confidential property of Scomi International and are not to be reproduced or disclosed to others by any means, in any form, or by any means, or transmitted into a machine language or used for reproduction or any other purpose without the written consent of Scomi International. In receipt of such permission, any and all use of this drawing or any copies hereof, and any copies shall be returned to Scomi International within one month.				DESIGNED BY PDL				DATE 10/20/08				CHECKED BY DATE				SCALE NTS				UNIT D				JOB NO.				REVISED BY DATE				JOB NO.																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
A				ATLAS 3 H&P 2 20 DIEN (H&P)				REV. NO.				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE				DATE			

521S-014

A

Operator Name/Number: OXY USA Inc. 16696
 Lease Name/Number: Cedar Canyon 16 #1H
 Pool Name/Number: Corral Draw Bone Spring 96238
 Surface Location: 808 FSL 660 FWL M Sec 16 T24S R29E
 Bottom Hole Location: 380 FNL 660 FWL D Sec 16 T24S R29E

C-102 Plats: 8/16/11 10/26/11 1/24/11 Elevation: 2924' GL

Proposed TD: 7670' TVD 11525' TMD
 SL - Lat:32.212358 Long:103.995374 X=441139.4 Y=604523.6 NAD - 1927
 BH - Lat: Long: X=445260.4 Y=604499.3 NAD - 1927

Casing Program:

Hole Size	Interval	OD Csg	Weight	Collar	Grade	Condition	Collapse Design Factor	Burst Design Factor	Tension Design Factor
17-1/2"	328'	13-3/8"	48	ST&C	H-40	New	1.98	4.62	2.38
				Hole filled with 8.4# Mud			770#	1730#	
12-1/4"	2970'	9-5/8"	40	LT&C	J-55	New	1.16	1.21	2.12
				Hole filled with 10.0# Mud			2570#	3950#	
8-3/4"	11525'	5-1/2"	17	LT&C	N-80	New	1.6	2.69	1.89
				Hole filled with 9.2# Mud			6280#	7740#	

Collapse and burst loads calculated using Stress Check with anticipated loads

Cement Program:

- 13-3/8" Surface Circulate cement to surface w/ 400sx PP cmt w/ 2% CaCl₂, 14.8ppg 1.35 yield 2500# 24hr CS 150% Excess
- 9-5/8" Intermediate Circulate cement to surface w/ 930sx HES light PP cmt w/ 5% Salt + 3#/sx Kol-Seal + .5% Halad-344 + 1% CaCl₂ + .125#/sx Poly-E-Flake, 12.9ppg 1.88 yield 840# 24hr CS 125% Excess followed by 200sx PP cmt w/ .5% WellLife-734, 14.8ppg 1.33 yield 1343# 24hr CS 125% Excess
- 5-1/2" Production Cement w/ 845sx IFH cmt w/ 3#/sx Kol-Seal + .5% Halad R-322 + .3% HR-601, 11.9ppg 2.47 yield 416# 24hr CS 70% Excess followed by 970sx Super H cmt w/ 0.5 Halad 344 + 0.4% CFR 3 + 3#/sx Kol Seal + .3% HR-601 + 1#/sx Salt, 13.2ppg 1.63 yield 1817# 24hr CS 50% Excess

Proposed Mud Circulation System:

Depth	Mud Wt. ppg	Visc sec	Fluid Loss	Type System
0 - 328'	8.4-8.9	32-34	NC	Fresh Water/Spud Mud
328 - 2970'	9.8-10.0	28-29	NC	Brine Water
2970 - TD	9.0-9.2	50-50	8-15	LSND

Pump high viscosity sweeps as needed for hole cleaning. The mud system will be monitored visually/manually as well as with an electronic PVT. The necessary mud products for additional weight and fluid loss control will be on location at all times.

BOP Program:

Surface None
 Intermediate/Production 13-5/8" 10M two ram stack w/ 5M annular preventer, 10M Choke Manifold

Estimated Tops of Geological Markers & Depths of Anticipated Fresh Water, Oil or Gas:

Geological Marker	Depth	Type	Source
a. Rustler	324'	Formation	Drilling
b. Bottom Salt	2744'	Formation	Drilling
c. Delaware-Bell Canyon	2979'	Oil/Gas	Drilling
d. Delaware-Cherry Canyon	3839'	Oil/Gas	Drilling
e. Delaware-Brushy Canyon	5064'	Oil/Gas	Drilling
f. Bone Spring	6654'	Oil/Gas	Drilling
g. 1st Bone Spring	7674'	Oil/Gas	Drilling

Date: 12/29/2011



Weatherford International Ltd.

WFT Plan Report - X & Y's



Weatherford

Company: Occidental Permian Ltd. Date: 12/29/2011 Time: 14:53:24 Page: 1
 Field: Eddy Co, NM (Nad 27) Co-ordinate(NE) Reference: Well: 1H, Grid North
 Site: Cedar Canyon 16 #1H Vertical (TVD) Reference: SITE 2948.0
 Well: 1H Section (VS) Reference: Well (0.00N,0.00E,359.66Azi)
 Wellpath: 1 Survey Calculation Method: Minimum Curvature Db: Sybase

Plan: Plan #2 Date Composed: 12/29/2011
 Principal: Yes Version: 1
 Tied-to: From Surface

Field: Eddy Co, NM (Nad 27)
 Map System: US State Plane Coordinate System 1927 Map Zone: New Mexico, Eastern Zone
 Geo Datum: NAD27 (Clarke 1866) Coordinate System: Well Centre
 Sys Datum: Mean Sea Level Geomagnetic Model: IGRF2010

Site: Cedar Canyon 16 #1H
 Site Position: Northing: 441139.40 ft Latitude: 32 12 44.487 N
 From: Map Easting: 604523.60 ft Longitude: 103 59 43.347 W
 Position Uncertainty: 0.00 ft North Reference: Grid
 Ground Level: 2924.00 ft Grid Convergence: 0.18 deg

Well: 1H Slot Name:
 Well Position: +N/-S 0.00 ft Northing: 441139.40 ft Latitude: 32 12 44.487 N
 +E/-W 0.00 ft Easting: 604523.60 ft Longitude: 103 59 43.347 W
 Position Uncertainty: 0.00 ft

Wellpath: 1 Drilled From: Surface
 Current Datum: SITE Height 2948.00 ft Tie-on Depth: 0.00 ft
 Magnetic Data: 4/15/2012 Above System Datum: Mean Sea Level
 Field Strength: 48504 nT Declination: 7.68 deg
 Vertical Section: Depth From (TVD) +N/-S Mag Dip Angle: 60.08 deg
 ft ft ft Direction deg
 0.00 0.00 0.00 359.66

Plan Section Information

MD ft	Incl deg	Azim deg	TVD ft	+N/-S ft	+E/-W ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	TFO deg	Target
0.00	0.00	359.66	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
7077.05	0.00	359.66	7077.05	0.00	0.00	0.00	0.00	0.00	0.00	
7973.82	89.68	359.66	7650.00	569.72	-3.37	10.00	10.00	0.00	359.66	
11525.22	89.68	359.66	7670.00	4121.00	-24.35	0.00	0.00	0.00	0.00	PBHL

Survey

MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	VS ft	DLS deg/100ft	MapN ft	MapE ft	Comment
7000.00	0.00	359.66	7000.00	0.00	0.00	0.00	0.00	441139.40	604523.60	KOP
7077.05	0.00	359.66	7077.05	0.00	0.00	0.00	0.00	441139.40	604523.60	
7100.00	2.30	359.66	7099.99	0.46	0.00	0.46	10.00	441139.86	604523.60	
7200.00	12.30	359.66	7199.06	13.14	-0.08	13.14	10.00	441152.54	604523.52	
7300.00	22.30	359.66	7294.42	42.83	-0.25	42.83	10.00	441182.23	604523.35	
7400.00	32.30	359.66	7383.17	88.63	-0.52	88.63	10.00	441228.03	604523.08	LP
7500.00	42.30	359.66	7462.62	149.14	-0.88	149.15	10.00	441288.54	604522.72	
7600.00	52.30	359.66	7530.36	222.54	-1.32	222.54	10.00	441361.94	604522.28	
7700.00	62.30	359.66	7584.32	306.57	-1.81	306.58	10.00	441445.97	604521.79	
7800.00	72.30	359.66	7622.87	398.71	-2.36	398.71	10.00	441538.11	604521.24	
7900.00	82.30	359.66	7644.83	496.13	-2.93	496.14	10.00	441635.53	604520.67	
7973.82	89.68	359.66	7650.00	569.72	-3.37	569.73	10.00	441709.12	604520.23	
8000.00	89.68	359.66	7650.15	595.90	-3.52	595.91	0.00	441735.30	604520.08	
8100.00	89.68	359.66	7650.71	695.89	-4.11	695.91	0.00	441835.29	604519.49	
8200.00	89.68	359.66	7651.27	795.89	-4.70	795.90	0.00	441935.29	604518.90	
8300.00	89.68	359.66	7651.84	895.89	-5.29	895.90	0.00	442035.29	604518.31	
8400.00	89.68	359.66	7652.40	995.88	-5.89	995.90	0.00	442135.28	604517.71	



Weatherford International Ltd.

WFT Plan Report - X & Y's



Weatherford

Company: Occidental Permian Ltd.
Field: Eddy Co, NM (Nad 27)
Site: Cedar Canyon 16 #1H
Well: 1H
Wellpath: 1

Date: 12/29/2011 Time: 14:53:24 Page: 2
Co-ordinate(NE) Reference: Well: 1H, Grid North
Vertical (TVD) Reference: SITE 2948.0
Section (VS) Reference: Well (0.00N,0.00E,359.66Azi)
Survey Calculation Method: Minimum Curvature Db: Sybase

Survey

MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	VS ft	DLS deg/100ft	MapN ft	MapE ft	Comment
8500.00	89.68	359.66	7652.96	1095.88	-6.48	1095.90	0.00	442235.28	604517.12	
8600.00	89.68	359.66	7653.53	1195.88	-7.07	1195.90	0.00	442335.28	604516.53	
8700.00	89.68	359.66	7654.09	1295.87	-7.66	1295.90	0.00	442435.27	604515.94	
8800.00	89.68	359.66	7654.65	1395.87	-8.25	1395.89	0.00	442535.27	604515.35	
8900.00	89.68	359.66	7655.21	1495.87	-8.84	1495.89	0.00	442635.27	604514.76	
9000.00	89.68	359.66	7655.78	1595.86	-9.43	1595.89	0.00	442735.26	604514.17	
9100.00	89.68	359.66	7656.34	1695.86	-10.02	1695.89	0.00	442835.26	604513.58	
9200.00	89.68	359.66	7656.90	1795.86	-10.61	1795.89	0.00	442935.26	604512.99	
9300.00	89.68	359.66	7657.47	1895.85	-11.20	1895.89	0.00	443035.25	604512.40	
9394.52	89.68	359.66	7658.00	1990.37	-11.76	1990.40	0.00	443129.77	604511.84	1st Bone Spring Sa
9400.00	89.68	359.66	7658.03	1995.85	-11.80	1995.89	0.00	443135.25	604511.80	
9500.00	89.68	359.66	7658.59	2095.85	-12.39	2095.88	0.00	443235.25	604511.21	
9600.00	89.68	359.66	7659.16	2195.84	-12.98	2195.88	0.00	443335.24	604510.62	
9700.00	89.68	359.66	7659.72	2295.84	-13.57	2295.88	0.00	443435.24	604510.03	
9800.00	89.68	359.66	7660.28	2395.84	-14.16	2395.88	0.00	443535.24	604509.44	
9900.00	89.68	359.66	7660.85	2495.83	-14.75	2495.88	0.00	443635.23	604508.85	
10000.00	89.68	359.66	7661.41	2595.83	-15.34	2595.88	0.00	443735.23	604508.26	
10100.00	89.68	359.66	7661.97	2695.83	-15.93	2695.87	0.00	443835.23	604507.67	
10200.00	89.68	359.66	7662.54	2795.82	-16.52	2795.87	0.00	443935.22	604507.08	
10300.00	89.68	359.66	7663.10	2895.82	-17.11	2895.87	0.00	444035.22	604506.49	
10400.00	89.68	359.66	7663.66	2995.82	-17.71	2995.87	0.00	444135.22	604505.89	
10500.00	89.68	359.66	7664.23	3095.81	-18.30	3095.87	0.00	444235.21	604505.30	
10600.00	89.68	359.66	7664.79	3195.81	-18.89	3195.87	0.00	444335.21	604504.71	
10700.00	89.68	359.66	7665.35	3295.81	-19.48	3295.86	0.00	444435.21	604504.12	
10800.00	89.68	359.66	7665.92	3395.80	-20.07	3395.86	0.00	444535.20	604503.53	
10900.00	89.68	359.66	7666.48	3495.80	-20.66	3495.86	0.00	444635.20	604502.94	
11000.00	89.68	359.66	7667.04	3595.80	-21.25	3595.86	0.00	444735.20	604502.35	
11100.00	89.68	359.66	7667.61	3695.79	-21.84	3695.86	0.00	444835.19	604501.76	
11200.00	89.68	359.66	7668.17	3795.79	-22.43	3795.86	0.00	444935.19	604501.17	
11300.00	89.68	359.66	7668.73	3895.79	-23.02	3895.86	0.00	445035.19	604500.58	
11400.00	89.68	359.66	7669.29	3995.78	-23.61	3995.85	0.00	445135.18	604499.99	
11500.00	89.68	359.66	7669.86	4095.78	-24.21	4095.85	0.00	445235.18	604499.39	
11525.22	89.68	359.66	7670.00	4121.00	-24.35	4121.07	0.00	445260.40	604499.25	PBHL

Targets

Name	Description Dip	Dir.	TVD ft	+N/-S ft	+E/-W ft	Map Northing ft	Map Easting ft	Latitude Deg Min Sec	Longitude Deg Min Sec
PBHL			7670.00	4121.00	-24.35	445260.40	604499.25	32 13 25.270 N	103 59 43.480 W

Casing Points

MD ft	TVD ft	Diameter in	Hole Size in	Name
500.00	500.00	0.000	0.000	Csg 1
3000.00	3000.00	0.000	0.000	Csg 2

Annotation

MD ft	TVD ft	
7077.05	7077.05	KOP
7973.82	7650.00	LP
11525.22	0.00	PBHL



Weatherford International Ltd.
WFT Plan Report - X & Y's




Weatherford

Company: Occidental Permian Ltd.	Date: 12/29/2011	Time: 14:53:24	Page: 3
Field: Eddy Co, NM (Nad 27)	Co-ordinate(NE) Reference:	Well: 1H, Grid North	
Site: Cedar Canyon 16 #1H	Vertical (TVD) Reference:	SITE 2948.0	
Well: 1H	Section (VS) Reference:	Well (0.00N,0.00E,359.66Azi)	
Wellpath: 1	Survey Calculation Method:	Minimum Curvature	Db: Sybase



Formations

MD ft	TVD ft	Formations	Lithology	Dip Angle deg	Dip Direction deg
9394.52	7658.00	1st Bone Spring Sand		0.00	0.00

BOP Diagram

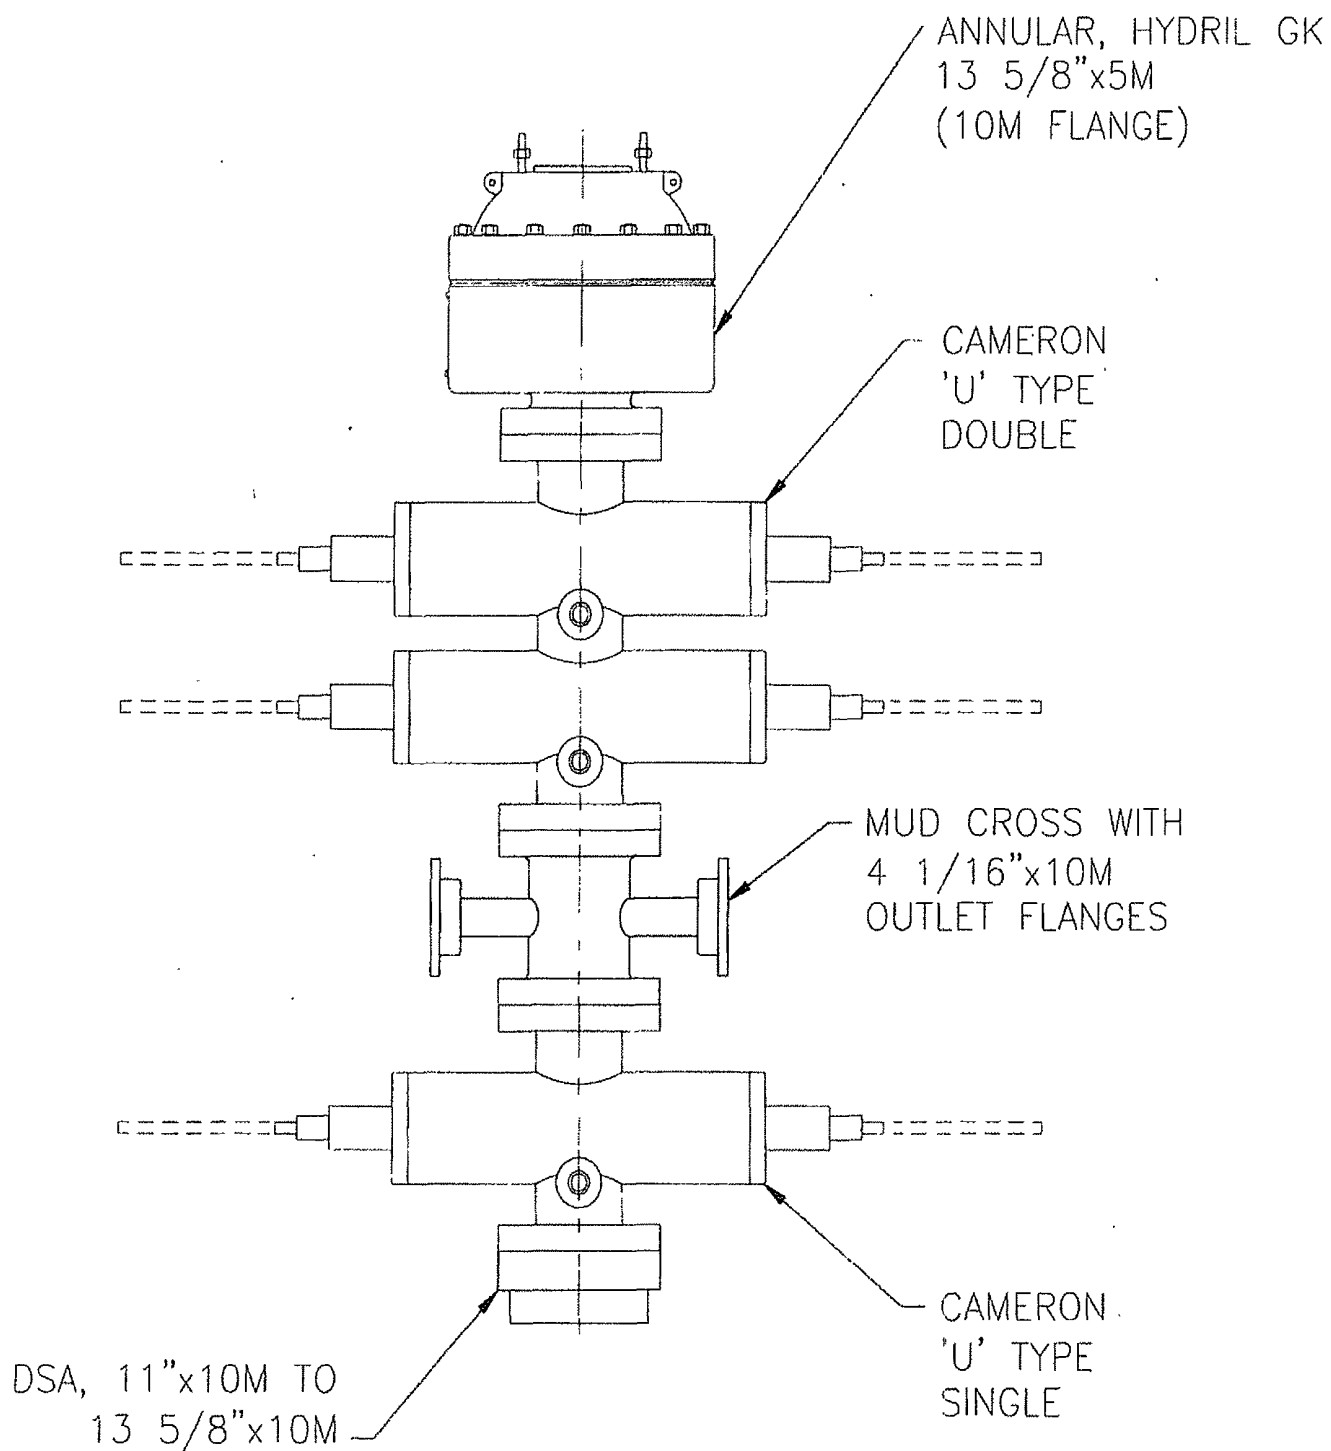

BOP STACK



ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 08-11-2010 BY 60322 UCBAW

**ISSUED FOR
FABRICATION**
December 18, 2007
CRAFTSMAN -
ENGINEER

ALL INFORMATION CONTAINED HEREIN IS UNCLASSIFIED
DATE 08-19-2010 BY 60322 UCBAW

PROPRIETARY

 HITMERICH & PAYKE INFORMATIONAL DRIVING CO	
1575-1580-1585-1590-1595-1600-1605-1610-1615-1620-1625-1630-1635-1640-1645-1650-1655-1660-1665-1670-1675-1680-1685-1690-1695-1700-1705-1710-1715-1720-1725-1730-1735-1740-1745-1750-1755-1760-1765-1770-1775-1780-1785-1790-1795-1800-1805-1810-1815-1820-1825-1830-1835-1840-1845-1850-1855-1860-1865-1870-1875-1880-1885-1890-1895-1900-1905-1910-1915-1920-1925-1930-1935-1940-1945-1950-1955-1960-1965-1970-1975-1980-1985-1990-1995-2000-2005-2010-2015-2020-2025-2030-2035-2040-2045-2050-2055-2060-2065-2070-2075-2080-2085-2090-2095-2100-2105-2110-2115-2120-2125-2130-2135-2140-2145-2150-2155-2160-2165-2170-2175-2180-2185-2190-2195-2200-2205-2210-2215-2220-2225-2230-2235-2240-2245-2250-2255-2260-2265-2270-2275-2280-2285-2290-2295-2300-2305-2310-2315-2320-2325-2330-2335-2340-2345-2350-2355-2360-2365-2370-2375-2380-2385-2390-2395-2400-2405-2410-2415-2420-2425-2430-2435-2440-2445-2450-2455-2460-2465-2470-2475-2480-2485-2490-2495-2500-2505-2510-2515-2520-2525-2530-2535-2540-2545-2550-2555-2560-2565-2570-2575-2580-2585-2590-2595-2600-2605-2610-2615-2620-2625-2630-2635-2640-2645-2650-2655-2660-2665-2670-2675-2680-2685-2690-2695-2700-2705-2710-2715-2720-2725-2730-2735-2740-2745-2750-2755-2760-2765-2770-2775-2780-2785-2790-2795-2800-2805-2810-2815-2820-2825-2830-2835-2840-2845-2850-2855-2860-2865-2870-2875-2880-2885-2890-2895-2900-2905-2910-2915-2920-2925-2930-2935-2940-2945-2950-2955-2960-2965-2970-2975-2980-2985-2990-2995-3000-3005-3010-3015-3020-3025-3030-3035-3040-3045-3050-3055-3060-3065-3070-3075-3080-3085-3090-3095-3100-3105-3110-3115-3120-3125-3130-3135-3140-3145-3150-3155-3160-3165-3170-3175-3180-3185-3190-3195-3200-3205-3210-3215-3220-3225-3230-3235-3240-3245-3250-3255-3260-3265-3270-3275-3280-3285-3290-3295-3300-3305-3310-3315-3320-3325-3330-3335-3340-3345-3350-3355-3360-3365-3370-3375-3380-3385-3390-3395-3400-3405-3410-3415-3420-3425-3430-3435-3440-3445-3450-3455-3460-3465-3470-3475-3480-3485-3490-3495-3500-3505-3510-3515-3520-3525-3530-3535-3540-3545-3550-3555-3560-3565-3570-3575-3580-3585-3590-3595-3600-3605-3610-3615-3620-3625-3630-3635-3640-3645-3650-3655-3660-3665-3670-3675-3680-3685-3690-3695-3700-3705-3710-3715-3720-3725-3730-3735-3740-3745-3750-3755-3760-3765-3770-3775-3780-3785-3790-3795-3800-3805-3810-3815-3820-3825-3830-3835-3840-3845-3850-3855-3860-3865-3870-3875-3880-3885-3890-3895-3900-3905-3910-3915-3920-3925-3930-3935-3940-3945-3950-3955-3960-3965-3970-3975-3980-3985-3990-3995-4000-4005-4010-4015-4020-4025-4030-4035-4040-4045-4050-4055-4060-4065-4070-4075-4080-4085-4090-4095-4100-4105-4110-4115-4120-4125-4130-4135-4140-4145-4150-4155-4160-4165-4170-4175-4180-4185-4190-4195-4200-4205-4210-4215-4220-4225-4230-4235-4240-4245-4250-4255-4260-4265-4270-4275-4280-4285-4290-4295-4300-4305-4310-4315-4320-4325-4330-4335-4340-4345-4350-4355-4360-4365-4370-4375-4380-4385-4390-4395-4400-4405-4410-4415-4420-4425-4430-4435-4440-4445-4450-4455-4460-4465-4470-4475-4480-4485-4490-4495-4500-4505-4510-4515-4520-4525-4530-4535-4540-4545-4550-4555-4560-4565-4570-4575-4580-4585-4590-4595-4600-4605-4610-4615-4620-4625-4630-4635-4640-4645-4650-4655-4660-4665-4670-4675-4680-4685-4690-4695-4700-4705-4710-4715-4720-4725-4730-4735-4740-4745-4750-4755-4760-4765-4770-4775-4780-4785-4790-4795-4800-4805-4810-4815-4820-4825-4830-4835-4840-4845-4850-4855-4860-4865-4870-4875-4880-4885-4890-4895-4900-4905-4910-4915-4920-4925-4930-4935-4940-4945-4950-4955-4960-4965-4970-4975-4980-4985-4990-4995-5000-5005-5010-5015-5020-5025-5030-5035-5040-5045-5050-5055-5060-5065-5070-5075-5080-5085-5090-5095-5100-5105-5110-5115-5120-5125-5130-5135-5140-5145-5150-5155-5160-5165-5170-5175-5180-5185-5190-5195-5200-5205-5210-5215-5220-5225-5230-5235-5240-5245-5250-5255-5260-5265-5270-5275-5280-5285-5290-5295-5300-5305-5310-5315-5320-5325-5330-5335-5340-5345-5350-5355-5360-5365-5370-5375-5380-5385-5390-5395-5400-5405-5410-5415-5420-5425-5430-5435-5440-5445-5450-5455-5460-5465-5470-5475-5480-5485-5490-5495-5500-5505-5510-5515-5520-5525-5530-5535-5540-5545-5550-5555-5560-5565-5570-5575-5580-55	

10M CHOKE MANIFOLD CONFIGURATION

