District I 1625 N French Dr., Hobbs, NM 88240

State of New Mexico Energy Minerals and Natural Resources

Form C-144 CLEZ Revised August 1, 2011

District II 811 S. First St, Artesia, NM 8821 District III

1220 S. St Francis Dr, Santa Fe, I

District IV

1000 Rio Brazos Road, Aztec, NM M 8750APR 17 2012

Department Oll Conservation Division 12/20 South St. Francis Dr. Santa Fe, NM 87505

For closed-loop systems that only use above ground steel tanks or haul-off bins and propose to implement waste removal for closure, submit to the appropriate NMOCD District Office

# ARTESIA | Permit or Closure Plan Application

(that only use above ground steel tanks or haul-off bins and propose to implement waste removal for closure)

Type of action: Permit Closure

Instructions: Please submit one application (Form C-144 CLEZ) per individual closed-loop system request. For any application request other than for a closed-loop system that only use above ground steel tanks or haul-off bins and propose to implement waste removal for closure, please submit a Form C-144.

Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.

operator: Yates Petroleum Corporation	OGRID #: <u>025575</u>			
Address: 105 South 4 <sup>th</sup> St Artesia, NM 88210				
Facility or well name: Antweil ANU Federal #4H				
API Number: 30-015-40426 OCD I	Permit Number: 213125			
U/L or Qtr/Qtr O Section 29 Township 19S				
Center of Proposed Design Latitude N 32 626528 Lo	ngitude <u>W 104.00001</u> NAD: <u>1927</u> 1983			
Surface Owner: 🔀 Federal 🗌 State 🗌 Private 🔲 Tribal Trust or Indian Allotm	ent			
2.  □ Closed-loop System: Subsection H of 19.15.17.11 NMAC  Operation: □ Drilling a new well □ Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent) □ P&A  □ Above Ground Steel Tanks or □ Haul-off Bins				
3.				
Signs: Subsection C of 19.15.17.11 NMAC				
12"x 24", 2" lettering, providing Operator's name, site location, and emergence	by telephone numbers			
Signed in compliance with 19.15.16.8 NMAC				
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC  Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.  Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC  Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC  Closure Plan (Please complete Box 5) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC				
Previously Approved Design (attach copy of design) API Number:				
Previously Approved Operating and Maintenance Plan API Number:				
S.  Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17.13.D NMAC)  Instructions: Please indentify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if more than two facilities are required.				
Disposal Facility Name: Gandy Marley	Disposal Facility Permit Number: NM – 01-0019			
Disposal Facility Name: CRI	Disposal Facility Permit Number: R-1966			
Disposal Facility Name: <u>Lea Land Farm</u> Disposal Facility Name: <u>Sundance Services Inc</u> ,	Disposal Facility Permit Number: WM – 1-035  Disposal Facility Permit Number: NM – 01-0003			
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future service and operations?  Yes (If yes, please provide the information below) No				
Required for impacted areas which will not be used for future service and operations.  Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC  Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC  Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC				

6. Operator Application Certification:				
I hereby certify that the information submitted with this application is true, accur	rate and complete to the best of my knowledge and belief			
Name (Print):	Title: Land Regulatory Agent			
Signature: 24h	Date: <u>4/17/2012</u>			
e-mail address: thahn@yatespetroleum.com	Telephone: <u>575-748-4120</u>			
7.  OCD Approval: Permit Application (including closure plan)  Closure P	lan (only)			
OCD Representative Signature:	Approval Date: 6/28/2012			
Title: Dist # Supewish	Approval Date: 6/28/2012  OCD Permit Number: 2/3/25			
8.  Closure Report (required within 60 days of closure completion): Subsection K of 19.15.17.13 NMAC  Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report.  The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.  Closure Completion Date:				
9.				
Closure Report Regarding Waste Removal Closure For Closed-loop Systems Instructions: Please indentify the facility or facilities for where the liquids, drit two facilities were utilized.				
Disposal Facility Name	Disposal Facility Permit Number:			
Disposal Facility Name:	Disposal Facility Permit Number:			
Were the closed-loop system operations and associated activities performed on on the second Yes (If yes, please demonstrate compliance to the items below) No	r in areas that will not be used for future service and operations?			
Required for impacted areas which will not be used for future service and operat  Site Reclamation (Photo Documentation)  Soil Backfilling and Cover Installation  Re-vegetation Application Rates and Seeding Technique	ions:			
Operator Closure Certification:  I hereby certify that the information and attachments submitted with this closure belief. I also certify that the closure complies with all applicable closure requirer				
Name (Print):	Title:			
Signature:	Date:			
e-mail address:	Telephone:			

# Yates Petroleum Corporation Closed Loop System

# Equipment Design Plan

Closed Loop System will consist of:

- 1 double panel shale shaker
- 1 (minimum ) Centrifuge, certain wells and flow rates may require 2 centrifuges On certain wells, the Centrifuge will be replaced by a Clackco Settling Tank System
- 1 minimum centrifugal pump to transfer fluids
- 2-500 bbl. FW Tanks
- 1-500 bbl. BW Tank
- 1 half round frac tank 250 bbl. capacity as necessary to catch cement / excess mud returns generated during a cement job.
- 1 Set of rail cars / catch bins

Certain wells will use an ASC Auger Tank

## Operation Plan

All equipment will be inspected at least hourly by rig personnel and daily by contractors' personnel.

Any spills / leaks will be reported to YPC, NMOCD, and cleaned up without delay.

## Closure Plan

Drilling with Closed Loop System, haul off bins will be taken to Gandy Marley, Lea Land Farm, CRI or Sundance Services Inc.

# **Yates Petroleum Corporation**

# **Hydrogen Sulfide Drilling Operation Plan**

## I. HYDROGEN SULFIDE TRAINING

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

- 1. The hazards and characteristics of hydrogen sulfide (H2S).
- 2. The proper use and maintenance of personal protective equipment and life support systems.
- 3. The proper use of H2S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
- 4. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

- 1. The effects of H2S on metal components. If high tensile tubular are to be used, personnel well be trained in their special maintenance requirements.
- 2. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
- 3. The contents and requirements of the H2S Drilling Operations Plan and H2S Contingency Plan.

There will be an initial training session just prior to encountering a known or probable H2S zone (within 3 days or 500 feet) and weekly H2S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H2S Drilling Operation Plan and the H2S Contingency Plan. **The location of this well does not require a Public Protection Plan.** 

H2S Plan Page 1

# II. H2S SAFETY EQUIPMENT AND SYSTEMS

NOTE: All H2S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonably expected to contain H2S.

#### 1. Well Control Equipment:

- A. Flare line
- B. Choke manifold
- C. Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit
- D. Auxiliary equipment may include if applicable: annular preventer & rotating head.

## 2. Protective equipment for essential personnel:

A. Mark II Survive Air (or equivalent) 30-minute units located in the doghouse and at briefing areas, as indicated on well site diagram.

#### 3. H2S detection and monitoring equipment:

A. 3 portable H2S monitors positioned at: Shale Shaker, Bell Nipple, and Rig Floor. These units have warning lights and audible sirens when H2S levels of 10 PPM are reached.

### 4. Visual warning systems:

- A. Wind direction indicators as shown on well site diagram (attached).
- B. Caution/Danger signs (attached) shall be posted on roads providing direct access to location. Signs will be painted with high visibility yellow with black lettering of a sufficient size to be readable at a reasonable distance from the immediate location. Bilingual signs will be used, when appropriate. See example attached.

### 5. Mud program:

A. The mud program has been designed to minimize the volume of H2S circulated to the surface. Proper mud weight, safe drilling practices and the use of H2S scavengers will minimize hazards when penetrating H2S bearing zones.

## 6. Metallurgy:

- A. All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H2S service.
- B. All elastomers used for packing and seals shall be H2S trim.

H2S Plan Page 2

#### 7. Communication:

- A. Cellular communications in company vehicles.
- B. Land line (telephone) communication at the Office.

## 8. Well testing:

A. There will be no drill stem testing.

## **EXHIBIT**

# DANGER

# **POISONS GAS**

# **HYDROGEN SULFIDE**



**CAUTION POTENTIAL DANGER** 

(YELLOW)

DANGER POISONS GAS ENCOUNTERED (RED) AUTHORIZED PERSONAL ONLY.
LOCATION SECURED.

1-575-746-1096 1-877-879-8899

EDDY COUNTY EMERGENCY NUMBERS ARTESIA FIRE DEPT. 575-746-5050 ARTESIA POLICE DEPT. 575-746-5000 EDDY CO. SHERIFF DEPT. 575-746-9888 LEA COUNTY EMERGENCY NUMBERS HOBBS FIRE DEPT. 575-397-9308 HOBBS POLICE DEPT. 575-397-9285 LEA CO. SHERIFF DEPT. 575-396-1196

# Yates Petroleum Corporation 105 S. Fourth Street Artesia, NM 88210


Hydrogen Sulfide (H<sub>2</sub>S) Contingency Plan


For

Antweil ANU Federal #4H 860' FSL & 660' FWL Section 29, T19S-R30E Eddy County NM

# Antweil ANU Federal #4H

This is an open drilling site.  $H_2S$  monitoring equipment and emergency response equipment will be used within 500' of zones known to contain  $H_2S$ , including warning signs, wind indicators and  $H_2S$  monitor.



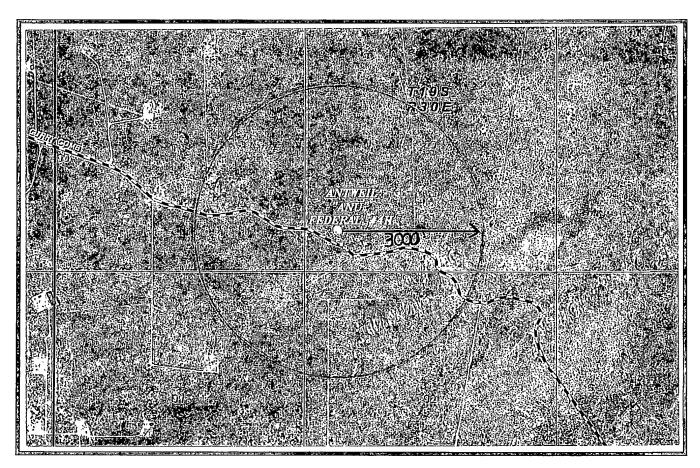

Assumed 100 ppm  $\mathbb{ROE} = 3000^{\circ}$  Assumed 100 ppm  $\mathbb{ROE} = 3000^{\circ}$  Assumed 100 ppm H2S concentration shall trigger activation of this plan.

#### **Emergency Procedures**

In the case of a release of gas containing H<sub>2</sub>S, the first responder(s) must isolate the area and prevent entry by other persons into the 100 ppm ROE. Additionally the first responder(s) must evacuate any public places encompassed by the 100 ppm ROE. First responder(s) must take care not to injure themselves during this operation. Company and/or local officials must be contacted to aid in this operation. Evacuation of the public should be beyond the 100 ppm ROE.

All responders must have training in the detection of H<sub>2</sub>S, measures for protection against the gas, equipment used for protection and emergency response. Additionally, responders must be equipped with H<sub>2</sub>S monitors and air packs in order to control the release. Use the "buddy system" to ensure no injuries during the response.

## **Ignition of Gas Source**

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO<sub>2</sub>). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever there is an ignition of the gas

#### Characteristics of H<sub>2</sub>S and SO<sub>2</sub>

Common Name	Chemical Formula	Specific Gravity	Threshold Limit	Hazardous Limit	Lethal Concentration
Hydrogen Sulfide	H <sub>2</sub> S	1.189 Air = 1	10 ppm	100 ppm/hr	600 ppm
Sulfur Dioxide	SO <sub>2</sub>	2.21 Air = 1	2 ppm	N/A	1000 ppm

### **Contacting Authorities**

YPC personnel must liaison with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available. The following call list of essential and potential responders has been prepared for use during a release. YPC Company response must be in coordination with the State of New Mexico's 'Hazardous Materials Emergency Response Plan' (HMER)

## Yates Petroleum Corporation Phone Numbers

Halliburton ......(575) 746-2757 B. J. Services .....(575) 746-3569

YPC Office	` /
Wade Bennett/Prod Superintendent	
LeeRoy Richards/Assistant Prod Superintendent	(575) 748-4228
Mike Larkin/Drilling	
Paul Hanes/Prod. Foreman/Roswell	
Tim Bussell/Drilling Superintendent	
Artesia Answering Service(During non-office hours)	(5/5) /48-4302
Agency Call List	
Eddy County (575)	
Artesia	
State Police	
City Police	
Sheriff's Office	
Ambulance	
Fire Department	
LEPC (Local Emergency Planning Committee)	
NMOCD	748-1283
Carlsbad	
State Police	885-3137
City Police	885-2111
Sheriff's Office	887-7551
Ambulance	911
Fire Department	885-2111
LEPC (Local Emergency Planning Committee)	887-3798
US Bureau of Land Management	887-6544
New Mexico Emergency Response Commission (Santa Fe)	
24 HR	` ,
New Mexico State Emergency Operations Center	
National Emergency Response Center (Washington, DC)	
Other	
Boots & Coots IWC1-800-256-9688 or (281) 931-8884	
Cudd Pressure Control(915) 699-0139 or (915) 563-3356	

VDC H29	Contingency	Dlan	Daga 1
110 1123	Contingency	Pian.	rage 4