

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources

Form C-144
June 1, 2004

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

For drilling and production facilities, submit to appropriate NMOCD District Office.
For downstream facilities, submit to Santa Fe office

Pit or Below-Grade Tank Registration or Closure

Is pit or below-grade tank covered by a "general plan"? Yes ☒ No ☐

Type of action: Registration of a pit or below-grade tank ☐ Closure of a pit or below-grade tank ☒

Operator: <u>EOG Resources Inc.</u> Telephone: <u>432-684-3714</u> e-mail address: <u>sean.oy@leaco.net</u>		
Address: <u>P.O. Box 2267 Midland Tx. 79702</u>		
Facility or well name: <u>Rock Spur 26 Fee Com #1</u> API #: <u>30-015-33855</u> U/L or Qtr/Qtr <u>A</u> Sec <u>26</u> T <u>24</u> R <u>28</u>		
County: <u>Eddy</u> Latitude <u>32.19302</u> Longitude <u>104.05159</u> NAD: 1927 <input type="checkbox"/> 1983 <input type="checkbox"/>		
Surface Owner: Federal <input type="checkbox"/> State <input type="checkbox"/> Private <input checked="" type="checkbox"/> Indian <input type="checkbox"/>		
Pit Type: Drilling <input checked="" type="checkbox"/> Production <input type="checkbox"/> Disposal <input type="checkbox"/> Workover <input type="checkbox"/> Emergency <input type="checkbox"/> Lined <input checked="" type="checkbox"/> Unlined <input type="checkbox"/> Liner type: Synthetic <input checked="" type="checkbox"/> Thickness <u>12</u> mil Clay <input type="checkbox"/> Pit Volume <u>7000</u> bbl	Below-grade tank Volume: _____ bbl Type of fluid: _____ Construction material: _____ Double-walled, with leak detection? Yes <input type="checkbox"/> If not, explain why not: _____	
Depth to ground water (vertical distance from bottom of pit to seasonal high water elevation of ground water.) <u>41 feet</u>	<u>Less than 50 feet</u> 50 feet or more, but less than 100 feet 100 feet or more	<u>(20 points)</u> (10 points) (0 points)
Wellhead protection area: (Less than 200 feet from a private domestic water source, or less than 1000 feet from all other water sources.)	<u>Yes</u> No	<u>(20 points)</u> (0 points)
Distance to surface water: (horizontal distance to all wetlands, playas, irrigation canals, ditches, and perennial and ephemeral watercourses.)	Less than 200 feet <u>200 feet or more, but less than 1000 feet</u> 1000 feet or more	(20 points) <u>(10 points)</u> (0 points)
Ranking Score (Total Points)		<u>50</u>

If this is a pit closure: (1) Attach a diagram of the facility showing the pit's relationship to other equipment and tanks. (2) Indicate disposal location: (check the onsite box if you are burying in place) onsite ☐ offsite ☒ If offsite, name of facility CRI. (3) Attach a general description of remedial action taken including remediation start date and end date. (4) Groundwater encountered: No ☐ Yes ☐ If yes, show depth below ground surface _____ ft. and attach sample results. (5) Attach soil sample results and a diagram of sample locations and excavations.

Additional Comments: Plan is to de-water drilling pit, excavate contents of pit and liner, haul to CRI a OCD approved facility. Keep manifest of loads. Backfill pit area with clean soil, level, contour & seed.
Notify the OCD before starting, and file final closure.
will start soon after approval.

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that the above-described pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☒, a general permit ☒, or an (attached) alternative OCD-approved plan ☐.

Date: 8/18/05

Printed Name/Title Eddie W. Seay Agent

Signature Eddie W. Seay

Your certification and NMOCD approval of this application/closure does not relieve the operator of liability should the contents of the pit or tank contaminate ground water or otherwise endanger public health or the environment. Nor does it relieve the operator of its responsibility for compliance with any other federal, state, or local laws and/or regulations.

Approval: Stipulations for closing drilling pit attached

Printed Name/Title Mike Bratcher Dist. IV

Signature Mike Bratcher

Date: 8/19/05

EOG Resources Inc. Rock Springs 26 FEE Com #1 30-015-33855 A-26-24s-28e

Stipulations on drilling pit closure for above well:

Notify NMOCD District 2 office if water is encountered during excavation operations.

Confirmation samples will be required prior to backfilling pit.

Notify NMOCD District 2 office 48 hours prior to commencement of operations.

Notify NMOCD District 2 office 48 hours prior to obtaining samples where analysis of such samples are to be submitted to NMOCD.

Notify NMOCD District 2 office in the event of liner being breached.

Mike Bratcher
NMOCD District 2
1301 W Grand Ave
Artesia, NM 88210
(505) 748-1283 Ext 108
(505) 626-0857
Mike.Bratcher@state.nm.com

A handwritten signature in black ink that reads "Mike Bratcher". The signature is written in a cursive, flowing style.

New Mexico Office of the State Engineer
Well Reports and DownloadsTownship: **24S** Range: **28E** Sections: NAD27 X: Y: Zone: Search Radius: County: Basin: Number: Suffix: Owner Name: (First) (Last) ☐ Non-Domestic ☐ Domestic ☒ All

Well / Surface Data Report

Avg Depth to Water Report

Water Column Report

Clear Form

WATERS Menu

Help


AVERAGE DEPTH OF WATER REPORT 08/17/2005

Bsn	Tws	Rng	Sec	Zone	X	Y	Wells	(Depth Water in Feet)		
								Min	Max	Avg
C	24S	28E	01				1	60	60	60
C	24S	28E	02				1	55	55	55
C	24S	28E	04				2	25	35	30
C	24S	28E	05				1	30	30	30
C	24S	28E	06				1	70	70	70
C	24S	28E	08				1	50	50	50
C	24S	28E	10				2	9	25	17
C	24S	28E	11				1	20	20	20
C	24S	28E	12				3	40	139	73
C	24S	28E	13				7	12	50	34
C	24S	28E	14				1	52	52	52
C	24S	28E	15				4	8	32	18
C	24S	28E	16				2	15	42	29
C	24S	28E	17				2	26	58	42
C	24S	28E	20				1	48	48	48

Record Count: 30

41 ft.

New Mexico Ground Level Double Horseshoe Pits (EOG)

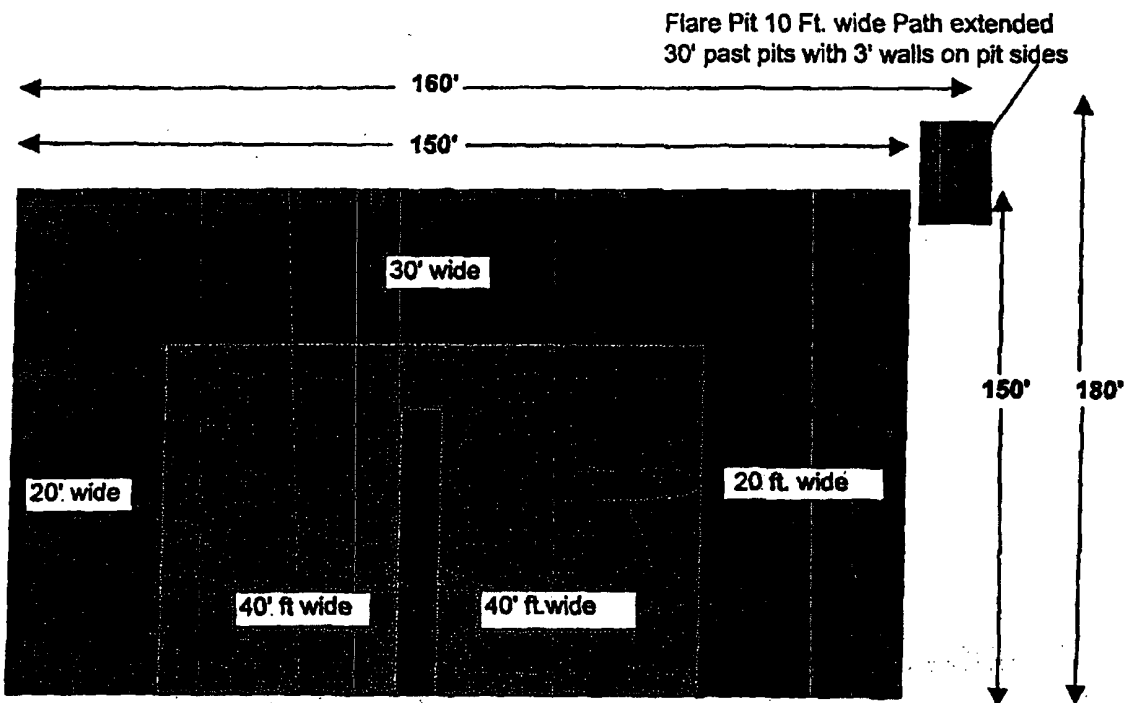

Pits will be 150' deep X 150' wide ground level. Flare pit is 10 X 30