

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTFORM APPROVED
OMB NO. 1004-0135
Expires: July 31, 2010**SUNDRY NOTICES AND REPORTS ON WELLS**
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.*5. Lease Serial No.
NMNM82845

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other8. Well Name and No.
POLO AOP FEDERAL 6

2. Name of Operator

Contact: LAURA WATTS

YATES PETROLEUM CORPORATION E-Mail: laura@yatespetroleum.com

9. API Well No.
30-015-28871-00-S2

3a. Address

105 SOUTH FOURTH STREET
ARTESIA, NM 88210

3b. Phone No. (include area code)

Ph: 575-748-1471

10. Field and Pool, or Exploratory
N SEVEN RIVERS-GLOR-YESO

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Sec 10 T19S R25E SWSE 660FSL 1980FEL

11. County or Parish, and State

EDDY COUNTY, NM


12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
☒ Notice of Intent	☐ Acidize	☐ Deepen	☐ Production (Start/Resume)	☐ Water Shut-Off
☐ Subsequent Report	☐ Alter Casing	☒ Fracture Treat	☐ Reclamation	☐ Well Integrity
☐ Final Abandonment Notice	☐ Casing Repair	☐ New Construction	☐ Recomplete	☐ Other
	☐ Change Plans	☐ Plug and Abandon	☐ Temporarily Abandon	
	☐ Convert to Injection	☐ Plug Back	☐ Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Yates Petroleum Corporation plans to Re-Frac this well as follows:

1. MIRU WSU and all safety equipment necessary. ND tree and frac valve.
2. Frac Glorietta 3,380 ft to 3,506 ft (57 holes)
3. Pump a fracture treatment down 7 inch casing limiting the surface treating pressure to 2800 psig (Treating Schedule attached). Set a pop off valve at 3000 psi.
4. MIRU WL and set a flow through frac plug at 3,330 ft. Perforate Yeso 2,512 ft to 2,688 ft (67 holes).
5. Pump a fracture treatment treatment down 7 inch casing limiting the surface treating pressure to 2800 psig (Treating Schedule attached). Set a pop valve at 3000 psi.
6. Flow the well back and allow the well to clean up. RIH wash sand and drill out the frac plug. Clean the well out down to the PBTD at 3,503 ft.
7. TIH with the production equipment specified by the Production Department. Hang the well on and

Accepted for record
CD NMOC D 1/2/14

14. I hereby certify that the foregoing is true and correct.

Electronic Submission #224368 verified by the BLM Well Information System

For YATES PETROLEUM CORPORATION, sent to the Carlsbad

Committed to AFMSS for processing by JUNE CARRASCO on 10/26/2013 (14JNC0173SE)

Name (Printed/Typed) LAURA WATTS

Title REG. REPORTING TECHNICIAN

Signature (Electronic Submission)

Date 10/24/2013

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By Chris Watts (BLM Approver Not Specified)

Title

Date 12/24/2013

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office Carlsbad

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Additional data for EC transaction #224368 that would not fit on the form

32. Additional remarks, continued

turn it over, to the Production Department to produce.

Treating Schedule attached
Schematics attached

WELL NAME: Polo AOP Fed Com # 6 FIELD: Dagger Draw
 LOCATION: 660' FSL & 1,980' FEL of Section 10-19S-25E Eddy Co., NM
 GL: 3,454' ZERO: 17' KB: 3,471'
 SPUD DATE: 06/17/96 COMPLETION DATE: 08/03/96
 COMMENTS: API No.: 30-015-28871


CASING PROGRAM

9-5/8" 36# J-55	1,162'
Surface	
7" 26# J-55 LT&C	1,019'
7" 23# J-55 LT&C	4,317'
7" 26# J-55 LT&C	2,025'
7" 26# N-80 LT&C	894'
Bottom	8,250'

Before

TOPS

SA	452'
Glorieta	2,405'
BS	3,668'
WC	5,603'
Canyon	7,602'

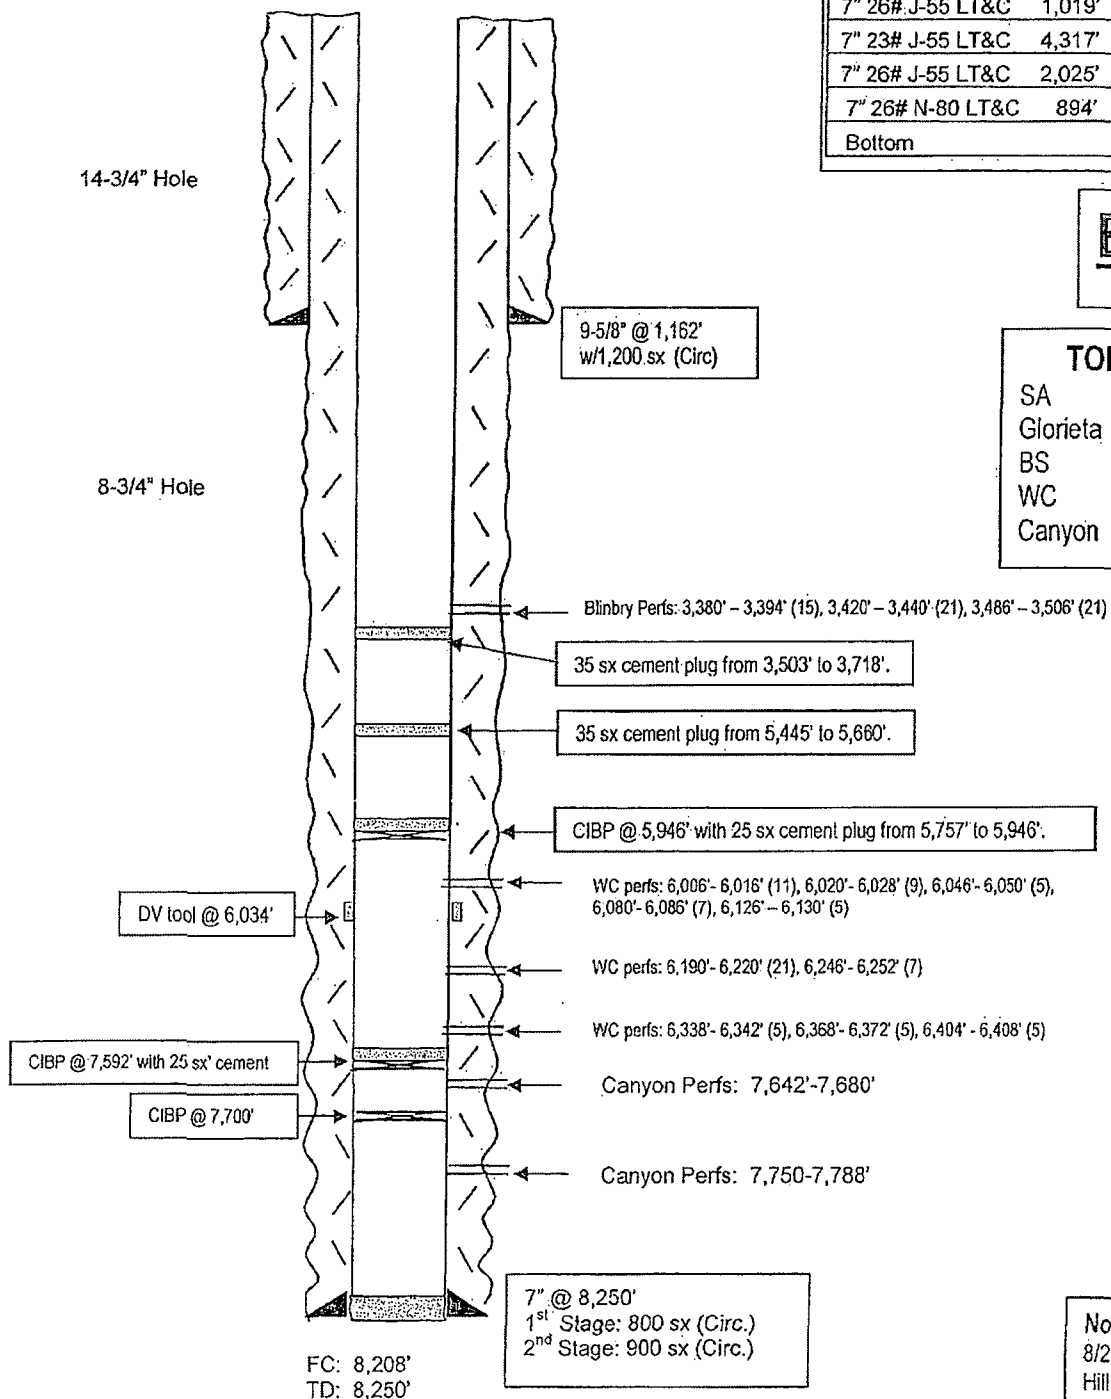

Not to Scale
 8/28/13
 Hill

WELL NAME: Polo AOP Fed Com # 6 FIELD: Dagger Draw

LOCATION: 660' FSL & 1,980' FEL of Section 10-19S-25E Eddy Co., NM

GL: 3,454' ZERO: 17' KB: 3,471'

SPUD DATE: 06/17/96 COMPLETION DATE: 08/03/96

COMMENTS: API No.: 30-015-28871


CASING PROGRAM

9-5/8" 36# J-55	1,162'
Surface	
7" 26# J-55 LT&C	1,019'
7" 23# J-55 LT&C	4,317'
7" 26# J-55 LT&C	2,025'
7" 26# N-80 LT&C	.894'
Bottom	8,250'

After

TOPS

SA	452'
Glorieta	2,405'
BS	3,668'
WC	5,603'
Canyon	7,602'

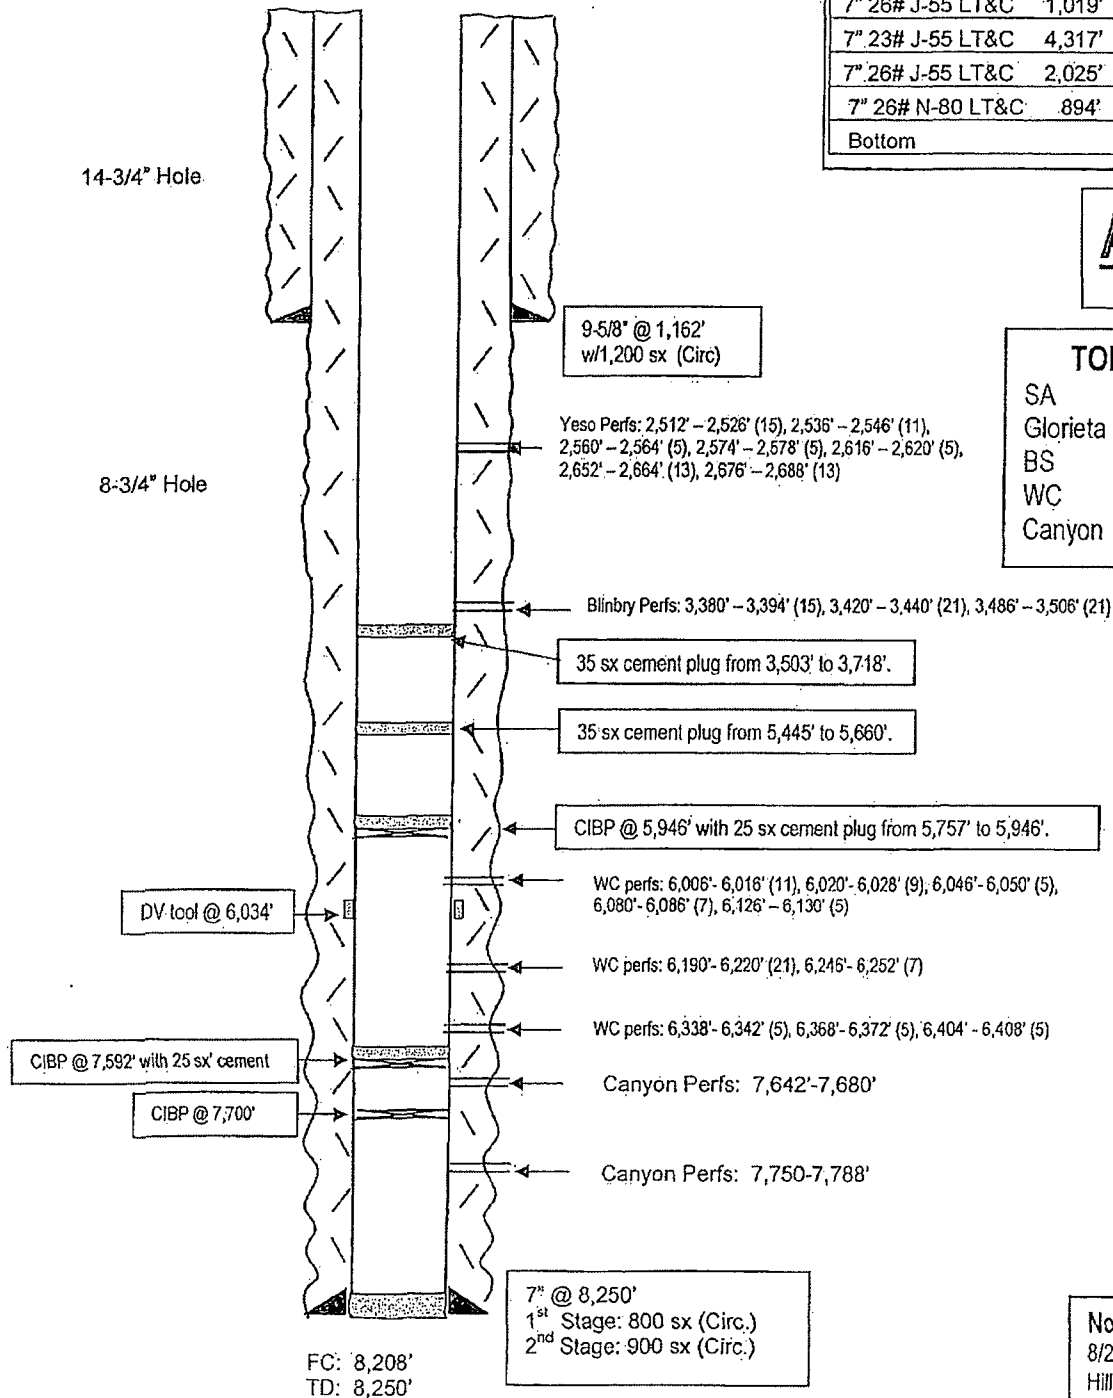

Not to Scale
8/28/13
Hill

Glorietta

Treating Schedule

Sta. #	Fluid	Stg. Type	Cln. Vol. (gals)	Rate (bpm)	Proppant	Conc. (lb/gal)	Stage Prop. (lbs)	Cum. Prop. (lbs)
1	Slick Water	Prepad	100	20		0.0	0	0
2	15% HCL	Acid	2,000	30		0.0	0	0
3	Slick Water	Prepad	2,000	100		0.0	0	0
4	Slick Water	Pad	56,000	100		0.0	0	0
5	Slick Water	Slurry	4,500	100	100 Mesh	0.2	900	900
6	Slick Water	Sweep	4,500	100		0.0	0	900
7	Slick Water	Slurry	4,500	100	100 Mesh	0.3	1,350	2,250
8	Slick Water	Sweep	4,500	100		0.0	0	2,250
9	Slick Water	Slurry	4,500	100	100 Mesh	0.4	1,800	4,050
10	Slick Water	Sweep	4,500	100		0.0	0	4,050
11	Slick Water	Slurry	4,500	100	100 Mesh	0.5	2,250	6,300
12	Slick Water	Sweep	4,500	100		0.0	0	6,300
13	Slick Water	Slurry	4,500	100	100 Mesh	0.6	2,700	9,000
14	Slick Water	Sweep	4,500	100		0.0	0	9,000
15	Slick Water	Slurry	4,500	100	100 Mesh	0.7	3,150	12,150
16	Slick Water	Sweep	4,500	100		0.0	0	12,150
17	Slick Water	Slurry	4,500	100	100 Mesh	0.8	3,600	15,750
18	Slick Water	Sweep	4,500	100		0.0	0	15,750
19	Slick Water	Slurry	4,500	100	100 Mesh	0.9	4,050	19,800
20	Slick Water	Sweep	4,500	100		0.0	0	19,800
21	Slick Water	Slurry	4,500	100	100 Mesh	1.0	4,500	24,300
22	Slick Water	Pad	10,700	100		0.0	0	24,300
23	Slick Water	Slurry	20,000	100	40/70 Brady	0.2	4,000	28,300
24	Slick Water	Sweep	6,000	100		0.0	0	28,300
25	Slick Water	Slurry	20,000	100	40/70 Brady	0.3	6,000	34,300
26	Slick Water	Sweep	6,000	100		0.0	0	34,300
27	Slick Water	Slurry	20,000	100	40/70 Brady	0.4	8,000	42,300
28	Slick Water	Sweep	6,000	100		0.0	0	42,300
29	Slick Water	Slurry	20,000	100	40/70 Brady	0.5	10,000	52,300
30	Slick Water	Sweep	6,000	100		0.0	0	52,300
31	Slick Water	Slurry	20,000	100	40/70 Brady	0.6	12,000	64,300
32	Slick Water	Sweep	6,000	100		0.0	0	64,300
33	Slick Water	Slurry	20,000	100	40/70 Brady	0.7	14,000	78,300
34	Slick Water	Sweep	6,000	100		0.0	0	78,300
35	Slick Water	Slurry	20,000	100	40/70 Brady	0.8	16,000	94,300
36	Slick Water	Sweep	6,000	100		0.0	0	94,300
37	Slick Water	Slurry	23,000	100	40/70 Brady	0.9	20,700	115,000
38	Slick Water	Sweep	6,000	100		0.0	0	115,000
39	Slick Water	Slurry	24,000	100	40/70 Brady	1.0	24,000	139,000
40	Slick Water	Pad	17,000	100		0.0	0	139,000
41	Slick Water	Slurry	17,000	100	16/30 Brady	1.0	17,000	156,000
42	Slick Water	Slurry	24,000	100	16/30 Brady	2.0	48,000	204,000
43	Slick Water	Slurry	32,000	100	16/30 Brady	3.0	96,000	300,000
44	Slick Water	Flush	28,706	100		0.0	0	300,000
Totals							300,000	

Estimated Surface Treating Pressure = 2,223 psig.

Maximum Surface Treating Pressure = 3,000 psig.

Treating Schedule

Sta. #	Fluid	Stg. Type	Cin. Vol. (gals)	Rate (bpm)	Proppant	Conc. (lb/gal)	Stage Prop. (lbs)	Cum. Prop. (lbs)
1	Slick Water	Prepad	100	20		0.0	0	0
2	15% HCL	Acid	2,000	30		0.0	0	0
3	Slick Water	Prepad	2,000	100		0.0	0	0
4	Slick Water	Pad	56,000	100		0.0	0	0
5	Slick Water	Slurry	4,500	100	100 Mesh	0.2	900	900
6	Slick Water	Sweep	4,500	100		0.0	0	900
7	Slick Water	Slurry	4,500	100	100 Mesh	0.3	1,350	2,250
8	Slick Water	Sweep	4,500	100		0.0	0	2,250
9	Slick Water	Slurry	4,500	100	100 Mesh	0.4	1,800	4,050
10	Slick Water	Sweep	4,500	100		0.0	0	4,050
11	Slick Water	Slurry	4,500	100	100 Mesh	0.5	2,250	6,300
12	Slick Water	Sweep	4,500	100		0.0	0	6,300
13	Slick Water	Slurry	4,500	100	100 Mesh	0.6	2,700	9,000
14	Slick Water	Sweep	4,500	100		0.0	0	9,000
15	Slick Water	Slurry	4,500	100	100 Mesh	0.7	3,150	12,150
16	Slick Water	Sweep	4,500	100		0.0	0	12,150
17	Slick Water	Slurry	4,500	100	100 Mesh	0.8	3,600	15,750
18	Slick Water	Sweep	4,500	100		0.0	0	15,750
19	Slick Water	Slurry	4,500	100	100 Mesh	0.9	4,050	19,800
20	Slick Water	Sweep	4,500	100		0.0	0	19,800
21	Slick Water	Slurry	4,500	100	100 Mesh	1.0	4,500	24,300
22	Slick Water	Pad	10,700	100		0.0	0	24,300
23	Slick Water	Slurry	20,000	100	40/70 Brady	0.2	4,000	28,300
24	Slick Water	Sweep	6,000	100		0.0	0	28,300
25	Slick Water	Slurry	20,000	100	40/70 Brady	0.3	6,000	34,300
26	Slick Water	Sweep	6,000	100		0.0	0	34,300
27	Slick Water	Slurry	20,000	100	40/70 Brady	0.4	8,000	42,300
28	Slick Water	Sweep	6,000	100		0.0	0	42,300
29	Slick Water	Slurry	20,000	100	40/70 Brady	0.5	10,000	52,300
30	Slick Water	Sweep	6,000	100		0.0	0	52,300
31	Slick Water	Slurry	20,000	100	40/70 Brady	0.6	12,000	64,300
32	Slick Water	Sweep	6,000	100		0.0	0	64,300
33	Slick Water	Slurry	20,000	100	40/70 Brady	0.7	14,000	78,300
34	Slick Water	Sweep	6,000	100		0.0	0	78,300
35	Slick Water	Slurry	20,000	100	40/70 Brady	0.8	16,000	94,300
36	Slick Water	Sweep	6,000	100		0.0	0	94,300
37	Slick Water	Slurry	23,000	100	40/70 Brady	0.9	20,700	115,000
38	Slick Water	Sweep	6,000	100		0.0	0	115,000
39	Slick Water	Slurry	24,000	100	40/70 Brady	1.0	24,000	139,000
40	Slick Water	Pad	17,000	100		0.0	0	139,000
41	Slick Water	Slurry	17,000	100	16/30 Brady	1.0	17,000	156,000
42	Slick Water	Slurry	24,000	100	16/30 Brady	2.0	48,000	204,000
43	Slick Water	Slurry	32,000	100	16/30 Brady	3.0	96,000	300,000
44	Slick Water	Flush	27,880	100		0.0	0	300,000
	Totals						300,000	

Estimated Surface Treating Pressure = 2,027 psig.

Maximum Surface Treating Pressure = 3,000 psig.