

RECEIVED
MAR 26 2014
OCD Artesia
NMOCD ARTESIA

ATS-14-150
FORM APPROVED
OMB No. 1004-0137
Expires October 31, 2014

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. NMNM014778	
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name	
2. Name of Operator <p style="text-align: center;">COG Production LLC. 217955</p>		7. If Unit or CA Agreement, Name and No. Mescal 22 Federal #1H < 382177	
3a. Address <p style="text-align: center;">2208 West Main Street Artesia, NM 88210</p>	3b. Phone No. (include area code) <p style="text-align: center;">575-748-6940</p>	8. Lease Name and Well No. Mescal 22 Federal #1H < 382177	
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface 2220' FSL & 360' FEL Unit Letter I (NESE) SHL Sec 22-T255-R29E At proposed prod. Zone 2075' FSL & 330' FWL Unit Letter L (NWSW) BHL Sec 22-T255-R29E		9. API Well No. <p style="text-align: center;">30-015-42245</p>	
14. Distance in miles and direction from nearest town or post office* <p style="text-align: center;">Approximately 7 miles from Malaga</p>		10. Field and Pool, or Exploratory <p style="text-align: center;">Willow Lake; Bone Spring, SE < 962177</p>	
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. Unit line, if any) 330'		16. No. of acres in lease <p style="text-align: center;">1280</p>	17. Spacing Unit dedicated to this well <p style="text-align: center;">160</p>
18. Distance from location* to nearest well, drilling, completed, applied for, on this lease, ft. SHL: 1024' Mescal #4H BHL: 1548'		19. Proposed Depth <p style="text-align: center;">TVD: 7,660' MD: 12,138'</p>	20. BLM/BIA Bond No. on file <p style="text-align: center;">NMB000860 & NMB000845</p>
21. Elevations (Show whether DF, KDB, RT, GL, etc.) <p style="text-align: center;">3093.1' GL</p>		22. Approximate date work will start* <p style="text-align: center;">2/1/2014</p>	23. Estimated duration <p style="text-align: center;">30 days</p>

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|---|--|
| <ul style="list-style-type: none"> 1. Well plat certified by a registered surveyor. 2. A Drilling Plan 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | <ul style="list-style-type: none"> 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). 5. Operator certification 6. Such other site specific information and/or plans as may be required by the authorized officer. |
|---|--|

25. Signature 	Name (Printed/Typed) <p style="text-align: center;">Mayte Reyes</p>	Date <p style="text-align: center;">11/7/2013</p>
-------------------	--	--

Title <p style="text-align: center;">Regulatory Analyst</p>	Name (Printed/Typed) <p style="text-align: center;">ISI STEPHEN J. CAFFEY</p>	Date <p style="text-align: center;">MAR 19 2014</p>
Approved by (Signature)	Title <p style="text-align: center;">FIELD MANAGER</p>	Office <p style="text-align: center;">CARLSBAD FIELD OFFICE</p>

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

APPROVAL FOR TWO YEARS

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

Carlsbad Controlled Water Basin

Approval Subject to General Requirements
& Special Stipulations Attached

**SEE ATTACHED FOR
CONDITIONS OF APPROVAL**

Surface Use Plan
COG Production LLC
Mescal 22 Federal #1H
SL: 2220' FSL & 360' FEL ULI
Section 22, T25S, R29E
BHL: 2075' FSL & 330' FWL ULL
Section 22, T25S, R29E
Eddy County, New Mexico

OPERATOR CERTIFICATION

I hereby certify that I, or persons under my direct supervision, have inspected the drill site and access road proposed herein; that I am familiar with the conditions that presently exist; that I have full knowledge of State and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or COG Production LLC, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements. Executed this 7th day of November, 2013.

Signed: Melanie J. Parker

Printed Name: Melanie J. Parker
Position: Regulatory Coordinator
Address: 2208 W. Main Street, Artesia, NM 88210
Telephone: (575) 748-6940
Field Representative (if not above signatory): Rand French
E-mail: mparker@concho.com

DISTRICT I
1825 N. FRENCH DR., HOBBS, NM 88240
Phone: (575) 393-6181 Fax: (575) 393-0720

DISTRICT II
1301 W. GRAND AVENUE, ARTESIA, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-0720

DISTRICT III
1000 RIO BRAZOS RD., AZTEC, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

DISTRICT IV
11885 S. ST. FRANCIS DR., SANTA FE, NM 87505
Phone: (505) 476-3480 Fax: (505) 476-3482

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
11885 SOUTH ST. FRANCIS DR.
Santa Fe, New Mexico 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate

AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-015- 42245	Pool Code 96217	Pool Name Willow Lake; Bone Spring, SE
Property Code 38217	Property Name MESCAL 22 FEDERAL	Well Number 1H
OGRID No. 217955	Operator Name COG PRODUCTION, LLC	Elevation 3093.1

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
1	22	25-S	29-E		2220	SOUTH	360	EAST	EDDY

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
L	22	25-S	29-E		2075	SOUTH	330	WEST	EDDY

Dedicated Acres 160	Joint or Infill	Consolidation Code	Order No. 12/38 3-19
------------------------	-----------------	--------------------	----------------------------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

NAD 27 PROPOSED BOTTOM HOLE LOCATION
Y=405277.4 N
X=609616.7 E
LAT.=32.113729° N
LONG.=103.979288° W

NAD 27 SURFACE LOCATION
Y=405446.1 N
X=614231.0 E
LAT.=32.114150° N
LONG.=103.964383° W

GRID AZ. = 267°54'25"
HORZ. DIST. = 4617.4'

330' B.H. 2075' 2220' 360' S.L.

NMNMO14778

Y=405855.6 N X=609283.8 E Y=405883.2 N X=614588.3 E
Y=404528.5 N X=609290.6 E Y=404555.5 N X=614596.6 E

OPERATOR CERTIFICATION

I hereby certify that the information herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Melanie Parker 11/7/13
Signature Date
Printed Name
E-mail Address
mparker@concho.com

SURVEYOR CERTIFICATION


I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

APRIL 18, 2013
Date of Survey

Signature & Seal of Professional Surveyor

Certificate No. CHAD HARCROW 17777
W.O. # 13-195 DRAWN BY: *Chad Harcrow* 4/29/13


SECTION 22, TOWNSHIP 25 SOUTH, RANGE 29 EAST, N.M.P.M.,
 EDDY COUNTY NEW MEXICO

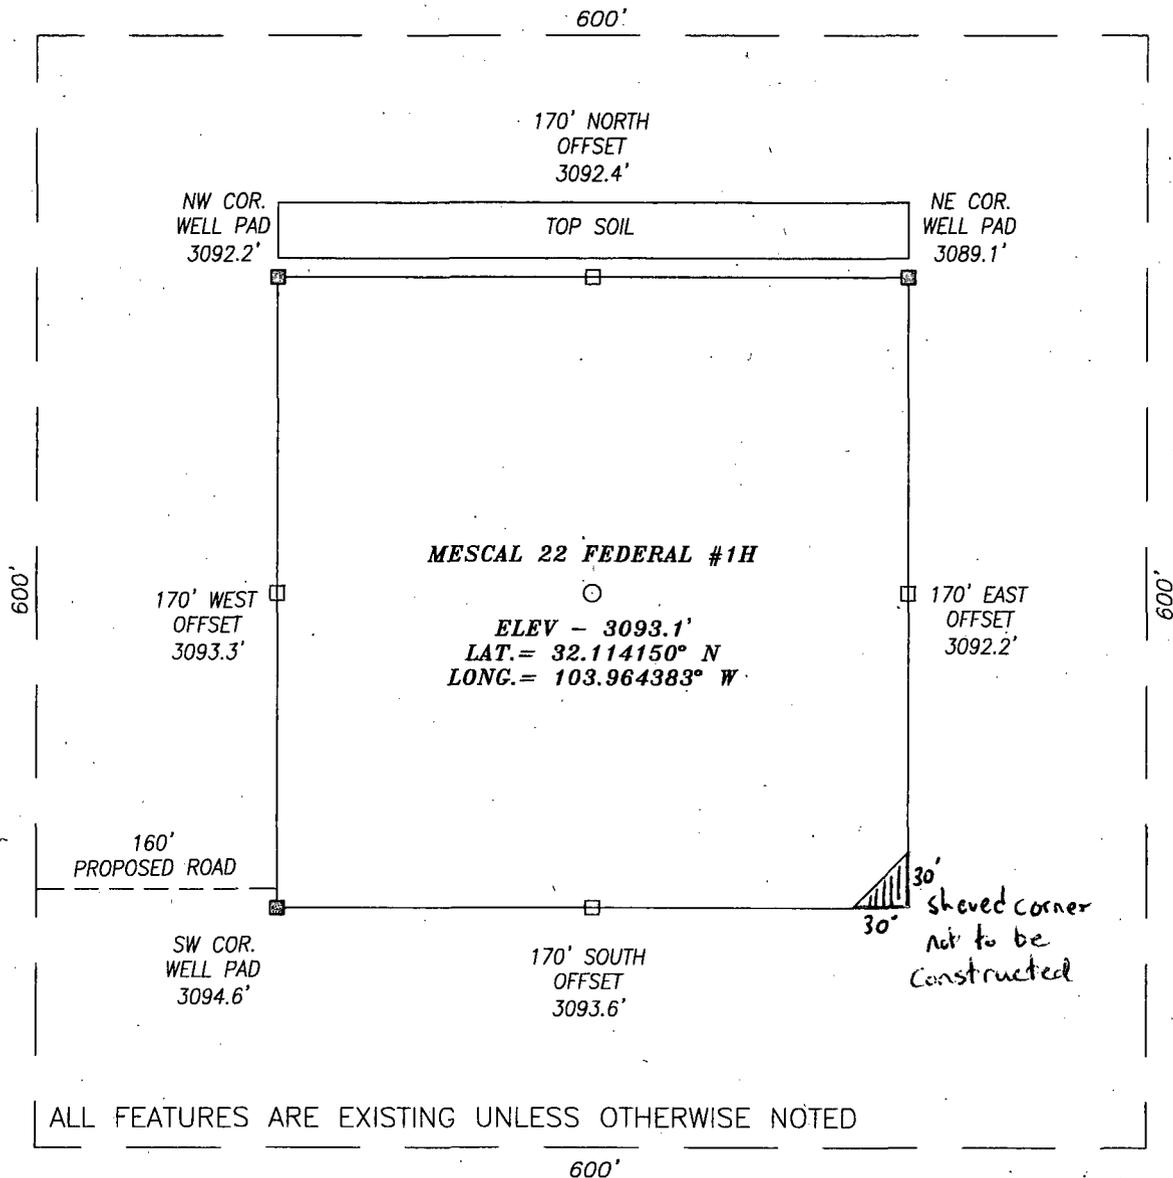

ALL FEATURES ARE EXISTING UNLESS OTHERWISE NOTED

DIRECTIONS TO LOCATION

TRAVELING SOUTH ON HWY 285 TURN LEFT (NORTHEAST) ONTO CR #725 (LONGHORN RD) AND GO APPROX. 3.8 MILES; THEN TURN RIGHT (SOUTHEAST) AND GO APPROX. 0.3 MILES; THEN TURN LEFT (NORTHEAST) ONTO PIPELINE RD #1 AND GO APPROX. 1.8 MILES; THEN TURN LEFT (NORTH) AND GO APPROX. 2.2 MILES; THEN TURN RIGHT (EAST) AND STAY ON ROAD FOR APPROX. 0.7 MILES; THEN TURN RIGHT (NORTHEAST) AND GO APPROX. 0.3 MILES; THEN TURN RIGHT (SOUTH) AND GO APPROX. 0.4 MILES AND PROPOSED WELL IS APPROX. 330 FEET EAST.




HARCROW SURVEYING, LLC
 1107 WATSON, ARTESIA, N.M. 88210
 PH: (575) 513-2570 FAX: (575) 746-2158
 chad_harcrow77@yahoo.com



COG PRODUCTION, LLC		
Mescal 22 Federal #1H Well Located 2220 feet from the south line and 360 feet from the east line of section 22, Township 25 South, Range 29 East, N.M.P.M., Eddy County, New Mexico		
SURVEY DATE: 08/02/2013	PAGE: 1 OF 1	
DRAFTING DATE: 08/13/2013		
APPROVED BY: CH	DRAWN BY: VD	FILE: 13-830

Location Verification Map

EXHIBIT 2

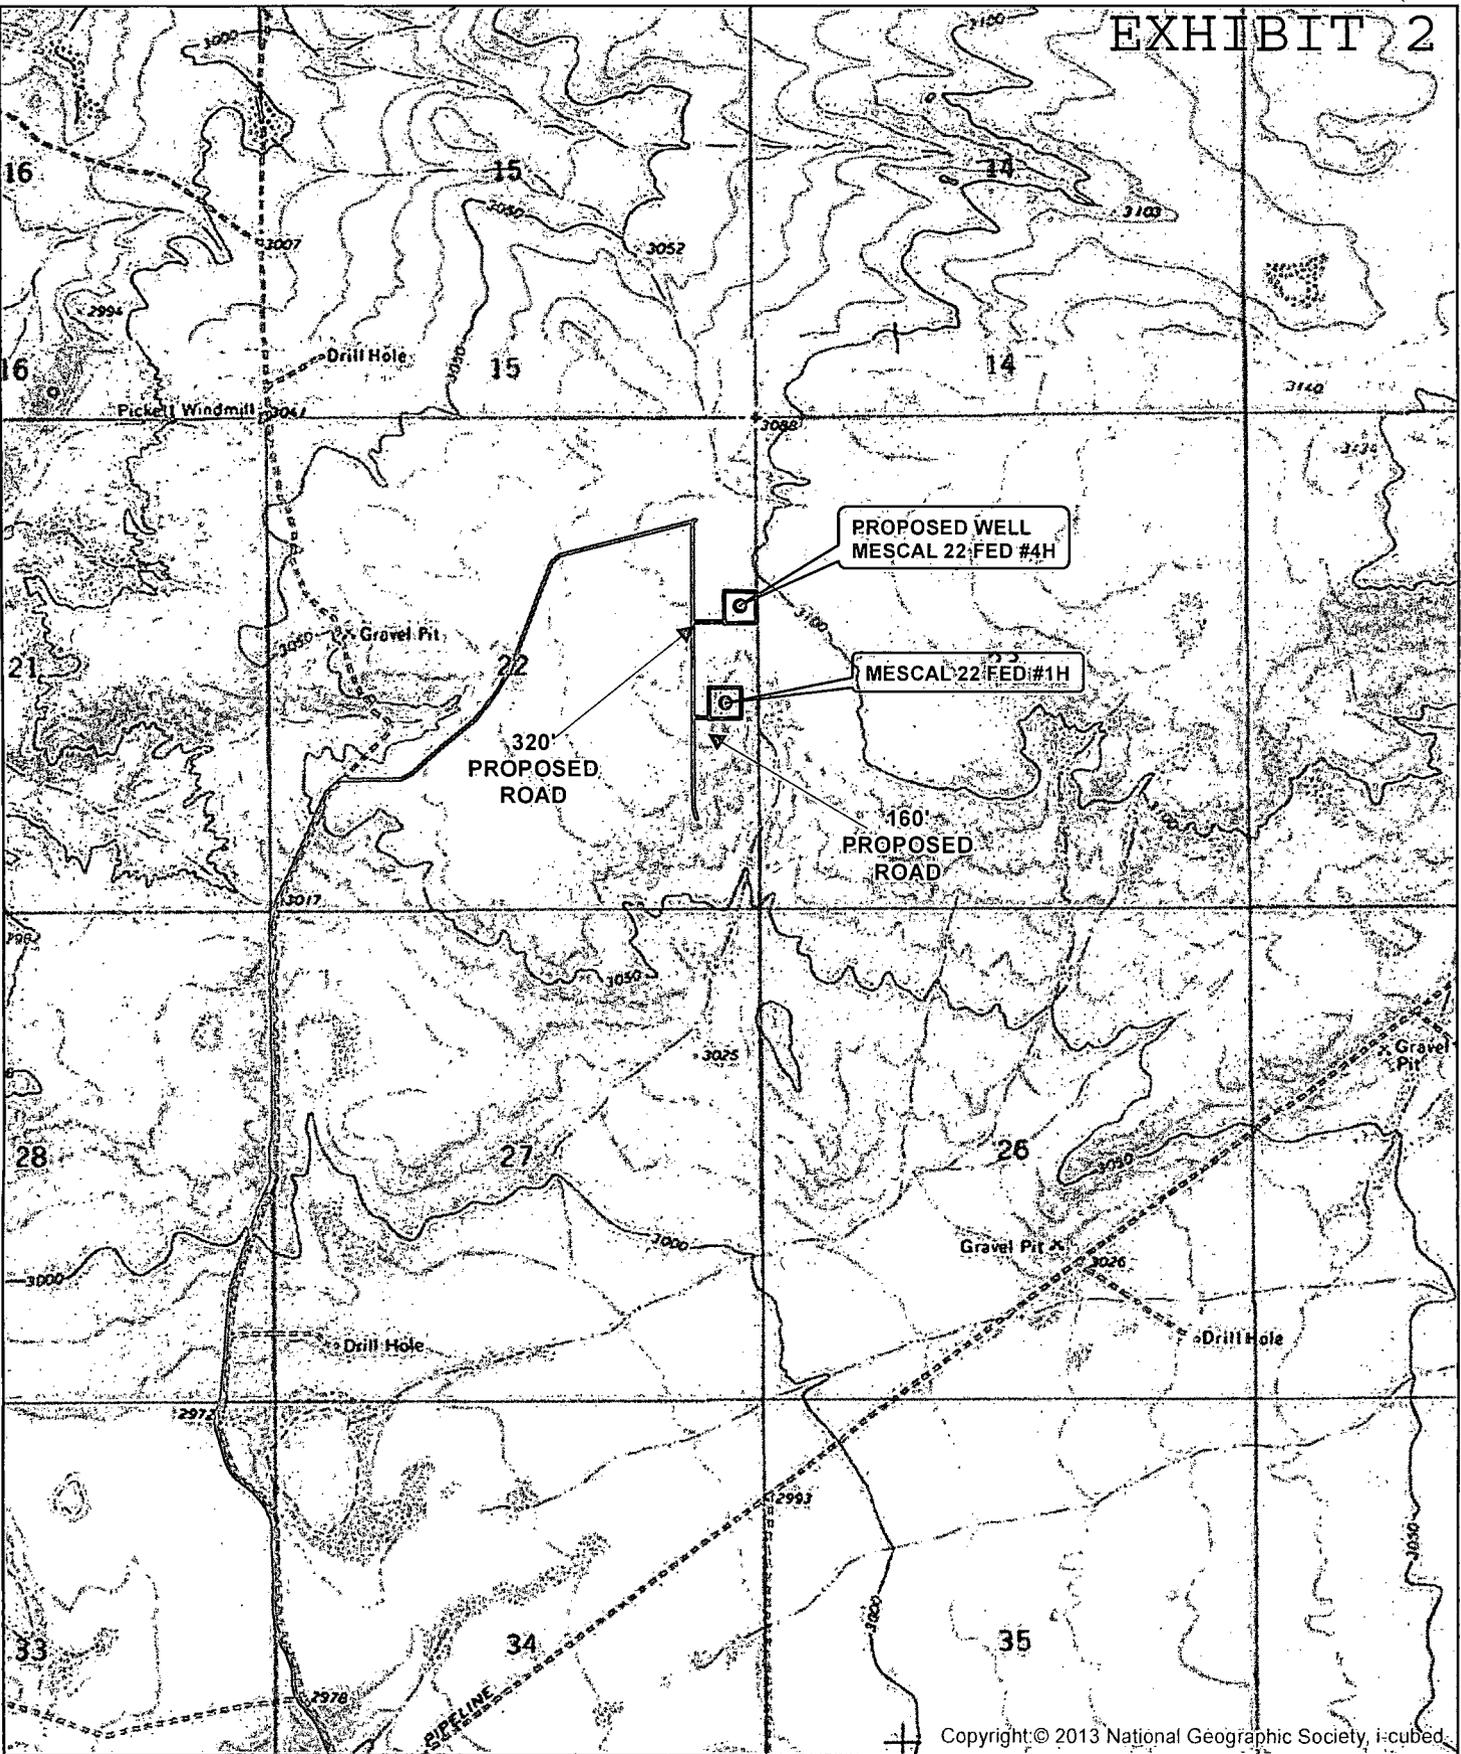

Copyright © 2013 National Geographic Society, i-cubed.

SEC. 22, TWP. 25 S, RGE. 29 E
 SURVEY: N.M.P.M
 COUNTY: EDDY STATE: NEW MEXICO
 DESCRIPTION: Mescal 22 Fed #1H
 (5074-050; 2000-050; 2000-050)

ELEVATION: 3093.1'
 OPERATOR: COG PRODUCTION LLC
 LEASE: Mescal 22 Fed
 W.O. # 13-525


1 IN = 2,000 FT

- MAIN ROAD
- PROPOSED ROAD
- TWO TRACK ROAD
- WELL

HARCROW SURVEYING, LLC
 1107 WATSON, ARTISTAN M 88210
 PH: (575) 313 2570 FAX: (575) 746 2158
 chad_harcrow77@yahoo.com



Location Verification Map

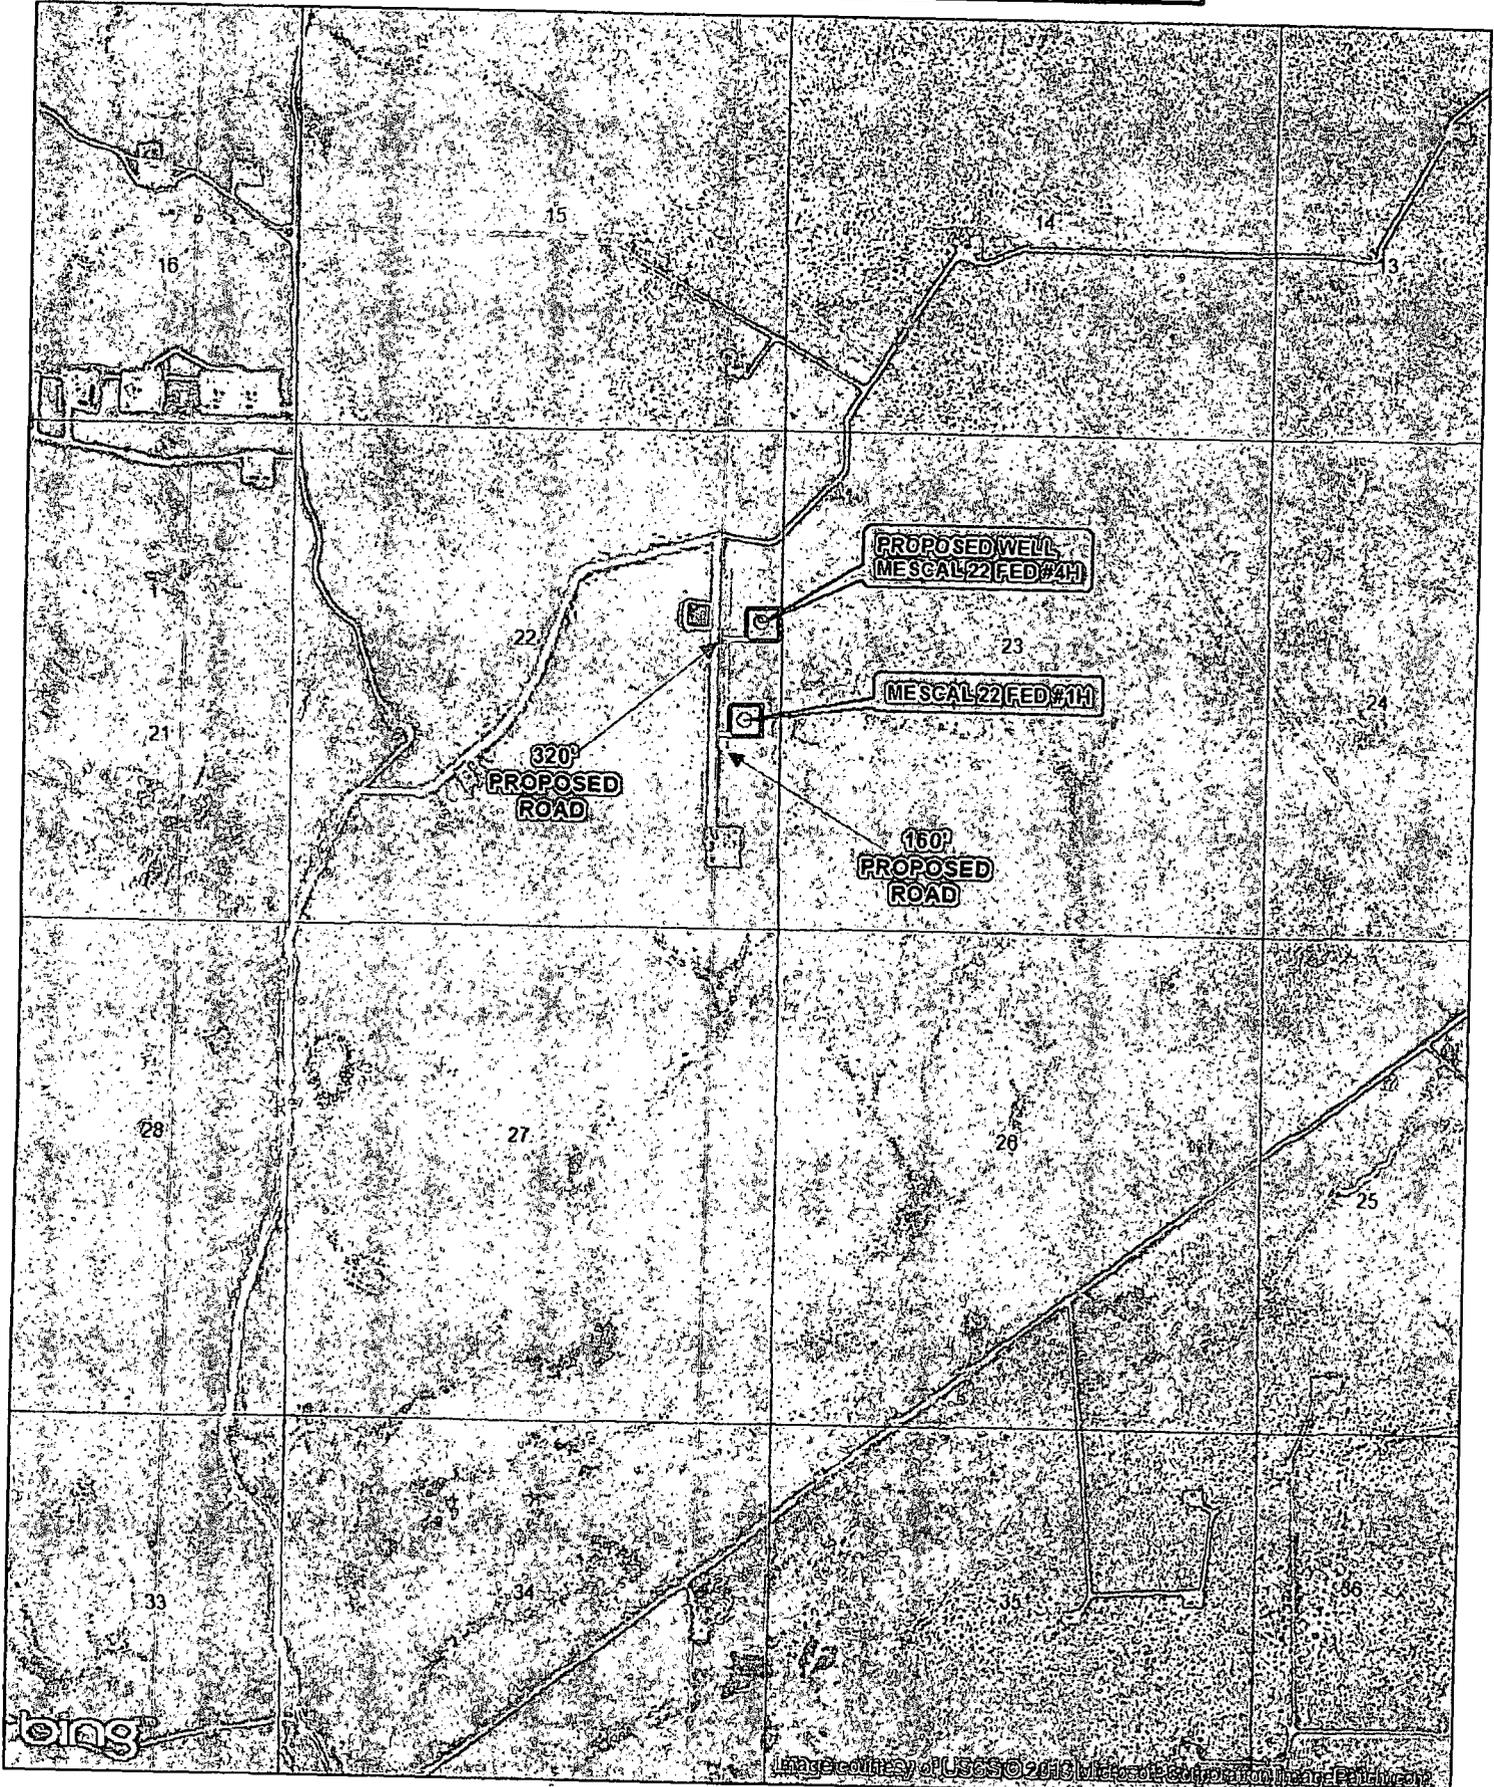

SEC. 22, TWP. 25 S, RGE. 29 E
 SURVEY: N.M.P.M
 COUNTY: EDDY STATE: NEW MEXICO
 DESCRIPTION: MESCAL 22 FED #1H

ELEVATION: 3093.1'
 OPERATOR: COG PRODUCTION LLC
 LEASE: MESCAL 22 FED
 W/O # 13,526


1 IN = 2,000 FT

- MAIN ROAD
- PROPOSED ROAD
- TWO TRACK ROAD
- WELL

HARCROW SURVEYING, LLC
 1107 WATSON, ARTESIA, NM 86210
 PH: (575) 513-2570 FAX: (575) 746-2158
 chad_harcrow77@yahoo.com




Location Verification Map

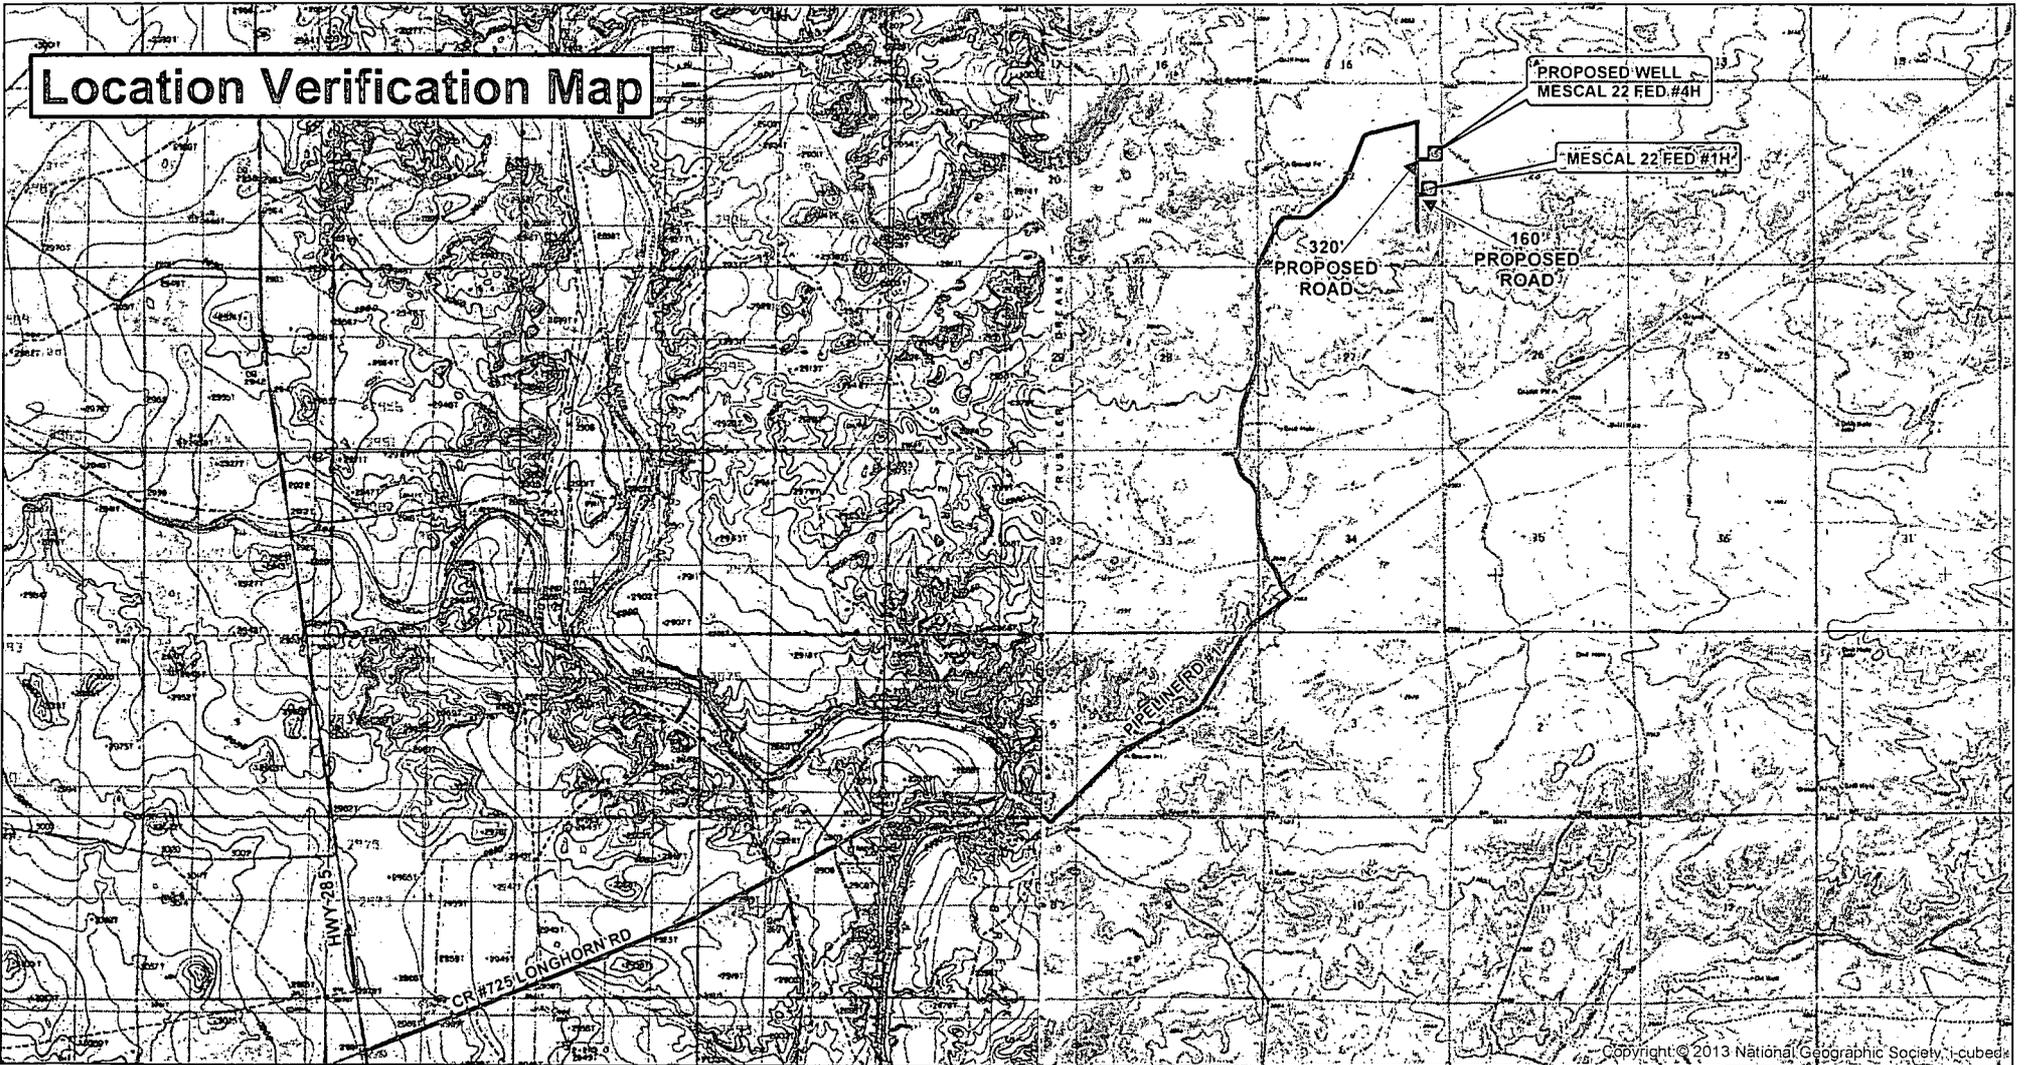

Copyright © 2013 National Geographic Society, Inc.

SEC. 22, TWP. 25 S, RGE. 29 E
 SURVEY: N.M.P.M
 COUNTY: EDDY STATE: NEW MEXICO
 DESCRIPTION: Mescal 22 FED #1H
 FOOTAGES: 2220' FSL & 360' FEL

ELEVATION: 3093.1'
 OPERATOR: COG PRODUCTION LLC
 LEASE: Mescal 22 FED
 W.O. # 13-525




- MAIN ROAD
- PROPOSED ROAD
- TWO TRACK ROAD
- WELL
- WELLPAD

HARCROW SURVEYING, LLC
 1107 WATSON, ARTESIA N.M. 88210
 PH: (575) 513-2570 FAX: (575) 746-2158
 chad_harcrow77@yahoo.com




MAP DATE 8/2013

Location Verification Map

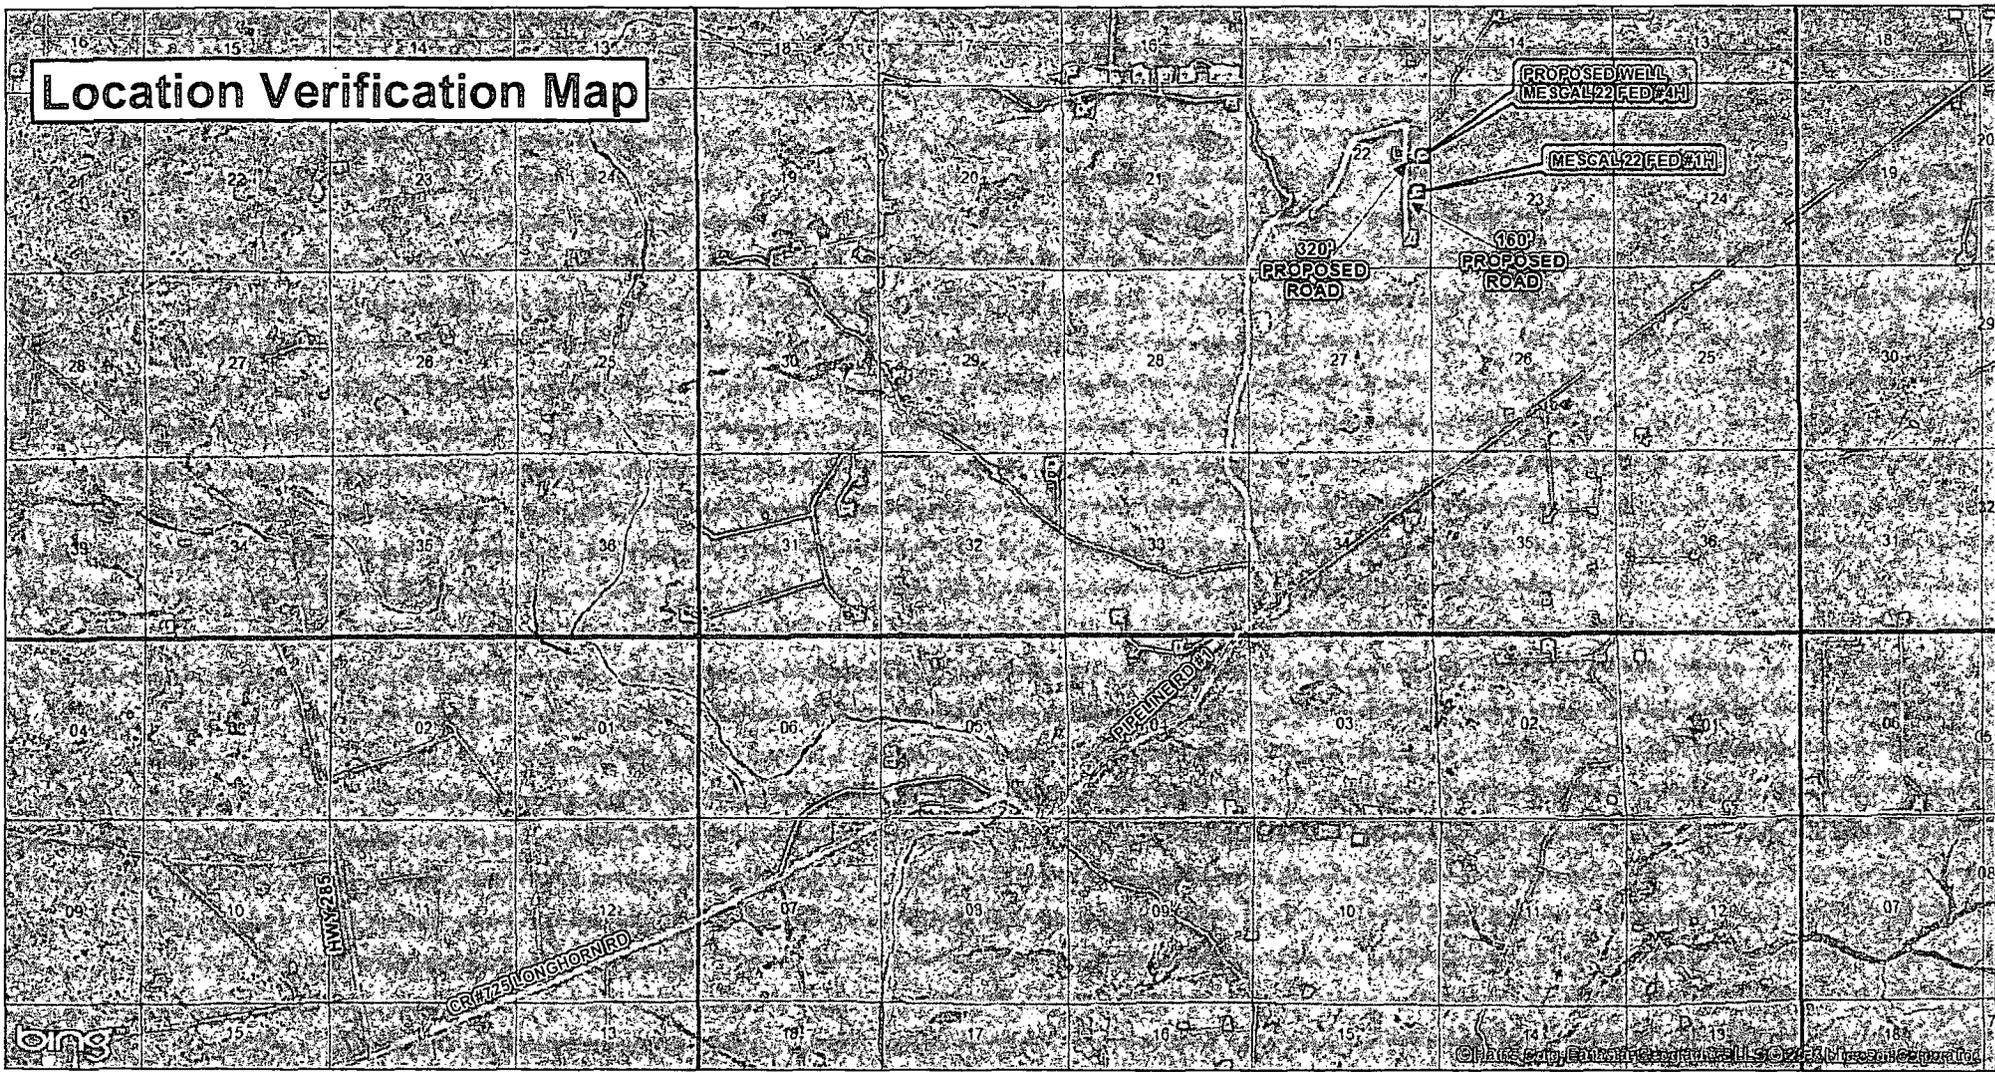

SEC. 22, TWP. 25 S, RGE. 29 E
 SURVEY: N.M.P.M
 COUNTY: EDDY STATE: NEW MEXICO
 DESCRIPTION: Mescal 22 Fed #1H
 FOOTAGES: 2220' FSL & 360' FEL

ELEVATION: 3093.1'
 OPERATOR: COG PRODUCTION LLC
 LEASE: Mescal 22 Fed
 W.O. # 13-525



- MAIN ROAD
- PROPOSED ROAD
- TWO TRACK ROAD
- WELL
- WELL PAD

HARCROW SURVEYING, LLC
 1107 WATSON, ARTESIA N.M. 88210
 PH: (575) 513-2570 FAX: (575) 746-2158
 chad_harcrow77@yahoo.com



MAP DATE 5/8/2013

COG Production LLC
DRILLING AND OPERATIONS PROGRAM
Mescal 22 Fed 1H
SHL: 2200' FSL & 360' FEL
BHL: 2075' FSL & 330' FWL
Section 22, T25S R29E
Eddy County, New Mexico

In conjunction with Form 3160-3, Application for Permit to Drill subject well, COG Production LLC submits the following eleven items of pertinent information in accordance with BLM requirements.

1. Geological surface formation: Permian
2. The estimated tops of geologic markers & estimated depths at which anticipated water, oil or gas formations are expected to be encountered are as follows:

Fresh Water	60'	
Rustler	564'	
Top of Salt	1,136'	
BOS/Castille	2,988'	
Delaware	3,188'	
Bone Spring	6,983'	Oil
U Avalon Shale	7,323'	Oil
L Avalon Shale	7,544'	Oil
1 st BS Sand	7,882'	Oil
TD MD	12,138'	
TD TVD	7,660'	

No other formations are expected to give up oil, gas or fresh water in measurable quantities.

The surface fresh water sands will be protected by setting 13-3/8" casing at 725' and circulating cement back to surface.

The salt sections will be isolated by setting 9-5/8" casing at 3,200' and circulating cement back to surface.

Other intervals will be isolated by setting 5 1/2" casing to total depth and circulating cement back to surface.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.

A 2" kill line and a minimum 3" choke line will be included in the drilling spool located below the ram-type BOP. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold with 3000 psi WP rating.

All casing strings below the conductor shall be pressure tested to 0.22 psi per foot of casing string depth or 1500 psig, whichever is greater, but not to exceed 70 percent of casing's minimum internal yield. If pressure declines more than 10 percent in 30 minutes, corrective action will be taken.

See
COA

While drilling the intermediate section, if a reading of H2S is greater than 100 ppm, well will be shut-in and a remote operated choke will be installed.

6. Estimated BHP & BHT:

Lateral TD = 3346 psi
Lateral TD = 131° F

7. Mud Program: The applicable depths and properties of this system are as follows:

Depth	Type System	Mud Weight	Viscosity (sec)	Waterloss (cc)
0' - 725'	Fresh Water	8.4	29	N.C.
725' - 3,200'	Brine	10.0	29	N.C.
3,200' - 12,138' (Lateral)	Cut Brine	8.5 - 8.7	29	N.C.

- The necessary mud products for weight addition and fluid loss control will be on location at all times.
- A visual and electronic mud monitoring system will be rigged up prior to spud to detect changes in the volume of mud system. The electronic system consists of a pit volume totalizer, stroke counter and flow sensor at flow line.
- If weight and/or viscosity are introduced to the mud system a daily mud check will be performed by mud contractor, along with tourly check by rig personnel.
- After setting intermediate casing, a third party gas unit detection system will be installed at the flow line.

8. Auxiliary Well Control and Monitoring Equipment:

- a. A Kelly cock will be in the drill string at all times.
- b. A full opening drill pipe stabbing valve having the appropriate connections will be on the rig floor at all times.
- c. Hydrogen Sulfide detection equipment will be in operation after drilling out the 13 3/8" casing shoe until the 5 1/2" casing is cemented. Breathing equipment will be on location upon drilling the 13 3/8" shoe until total depth is reached.

See
COA

9. Testing, Logging and Coring Program:

- a. Drill stem tests will be based on geological sample shows.
- b. If open hole electrical logging is performed, the program will be:
 - i. Total Depth to Intermediate Casing: Dual Laterolog-Micro Laterolog and Gamma Ray. Compensated Neutron – Z Density log with Gamma Ray and Caliper.
 - ii. Total Depth to Surface: Compensated Neutron with Gamma Ray
 - iii. No cores are planned.
 - iv. Additional testing will be initiated subsequent to setting the 5 1/2" production casing. Specific intervals will be targeted based on log evaluation, geological sample shows and drill stem tests.

10. Potential Hazards:

- a. No abnormal pressures or temperatures are expected. There is no known presence of H₂S in this area. If H₂S is encountered the operator will comply with the provisions of Onshore Oil and Gas Order No. 6. All personnel will be familiar with all aspects of safe operation of equipment being used to drill this well. No H₂S is anticipated to be encountered.

11. Anticipated starting date and Duration of Operations:

- a. Road and location construction will begin after the BLM has approved the APD. Anticipated spud date will be as soon as possible after BLM approval and as soon as a rig will be available. Move in operations and drilling is expected to take 30 days.



COG Production LLC

Eddy County, NM(NAD 27 NME)

Mescal 22 Federal

1H

OH

Plan: Design #1

Standard Planning Report - Geographic

29 October, 2013

NEXUS
DIRECTIONAL SOLUTIONS, L.P.



Nexus Directional Solutions L.P.
Planning Report - Geographic



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Site Mescal 22 Federal
Company:	COG Production LLC	TVD Reference:	WELL @ 3110.6usft (Original Well Elev)
Project:	Eddy County, NM(NAD 27 NME)	MD Reference:	WELL @ 3110.6usft (Original Well Elev)
Site:	Mescal 22 Federal	North Reference:	Grid
Well:	1H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Design #1		

Project:	Eddy County, NM(NAD 27 NME)		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site:	Mescal 22 Federal				
Site Position:	Northing:	405,446.10 usft	Latitude:	32° 6' 50.941 N	
From: Map	Easting:	614,231.00 usft	Longitude:	103° 57' 51.780 W	
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.20 °

Well:	1H					
Well Position	+N-S	0.0 usft	Northing:	405,446.10 usft	Latitude:	32° 6' 50.941 N
	+E-W	0.0 usft	Easting:	614,231.00 usft	Longitude:	103° 57' 51.780 W
Position Uncertainty	0.0 usft	Wellhead Elevation:		Ground Level:	3,093.1 usft	

Wellbore:	OH
-----------	----

Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	10/22/13	7.47	59.96	48,274

Design:	Design #1
---------	-----------

Audit Notes:	
Version:	Phase: PROTOTYPE Tie On Depth: 0.0

Vertical Section:	Depth From (TVD) (usft)	+N-S (usft)	+E-W (usft)	Direction (°)
	0.0	0.0	0.0	267.91

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N-S (usft)	+E-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
7,248.2	0.00	0.00	7,248.2	0.0	0.0	0.00	0.00	0.00	0.00	
8,005.8	90.91	267.91	7,725.6	-17.7	-484.7	12.00	12.00	0.00	267.91	
12,138.7	90.91	267.91	7,660.0	-168.7	-4,614.3	0.00	0.00	0.00	0.00	PBHL Mescal 22 Fed



Nexus Directional Solutions L.P.
 Planning Report - Geographic



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Site Mescal 22 Federal
Company:	COG Production LLC	TVD Reference:	WELL @ 3110.6usft (Original Well Elev)
Project:	Eddy County, NM(NAD 27 NME)	MD Reference:	WELL @ 3110.6usft (Original Well Elev)
Site:	Mescal 22 Federal	North Reference:	Grid
Well:	1H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
0.0	0.00	0.00	0.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
100.0	0.00	0.00	100.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
200.0	0.00	0.00	200.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
300.0	0.00	0.00	300.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
400.0	0.00	0.00	400.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
500.0	0.00	0.00	500.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
600.0	0.00	0.00	600.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
700.0	0.00	0.00	700.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
800.0	0.00	0.00	800.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
900.0	0.00	0.00	900.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
1,000.0	0.00	0.00	1,000.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
1,100.0	0.00	0.00	1,100.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
1,200.0	0.00	0.00	1,200.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
1,300.0	0.00	0.00	1,300.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
1,400.0	0.00	0.00	1,400.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
1,500.0	0.00	0.00	1,500.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
1,600.0	0.00	0.00	1,600.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
1,700.0	0.00	0.00	1,700.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
1,800.0	0.00	0.00	1,800.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
1,900.0	0.00	0.00	1,900.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
2,000.0	0.00	0.00	2,000.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
2,100.0	0.00	0.00	2,100.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
2,200.0	0.00	0.00	2,200.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
2,300.0	0.00	0.00	2,300.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
2,400.0	0.00	0.00	2,400.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
2,500.0	0.00	0.00	2,500.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
2,600.0	0.00	0.00	2,600.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
2,700.0	0.00	0.00	2,700.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
2,800.0	0.00	0.00	2,800.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
2,900.0	0.00	0.00	2,900.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
3,000.0	0.00	0.00	3,000.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
3,100.0	0.00	0.00	3,100.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
3,200.0	0.00	0.00	3,200.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
3,300.0	0.00	0.00	3,300.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
3,400.0	0.00	0.00	3,400.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
3,500.0	0.00	0.00	3,500.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
3,600.0	0.00	0.00	3,600.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
3,700.0	0.00	0.00	3,700.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
3,800.0	0.00	0.00	3,800.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
3,900.0	0.00	0.00	3,900.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
4,000.0	0.00	0.00	4,000.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
4,100.0	0.00	0.00	4,100.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
4,200.0	0.00	0.00	4,200.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
4,300.0	0.00	0.00	4,300.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
4,400.0	0.00	0.00	4,400.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
4,500.0	0.00	0.00	4,500.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
4,600.0	0.00	0.00	4,600.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
4,700.0	0.00	0.00	4,700.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
4,800.0	0.00	0.00	4,800.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
4,900.0	0.00	0.00	4,900.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
5,000.0	0.00	0.00	5,000.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
5,100.0	0.00	0.00	5,100.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
5,200.0	0.00	0.00	5,200.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
5,300.0	0.00	0.00	5,300.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W
5,400.0	0.00	0.00	5,400.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W



Nexus Directional Solutions L.P.
Planning Report - Geographic



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Site Mescal 22 Federal
Company:	COG Production LLC	TVD Reference:	WELL @ 3110.6usft (Original Well Elev)
Project:	Eddy County, NM(NAD 27 NME)	MD Reference:	WELL @ 3110.6usft (Original Well Elev)
Site:	Mescal 22 Federal	North Reference:	Grid
Well:	1H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Design #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
5,500.0	0.00	0.00	5,500.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W	
5,600.0	0.00	0.00	5,600.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W	
5,700.0	0.00	0.00	5,700.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W	
5,800.0	0.00	0.00	5,800.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W	
5,900.0	0.00	0.00	5,900.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W	
6,000.0	0.00	0.00	6,000.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W	
6,100.0	0.00	0.00	6,100.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W	
6,200.0	0.00	0.00	6,200.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W	
6,300.0	0.00	0.00	6,300.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W	
6,400.0	0.00	0.00	6,400.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W	
6,500.0	0.00	0.00	6,500.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W	
6,600.0	0.00	0.00	6,600.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W	
6,700.0	0.00	0.00	6,700.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W	
6,800.0	0.00	0.00	6,800.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W	
6,900.0	0.00	0.00	6,900.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W	
7,000.0	0.00	0.00	7,000.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W	
7,100.0	0.00	0.00	7,100.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W	
7,200.0	0.00	0.00	7,200.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W	
7,248.2	0.00	0.00	7,248.2	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W	
7,250.0	0.21	267.91	7,250.0	0.0	0.0	405,446.10	614,231.00	32° 6' 50.941 N	103° 57' 51.780 W	
7,275.0	3.21	267.91	7,275.0	0.0	-0.7	405,446.07	614,230.25	32° 6' 50.940 N	103° 57' 51.788 W	
7,300.0	6.21	267.91	7,299.9	-0.1	-2.8	405,446.00	614,228.20	32° 6' 50.940 N	103° 57' 51.812 W	
7,325.0	9.21	267.91	7,324.7	-0.2	-6.2	405,445.87	614,224.85	32° 6' 50.939 N	103° 57' 51.851 W	
7,350.0	12.21	267.91	7,349.2	-0.4	-10.8	405,445.70	614,220.21	32° 6' 50.937 N	103° 57' 51.905 W	
7,375.0	15.21	267.91	7,373.5	-0.6	-16.7	405,445.49	614,214.29	32° 6' 50.935 N	103° 57' 51.974 W	
7,400.0	18.21	267.91	7,397.5	-0.9	-23.9	405,445.23	614,207.10	32° 6' 50.933 N	103° 57' 52.058 W	
7,425.0	21.21	267.91	7,421.0	-1.2	-32.3	405,444.92	614,198.68	32° 6' 50.930 N	103° 57' 52.156 W	
7,450.0	24.21	267.91	7,444.0	-1.5	-42.0	405,444.56	614,189.03	32° 6' 50.927 N	103° 57' 52.268 W	
7,475.0	27.21	267.91	7,466.6	-1.9	-52.8	405,444.17	614,178.19	32° 6' 50.923 N	103° 57' 52.394 W	
7,500.0	30.21	267.91	7,488.5	-2.4	-64.8	405,443.73	614,166.19	32° 6' 50.919 N	103° 57' 52.533 W	
7,525.0	33.21	267.91	7,509.8	-2.8	-77.9	405,443.25	614,153.06	32° 6' 50.915 N	103° 57' 52.686 W	
7,550.0	36.21	267.91	7,530.3	-3.4	-92.2	405,442.73	614,138.84	32° 6' 50.910 N	103° 57' 52.851 W	
7,575.0	39.21	267.91	7,550.1	-3.9	-107.4	405,442.17	614,123.56	32° 6' 50.905 N	103° 57' 53.029 W	
7,600.0	42.21	267.91	7,569.0	-4.5	-123.7	405,441.58	614,107.26	32° 6' 50.900 N	103° 57' 53.219 W	
7,625.0	45.21	267.91	7,587.1	-5.2	-141.0	405,440.94	614,090.00	32° 6' 50.894 N	103° 57' 53.419 W	
7,650.0	48.21	267.91	7,604.2	-5.8	-159.2	405,440.28	614,071.82	32° 6' 50.888 N	103° 57' 53.631 W	
7,675.0	51.21	267.91	7,620.4	-6.5	-178.2	405,439.58	614,052.76	32° 6' 50.882 N	103° 57' 53.852 W	
7,700.0	54.21	267.91	7,635.5	-7.2	-198.1	405,438.86	614,032.89	32° 6' 50.876 N	103° 57' 54.083 W	
7,725.0	57.21	267.91	7,649.6	-8.0	-218.8	405,438.10	614,012.25	32° 6' 50.869 N	103° 57' 54.323 W	
7,750.0	60.21	267.91	7,662.6	-8.8	-240.1	405,437.32	613,990.90	32° 6' 50.862 N	103° 57' 54.572 W	
7,775.0	63.21	267.91	7,674.5	-9.6	-262.1	405,436.52	613,968.90	32° 6' 50.855 N	103° 57' 54.827 W	
7,800.0	66.21	267.91	7,685.1	-10.4	-284.7	405,435.69	613,946.32	32° 6' 50.847 N	103° 57' 55.090 W	
7,825.0	69.21	267.91	7,694.6	-11.3	-307.8	405,434.85	613,923.20	32° 6' 50.840 N	103° 57' 55.359 W	
7,850.0	72.21	267.91	7,702.9	-12.1	-331.4	405,433.98	613,899.62	32° 6' 50.832 N	103° 57' 55.633 W	
7,875.0	75.21	267.91	7,709.9	-13.0	-355.4	405,433.11	613,875.65	32° 6' 50.824 N	103° 57' 55.912 W	
7,900.0	78.21	267.91	7,715.6	-13.9	-379.7	405,432.22	613,851.33	32° 6' 50.816 N	103° 57' 56.195 W	
7,925.0	81.21	267.91	7,720.1	-14.8	-404.2	405,431.32	613,826.75	32° 6' 50.808 N	103° 57' 56.480 W	
7,950.0	84.21	267.91	7,723.3	-15.7	-429.0	405,430.41	613,801.98	32° 6' 50.800 N	103° 57' 56.769 W	
7,975.0	87.21	267.91	7,725.1	-16.6	-453.9	405,429.50	613,777.07	32° 6' 50.792 N	103° 57' 57.058 W	
8,000.0	90.21	267.91	7,725.7	-17.5	-478.9	405,428.59	613,752.09	32° 6' 50.783 N	103° 57' 57.349 W	
8,005.8	90.91	267.91	7,725.6	-17.7	-484.7	405,428.38	613,746.28	32° 6' 50.782 N	103° 57' 57.416 W	
8,100.0	90.91	267.91	7,724.1	-21.2	-578.8	405,424.94	613,652.17	32° 6' 50.751 N	103° 57' 58.511 W	
8,200.0	90.91	267.91	7,722.6	-24.8	-678.8	405,421.28	613,552.25	32° 6' 50.718 N	103° 57' 59.673 W	
8,300.0	90.91	267.91	7,721.0	-28.5	-778.7	405,417.63	613,452.33	32° 6' 50.685 N	103° 58' 0.835 W	
8,400.0	90.91	267.91	7,719.4	-32.1	-878.6	405,413.98	613,352.41	32° 6' 50.652 N	103° 58' 1.997 W	



Nexus Directional Solutions L.P.
Planning Report - Geographic



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Site Mescal 22 Federal
Company:	COG Production LLC	TVD Reference:	WELL @ 3110.6usft (Original Well Elev)
Project:	Eddy County, NM(NAD 27 NME)	MD Reference:	WELL @ 3110.6usft (Original Well Elev)
Site:	Mescal 22 Federal	North Reference:	Grid
Well:	1H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Design #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N-S (usft)	+E-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
8,500.0	90.91	267.91	7,717.8	-35.8	-978.5	405,410.32	613,252.49	32° 6' 50.619 N	103° 58' 3.158 W	
8,600.0	90.91	267.91	7,716.2	-39.4	-1,078.4	405,406.67	613,152.57	32° 6' 50.587 N	103° 58' 4.320 W	
8,700.0	90.91	267.91	7,714.6	-43.1	-1,178.4	405,403.02	613,052.65	32° 6' 50.554 N	103° 58' 5.482 W	
8,800.0	90.91	267.91	7,713.0	-46.7	-1,278.3	405,399.36	612,952.73	32° 6' 50.521 N	103° 58' 6.644 W	
8,900.0	90.91	267.91	7,711.4	-50.4	-1,378.2	405,395.71	612,852.81	32° 6' 50.488 N	103° 58' 7.806 W	
9,000.0	90.91	267.91	7,709.8	-54.0	-1,478.1	405,392.06	612,752.88	32° 6' 50.455 N	103° 58' 8.968 W	
9,100.0	90.91	267.91	7,708.3	-57.7	-1,578.0	405,388.41	612,652.96	32° 6' 50.423 N	103° 58' 10.130 W	
9,200.0	90.91	267.91	7,706.7	-61.3	-1,678.0	405,384.75	612,553.04	32° 6' 50.390 N	103° 58' 11.292 W	
9,300.0	90.91	267.91	7,705.1	-65.0	-1,777.9	405,381.10	612,453.12	32° 6' 50.357 N	103° 58' 12.454 W	
9,400.0	90.91	267.91	7,703.5	-68.7	-1,877.8	405,377.45	612,353.20	32° 6' 50.324 N	103° 58' 13.616 W	
9,500.0	90.91	267.91	7,701.9	-72.3	-1,977.7	405,373.79	612,253.28	32° 6' 50.291 N	103° 58' 14.778 W	
9,600.0	90.91	267.91	7,700.3	-76.0	-2,077.6	405,370.14	612,153.36	32° 6' 50.259 N	103° 58' 15.940 W	
9,700.0	90.91	267.91	7,698.7	-79.6	-2,177.6	405,366.49	612,053.44	32° 6' 50.226 N	103° 58' 17.102 W	
9,800.0	90.91	267.91	7,697.1	-83.3	-2,277.5	405,362.83	611,953.52	32° 6' 50.193 N	103° 58' 18.264 W	
9,900.0	90.91	267.91	7,695.6	-86.9	-2,377.4	405,359.18	611,853.60	32° 6' 50.160 N	103° 58' 19.426 W	
10,000.0	90.91	267.91	7,694.0	-90.6	-2,477.3	405,355.53	611,753.68	32° 6' 50.127 N	103° 58' 20.588 W	
10,100.0	90.91	267.91	7,692.4	-94.2	-2,577.2	405,351.87	611,653.76	32° 6' 50.094 N	103° 58' 21.750 W	
10,200.0	90.91	267.91	7,690.8	-97.9	-2,677.2	405,348.22	611,553.84	32° 6' 50.062 N	103° 58' 22.912 W	
10,300.0	90.91	267.91	7,689.2	-101.5	-2,777.1	405,344.57	611,453.92	32° 6' 50.029 N	103° 58' 24.074 W	
10,400.0	90.91	267.91	7,687.6	-105.2	-2,877.0	405,340.91	611,354.00	32° 6' 49.996 N	103° 58' 25.235 W	
10,500.0	90.91	267.91	7,686.0	-108.8	-2,976.9	405,337.26	611,254.08	32° 6' 49.963 N	103° 58' 26.397 W	
10,600.0	90.91	267.91	7,684.4	-112.5	-3,076.8	405,333.61	611,154.15	32° 6' 49.930 N	103° 58' 27.559 W	
10,700.0	90.91	267.91	7,682.8	-116.1	-3,176.8	405,329.96	611,054.23	32° 6' 49.897 N	103° 58' 28.721 W	
10,800.0	90.91	267.91	7,681.3	-119.8	-3,276.7	405,326.30	610,954.31	32° 6' 49.864 N	103° 58' 29.883 W	
10,900.0	90.91	267.91	7,679.7	-123.4	-3,376.6	405,322.65	610,854.39	32° 6' 49.832 N	103° 58' 31.045 W	
11,000.0	90.91	267.91	7,678.1	-127.1	-3,476.5	405,319.00	610,754.47	32° 6' 49.799 N	103° 58' 32.207 W	
11,100.0	90.91	267.91	7,676.5	-130.8	-3,576.5	405,315.34	610,654.55	32° 6' 49.766 N	103° 58' 33.369 W	
11,200.0	90.91	267.91	7,674.9	-134.4	-3,676.4	405,311.69	610,554.63	32° 6' 49.733 N	103° 58' 34.531 W	
11,300.0	90.91	267.91	7,673.3	-138.1	-3,776.3	405,308.04	610,454.71	32° 6' 49.700 N	103° 58' 35.693 W	
11,400.0	90.91	267.91	7,671.7	-141.7	-3,876.2	405,304.38	610,354.79	32° 6' 49.667 N	103° 58' 36.855 W	
11,500.0	90.91	267.91	7,670.1	-145.4	-3,976.1	405,300.73	610,254.87	32° 6' 49.634 N	103° 58' 38.017 W	
11,600.0	90.91	267.91	7,668.6	-149.0	-4,076.1	405,297.08	610,154.95	32° 6' 49.601 N	103° 58' 39.179 W	
11,700.0	90.91	267.91	7,667.0	-152.7	-4,176.0	405,293.42	610,055.03	32° 6' 49.568 N	103° 58' 40.341 W	
11,800.0	90.91	267.91	7,665.4	-156.3	-4,275.9	405,289.77	609,955.11	32° 6' 49.536 N	103° 58' 41.503 W	
11,900.0	90.91	267.91	7,663.8	-160.0	-4,375.8	405,286.12	609,855.19	32° 6' 49.503 N	103° 58' 42.665 W	
12,000.0	90.91	267.91	7,662.2	-163.6	-4,475.7	405,282.46	609,755.27	32° 6' 49.470 N	103° 58' 43.827 W	
12,100.0	90.91	267.91	7,660.6	-167.3	-4,575.7	405,278.81	609,655.35	32° 6' 49.437 N	103° 58' 44.989 W	
12,138.7	90.91	267.91	7,660.0	-168.7	-4,614.3	405,277.40	609,616.70	32° 6' 49.424 N	103° 58' 45.438 W	

Design Targets										
Target Name	Dip Angle (°)	Dip Dir (°)	TVD (usft)	+N-S (usft)	+E-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
PBHL Mescal 22 Fed #1 - plan hits target center - Point	0.00	0.00	7,660.0	-168.7	-4,614.3	405,277.40	609,616.70	32° 6' 49.424 N	103° 58' 45.438 W	



COG Production LLC

Eddy County, NM(NAD 27 NME)

Mescal 22 Federal

4H

OH

Plan: Design #1

Standard Planning Report - Geographic

29 October, 2013

NEXUS
DIRECTIONAL SOLUTIONS, L.P.



Nexus Directional Solutions L.P.
Planning Report - Geographic



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Site Mescal 22 Federal
Company:	COG Production LLC	TVD Reference:	WELL @ 3113.1usft (Original Well Elev)
Project:	Eddy County, NM(NAD 27 NME)	MD Reference:	WELL @ 3113.1usft (Original Well Elev)
Site:	Mescal 22 Federal	North Reference:	Grid
Well:	4H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Design #1		

Project:	Eddy County, NM(NAD 27-NME)		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site:	Mescal 22 Federal				
Site Position:	Northing:	405,446.10 usft	Latitude:	32° 6' 50.941 N	
From: Map	Easting:	614,231.00 usft	Longitude:	103° 57' 51.780 W	
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.20 °

Well:	4H					
Well Position	+N/-S	1,042.0 usft	Northing:	406,488.10 usft	Latitude:	32° 7' 1.247 N
	+E/-W	163.4 usft	Easting:	614,394.40 usft	Longitude:	103° 57' 49.838 W
Position Uncertainty	0.0 usft		Wellhead Elevation:		Ground Level:	3,095.6 usft

Wellbore:	OH
-----------	----

Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	10/22/13	7.47	59.96	48,276

Design:	Design #1
---------	-----------

Audit Notes:	
Version:	Phase: PROTOTYPE Tie On Depth: 0.0

Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.0	1,042.0	163.4	272.75

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	1,042.0	163.4	0.00	0.00	0.00	0.00	
7,253.3	0.00	0.00	7,253.3	1,042.0	163.4	0.00	0.00	0.00	0.00	
8,011.1	90.94	272.75	7,730.7	1,065.3	-321.3	12.00	12.00	0.00	272.75	
12,318.1	90.94	272.75	7,660.0	1,271.8	-4,622.8	0.00	0.00	0.00	0.00	PBHL Mescal 22 Fed



Nexus Directional Solutions L.P.
 Planning Report - Geographic



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Site Mescal 22 Federal
Company:	COG Production LLC	TVD Reference:	WELL @ 3113.1usft (Original Well Elev)
Project:	Eddy County, NM(NAD 27 NME)	MD Reference:	WELL @ 3113.1usft (Original Well Elev)
Site:	Mescal 22 Federal	North Reference:	Grid
Well:	4H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Design #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N-S (usft)	+E-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
0.0	0.00	0.00	0.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
100.0	0.00	0.00	100.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
200.0	0.00	0.00	200.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
300.0	0.00	0.00	300.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
400.0	0.00	0.00	400.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
500.0	0.00	0.00	500.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
600.0	0.00	0.00	600.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
700.0	0.00	0.00	700.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
800.0	0.00	0.00	800.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
900.0	0.00	0.00	900.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
1,000.0	0.00	0.00	1,000.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
1,100.0	0.00	0.00	1,100.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
1,200.0	0.00	0.00	1,200.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
1,300.0	0.00	0.00	1,300.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
1,400.0	0.00	0.00	1,400.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
1,500.0	0.00	0.00	1,500.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
1,600.0	0.00	0.00	1,600.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
1,700.0	0.00	0.00	1,700.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
1,800.0	0.00	0.00	1,800.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
1,900.0	0.00	0.00	1,900.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
2,000.0	0.00	0.00	2,000.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
2,100.0	0.00	0.00	2,100.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
2,200.0	0.00	0.00	2,200.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
2,300.0	0.00	0.00	2,300.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
2,400.0	0.00	0.00	2,400.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
2,500.0	0.00	0.00	2,500.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
2,600.0	0.00	0.00	2,600.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
2,700.0	0.00	0.00	2,700.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
2,800.0	0.00	0.00	2,800.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
2,900.0	0.00	0.00	2,900.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
3,000.0	0.00	0.00	3,000.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
3,100.0	0.00	0.00	3,100.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
3,200.0	0.00	0.00	3,200.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
3,300.0	0.00	0.00	3,300.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
3,400.0	0.00	0.00	3,400.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
3,500.0	0.00	0.00	3,500.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
3,600.0	0.00	0.00	3,600.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
3,700.0	0.00	0.00	3,700.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
3,800.0	0.00	0.00	3,800.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
3,900.0	0.00	0.00	3,900.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
4,000.0	0.00	0.00	4,000.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
4,100.0	0.00	0.00	4,100.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
4,200.0	0.00	0.00	4,200.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
4,300.0	0.00	0.00	4,300.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
4,400.0	0.00	0.00	4,400.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
4,500.0	0.00	0.00	4,500.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
4,600.0	0.00	0.00	4,600.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
4,700.0	0.00	0.00	4,700.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
4,800.0	0.00	0.00	4,800.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
4,900.0	0.00	0.00	4,900.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
5,000.0	0.00	0.00	5,000.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
5,100.0	0.00	0.00	5,100.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
5,200.0	0.00	0.00	5,200.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
5,300.0	0.00	0.00	5,300.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	
5,400.0	0.00	0.00	5,400.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W	



Nexus Directional Solutions L.P.
Planning Report - Geographic



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Site Mescal 22 Federal
Company:	COG Production LLC	TVD Reference:	WELL @ 3113.1usft (Original Well Elev)
Project:	Eddy County, NM(NAD 27 NME)	MD Reference:	WELL @ 3113.1usft (Original Well Elev)
Site:	Mescal 22 Federal	North Reference:	Grid
Well:	4H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
5,500.0	0.00	0.00	5,500.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W
5,600.0	0.00	0.00	5,600.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W
5,700.0	0.00	0.00	5,700.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W
5,800.0	0.00	0.00	5,800.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W
5,900.0	0.00	0.00	5,900.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W
6,000.0	0.00	0.00	6,000.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W
6,100.0	0.00	0.00	6,100.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W
6,200.0	0.00	0.00	6,200.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W
6,300.0	0.00	0.00	6,300.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W
6,400.0	0.00	0.00	6,400.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W
6,500.0	0.00	0.00	6,500.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W
6,600.0	0.00	0.00	6,600.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W
6,700.0	0.00	0.00	6,700.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W
6,800.0	0.00	0.00	6,800.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W
6,900.0	0.00	0.00	6,900.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W
7,000.0	0.00	0.00	7,000.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W
7,100.0	0.00	0.00	7,100.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W
7,200.0	0.00	0.00	7,200.0	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W
7,253.3	0.00	0.00	7,253.3	1,042.0	163.4	406,488.10	614,394.40	32° 7' 1.247 N	103° 57' 49.838 W
7,275.0	2.61	272.75	7,275.0	1,042.0	162.9	406,488.12	614,393.91	32° 7' 1.247 N	103° 57' 49.844 W
7,300.0	5.61	272.75	7,299.9	1,042.1	161.1	406,488.21	614,392.12	32° 7' 1.248 N	103° 57' 49.865 W
7,325.0	8.61	272.75	7,324.7	1,042.3	158.0	406,488.36	614,389.03	32° 7' 1.250 N	103° 57' 49.901 W
7,350.0	11.61	272.75	7,349.3	1,042.5	153.6	406,488.57	614,384.65	32° 7' 1.252 N	103° 57' 49.952 W
7,375.0	14.61	272.75	7,373.7	1,042.7	148.0	406,488.84	614,378.98	32° 7' 1.255 N	103° 57' 50.017 W
7,400.0	17.61	272.75	7,397.7	1,043.1	141.1	406,489.17	614,372.06	32° 7' 1.258 N	103° 57' 50.098 W
7,425.0	20.61	272.75	7,421.3	1,043.5	132.9	406,489.56	614,363.88	32° 7' 1.263 N	103° 57' 50.193 W
7,450.0	23.61	272.75	7,444.5	1,043.9	123.5	406,490.02	614,354.49	32° 7' 1.267 N	103° 57' 50.302 W
7,475.0	26.61	272.75	7,467.1	1,044.4	112.9	406,490.52	614,343.89	32° 7' 1.273 N	103° 57' 50.425 W
7,500.0	29.61	272.75	7,489.2	1,045.0	101.1	406,491.09	614,332.13	32° 7' 1.279 N	103° 57' 50.562 W
7,525.0	32.61	272.75	7,510.6	1,045.6	88.2	406,491.71	614,319.23	32° 7' 1.285 N	103° 57' 50.712 W
7,550.0	35.61	272.75	7,531.3	1,046.3	74.2	406,492.38	614,305.22	32° 7' 1.292 N	103° 57' 50.875 W
7,575.0	38.61	272.75	7,551.2	1,047.0	59.2	406,493.10	614,290.16	32° 7' 1.300 N	103° 57' 51.050 W
7,600.0	41.61	272.75	7,570.3	1,047.8	43.1	406,493.88	614,274.07	32° 7' 1.308 N	103° 57' 51.237 W
7,625.0	44.61	272.75	7,588.6	1,048.6	26.0	406,494.70	614,257.01	32° 7' 1.317 N	103° 57' 51.435 W
7,650.0	47.61	272.75	7,605.9	1,049.5	8.0	406,495.56	614,239.02	32° 7' 1.326 N	103° 57' 51.645 W
7,675.0	50.61	272.75	7,622.3	1,050.4	-10.9	406,496.47	614,220.14	32° 7' 1.336 N	103° 57' 51.864 W
7,700.0	53.61	272.75	7,637.6	1,051.3	-30.6	406,497.41	614,200.44	32° 7' 1.346 N	103° 57' 52.093 W
7,725.0	56.61	272.75	7,651.9	1,052.3	-51.0	406,498.40	614,179.96	32° 7' 1.356 N	103° 57' 52.331 W
7,750.0	59.61	272.75	7,665.1	1,053.3	-72.2	406,499.41	614,158.76	32° 7' 1.367 N	103° 57' 52.578 W
7,775.0	62.61	272.75	7,677.2	1,054.4	-94.1	406,500.46	614,136.90	32° 7' 1.378 N	103° 57' 52.832 W
7,800.0	65.61	272.75	7,688.1	1,055.4	-116.6	406,501.54	614,114.43	32° 7' 1.390 N	103° 57' 53.093 W
7,825.0	68.61	272.75	7,697.8	1,056.5	-139.6	406,502.65	614,091.43	32° 7' 1.401 N	103° 57' 53.360 W
7,850.0	71.61	272.75	7,706.3	1,057.7	-163.0	406,503.77	614,067.95	32° 7' 1.413 N	103° 57' 53.633 W
7,875.0	74.61	272.75	7,713.6	1,058.8	-186.9	406,504.92	614,044.06	32° 7' 1.425 N	103° 57' 53.911 W
7,900.0	77.61	272.75	7,719.6	1,060.0	-211.2	406,506.08	614,019.82	32° 7' 1.438 N	103° 57' 54.193 W
7,925.0	80.61	272.75	7,724.3	1,061.2	-235.7	406,507.26	613,995.31	32° 7' 1.450 N	103° 57' 54.478 W
7,950.0	83.61	272.75	7,727.8	1,062.3	-260.4	406,508.45	613,970.57	32° 7' 1.463 N	103° 57' 54.765 W
7,975.0	86.61	272.75	7,729.9	1,063.5	-285.3	406,509.64	613,945.70	32° 7' 1.475 N	103° 57' 55.055 W
8,000.0	89.61	272.75	7,730.7	1,064.7	-310.3	406,510.84	613,920.74	32° 7' 1.488 N	103° 57' 55.345 W
8,011.1	90.94	272.75	7,730.7	1,065.3	-321.3	406,511.37	613,909.66	32° 7' 1.494 N	103° 57' 55.474 W
8,100.0	90.94	272.75	7,729.2	1,069.5	-410.1	406,515.64	613,820.87	32° 7' 1.539 N	103° 57' 56.506 W
8,200.0	90.94	272.75	7,727.6	1,074.3	-510.0	406,520.43	613,721.00	32° 7' 1.590 N	103° 57' 57.667 W
8,300.0	90.94	272.75	7,725.9	1,079.1	-609.9	406,525.23	613,621.13	32° 7' 1.641 N	103° 57' 58.828 W
8,400.0	90.94	272.75	7,724.3	1,083.9	-709.7	406,530.02	613,521.25	32° 7' 1.691 N	103° 57' 59.989 W
8,500.0	90.94	272.75	7,722.6	1,088.7	-809.6	406,534.82	613,421.38	32° 7' 1.742 N	103° 58' 1.150 W



Nexus Directional Solutions L.P.
Planning Report - Geographic



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Site Mescal 22 Federal
Company:	COG Production LLC	TVD Reference:	WELL @ 3113.1usft (Original Well Elev)
Project:	Eddy County, NM(NAD 27 NME)	MD Reference:	WELL @ 3113.1usft (Original Well Elev)
Site:	Mescal 22 Federal	North Reference:	Grid
Well:	4H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Design #1		


Planned/Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/S (usft)	+E/W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
8,600.0	90.94	272.75	7,721.0	1,093.5	-909.5	406,539.61	613,321.51	32° 7' 1.793 N	103° 58' 2.311 W
8,700.0	90.94	272.75	7,719.4	1,098.3	-1,009.4	406,544.41	613,221.64	32° 7' 1.844 N	103° 58' 3.472 W
8,800.0	90.94	272.75	7,717.7	1,103.1	-1,109.2	406,549.20	613,121.77	32° 7' 1.895 N	103° 58' 4.634 W
8,900.0	90.94	272.75	7,716.1	1,107.9	-1,209.1	406,554.00	613,021.90	32° 7' 1.945 N	103° 58' 5.795 W
9,000.0	90.94	272.75	7,714.4	1,112.7	-1,309.0	406,558.79	612,922.03	32° 7' 1.996 N	103° 58' 6.956 W
9,100.0	90.94	272.75	7,712.8	1,117.5	-1,408.8	406,563.59	612,822.15	32° 7' 2.047 N	103° 58' 8.117 W
9,200.0	90.94	272.75	7,711.2	1,122.3	-1,508.7	406,568.38	612,722.28	32° 7' 2.098 N	103° 58' 9.278 W
9,300.0	90.94	272.75	7,709.5	1,127.1	-1,608.6	406,573.18	612,622.41	32° 7' 2.149 N	103° 58' 10.439 W
9,400.0	90.94	272.75	7,707.9	1,131.9	-1,708.5	406,577.97	612,522.54	32° 7' 2.199 N	103° 58' 11.600 W
9,500.0	90.94	272.75	7,706.2	1,136.7	-1,808.3	406,582.77	612,422.67	32° 7' 2.250 N	103° 58' 12.761 W
9,600.0	90.94	272.75	7,704.6	1,141.5	-1,908.2	406,587.56	612,322.80	32° 7' 2.301 N	103° 58' 13.922 W
9,700.0	90.94	272.75	7,703.0	1,146.3	-2,008.1	406,592.36	612,222.93	32° 7' 2.352 N	103° 58' 15.083 W
9,800.0	90.94	272.75	7,701.3	1,151.1	-2,107.9	406,597.15	612,123.05	32° 7' 2.403 N	103° 58' 16.244 W
9,900.0	90.94	272.75	7,699.7	1,155.8	-2,207.8	406,601.95	612,023.18	32° 7' 2.453 N	103° 58' 17.405 W
10,000.0	90.94	272.75	7,698.0	1,160.6	-2,307.7	406,606.74	611,923.31	32° 7' 2.504 N	103° 58' 18.567 W
10,100.0	90.94	272.75	7,696.4	1,165.4	-2,407.6	406,611.54	611,823.44	32° 7' 2.555 N	103° 58' 19.728 W
10,200.0	90.94	272.75	7,694.7	1,170.2	-2,507.4	406,616.33	611,723.57	32° 7' 2.606 N	103° 58' 20.889 W
10,300.0	90.94	272.75	7,693.1	1,175.0	-2,607.3	406,621.13	611,623.70	32° 7' 2.656 N	103° 58' 22.050 W
10,400.0	90.94	272.75	7,691.5	1,179.8	-2,707.2	406,625.92	611,523.82	32° 7' 2.707 N	103° 58' 23.211 W
10,500.0	90.94	272.75	7,689.8	1,184.6	-2,807.1	406,630.72	611,423.95	32° 7' 2.758 N	103° 58' 24.372 W
10,600.0	90.94	272.75	7,688.2	1,189.4	-2,906.9	406,635.51	611,324.08	32° 7' 2.809 N	103° 58' 25.533 W
10,700.0	90.94	272.75	7,686.5	1,194.2	-3,006.8	406,640.31	611,224.21	32° 7' 2.859 N	103° 58' 26.694 W
10,800.0	90.94	272.75	7,684.9	1,199.0	-3,106.7	406,645.10	611,124.34	32° 7' 2.910 N	103° 58' 27.855 W
10,900.0	90.94	272.75	7,683.3	1,203.8	-3,206.5	406,649.90	611,024.47	32° 7' 2.961 N	103° 58' 29.016 W
11,000.0	90.94	272.75	7,681.6	1,208.6	-3,306.4	406,654.70	610,924.60	32° 7' 3.012 N	103° 58' 30.177 W
11,100.0	90.94	272.75	7,680.0	1,213.4	-3,406.3	406,659.49	610,824.72	32° 7' 3.062 N	103° 58' 31.339 W
11,200.0	90.94	272.75	7,678.3	1,218.2	-3,506.2	406,664.29	610,724.85	32° 7' 3.113 N	103° 58' 32.500 W
11,300.0	90.94	272.75	7,676.7	1,223.0	-3,606.0	406,669.08	610,624.98	32° 7' 3.164 N	103° 58' 33.661 W
11,400.0	90.94	272.75	7,675.1	1,227.8	-3,705.9	406,673.88	610,525.11	32° 7' 3.215 N	103° 58' 34.822 W
11,500.0	90.94	272.75	7,673.4	1,232.6	-3,805.8	406,678.67	610,425.24	32° 7' 3.265 N	103° 58' 35.983 W
11,600.0	90.94	272.75	7,671.8	1,237.4	-3,905.6	406,683.47	610,325.37	32° 7' 3.316 N	103° 58' 37.144 W
11,700.0	90.94	272.75	7,670.1	1,242.2	-4,005.5	406,688.26	610,225.50	32° 7' 3.367 N	103° 58' 38.305 W
11,800.0	90.94	272.75	7,668.5	1,247.0	-4,105.4	406,693.06	610,125.62	32° 7' 3.417 N	103° 58' 39.466 W
11,900.0	90.94	272.75	7,666.9	1,251.8	-4,205.3	406,697.85	610,025.75	32° 7' 3.468 N	103° 58' 40.627 W
12,000.0	90.94	272.75	7,665.2	1,256.5	-4,305.1	406,702.65	609,925.88	32° 7' 3.519 N	103° 58' 41.788 W
12,100.0	90.94	272.75	7,663.6	1,261.3	-4,405.0	406,707.44	609,826.01	32° 7' 3.570 N	103° 58' 42.950 W
12,200.0	90.94	272.75	7,661.9	1,266.1	-4,504.9	406,712.24	609,726.14	32° 7' 3.620 N	103° 58' 44.111 W
12,300.0	90.94	272.75	7,660.3	1,270.9	-4,604.7	406,717.03	609,626.27	32° 7' 3.671 N	103° 58' 45.272 W
12,318.1	90.94	272.75	7,660.0	1,271.8	-4,622.8	406,717.90	609,608.20	32° 7' 3.680 N	103° 58' 45.482 W

Design Targets									
Target Name	Dip Angle (°)	Dip Dir (°)	TVD (usft)	+N/S (usft)	+E/W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
PBHL Mescal 22 Federa - plan hits target center - Point	0.00	0.00	7,660.0	1,271.8	-4,622.8	406,717.90	609,608.20	32° 7' 3.680 N	103° 58' 45.482 W



NEXUS

DIRECTIONAL SOLUTIONS, L.P.




Azimuths to Grid North
 True North: -0.20°
 Magnetic North: 7.27°
 Magnetic Field
 Strength: 48274.3snT
 Dip Angle: 59.96°
 Date: 10/22/2013
 Model: IGRF2010

To convert a Magnetic Direction to a Grid Direction, Add 7.27°
 To convert a True Direction to a Grid Direction, Subtract 0.20°

Mescal 22 Federal 1H
Eddy County, NM(NAD 27 NME)
Northing: (Y) 405446.10
Easting: (X) 614231.00
Design #1

WELL DETAILS:									
WELL @ 3110.6ustf (Original Well Elev)									
-N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Slot			
0.0	0.0	405446.10	614231.00	32° 6' 50.941 N	103° 57' 51.780 W				
SECTION DETAILS									
MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
7248.2	0.00	0.00	7248.2	0.0	0.0	0.00	0.00	0.0	
8005.8	90.91	267.91	7725.6	-17.7	-484.7	12.00	267.91	485.0	
12138.7	90.91	267.91	7660.0	-168.7	-4614.3	0.00	0.00	4617.4	PBHL Mescal 22 Fed #1H
DESIGN TARGET DETAILS									
Name	TVD	+N/-S	+E/-W	Northing	Easting				
PBHL Mescal 22 Fed #1H	7660.0	-168.7	-4614.3	405277.40	609616.70				

LEGEND
 → Design #1

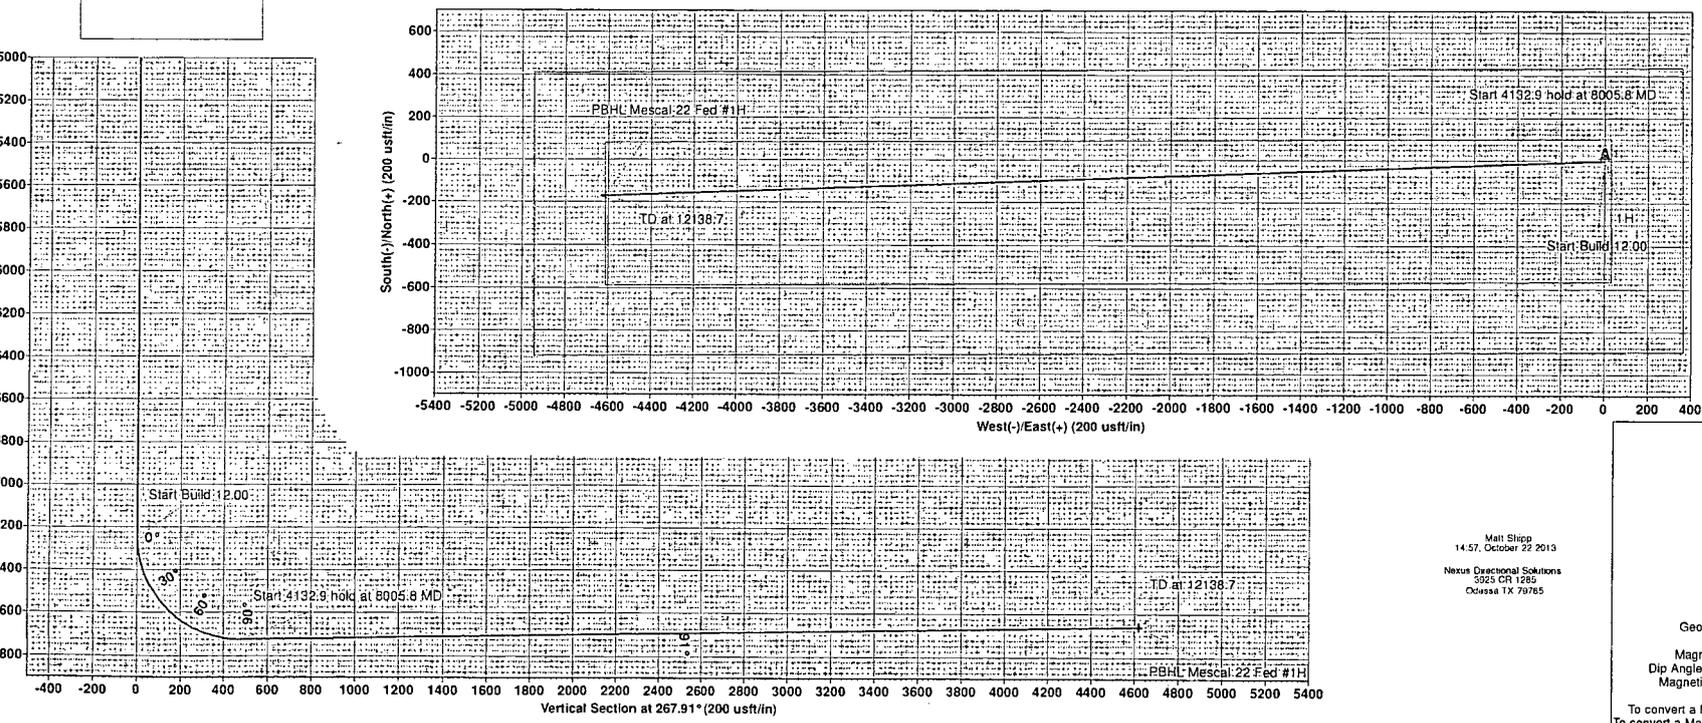

Map System: US State Plane 1927 (Exact solution)
 Datum: NAD 1927 (NADCON CONUS)
 Ellipsoid: Clarke 1866
 Zone Name: New Mexico East 3001
 Local Origin: Site Mescal 22 Federal, Grid North
 Latitude: 32° 6' 50.941 N
 Longitude: 103° 57' 51.780 W
 Grid East: 614231.00
 Grid North: 405446.10
 Scale Factor: 1.000
 Geomagnetic Model: IGRF2010
 Sample Date: 22-Oct-13
 Magnetic Declination: 7.47°
 Dip Angle from Horizontal: 59.96°
 Magnetic Field Strength: 48274
 To convert a Magnetic Direction to a Grid Direction, Add 7.27°
 To convert a Magnetic Direction to a True Direction, Add 7.47° East
 To convert a True Direction to a Grid Direction, Subtract 0.20°

Matt Slapp
 14.57, October 22 2013
 Nexus Directional Solutions
 5925 CR 1285
 Odessa TX 79765



New Mexico Office of the State Engineer
Water Column/Average Depth to Water

No records found.

PLSS Search:

Section(s): 22

Township: 25S

Range: 29E



New Mexico Office of the State Engineer Water Column/Average Depth to Water

(A CLW##### in the
POD suffix indicates the
POD has been replaced
& no longer serves a
water right file.)

(R=POD has
been replaced,
O=orphaned,
C=the file is (quarters are 1=NW 2=NE 3=SW 4=SE)
closed) (quarters are smallest to largest) (NAD83 UTM in meters) (In feet)

POD Number	POD Sub-Code	basin	County	Q 64	Q 16	Q 4	Sec	Tws	Rng	X	Y	Depth Well	Depth Water	Water Column
C 01337	C	ED		2	1	30	25S	29E		591926	3552642*	180	30	150
C 01880	C	ED		3	3	2	06	25S	29E	592161	3558605*	85	40	45
C 02371	C	ED		2	3	15	25S	29E		596741	3555106*	200	60	140
C 02459	C	ED		4	4	1	02	25S	29E	598422	3558663*	150		
C 02518	C	ED		3	4	08	25S	29E		593895	3556300*	462		
C 02680	C	ED		2	3	15	25S	29E		596741	3555106*	200		
RA 07162 EXP2		ED		1	3	1	10	25S	29E	596214	3557222*	55	40	15

Average Depth to Water: **42 feet**

Minimum Depth: **30 feet**

Maximum Depth: **60 feet**

Record Count: 7

PLSS Search:


Township: 25S

Range: 29E


*UTM location was derived from PLSS - see Help

The data is furnished by the NMOSE/ISC and is accepted by the recipient with the expressed understanding that the OSE/ISC make no warranties, expressed or implied, concerning the accuracy, completeness, reliability, usability, or suitability for any particular purpose of the data.


2,000 psi BOP Schematic

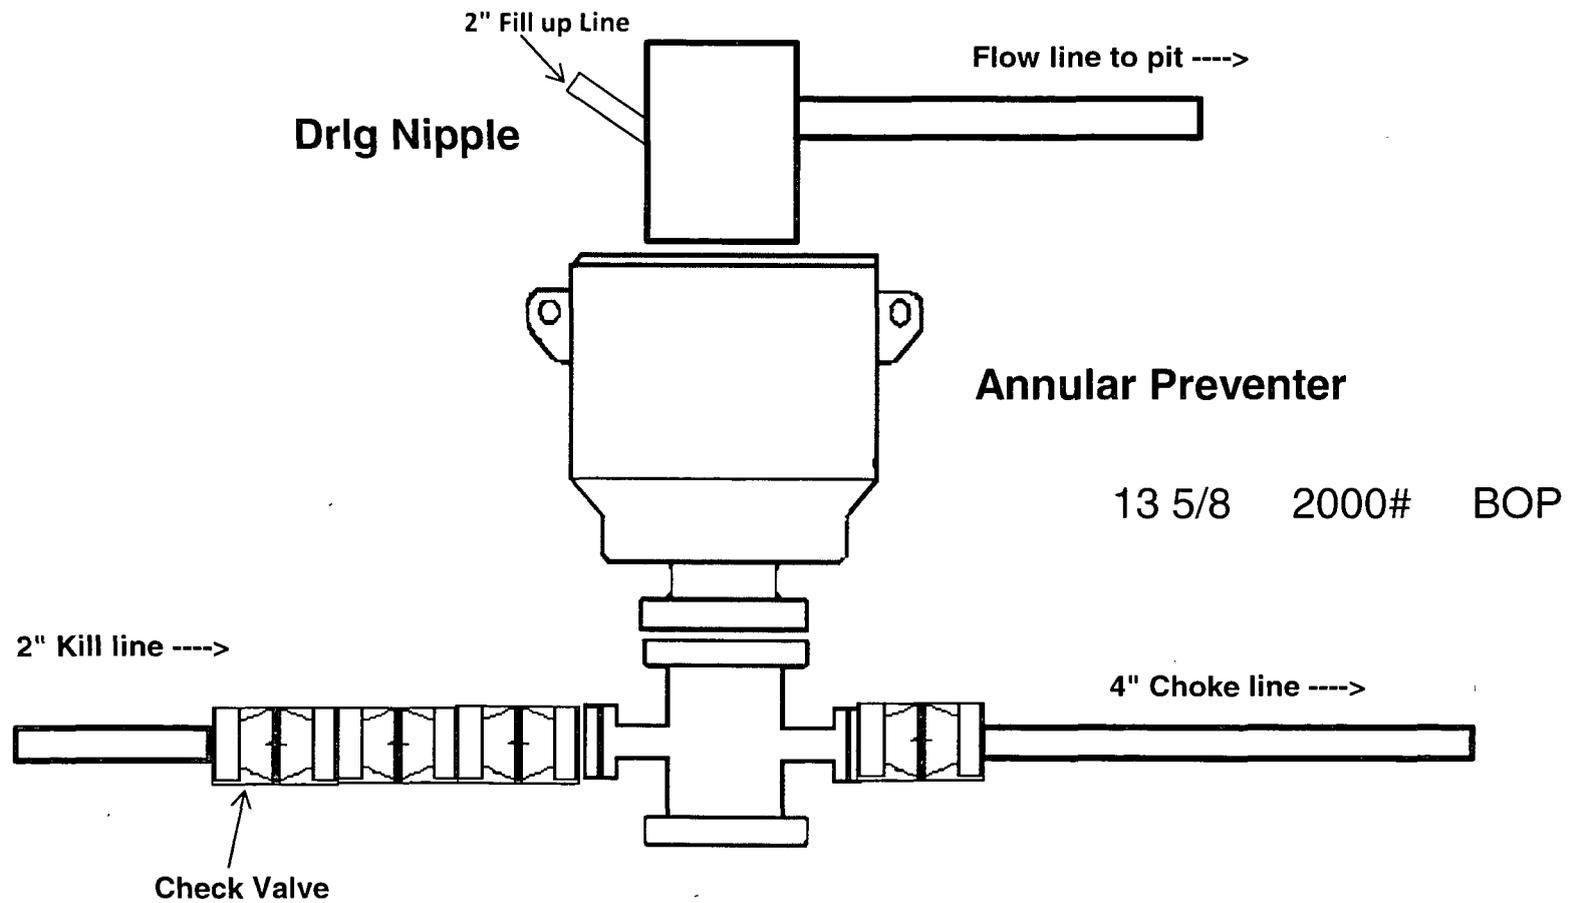


3,000 psi BOP Schematic

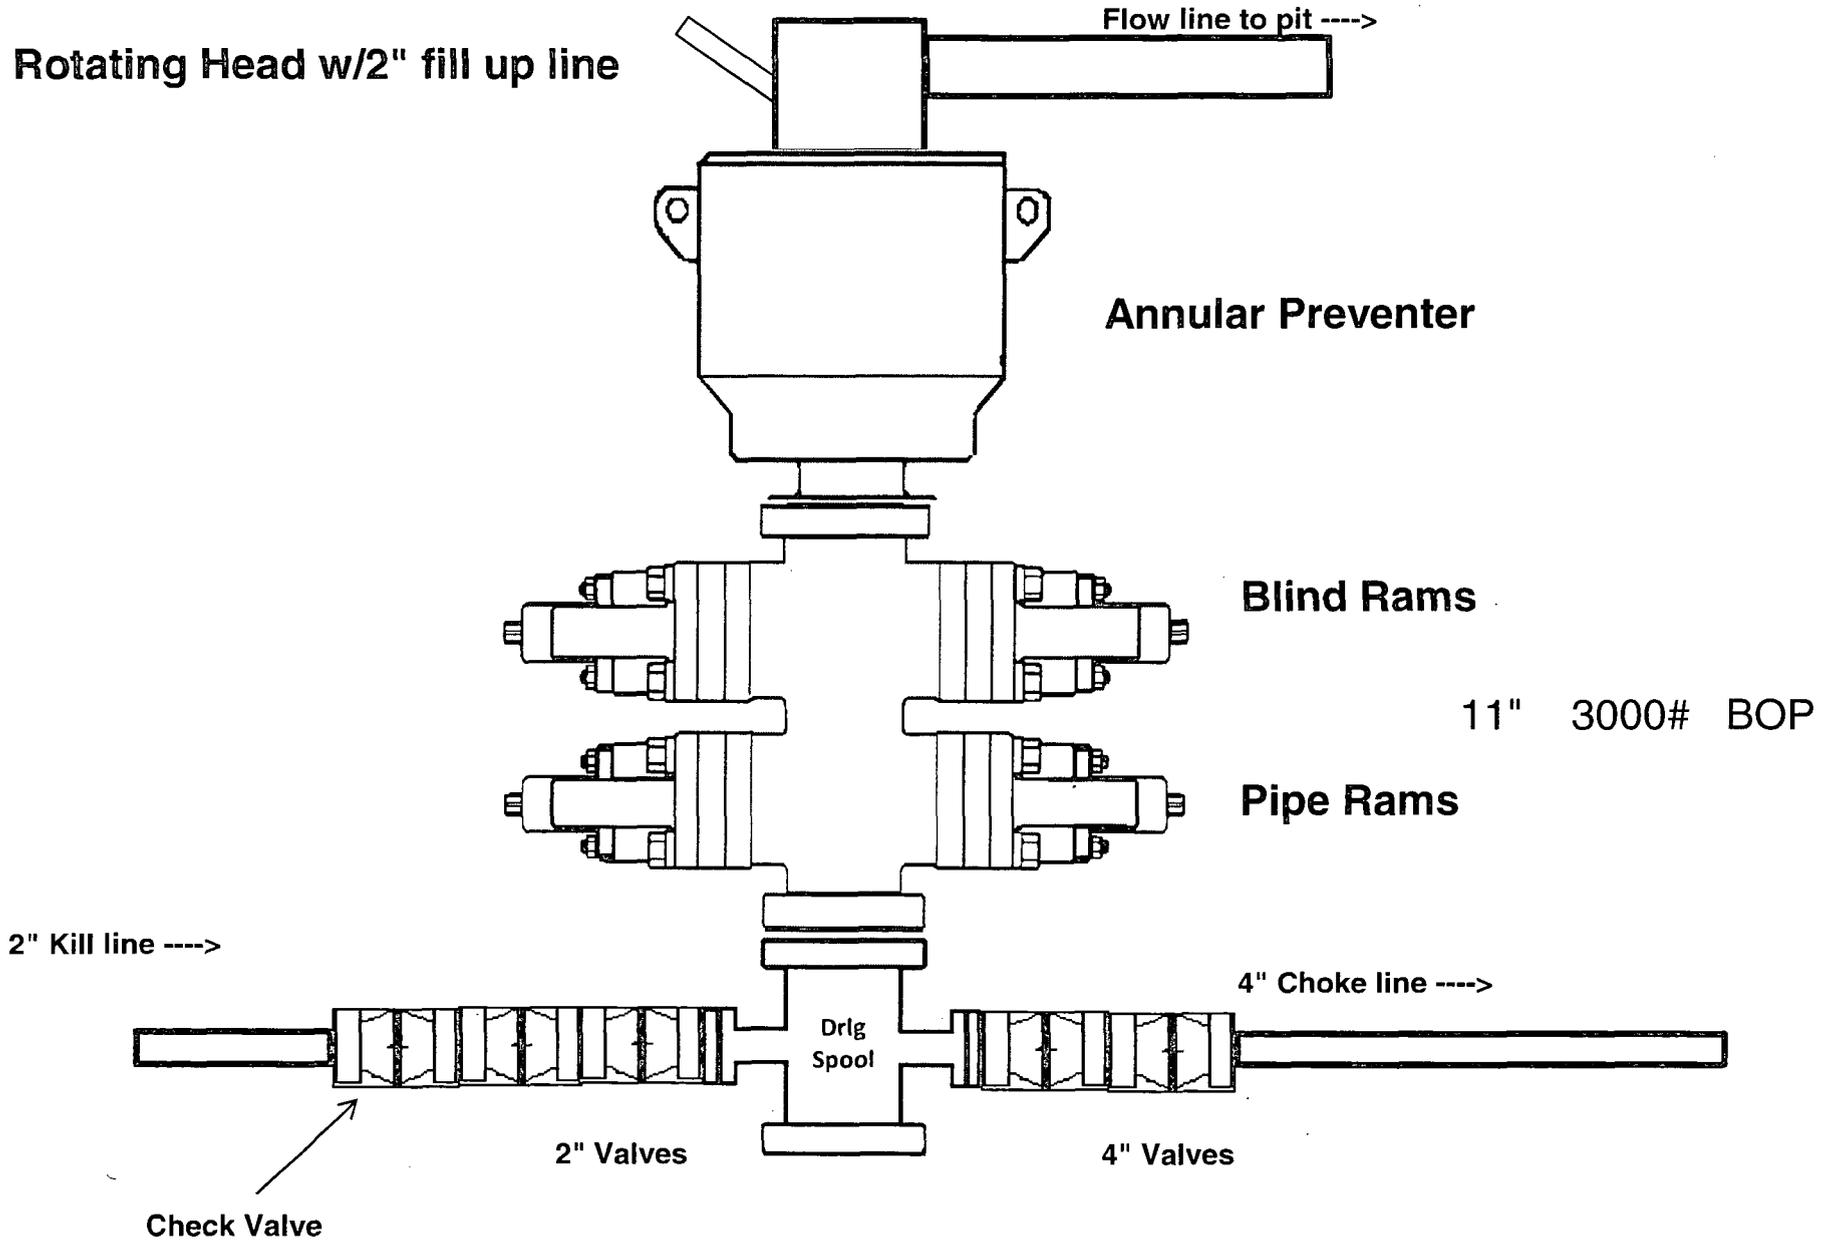

2M Choke Manifold Equipment

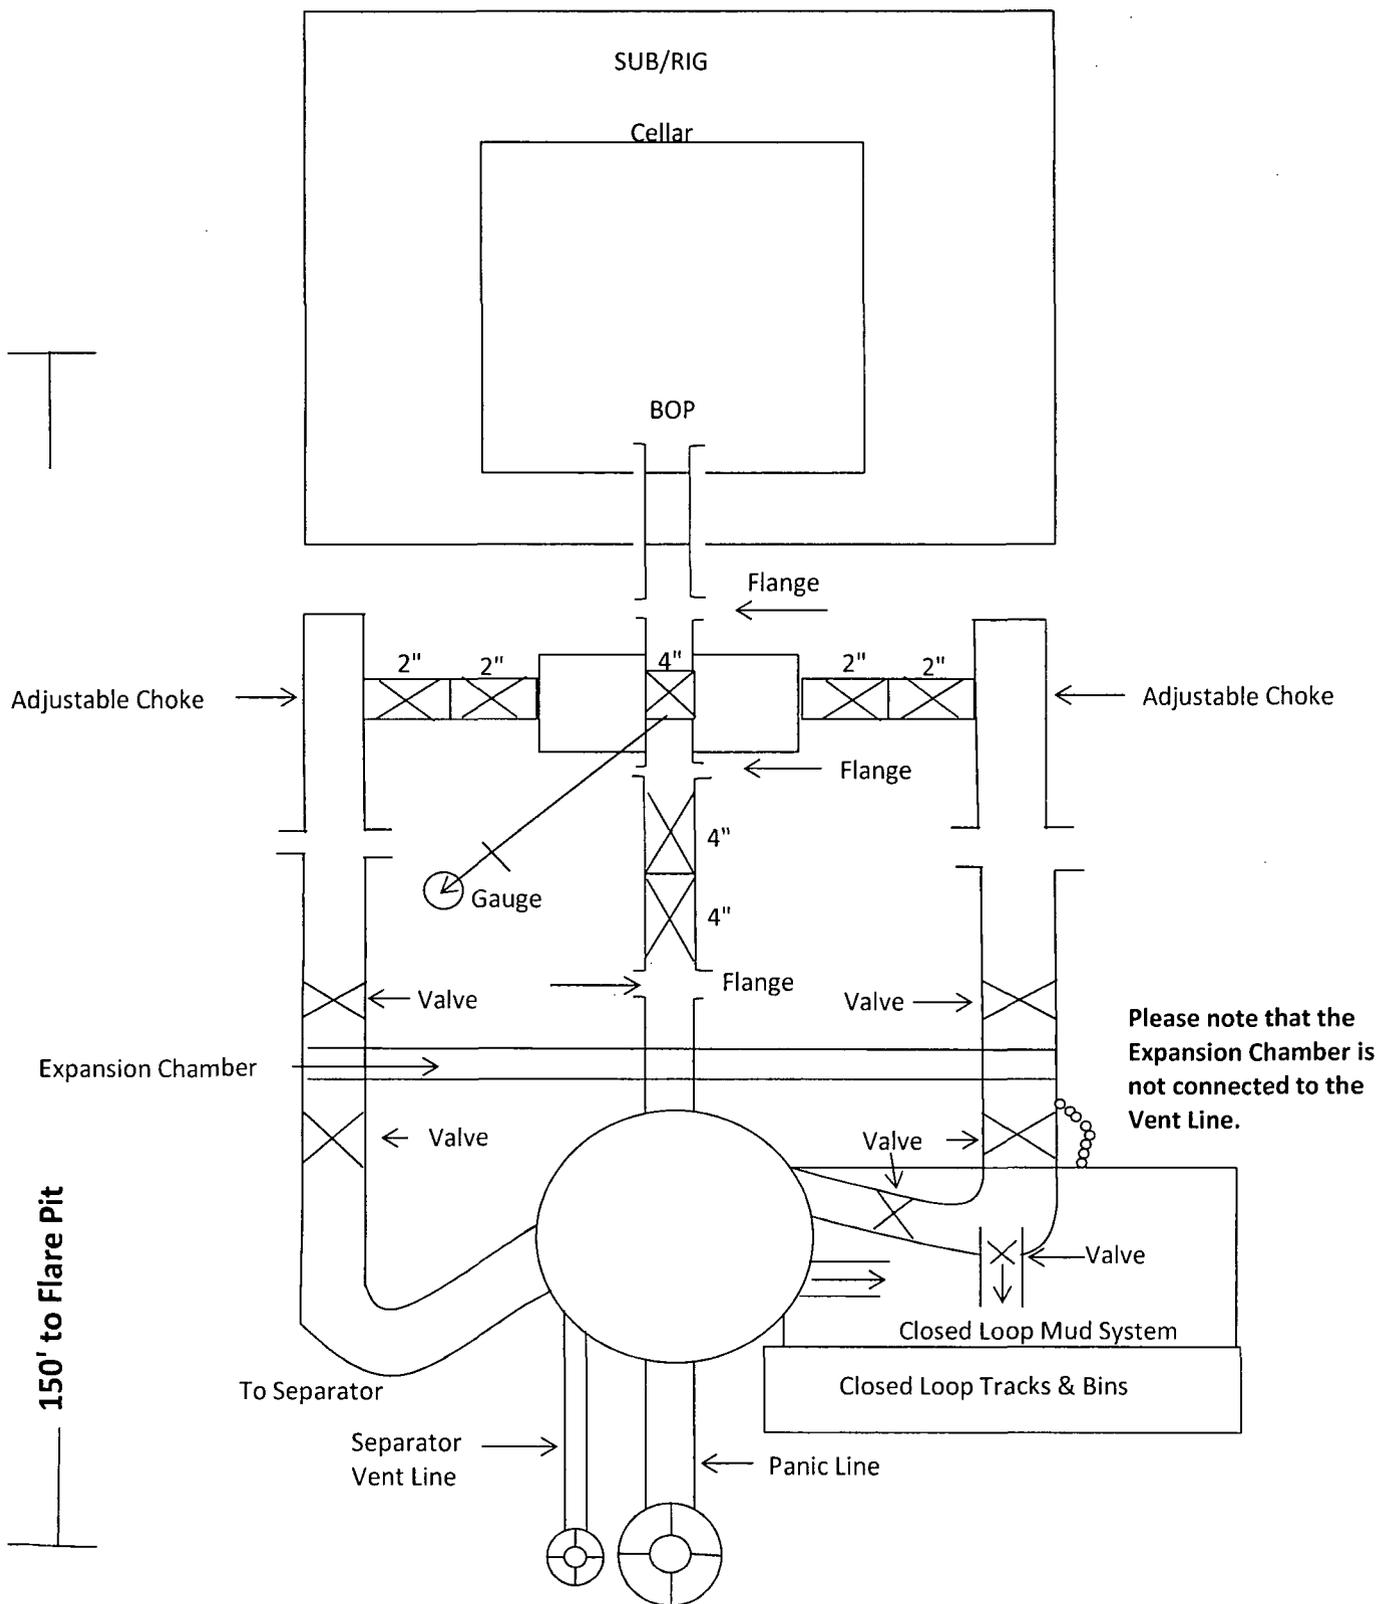

3M Choke Manifold Equipment

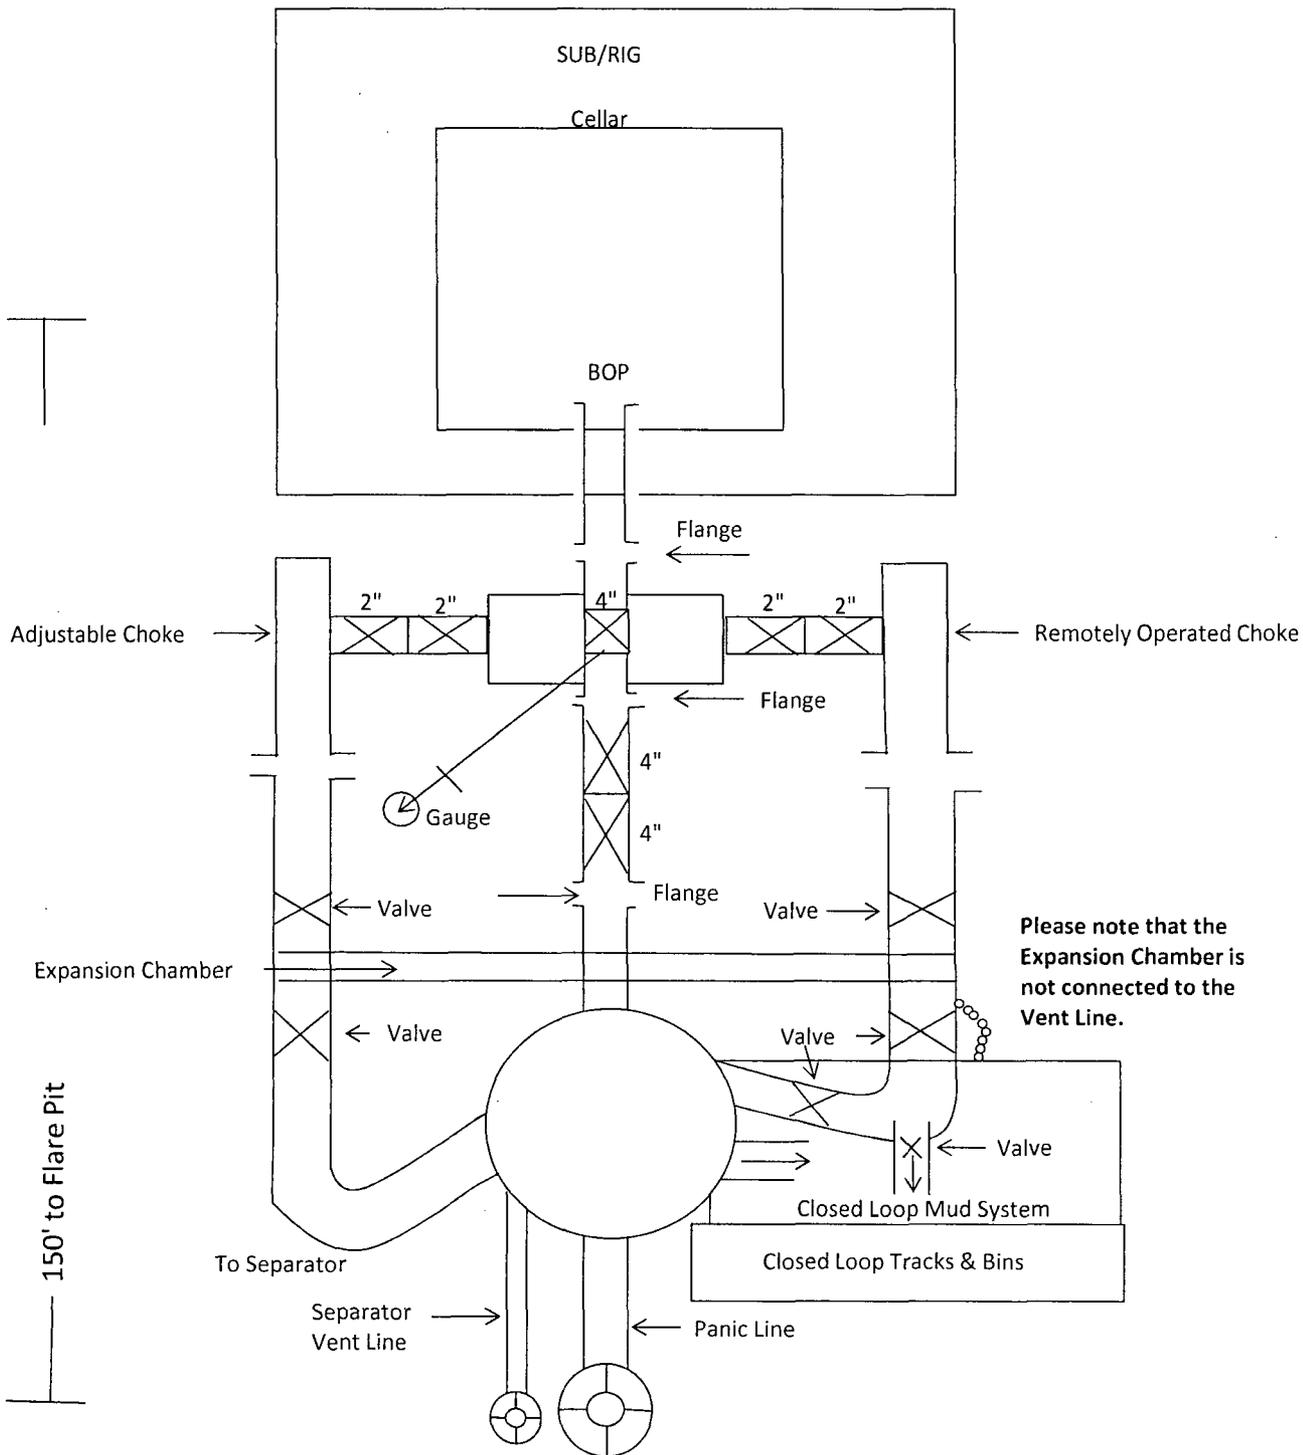




COG Production LLC
 2208 West Main
 Artesia, NM 88210

Exhibit 3 Production Facility Layout

Mescal 22 Federal #1H
 Section 22 - T25S - R29E

Top Soil will be stockpiled on the North side.

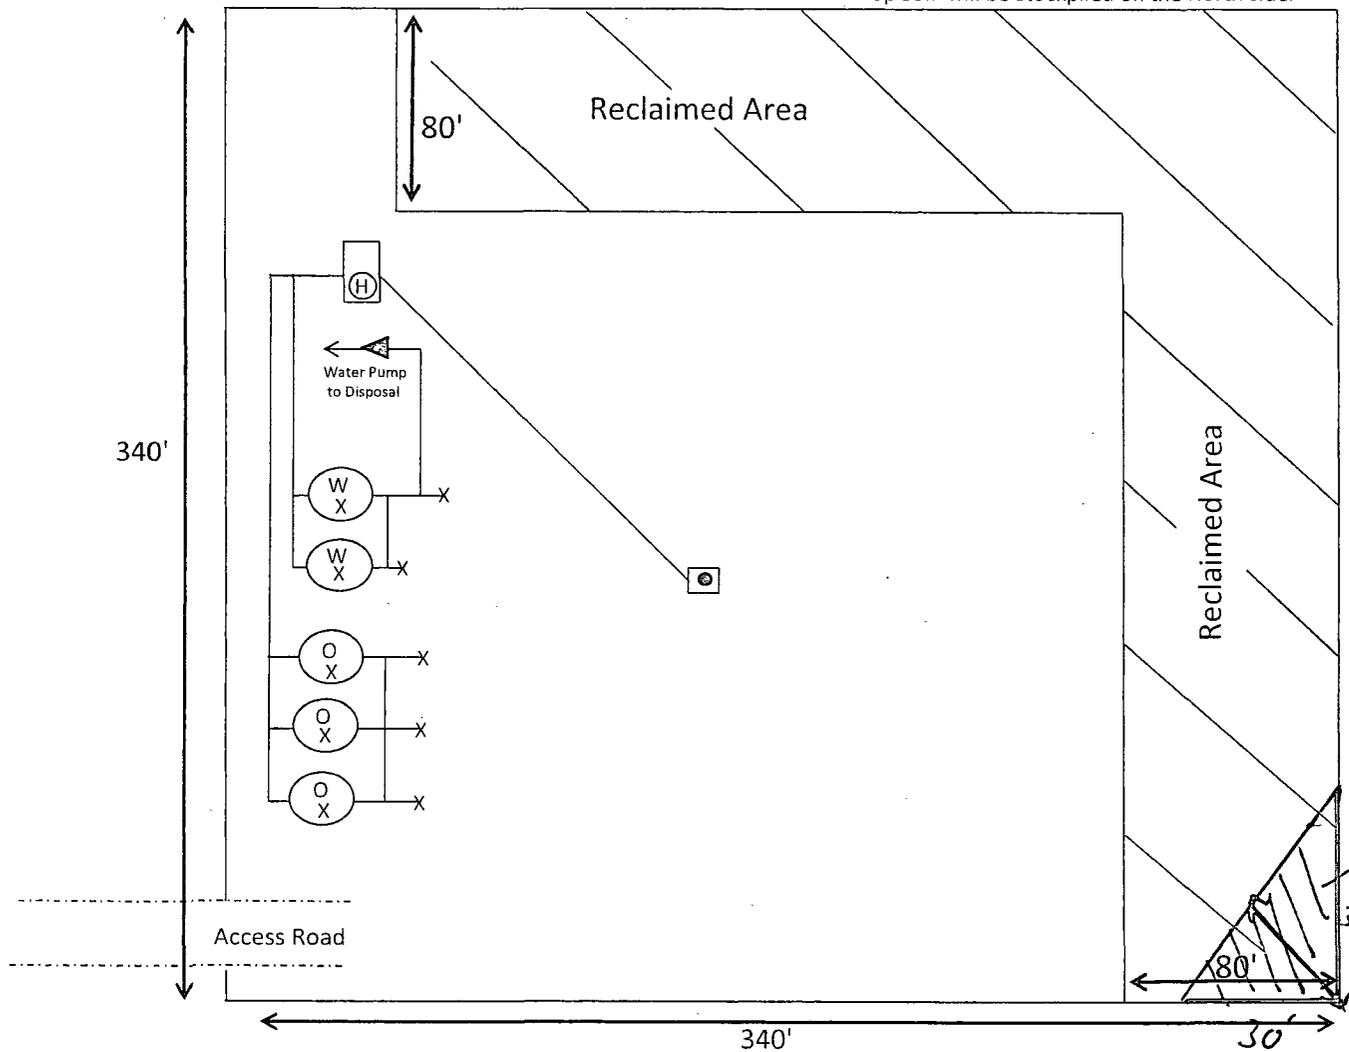

North



Scale

■ = 5' x 5'

Legend

⊙ = 500 BBL Steel Oil Tank

⊗ = 500 BBL Steel Water Tank

⊕ = 6' x 20' Heater

*Shaved pad corner
 30' that will not be constructed.
 LAB 2/21/14*

COG PRODUCTION LLC
HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

1. HYDROGEN SULFIDE TRAINING

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

- a. The hazards and characteristics of hydrogen sulfide (H₂S).
- b. The proper use and maintenance of personal protective equipment and life support systems.
- c. The proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
- d. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

- a. The effects of H₂S on metal components. If high tensile tubulars are to be used, personnel will be trained in their special maintenance requirements.
- b. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
- c. The contents and requirements of the H₂S Drilling Operations Plan and the Public Protection Plan.

There will be an initial training session just prior to encountering a known or probable H₂S zone (within 3 days or 500 feet) and weekly H₂S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H₂S Drilling Operations Plan and the Public Protection Plan. This plan shall be available at the well site. All personnel will be required to carry documentation that they have received the proper training.

2. H₂S SAFETY EQUIPMENT AND SYSTEMS

Note: All H₂S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonably expected to contain H₂S. If H₂S greater than 100 ppm is encountered in the gas stream we will shut in and install H₂S equipment.

- a. Well Control Equipment:
 - Flare line.
 - Choke manifold with remotely operated choke.
 - Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit.
 - Auxiliary equipment to include: annular preventer, mud-gas separator, rotating head.

- b. Protective equipment for essential personnel:
Mark II Surviveair 30-minute units located in the dog house and at briefing areas.
- c. H2S detection and monitoring equipment:
2 - portable H2S monitor positioned on location for best coverage and response. These units have warning lights and audible sirens when H2S levels of 20 ppm are reached.
- d. Visual warning systems:
Caution/Danger signs shall be posted on roads providing direct access to location. Signs will be painted a high visibility yellow with black lettering of sufficient size to be readable at a reasonable distance from the immediate location. Bilingual signs will be used, when appropriate. See example attached.
- e. Mud Program:
The mud program has been designed to minimize the volume of H2S circulated to the surface.
- f. Metallurgy:
All drill strings, casings, tubing, wellhead, blowout preventers, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H2S service.
- g. Communication:
Company vehicles equipped with cellular telephone.

COG PRODUCTION LLC has conducted a review to determine if an H2S contingency plan is required for the above referenced well. We were able to conclude that any potential hazardous volume would be minimal. H2S concentrations of wells in this area from surface to TD are low enough; therefore, we do not believe that an H2S contingency plan is necessary.

W A R N I N G

**YOU ARE ENTERING AN H₂S AREA
AUTHORIZED PERSONNEL ONLY**

- 1. BEARDS OR CONTACT LENSES NOT ALLOWED***
- 2. HARD HATS REQUIRED***
- 3. SMOKING IN DESIGNATED AREAS ONLY***
- 4. BE WIND CONSCIOUS AT ALL TIMES***
- 5. CK WITH COG OPERATING LLC FOREMAN AT MAIN OFFICE***

COG PRODUCTION LLC

1-575-748-6940

EMERGENCY CALL LIST


	<u>OFFICE</u>	<u>MOBILE</u>
COG PRODUCTION LLC OFFICE	575-748-6940	
SHERYL BAKER	575-748-6940	432-934-1873
KENT GREENWAY	575-746-2010	432-557-1694
SETH WILD	432-683-7443	432-528-3633
WALTER ROYE	575-748-6940	432-934-1886

EMERGENCY RESPONSE NUMBERS

	<u>OFFICE</u>
STATE POLICE	575-748-9718
EDDY COUNTY SHERIFF	575-746-2701
EMERGENCY MEDICAL SERVICES (AMBULANCE)	911 or 575-746-2701
EDDY COUNTY EMERGENCY MANAGEMENT (HARRY BURGESS)	575-887-9511
STATE EMERGENCY RESPONSE CENTER (SERC)	575-476-9620
CARLSBAD POLICE DEPARTMENT	575-885-2111
CARLSBAD FIRE DEPARTMENT	575-885-3125
NEW MEXICO OIL CONSERVATION DIVISION	575-748-1283
INDIAN FIRE & SAFETY	800-530-8693
HALLIBURTON SERVICES	800-844-8451

Well pad will be 340' X 340'
with cellar in center of pad

COG Production LLC
H₂S Equipment Schematic
Terrain: Shinnery mesquite grasslands.

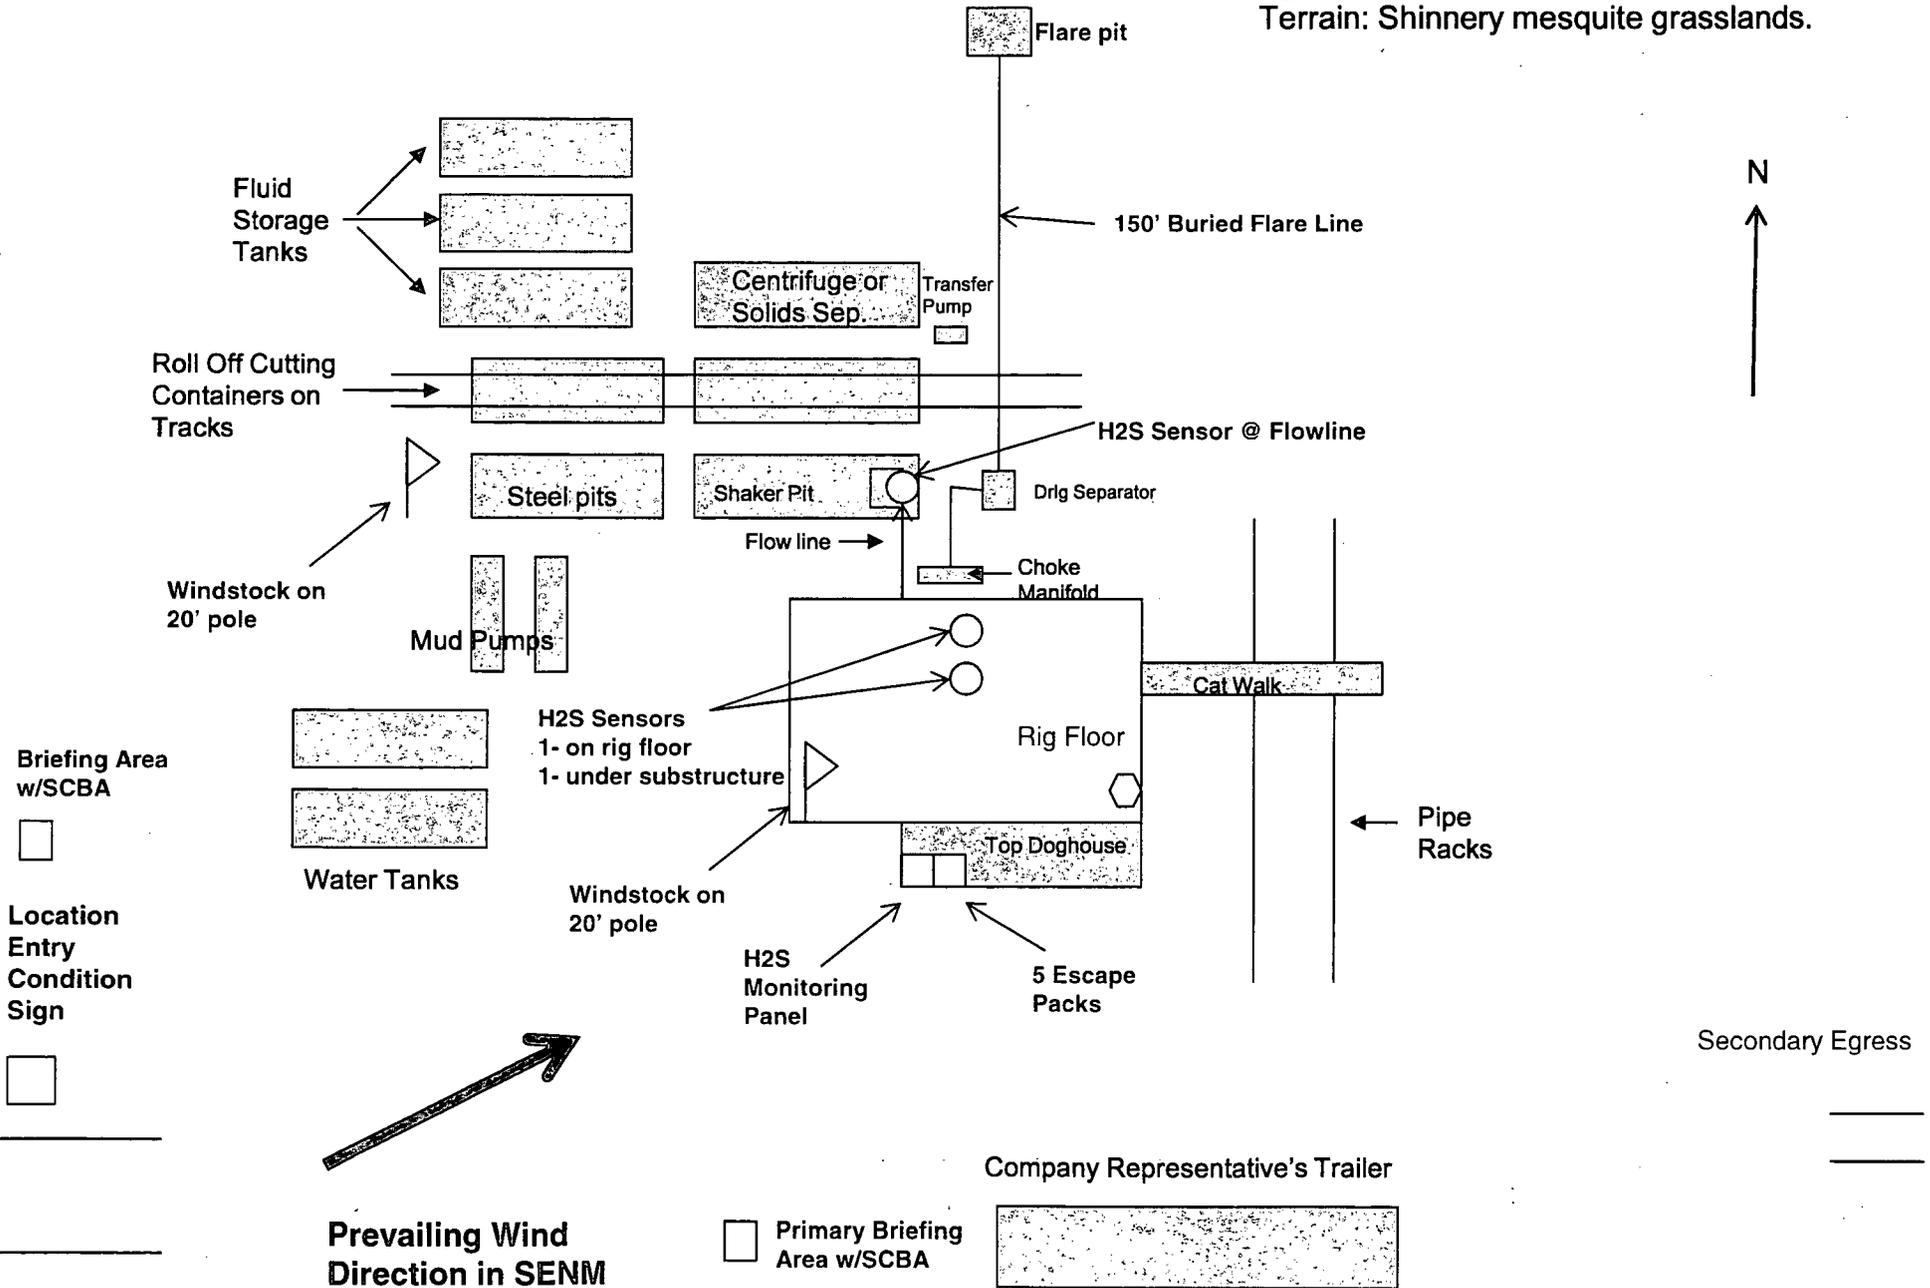

COG Production LLC
Rig Plat & Closed Loop Equipment Diagram

Well pad will be 340' X 340'
with cellar in center of pad

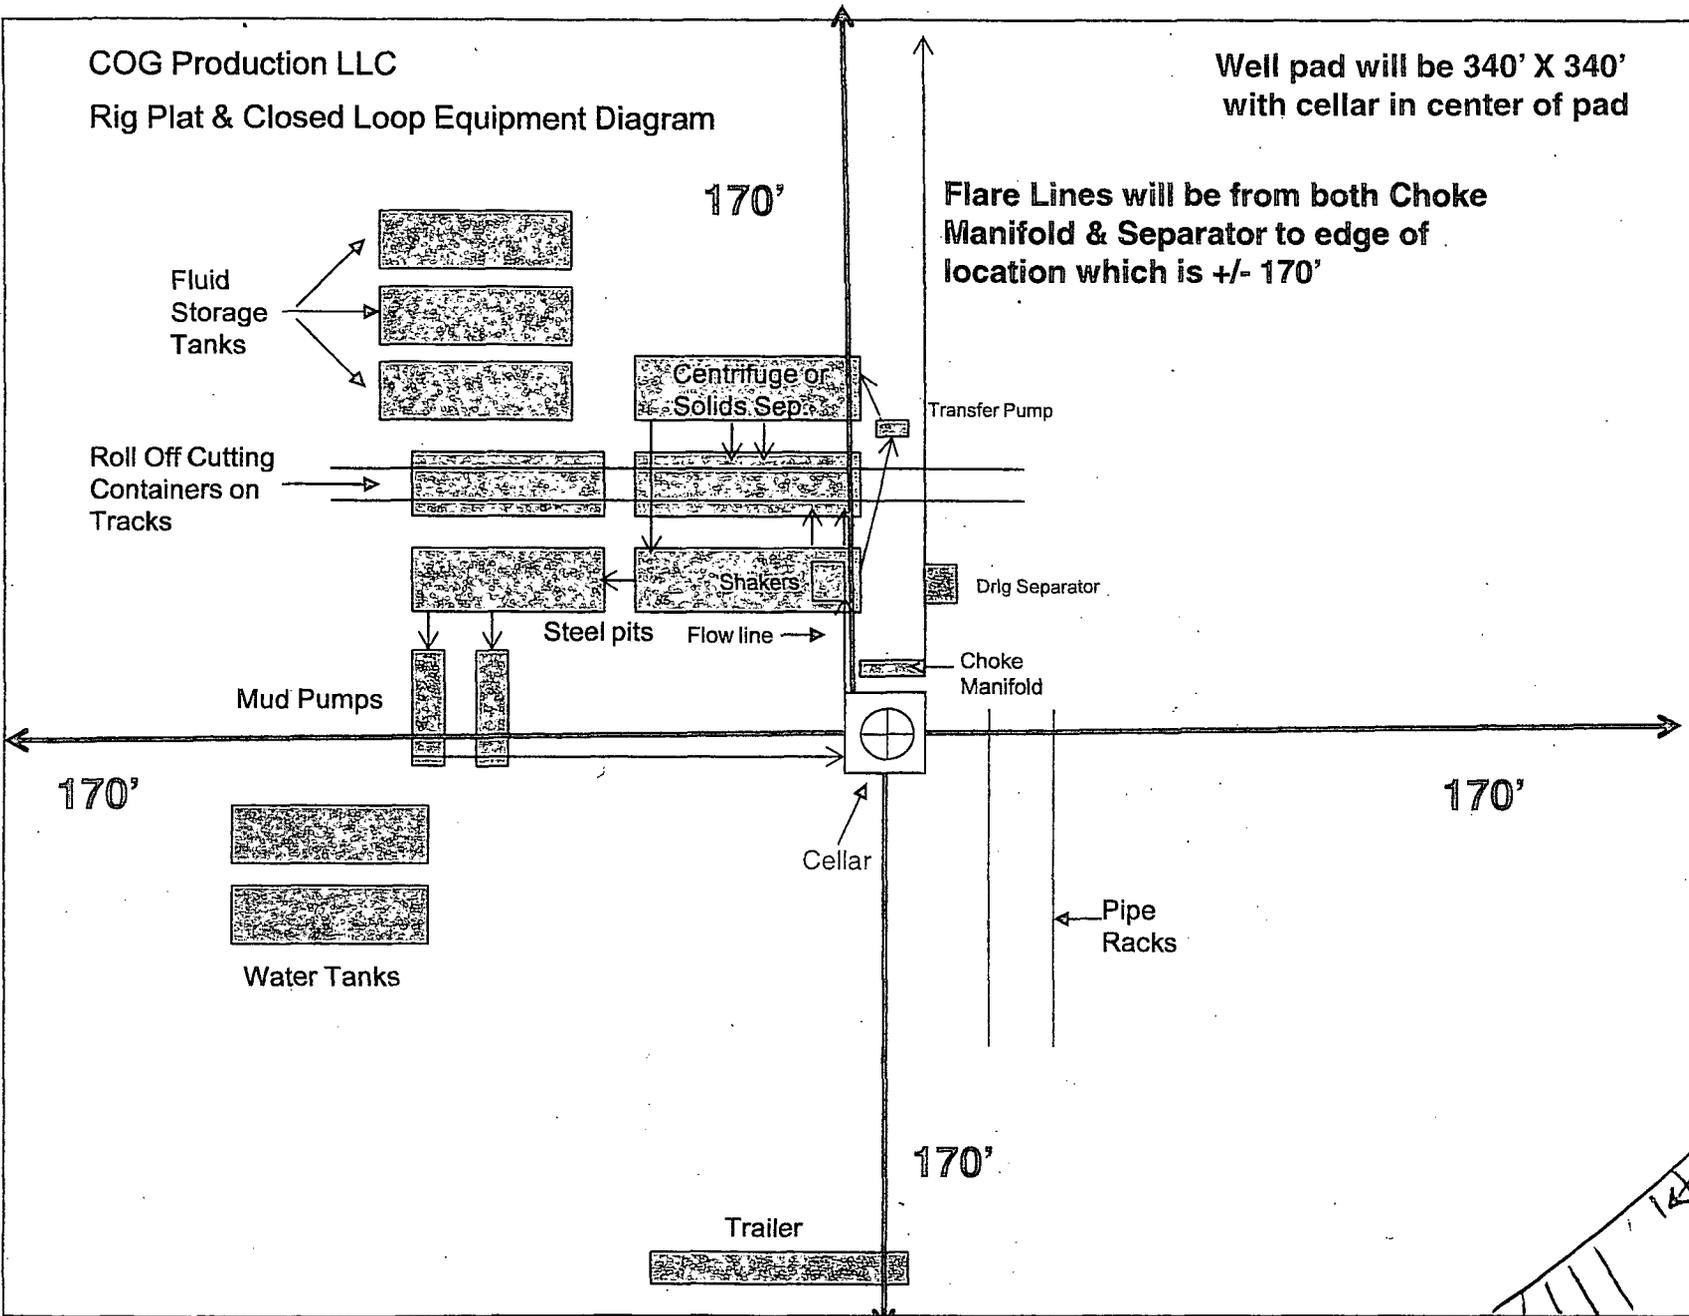


Exhibit 1

"I further certify that COG will comply with Rule 19.15.17 NMAC by using a Closed Loop System."

Surface Use Plan
COG Production LLC
Mescal 22 Federal #1H
SL: 2220' FSL & 360' FEL ULI
Section 22, T25S, R29E
BHL: 2075' FSL & 330' FWL ULL
Section 22, T25S, R29E
Eddy County, New Mexico

Surface Use & Operating Plan

Mescal 22 Federal #1H

- Surface Tenant: W. P. Ranches Family Limited Partnership, PO Box 24, Cherokee, TX 76832
- New Road: 160'
- Flow Line: on well pad
- Facilities: will be constructed on well pad – see Exhibit 3

Well Site Information

V Door: East

Topsoil: North

Interim Reclamation: North and East

Notes

Onsite: On-site was done by Legion Brumley (BLM); Eric Conklin (COG) on August 1, 2013.

Surface Use Plan
COG Production LLC
Mescal 22 Federal #1H
SL: 2220' FSL & 360' FEL ULI
Section 22, T25S, R29E
BHL: 2075' FSL & 330' FWL ULL
Section 22, T25S, R29E
Eddy County, New Mexico

SURFACE USE AND OPERATING PLAN

1. Existing & Proposed Access Roads

- A. The well site survey and elevation plat for the proposed well is attached with this application. It was staked by Harcrow Surveying, Artesia, NM:
- B. All roads to the location are shown on the Location Verification Map Exhibit 2. The existing lease roads are illustrated and are adequate for travel during drilling and production operations. Upgrading existing roads prior to drilling the well will be done where necessary. The road route to the well site is depicted in Exhibit #2. The road shown in Exhibit #2 will be used to access the well.
- C. Directions to location: See 600 x 600 plat
- D. Routine grading and maintenance of existing roads will be conducted as necessary to maintain their condition as long as any operations continue on this lease. Roads will be maintained according to specifications in section 2A of this Surface Use and Operating Plan.

2. Proposed Access Road:

The Location Verification Map shows that that 160' of new access road will be required for this location. If any road is required it will be constructed as follows:

The maximum width of the running surface will be 14'. The road will be crowned, ditched and constructed of 6" rolled and compacted caliche. Ditches will be at 3:1 slope and 4 feet wide. Water will be diverted where necessary to avoid ponding, prevent erosion, maintain good drainage, and to be consistent with local drainage patterns.

- A. The average grade will be less than 1%.
- B. No turnouts are planned.
- C. No culverts, cattleguard, gates, low water crossings or fence cuts are necessary.
- D. Surfacing material will consist of native caliche. Caliche will be obtained from the actual well site if available. If not available onsite, caliche will be hauled from the nearest BLM approved caliche pit.

Surface Use Plan
COG Production LLC
Mescal 22 Federal #1H
SL: 2220' FSL & 360' FEL U L I
Section 22, T25S, R29E
BHL: 2075' FSL & 330' FWL U L L
Section 22, T25S, R29E
Eddy County, New Mexico

6. Source of Construction Materials and Location "Turn-Over" Procedure:

Obtaining caliche: One primary way of obtaining caliche to build locations and roads will be by "turning over" the location. This means, caliche will be obtained from the actual well site. A caliche permit will be obtained from BLM prior to obtaining caliche. 2400 cubic yards is the maximum amount of caliche needed for pad and roads. Amount will vary for each pad. The procedure below has been approved by BLM personnel:

- A. The top 6 inches of topsoil is pushed off and stockpiled along the side of the location.
- B. An approximate 160' X 160' area is used within the proposed well site to remove caliche.
- C. Subsoil is removed and stockpiled within the surveyed well pad.
- D. When caliche is found, material will be stock piled within the pad site to build the location and road.
- E. Then subsoil is pushed back in the hole and caliche is spread accordingly across entire location and road.
- F. Once well is drilled, the stock piled top soil will be used for interim reclamation and spread along areas where caliche is picked up and the location size is reduced.
- G. Neither caliche, nor subsoil will be stock piled outside of the well pad. Topsoil will be stockpiled along the edge of the pad as depicted in the Well Site Layout or survey plat.

In the event that no caliche is found onsite, caliche will be hauled in from a BLM approved caliche pit or other established mineral pit. A BLM mineral material permit will be acquired prior to obtaining any mineral material from BLM pits or land.

7. Methods of Handling Water Disposal:

- A. The well will be drilled utilizing a closed loop mud system. Drill cuttings will be held in roll-off style mud boxes and taken to an NMOCD approved disposal site.
- B. Drilling fluids will be contained in steel mud pits.
- C. Water produced from the well during completion will be held temporarily in steel tanks and then taken to an NMOCD approved commercial disposal facility.

Surface Use Plan
COG Production LLC
Mescal 22 Federal #1H
SL: 2220' FSL & 360' FEL ULI
Section 22, T25S, R29E
BHL: 2075' FSL & 330' FWL ULL
Section 22, T25S, R29E
Eddy County, New Mexico

- D. Garbage and trash produced during drilling or completion operations will be collected in a trash bin and hauled to an approved landfill. No toxic waste or hazardous chemicals will be produced by this operation.
- E. Human waste and grey water will need to be properly contained and disposed of. Proper disposal and elimination of waste and grey water may include but are not limited to portable septic systems and/or portable waste gathering systems (i.e. portable toilets).
- F. After the rig is moved out and the well is either completed or abandoned, all waste materials will be cleaned up within 30 days. In the event of a dry hole only a dry hole marker will remain.

8. Ancillary Facilities:

No airstrip, campsite or other facilities will be built as a result of the operation on this well.

9. Well Site Layout:

- A. The drill pad layout, with elevations staked by Harcrow Surveying, is shown in the Elevation Plat. Dimensions of the pad and pits are shown on the Rig Layout. V door direction is East. Topsoil, if available, will be stockpiled per BLM specifications. Because the pad is almost level no major cuts will be required.
- B. The Rig Layout Closed-Loop exhibit shows the proposed orientation of closed loop system and access road. No permanent living facilities are planned, but a temporary foreman/toolpusher's trailer will be on location during the drilling operations.

10. Plans for Restoration of the Surface:

- A. Interim Reclamation will take place after the well has been completed. The pad will be downsized by reclaiming the areas not needed for production operations. The portions of the pad that are not needed for production operations will be re-contoured to its original state as much as possible. The caliche that is removed will be reused to either build another pad site or for road repairs within the lease. The stockpiled topsoil will then be spread out reclaimed area and reseeded with a BLM approved seed mixture. In the event that the well must be worked over or maintained, it may be necessary to drive, park, and/or operate machinery on reclaimed land. This area will be repaired or reclaimed after work is complete.

Surface Use Plan
COG Production LLC
Mescal 22 Federal #1H
SL: 2220' FSL & 360' FEL ULI
Section 22, T25S, R29E
BHL: 2075' FSL & 330' FWL ULL
Section 22, T25S, R29E
Eddy County, New Mexico

- B. Final Reclamation: Upon plugging and abandoning the well all caliche for well pad and lease road will be removed and surface will be recontoured to reflect its surroundings as much as possible. Caliche will be recycled for road repair or reused for another well pad within the lease. If any topsoil remains, it will be spread out and the area will be re-seeded with a BLM approved mixture and re-vegetated as per BLM orders.

11. Surface Ownership:

- A. The surface is owned by the U.S. Government and is administered by the Bureau of Land Management. The surface is multiple uses with the primary uses of the region for grazing of livestock and the production of oil and gas.
- B. The surface tenant is W.P. Ranches Family Limited Partnership, P O Box 24, Cherokee, TX 76832.
- C. The proposed road routes and surface location will be restored as directed by the BLM.

12. Other Information:

- A. The area around the well site is grassland and the topsoil is sandy. The vegetation is moderately sparse with native prairie grasses, some mesquite and shinnery oak. No wildlife was observed but it is likely that mule deer, rabbits, coyotes and rodents traverse the area.
- B. There is no permanent or live water in the immediate area.
- C. There are no dwellings within 2 miles of this location.
- D. If needed, a Cultural Resources Examination is being prepared by Boone Arch Services of NM, LLC., 2030 North Canal, Carlsbad, New Mexico, 88220, phone # 575-885-1352, and the results will be forwarded to your office in the near future. **Otherwise, COG will be participating in the Permian Basin MOA Program.**

13. Bond Coverage:

Bond Coverage is Statewide Bonds # NMB000860 and NMB000845

Surface Use Plan
COG Production LLC
Mescal 22 Federal #1H
SL: 2220' FSL & 360' FEL UL I
Section 22, T25S, R29E
BHL: 2075' FSL & 330' FWL UL L
Section 22, T25S, R29E
Eddy County, New Mexico

14. Lessee's and Operator's Representative:

The COG Production LLC representative responsible for assuring compliance with the surface use plan is as follows:

Sheryl Baker
Drilling Superintendent
COG Production LLC
2208 West Main Street
Artesia, NM 88210
Phone (575) 748-6940 (office)
 (432) 934-1873 (cell)

Ray Peterson
Drilling Manager
COG Production LLC
One Concho Center
600 W Illinois Ave
Midland, TX 79701
Phone (432) 685-4304 (office)
 (432) 818-2254 (business)

PECOS DISTRICT CONDITIONS OF APPROVAL

OPERATOR'S NAME:	COG Production LLC
LEASE NO.:	NMNM-14778
WELL NAME & NO.:	Mescal 22 Federal 1H
SURFACE HOLE FOOTAGE:	2220' FSL & 0360' FEL
BOTTOM HOLE FOOTAGE:	2075' FSL & 0330' FWL
LOCATION:	Section 22, T. 25 S., R 29 E., NMPM.
COUNTY:	Eddy County, New Mexico

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- General Provisions**
- Permit Expiration**
- Archaeology, Paleontology, and Historical Sites**
- Noxious Weeds**
- Special Requirements**
 - Watershed Protection Requirements
 - *Berm Pad
 - *Erosion Control
- Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- Road Section Diagram**
- Drilling**
 - Cement Requirements
 - Medium Cave/Karst
 - Logging Requirements
 - Waste Material and Fluids
- Production (Post Drilling)**
 - Well Structures & Facilities
- Interim Reclamation**
- Final Abandonment & Reclamation**

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

Watershed Protection Requirements:

Berm Pad

The entire perimeter of the well pad will be bermed to prevent oil, salt, and other chemical contaminants from leaving the well pad.

- The berm shall be constructed at a minimum of 12 inches high with impermeable mineral material (e.g. caliche).
- No water flow from the uphill side(s) of the pad shall be allowed to enter the well pad.
- The topsoil stockpile shall be located outside the bermed well pad.
- Topsoil, either from the well pad or surrounding area, shall not be used to construct the berm.
- No storm drains, tubing or openings shall be placed in the berm.
- If fluid collects within the bermed area, the fluid must be vacuumed into a safe container and disposed of properly at a state approved facility.
- The integrity of the berm shall be maintained around the surfaced pad throughout the life of the well and around the downsized pad after interim reclamation has been completed.
- Any access road entering the well pad shall be constructed so that the integrity of the berm height surrounding the well pad is not compromised. (Any access road crossing the berm cannot be lower than the berm height.)

Erosion Control

Any water erosion that may occur due to the construction of the well pad during the life of the well will be quickly corrected and proper measures will be taken to prevent future erosion.

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. EXCLOSURE FENCING (CELLARS & PITS)

Exclosure Fencing

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

G. ON LEASE ACCESS ROADS

Road Width

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill out-sloping and in-sloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch

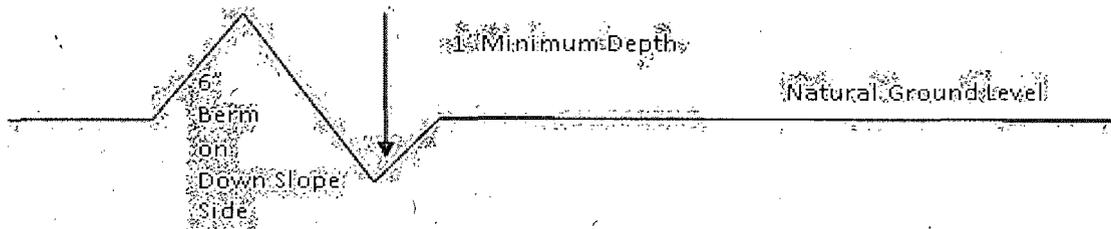

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

Cattleguards

An appropriately sized cattleguard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattleguards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattleguards that are in place and are utilized during lease operations.


Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Construction Steps


1. Salvage topsoil
2. Construct road

3. Redistribute topsoil
4. Revegetate slopes

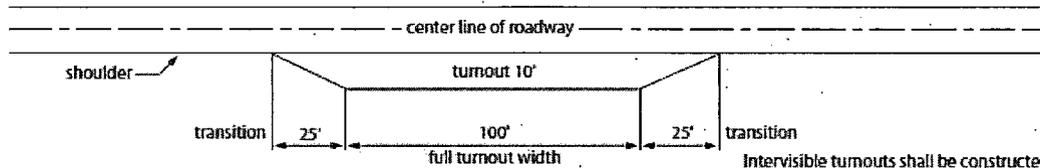


Intervisible turnouts shall be constructed on all single lane roads on all blind curves with additional turnouts as needed to keep spacing below 1000 feet.


Typical Turnout Plan




Level Ground Section

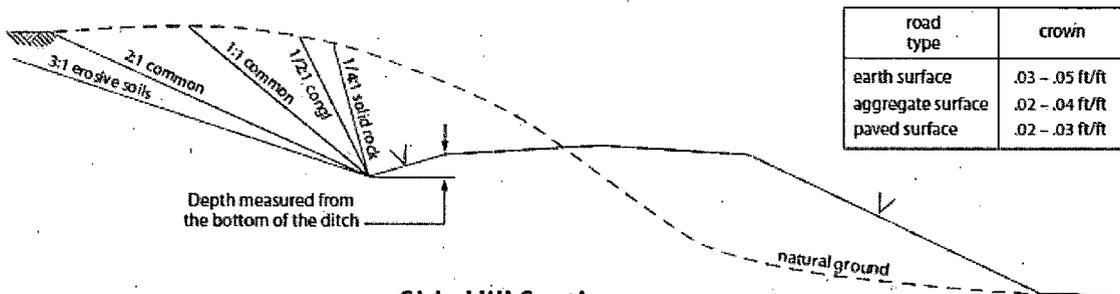

Side Hill Section

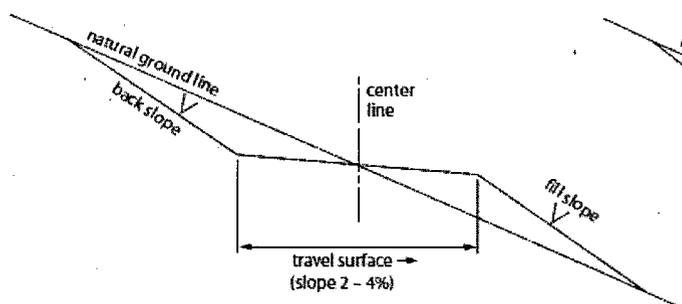

Typical Outsloped Section

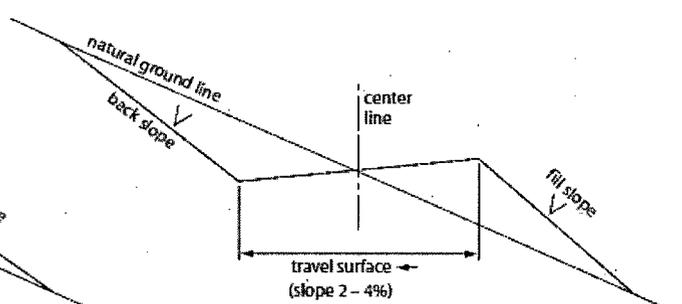

Typical Insloped Section

Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

VII. DRILLING

A. DRILLING OPERATIONS REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

1. **Operator has stated that Hydrogen Sulfide (H₂S) monitors will be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.**
2. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval. **If the drilling rig is removed without approval – an Incident of Non-Compliance will be written and will be a “Major” violation.**
3. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works is located, this does not include the dog house or stairway area.
4. **The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.**

B. CASING

Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need

prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.).

Centralizers required on surface casing per Onshore Order 2.III.B.1.f.

Wait on cement (WOC) time prior to drilling out for a primary cement job will be a minimum 18 hours for a water basin, 24 hours in the potash area, or 500 pounds compressive strength, whichever is greater for all casing strings. DURING THIS WOC TIME, NO DRILL PIPE, ETC. SHALL BE RUN IN THE HOLE. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. IF OPERATOR DOES NOT HAVE THE WELL SPECIFIC CEMENT DETAILS ONSITE PRIOR TO PUMPING THE CEMENT FOR EACH CASING STRING, THE WOC WILL BE 30 HOURS. See individual casing strings for details regarding lead cement slurry requirements.

No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.

Medium Cave/Karst

Possibility of water flows in the Salado, Castile, and Delaware.

Possibility of lost circulation in the Rustler and Delaware.

1. The **13-3/8** inch surface casing shall be set at approximately **725** feet (a minimum of 25 feet into the Rustler Anhydrite and above the salt) and cemented to the surface. **If salt is encountered, set casing at least 25 feet above the salt.**
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry.**
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The minimum required fill of cement behind the **9-5/8** inch intermediate casing is:

- Cement to surface. If cement does not circulate see B.1.a, c-d above. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst.**

Centralizers required on horizontal leg, must be type for horizontal service and a minimum of one every other joint.

3. The minimum required fill of cement behind the **5-1/2** inch production casing is:

- Cement to surface. If cement does not circulate, contact the appropriate BLM office.

4. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

C. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **2000 (2M)** psi.
 - a. **For surface casing only:** If the BOP/BOPE is to be tested against casing, the wait on cement (WOC) time for that casing is to be met (see WOC statement at start of casing section). Independent service company required.
3. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the **9-5/8** intermediate casing shoe shall be **3000 (3M)** psi.
4. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including

lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. The tests shall be done by an independent service company utilizing a test plug **not a cup or J-packer**. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (18 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- c. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- d. The results of the test shall be reported to the appropriate BLM office.
- e. All tests are required to be recorded on a calibrated test chart. **A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.**
- f. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.

D. DRILL STEM TEST

If drill stem tests are performed, Onshore Order 2.III.D shall be followed.

E. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

JAM 021814

VIII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Exclosure Netting (Open-top Tanks)

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

Chemical and Fuel Secondary Containment and Exclosure Screening

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

Open-Vent Exhaust Stack Exclosures

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare-stacks, in-line units, and compressor mufflers.

Containment Structures

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the

largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

IX. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

X. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Seed Mixture 3, for Shallow Sites

The holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed will be done in accordance with State law(s) and within nine (9) months prior to purchase. Commercial seed will be either certified or registered seed. The seed container will be tagged in accordance with State law(s) and available for inspection by the authorized officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). The holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. The seeding will be repeated until a satisfactory stand is established as determined by the authorized officer. Evaluation of growth will not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

<u>Species</u>	<u>lb/acre</u>
Plains Bristlegrass (<i>Setaria magrostachya</i>)	1.0
Green Spangletop (<i>Leptochloa dubia</i>)	2.0
Side oats Grama (<i>Bouteloua curtipendula</i>)	5.0

*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed