

Submit 3 Copies To Appropriate District Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
May 27, 2004

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-005-62700
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. LG-7426
7. Lease Name or Unit Agreement Name Hanlad "A" State Battery #1
8. Well Number #10
9. OGRID Number 009974
10. Pool name or Wildcat Diablo San Andres

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
Hanson Operating Company, Inc.

3. Address of Operator
P. O. Box 1515, Roswell, New Mexico 88202-1515

4. Well Location
Unit Letter G : 1650 feet from the North line and 2310 feet from the East line
Section 28 Township 10 South Range 27 East NMPM Chaves County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3811' GR

Pit or Below-grade Tank Application ☐ or Closure ☐

Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____

Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐

REMEDIAL WORK ☐
CO ☐
CAS ☐

SUPPLEMENTAL FORMS ARE AVAILABLE ON OUR WEBSITE AND SHOULD BE USED WHEN FILING REGULATORY DOCUMENTS.
www.emnrd.state.nm.us

ASING ☐
☐

OTHER: ☐

OTHE ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Plan to plug and abandon the well as follows:

1. MIRU. Set cement tanks. Pull tubing, rods and pump.
2. Set CIBP at 1900' with 35' cement cap.
3. Circulate hole with 10# brine and 12.5 ppb salt water gel.
4. Pump 50 sack solid cement plug inside 5 1/2" casing from 520' to surface.
5. Set Dry Hole Marker.
6. Clean and remediate location.

CONDITIONS OF APPROVAL ATTACHED

Approval Granted providing work is
Completed by May 9, 2015


I hereby certify that the information above is true and correct. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCAD guidelines ☐, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE Carol J. Smith TITLE Production Analyst DATE 04/22/2014
Type or print name Carol J. Smith E-mail address: hanson@dfn.com Telephone No. 575-622-7330

For State Use Only

APPROVED BY: AKDade TITLE Dist. H. Supervisor DATE May 9, 2014
Conditions of Approval (if any):

* See Attached COA's



Approved for plugging of well bore only.
Liability under bond is retained pending receipt of C-103 (Subsequent Report of Well Plugging) which may be found at OCD Web Page under www.emnrd.state.nm.us/oed.

WELLBORE DIAGRAM

OPERATOR
WELL NAME
LOCATION
GL
SPUD DATE
COMMENTS:

Hanson Operating Company, Inc.

Hanlad "A" State Battery #1 Well #10

FIELD

Diablo San Andres

1650' FNL & 2310' FEL, G-Section 28-10S-27E, Chaves County, NM

3811'

ZERO

KB


5/17/1989

COMPLETION DATE

9/24/1989

API #30-005-62700

12 1/4" Hole

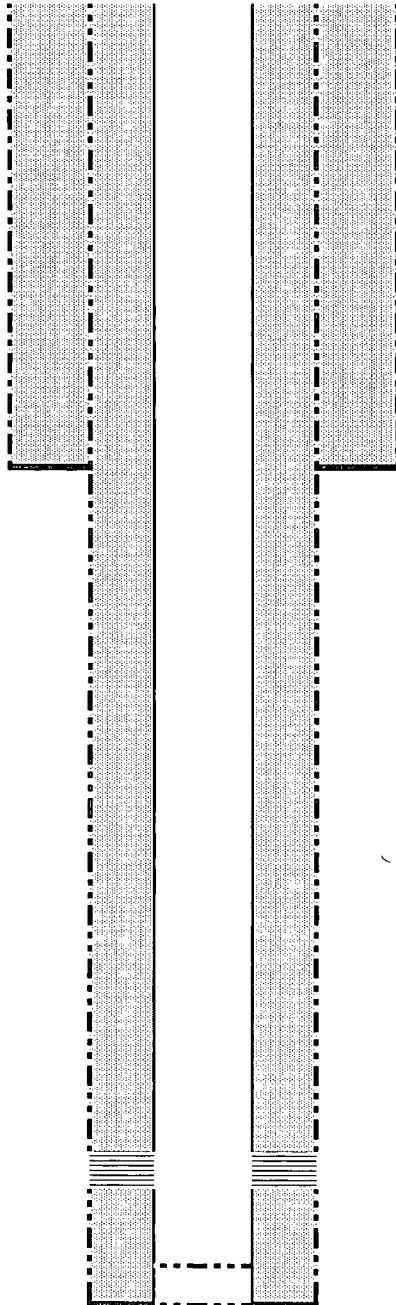

CASING PROGRAM

8 5/8"	24#	520'
5 1/2"	15.5#	2074'

8 5/8" at 520' with 400 sacks cement circulated

BEFORE

8" Hole

San Andres

Perfs: 1981'-2050' 18 holes

5 1/2" at 2074' with 300 sacks cement circulated

PBTD at 2070'

TD 2074'

Not to Scale
4/22/2014

WELLBORE DIAGRAM

OPERATOR
WELL NAME
LOCATION
GL
SPUD DATE
COMMENTS:

Hanson Operating Company, Inc.			
Hanlad "A" State Battery #1 Well #10		FIELD	Diablo San Andres
1650' FNL & 2310' FEL, G-Section 28-10S-27E, Chaves County, NM			
3811'	ZERO	KB	
5/17/1989	COMPLETION DATE		9/24/1989
API #30-005-62700			


12 1/4" Hole

50 Sack Cement
Plug 520'-Surface

8" Hole

CIBP at 1900'
35' Cement Cap

PBTD at 2070'

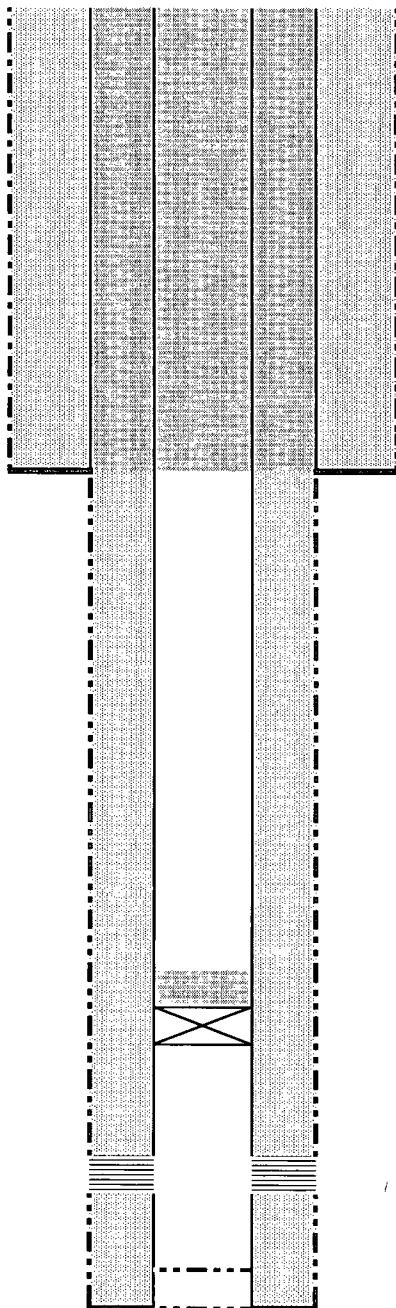

CASING PROGRAM

8 5/8"	24#	520'
5 1/2"	15.5#	2074'

8 5/8" at 520' with 400 sacks cement circulated

AFTER

San Andres
Perfs: 1981'-2050' 18 holes

5 1/2" at 2074' with 300 sacks cement circulated

TD 2074'

Not to Scale
4/22/2014

NEW MEXICO OIL CONSERVATION DIVISION
DISTRICT 2 OFFICE
811 S. FIRST STREET
ARTESIA, NM 88210
(575)748-1283

CONDITIONS OF APPROVAL FOR PLUGGING & ABANDONMENT

Operator: Hanson Operating

Well Name & Number: Hankland "A" State Battery 1 # 10

API #: 30-005-62700

1. Produced water **will not** be used during any part of the plugging & abandonment operation.
2. Notify NMOCD Dist. 2 office at least 24 hrs before beginning work.
3. Closed Loop System is to be used for entire plugging operation. Upon completion, contents of steel pit are to be hauled to a permitted disposal location.
4. Trucking companies being used to haul oilfield waste fluids to a disposal – commercial or private – shall have an approved NMOCD C-133 permit. A copy of this permit shall be available in each truck used to haul waste products. It is the responsibility of the operator, as well as the contractor, to verify that this permit is place prior to performing work. Drivers shall produce a copy upon request of NMOCD Field Inspectors.
5. A subsequent C-103 will serve as notification that the well bore has been plugged ONLY. A C-103 FINAL shall be filed before any bonding can be released on the well. Upon receipt of the Final, an inspection will be performed to verify that the location has been satisfactorily cleaned to NMOCD standards.
6. If work has not begun within 90 days of the approval of this procedure, an extension request must be filed, stating reason that well has not been plugged.
7. Every attempt must be made to clean the well bore out to below the perms, before any plugs can be set, by whatever means possible.
8. Cement Retainers may not be used.

9. Squeeze pressures are not to exceed 500 PSI, unless approval is given by NMOCD.
10. Plugs may be combined after consulting with and getting approval from NMOCD.
11. Minimum WOC time for tag plugs will be 4 Hrs.

DATE: 5/9/14

APPROVED BY:

Al Stede

GUIDELINES FOR PLUGGING AND ABANDONMENT

DISTRICT II / ARTESIA

- All cement plugs will be a minimum of 100' in length or a minimum of 25 sacks of cement, whichever is greater.
- Mud laden fluids must be placed between all cement plugs.
- Mud laden fluids must be mixed at 25 sacks of gel per 100 bbls of water.
- A cement plug is required to be set 50' below and 50' above all casing shoes and casing stub plugs. These plugs must be tagged.
- A CIBP with 35' of cement on top may be set in lieu of 100' cement plug.
- A plug as indicated above must be placed within 100' of top perforation. This plug must be tagged.
- Plugs set below and above salt zones must be tagged.
- No more than 2000' is to be allowed between cement plugs in open hole and no more than 3000' in cased hole.
- DV tools are required to have a 100' cement plug set 50' above and below the tool and must be tagged.
- Formations to be isolated with plugs placed at the top of each formation are:
 - Fusselman
 - Devonian
 - Morrow
 - Wolfcamp
 - Bone Spring
 - Delaware
 - Any Salt Section (Plug at top and bottom)
 - Abo
 - Glorieta
 - Yates (this plug is usually at base of salt section)
- If cement does not exist behind casing strings at recommended formation depths, the casing must be cut and pulled with plugs set at these depths or casing must be perforated and cement squeezed behind casing at the formation depths.
- In the R-111-P area (Potash Mine area) a solid cement plug must be set across the salt section. Fluid used to mix the cement shall be saturated with the salts common to the section penetrated and in suitable proportions, but not more than a 3% calcium chloride by weight of cement will be considered the desired mixture whenever possible (50' below and 50' above).