



Weatherford[®]

Evaluation, Drilling & Intervention
10000 West County Rd. 116
P.O. Box 61028
Midland, TX USA 79711
Tel. (432) 561-8892 Fax (432) 561-8895

Occidental Permian Ltd.
5 Greenway Plaza Suite 110
Houston Tx 77046

Date: March 4, 2014

Attention: Kacie Cruz

15- 41231

Re: Occidental Permian Ltd
Well: Eeyore 34 State #2
Eddy County, New Mexico

Enclosed, please find the original survey performed on the referenced well by Precision Energy Services, Inc. (P-5 No. 676004), a Weatherford company. Other information required by your office is as follows:


<u>Name & Title Of Surveyor</u>	<u>Well Number</u>	<u>Surveyed Depths</u>	<u>Dates Performed</u>	<u>Type of Survey</u>
Jaime Rivera	2	452' MD	2-21-2014	Measurement
MWD Supervisor		5146' MD	2-28-2014	While Drilling


A notarized plan vs. actual is attached to the survey report. If any other information is required, please contact the undersigned at the letterhead address and phone number.

Daniel Rodriguez
MWD Coordinator

On this, the 12th day of March, 20 14, before me a notary public, the undersigned officer, personally appeared Daniel Rodriguez, known to me (or satisfactorily proven) to be the person whose name is subscribed to the within instrument, and acknowledged that he executed the same for the purposes therein contained.

In witness hereof, I hereunto set my hand and official seal.


Notary Public

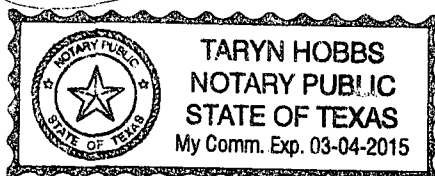



Weatherford International Ltd.

WFT Survey Report X&Y's



Weatherford

Company: Occidental Permian Ltd. Date: 3/1/2014 Time: 15:36:06 Page: 1
 Field: Eddy Co, NM (Nad 27) Co-ordinate(NE) Reference: Well: Eeyore 34 State #2, Grid North
 Site: Eeyore 34 State #2 Vertical (TVD) Reference: SITE 3689.3
 Well: Eeyore 34 State #2 Section (VS) Reference: Well (0.00N,0.00E,90.00Azi)
 Wellpath: ST01 Survey Calculation Method: Minimum Curvature Db: Sybase

Survey: Start Date:

Company: Engineer:
 Tool: Tied-to:

Site: Eeyore 34 State #2

Site Position: Northing: 653281.10 ft Latitude: 32 47 45.015 N
 From: Map Easting: 553725.10 ft Longitude: 104 9 30.588 W
 Position Uncertainty: 0.00 ft North Reference: Grid
 Ground Level: 3675.30 ft Grid Convergence: 0.09 deg

Well: Eeyore 34 State #2 Slot Name:

Well Position: +N/-S 0.00 ft Northing: 653281.10 ft Latitude: 32 47 45.015 N
 +E/-W 0.00 ft Easting: 553725.10 ft Longitude: 104 9 30.588 W
 Position Uncertainty: 0.00 ft

Wellpath: ST01

Current Datum: SITE Height 3689.30 ft Drilled From: ST00
 Magnetic Data: 2/20/2014 Tie-on Depth: 2459.00 ft
 Field Strength: 48652 nT Above System Datum: Mean Sea Level
 Vertical Section: Depth From (TVD) +N/-S Declination: 7.57 deg
 ft ft ft Mag Dip Angle: 60.55 deg
 0.00 0.00 0.00 Direction: 90.00

Survey

MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	DLS deg/100ft	VS ft	MapN ft	MapE ft	Comment
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	653281.10	553725.10	
452.00	1.90	340.78	451.92	7.08	-2.47	0.42	-2.47	653288.18	553722.63	First WFT Svy
575.00	1.85	339.17	574.85	10.86	-3.84	0.06	-3.84	653291.96	553721.26	
698.00	1.85	341.21	697.79	14.59	-5.19	0.05	-5.19	653295.69	553719.91	
822.00	1.86	342.89	821.72	18.41	-6.43	0.04	-6.43	653299.51	553718.67	
986.00	1.69	343.18	985.64	23.27	-7.91	0.10	-7.91	653304.37	553717.19	
1159.00	1.76	338.74	1158.57	28.19	-9.61	0.09	-9.61	653309.29	553715.49	
1332.00	1.66	328.20	1331.49	32.79	-11.89	0.19	-11.89	653313.89	553713.21	
1504.00	1.63	327.36	1503.42	36.97	-14.53	0.02	-14.53	653318.07	553710.57	
1677.00	1.42	324.05	1676.36	40.78	-17.11	0.13	-17.11	653321.88	553707.99	
1859.00	1.27	314.61	1858.31	44.02	-19.87	0.15	-19.87	653325.12	553705.23	
2032.00	1.26	316.97	2031.26	46.76	-22.53	0.03	-22.53	653327.86	553702.57	
2204.00	1.13	312.66	2203.23	49.29	-25.07	0.09	-25.07	653330.39	553700.03	
2376.00	1.07	325.45	2375.20	51.76	-27.23	0.15	-27.23	653332.86	553697.87	
2420.00	0.98	320.70	2419.19	52.39	-27.70	0.28	-27.70	653333.49	553697.40	
2459.00	0.98	324.40	2458.18	52.92	-28.11	0.16	-28.11	653334.02	553696.99	Tie on ST00
2502.00	1.62	56.64	2501.17	53.55	-27.81	4.48	-27.81	653334.65	553697.29	First ST01 Svy
2550.00	5.95	76.55	2549.06	54.50	-24.83	9.29	-24.83	653335.60	553700.27	
2593.00	7.37	76.30	2591.77	55.68	-19.98	3.30	-19.98	653336.78	553705.12	
2636.00	6.96	75.30	2634.43	56.99	-14.78	1.00	-14.78	653338.09	553710.32	
2679.00	7.10	81.08	2677.11	58.06	-9.63	1.68	-9.63	653339.16	553715.47	
2722.00	6.88	74.12	2719.79	59.18	-4.53	2.03	-4.53	653340.28	553720.57	
2765.00	7.07	74.89	2762.47	60.57	0.50	0.49	0.50	653341.67	553725.60	
2809.00	7.12	74.36	2806.14	62.02	5.74	0.19	5.74	653343.12	553730.84	
2852.00	7.16	75.05	2848.80	63.42	10.90	0.22	10.90	653344.52	553736.00	
2895.00	6.95	76.44	2891.48	64.73	16.01	0.63	16.01	653345.83	553741.11	
2938.00	7.34	74.60	2934.14	66.07	21.19	1.05	21.19	653347.17	553746.29	
2981.00	7.34	73.89	2976.79	67.56	26.48	0.21	26.48	653348.66	553751.58	
3025.00	7.30	75.16	3020.43	69.05	31.88	0.38	31.88	653350.15	553756.98	
3068.00	7.18	74.86	3063.09	70.45	37.12	0.29	37.12	653351.55	553762.22	



Weatherford International Ltd.

WFT Survey Report X&Y's

**Weatherford**

Company: Occidental Permian Ltd.
Field: Eddy Co, NM (Nad 27)
Site: Eeyore 34 State #2
Well: Eeyore 34 State #2
Wellpath: ST01

Date: 3/1/2014 Time: 15:36:06 Page: 2
Co-ordinate(NE) Reference: Well: Eeyore 34 State #2, Grid North
Vertical (TVD) Reference: SITE 3689.3
Section (VS) Reference: Well (0.00N,0.00E,90.00Azi)
Survey Calculation Method: Minimum Curvature Db: Sybase

Survey

MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	DLS deg/100ft	VS ft	MapN ft	MapE ft	Comment
3111.00	6.70	76.02	3105.77	71.76	42.14	1.16	42.14	653352.86	553767.24	
3154.00	6.83	75.41	3148.48	73.01	47.05	0.35	47.05	653354.11	553772.15	
3197.00	6.80	75.87	3191.17	74.28	52.00	0.14	52.00	653355.38	553777.10	
3241.00	6.39	78.11	3234.88	75.42	56.92	1.10	56.92	653356.52	553782.02	
3284.00	6.55	78.71	3277.61	76.39	61.66	0.40	61.66	653357.49	553786.76	
3327.00	6.54	78.00	3320.33	77.38	66.46	0.19	66.46	653358.48	553791.56	
3370.00	6.44	76.11	3363.05	78.47	71.20	0.55	71.20	653359.57	553796.30	
3413.00	6.54	74.74	3405.77	79.69	75.90	0.43	75.90	653360.79	553801.00	
3456.00	6.81	72.84	3448.48	81.09	80.70	0.81	80.70	653362.19	553805.80	
3629.00	6.66	72.47	3620.29	87.14	100.07	0.09	100.07	653368.24	553825.17	
3802.00	6.58	71.19	3792.14	93.35	119.02	0.10	119.02	653374.45	553844.12	
3975.00	6.23	67.60	3964.06	100.13	137.08	0.31	137.08	653381.23	553862.18	
4148.00	5.92	65.27	4136.09	107.44	153.86	0.23	153.86	653388.54	553878.96	
4320.00	5.35	62.20	4307.25	114.89	169.01	0.37	169.01	653395.99	553894.11	
4493.00	5.20	59.27	4479.52	122.66	182.88	0.18	182.88	653403.76	553907.98	
4665.00	4.20	53.69	4650.94	130.37	194.66	0.64	194.66	653411.47	553919.76	
4838.00	4.06	53.65	4823.49	137.75	204.70	0.08	204.70	653418.85	553929.80	
5011.00	4.14	48.49	4996.05	145.52	214.31	0.22	214.31	653426.62	553939.41	
5146.00	3.85	42.59	5130.72	152.08	221.02	0.37	221.02	653433.18	553946.12	Last ST01 Svy
5200.00	3.85	42.59	5184.60	154.75	223.48	0.00	223.48	653435.85	553948.58	Proj to Bit

Annotation

MD ft	TVD ft	
2459.00	2458.18	Tie on ST00
2502.00	2501.17	First ST01 Svy
5146.00	5130.72	Last ST01 Svy
5200.00	5184.60	Proj to Bit



Eeyore 34 State #2 Eddy Co., NM



SECTION DETAILS									
Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec Target
1	2459.00	0.98	324.40	2458.18	52.92	-28.11	0.00	0.00	-28.11
2	2494.00	0.98	324.40	2493.18	53.40	-28.46	0.00	0.00	-28.46
3	2714.61	6.00	90.00	2713.42	54.94	-18.01	3.00	132.49	-18.01
4	5214.89	6.00	90.00	5200.00	54.94	243.34	0.00	0.00	243.34

WELL DETAILS							
Name	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Slot
Eeyore 34 State #2	0.00	0.00	653281.10	553725.10	32°47'45.015N	104°09'30.588W	N/A

TARGET DETAILS						
Name	TVD	+N/-S	+E/-W	Northing	Easting	Shape
None						

SITE DETAILS			
Eeyore 34 State #2			
Site Centre Northing:	653281.10		
Easting:	553725.10		
Ground Level:	3675.30		
Positional Uncertainty:	0.00		
Convergence:	0.09		

LEGEND	
	Eeyore 34 State #2, ST01, Plan #2
	ST01
	MWD Svy

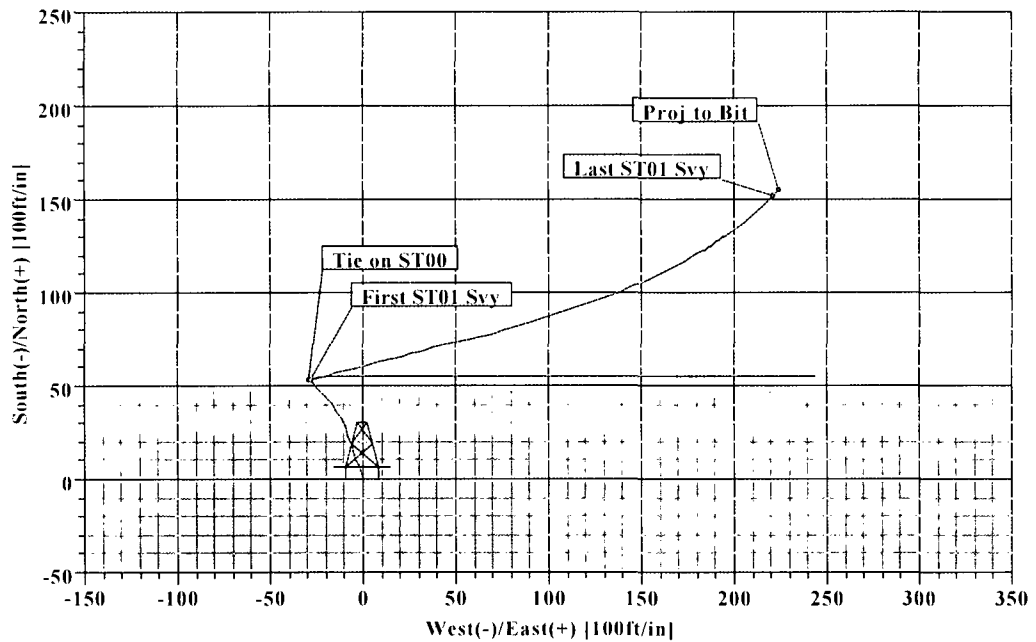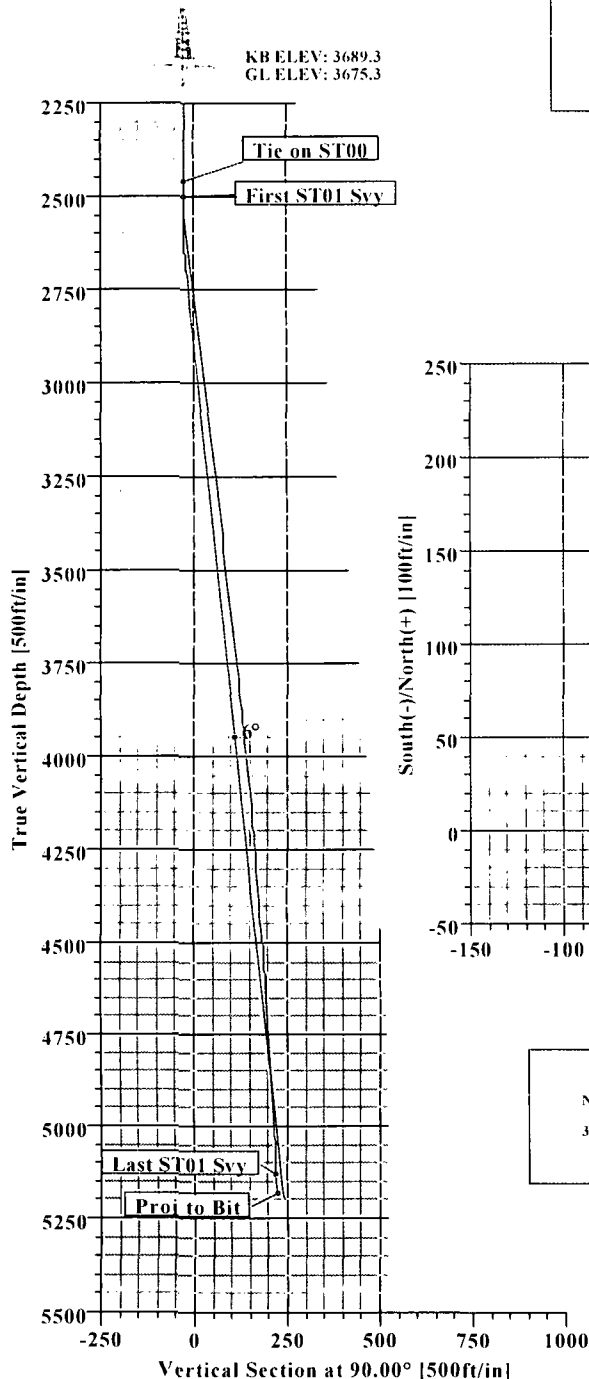

Survey: MWD Svy (Eeyore 34 State #2/ST01)									
No	MD	Inc	Az	TVD	+N/-S	+E/-W	DLeg	TFace	VSec
35	5200.00	3.85	42.59	5184.60	154.75	223.48	0.0000	0.00	223.48



Weatherford