

Surveyor Certification Form

Survey Company: MS ENERGY SERVICES

Surveyors Name: DAVID MARTINEZ

Survey Job Type: RATE GYRO

Customer: OXY USA, INC

Well: FNR 26 FED 4H

API: 30-315-41012

Surveyed from: SURFACE TO A DEPTH OF 548' MD

Survey Run Date: 8-28-13 to 8-29-13

Surface Location: EDDY COUNTY, NM

NM OIL CONSERVATION

ARTESIA DISTRICT

JUL 02 2014

RECEIVED

I certify that the data is true, correct, and complete and within the limitations of the tool set forth by MS Energy Services; that I am authorized and qualified to make this report; and that I have reviewed this report and find that it conforms to the principles and procedures as set forth by MS Energy Services.

David Martinez

Digitally signed by David Martinez
DN: cn=David Martinez, o=MS Energy Services,
ou=MS Survey,
email=dmartinez@msenergyservices.com, c=US
Date: 2013.01.02 16:05:24 -06'00'



Job Number: SVMO-130674

Company: OXY USA, Inc.

Lease/Well: FNR 26 FED 4H

Location: Eddy County, NM

Rig Name: H&P #474

RKB: 25'

G.L. or M.S.L.: GL

State/Country: New Mexico/USA

Declination: 7.23°

Grid: East To Grid North

File name: F:\SURVEY\2013SU-1\OXY\MO\FNR\26FED4H.SVY

Date/Time: 30-Aug-13 / 08:47

Curve Name: Surface - 548' M.D. (Rate Gyro)

NM OIL CONSERVATION
 ARTESIA DISTRICT
 JUL 02 2014
 RECEIVED

WINSERVE SURVEY CALCULATIONS
 Minimum Curvature Method
 Vertical Section Plane 89.67
 Vertical Section Referenced to Wellhead
 Rectangular Coordinates Referenced to Wellhead

Measured Depth FT	Incl Angle Deg	Drift Direction Deg	True Vertical Depth	N-S FT	E-W FT	Vertical Section FT	CLOSURE		Dogleg Severity Deg/100
							Distance FT	Direction Deg	
.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
100.00	.55	329.09	100.00	.41	-.25	-.24	.48	329.09	.55
200.00	.66	325.66	199.99	1.30	-.82	-.81	1.54	327.80	.12
300.00	1.00	334.25	299.98	2.56	-1.52	-1.51	2.98	329.27	.36
400.00	.76	334.88	399.97	3.95	-2.18	-2.16	4.51	331.06	.24
500.00	.92	22.73	499.96	5.29	-2.15	-2.12	5.71	337.84	.70
Last Survey Depth Recorded									
548.00	1.12	34.14	547.95	6.03	-1.74	-1.71	6.28	343.89	.59

OCCIDENTAL PERMIAN LTD.

Forty Niner Ridge
Eddy County, NM
FNR "26" Federal #4H
DH - Job #320813-MPH-875

Survey: MWD - Tie-In @ 548'

SDI Survey Report


This survey is correct to the best of my knowledge and is supported by actual field data.

Lehman

Notarized this date 1st of October, 2013.

Carrie Reed

Notary Signature
County of Midland
State of Texas

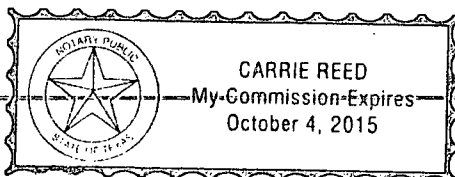

SDI
SDI Survey Report

Company:	OCCIDENTAL PERMIAN LTD.	Local Co-ordinate Reference:	Well FNR "26" Federal #4H
Project:	Forty Niner Ridge	TVD Reference:	WELL @ 0.0usft (Original Well Elev)
Site:	Eddy County, NM	MD Reference:	WELL @ 0.0usft (Original Well Elev)
Well:	FNR "26" Federal #4H	North Reference:	Grid
Wellbore:	DH - Job #320813-MPH-875	Survey Calculation Method:	Minimum Curvature
Design:	DH - Job #320813-MPH-875	Database:	EDM-Regulatory

Project	Forty Niner Ridge		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site	Eddy County, NM		
Site Position:	Northing:	462,426.28 usft	Latitude: 32° 16' 13.564 N
From: Lat/Long	Easting:	646,735.83 usft	Longitude: 103° 51' 30.915 W
Position Uncertainty: 0.0 usft	Slot Radius: 13-3/16"	Grid Convergence:	0.25 °

Well	FNR "26" Federal #4H, Directional		
Well Position	+N/-S	0.0 usft	Latitude: 32° 16' 13.564 N
	+E/-W	0.0 usft	Longitude: 103° 51' 30.915 W
Position Uncertainty	0.0 usft	Wellhead Elevation:	usft
		Ground Level:	0.0 usft

Wellbore	DH - Job #320813-MPH-875				
Magnetics	Model Name	Sample Date	Declination	Dip Angle	Field Strength
			(°)	(°)	(nT)
	IGRF2010	9/1/2013	7.45	60.13	48,417

Design:	DH - Job #320813-MPH-875			
Audit Notes:				
Version: 1.0	Phase:	ACTUAL	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W	Direction
	(usft)	(usft)	(usft)	(°)
	0.0	0.0	0.0	196.96

Survey Program	Date	10/7/2013		
From	To	Survey (Wellbore)	Tool Name	Description
(usft)	(usft)			
574.0	12,020.0	MWD - Tie-In @ 548' (DH - Job #320813)	MWD	MWD

Survey									
MD	Inc	Azi (azimuth)	TVD	N/S	E/W	Closure Azimuth	Closure Distance		
(usft)	(°)	(°)	(usft)	(usft)	(usft)	(°)	(usft)		
548.0	1.12	34.14	548.0	6.0	-1.7	343.90	6.3		
574.0	1.06	39.99	573.9	6.4	-1.4	347.34	6.6		
665.0	1.41	38.41	664.9	7.9	-0.2	358.51	7.9		
756.0	1.32	41.31	755.9	9.6	1.2	7.01	9.7		
847.0	1.06	44.04	846.9	11.0	2.5	12.59	11.3		
939.0	1.14	41.40	938.9	12.3	3.7	16.55	12.8		
1,033.0	0.97	29.45	1,032.8	13.7	4.7	18.81	14.5		
1,127.0	1.14	36.21	1,126.8	15.1	5.6	20.32	16.1		
1,221.0	1.06	20.57	1,220.8	16.7	6.5	21.15	17.9		
1,316.0	1.23	18.90	1,315.8	18.5	7.1	21.01	19.8		
1,410.0	1.06	25.32	1,409.8	20.2	7.8	21.08	21.7		
1,505.0	1.41	26.11	1,504.8	22.1	8.7	21.49	23.7		

SDI
SDI Survey Report

Company:	OCCIDENTAL PERMIAN LTD.	Local Co-ordinate Reference:	Well FNR "26" Federal #4H
Project:	Forty Niner Ridge	TVD Reference:	WELL @ 0.0usft (Original Well Elev)
Site:	Eddy County, NM	MD Reference:	WELL @ 0.0usft (Original Well Elev)
Well:	FNR "26" Federal #4H	North Reference:	Grid
Wellbore:	DH - Job #320813-MPH-875	Survey Calculation Method:	Minimum Curvature
Design:	DH - Job #320813-MPH-875	Database:	EDM-Regulatory

Survey									
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	Closure Azimuth (°)	Closure Distance (usft)		
1,599.0	1.23	26.99	1,598.7	24.0	9.7	21.91	25.9		
1,693.0	1.14	37.62	1,692.7	25.7	10.7	22.61	27.8		
1,787.0	1.41	30.85	1,786.7	27.4	11.9	23.40	29.8		
1,882.0	1.49	49.13	1,881.7	29.2	13.4	24.62	32.1		
1,976.0	1.58	51.42	1,975.6	30.8	15.3	26.44	34.4		
2,071.0	1.32	42.28	2,070.6	32.4	17.1	27.77	36.7		
2,165.0	1.41	49.49	2,164.6	34.0	18.7	28.81	38.8		
2,259.0	1.49	45.71	2,258.5	35.6	20.4	29.87	41.1		
2,354.0	0.35	3.43	2,353.5	36.7	21.3	30.15	42.5		
2,448.0	0.18	14.15	2,447.5	37.2	21.4	29.92	42.9		
2,543.0	0.35	7.83	2,542.5	37.6	21.5	29.73	43.3		
2,635.0	0.53	322.47	2,634.5	38.2	21.3	29.08	43.7		
2,731.0	0.62	314.12	2,730.5	38.9	20.6	27.89	44.1		
2,826.0	1.06	231.16	2,825.5	38.7	19.6	26.78	43.4		
2,920.0	1.49	235.99	2,919.5	37.5	17.9	25.47	41.6		
3,014.0	1.58	239.42	3,013.4	36.2	15.7	23.51	39.5		
3,109.0	1.58	251.11	3,108.4	35.1	13.4	20.86	37.5		
3,203.0	2.02	249.70	3,202.4	34.1	10.6	17.26	35.7		
3,297.0	2.20	239.33	3,296.3	32.6	7.5	12.94	33.4		
3,392.0	1.14	209.09	3,391.3	30.8	5.5	10.04	31.3		
3,486.0	0.35	214.02	3,485.3	29.8	4.8	9.24	30.2		
3,581.0	0.79	113.29	3,580.2	29.3	5.3	10.23	29.8		
3,675.0	0.70	135.18	3,674.2	28.6	6.3	12.38	29.3		
3,770.0	0.97	126.92	3,769.2	27.7	7.3	14.82	28.7		
3,864.0	0.62	131.22	3,863.2	26.9	8.4	17.24	28.2		
3,952.0	0.35	95.36	3,951.2	26.6	9.0	18.67	28.1		
4,046.0	0.26	44.83	4,045.2	26.7	9.4	19.43	28.3		
4,140.0	0.35	69.44	4,139.2	27.0	9.8	20.05	28.7		
4,235.0	0.53	47.90	4,234.2	27.3	10.4	20.88	29.3		
4,329.0	0.44	60.91	4,328.2	27.8	11.1	21.70	29.9		
4,424.0	0.62	36.13	4,423.2	28.4	11.7	22.37	30.7		
4,518.0	0.53	34.63	4,517.2	29.2	12.2	22.76	31.6		
4,612.0	0.88	52.21	4,611.2	30.0	13.1	23.54	32.7		
4,707.0	0.62	30.68	4,706.2	30.9	13.9	24.24	33.8		
4,801.0	0.70	19.16	4,800.2	31.8	14.3	24.25	34.9		
4,895.0	0.62	4.84	4,894.2	32.9	14.6	23.90	36.0		
4,990.0	0.70	17.23	4,989.2	34.0	14.8	23.53	37.0		
5,085.0	0.97	20.75	5,084.2	35.3	15.2	23.38	38.4		
5,179.0	0.97	15.74	5,178.1	36.8	15.7	23.18	40.0		
5,273.0	0.79	9.67	5,272.1	38.2	16.1	22.82	41.4		
5,368.0	0.79	12.04	5,367.1	39.5	16.3	22.46	42.7		
5,463.0	0.44	5.72	5,462.1	40.5	16.5	22.17	43.7		
5,557.0	0.62	358.60	5,556.1	41.3	16.5	21.77	44.5		
5,651.0	0.79	194.68	5,650.1	41.2	16.3	21.62	44.3		

SDI
SDI Survey Report

Company:	OCCIDENTAL PERMIAN LTD.	Local Co-ordinate Reference:	Well FNR "26" Federal #4H
Project:	Forty Niner Ridge	TVD Reference:	WELL @ 0.0usft (Original Well Elev)
Site:	Eddy County, NM	MD Reference:	WELL @ 0.0usft (Original Well Elev)
Well:	FNR "26" Federal #4H	North Reference:	Grid
Wellbore:	DH - Job #320813-MPH-875	Survey Calculation Method:	Minimum Curvature
Design:	DH - Job #320813-MPH-875	Database:	EDM-Regulatory

Survey								
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	Closure Azimuth (°)	Closure Distance (usft)	
5,745.0	1.06	197.49	5,744.1	39.8	15.9	21.81	42.8	
5,840.0	0.97	183.78	5,839.1	38.1	15.6	22.25	41.2	
5,935.0	1.23	189.06	5,934.1	36.3	15.4	22.95	39.4	
6,029.0	1.32	195.38	6,028.0	34.3	14.9	23.54	37.4	
6,123.0	1.23	190.02	6,122.0	32.2	14.5	24.18	35.3	
6,218.0	1.41	181.15	6,217.0	30.1	14.3	25.39	33.3	
6,312.0	1.06	180.71	6,311.0	28.0	14.2	26.92	31.4	
6,406.0	1.32	183.52	6,405.0	26.1	14.2	28.49	29.7	
6,500.0	1.32	187.21	6,498.9	23.9	14.0	30.25	27.7	
6,595.0	0.97	194.77	6,593.9	22.1	13.6	31.67	25.9	
6,689.0	1.41	196.26	6,687.9	20.2	13.1	32.95	24.1	
6,783.0	1.49	193.63	6,781.9	17.9	12.5	34.89	21.8	
6,878.0	1.41	192.83	6,876.8	15.6	11.9	37.48	19.6	
6,946.0	1.23	190.81	6,944.8	14.0	11.6	39.61	18.2	
6,975.0	1.13	185.30	6,973.8	13.4	11.5	40.62	17.7	
7,006.0	1.41	145.50	7,004.8	12.8	11.7	42.42	17.4	
7,038.0	3.48	92.95	7,036.8	12.4	12.9	46.05	17.9	
7,069.0	5.89	87.45	7,067.7	12.5	15.4	51.08	19.8	
7,101.0	8.53	81.30	7,099.4	12.9	19.4	56.42	23.3	
7,132.0	11.61	80.25	7,129.9	13.8	24.8	60.93	28.3	
7,164.0	15.12	82.36	7,161.1	14.9	32.1	65.13	35.4	
7,195.0	17.32	84.03	7,190.8	15.9	40.7	68.67	43.7	
7,227.0	19.60	86.33	7,221.2	16.7	50.8	71.77	53.5	
7,258.0	22.89	87.88	7,250.1	17.3	62.0	74.42	64.3	
7,290.0	25.94	90.09	7,279.2	17.5	75.2	76.90	77.2	
7,321.0	28.69	92.21	7,306.7	17.2	89.4	79.11	91.1	
7,353.0	31.66	92.86	7,334.4	16.5	105.5	81.12	106.8	
7,384.0	33.85	93.17	7,360.5	15.6	122.2	82.73	123.2	
7,415.0	37.11	92.38	7,385.7	14.7	140.2	84.00	141.0	
7,447.0	39.66	91.76	7,410.8	14.0	160.1	84.99	160.7	
7,478.0	42.30	90.88	7,434.2	13.6	180.4	85.70	180.9	
7,510.0	45.02	90.44	7,457.3	13.3	202.5	86.24	202.9	
7,541.0	46.78	90.71	7,478.9	13.1	224.7	86.67	225.1	
7,573.0	48.45	90.79	7,500.5	12.8	248.4	87.06	248.7	
7,604.0	51.09	90.79	7,520.5	12.4	272.0	87.38	272.3	
7,635.0	53.29	91.15	7,539.5	12.0	296.5	87.68	296.8	
7,667.0	54.96	91.59	7,558.3	11.4	322.4	87.97	322.6	
7,698.0	56.37	91.67	7,575.7	10.7	348.0	88.24	348.2	
7,730.0	58.65	91.23	7,592.9	10.0	375.0	88.47	375.1	
7,761.0	60.41	91.76	7,608.6	9.3	401.7	88.67	401.8	
7,793.0	62.70	91.67	7,623.9	8.5	429.8	88.87	429.9	
7,824.0	65.16	91.41	7,637.5	7.7	457.7	89.03	457.7	
7,856.0	67.01	91.41	7,650.5	7.0	486.9	89.18	487.0	
7,887.0	69.13	91.21	7,662.1	6.3	515.7	89.30	515.7	

SDI
SDI Survey Report

Company:	OCCIDENTAL PERMIAN LTD.	Local Co-ordinate Reference:	Well FNR "26" Federal #4H
Project:	Forty Niner Ridge	TVD Reference:	WELL @ 0.0usft (Original Well Elev)
Site:	Eddy County, NM	MD Reference:	WELL @ 0.0usft (Original Well Elev)
Well:	FNR "26" Federal #4H	North Reference:	Grid
Wellbore:	DH - Job #320813-MPH-875	Survey Calculation Method:	Minimum Curvature
Design:	DH - Job #320813-MPH-875	Database:	EDM-Regulatory

Survey								
MD (usft)	Inc. (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	Closure Azimuth (°)	Closure Distance (usft)	
7,919.0	71.16	90.87	7,672.9	5.8	545.8	89.39	545.8	
7,950.0	72.81	90.71	7,682.5	5.4	575.2	89.46	575.3	
7,982.0	74.66	90.71	7,691.5	5.0	605.9	89.53	606.0	
8,013.0	76.15	90.62	7,699.3	4.7	635.9	89.58	636.0	
8,045.0	77.91	90.09	7,706.5	4.5	667.1	89.62	667.1	
8,076.0	80.28	88.95	7,712.3	4.7	697.6	89.61	697.6	
8,108.0	83.01	88.16	7,717.0	5.5	729.2	89.57	729.2	
8,122.0	84.06	88.42	7,718.6	5.9	743.1	89.54	743.1	
8,234.0	87.85	90.79	7,726.5	6.7	854.8	89.55	854.8	
8,329.0	91.01	89.65	7,727.4	6.3	949.8	89.62	949.8	
8,423.0	91.36	89.12	7,725.5	7.3	1,043.8	89.60	1,043.8	
8,518.0	88.64	87.72	7,725.5	10.0	1,138.7	89.50	1,138.8	
8,613.0	90.84	88.86	7,725.9	12.8	1,233.7	89.41	1,233.7	
8,707.0	91.71	89.12	7,723.8	14.5	1,327.6	89.38	1,327.7	
8,802.0	91.63	88.95	7,721.0	16.1	1,422.6	89.35	1,422.7	
8,896.0	91.80	88.07	7,718.2	18.5	1,516.5	89.30	1,516.6	
8,990.0	92.07	89.39	7,715.0	20.6	1,610.4	89.27	1,610.5	
9,085.0	89.34	88.95	7,713.9	22.0	1,705.4	89.26	1,705.5	
9,180.0	87.41	89.56	7,716.6	23.2	1,800.3	89.26	1,800.5	
9,275.0	88.20	91.06	7,720.2	22.7	1,895.3	89.31	1,895.4	
9,370.0	88.64	90.97	7,722.8	21.0	1,990.2	89.40	1,990.3	
9,464.0	88.99	92.20	7,724.8	18.4	2,084.2	89.49	2,084.2	
9,558.0	89.08	92.38	7,726.4	14.6	2,178.1	89.62	2,178.1	
9,653.0	88.90	92.11	7,728.0	10.9	2,273.0	89.72	2,273.0	
9,747.0	91.28	91.94	7,727.9	7.6	2,366.9	89.82	2,366.9	
9,841.0	88.02	92.29	7,728.5	4.1	2,460.8	89.90	2,460.8	
9,936.0	88.55	91.06	7,731.3	1.3	2,555.7	89.97	2,555.7	
10,031.0	88.20	90.88	7,734.0	-0.3	2,650.7	90.01	2,650.7	
10,125.0	88.29	89.83	7,736.9	-0.8	2,744.6	90.02	2,744.6	
10,220.0	89.34	88.33	7,738.8	0.7	2,839.6	89.99	2,839.6	
10,314.0	88.81	88.33	7,740.4	3.4	2,933.6	89.93	2,933.6	
10,409.0	89.63	88.12	7,741.6	6.4	3,028.5	89.88	3,028.5	
10,504.0	88.46	87.63	7,743.2	9.9	3,123.4	89.82	3,123.4	
10,599.0	87.76	86.66	7,746.4	14.6	3,218.2	89.74	3,218.3	
10,694.0	86.88	85.34	7,750.8	21.2	3,312.9	89.63	3,313.0	
10,788.0	88.02	85.52	7,755.0	28.7	3,406.5	89.52	3,406.6	
10,882.0	89.08	85.70	7,757.4	35.9	3,500.2	89.41	3,500.4	
10,977.0	88.99	86.14	7,759.0	42.7	3,595.0	89.32	3,595.2	
11,071.0	90.22	87.72	7,759.6	47.7	3,688.8	89.26	3,689.1	
11,167.0	90.13	89.56	7,759.3	50.0	3,784.8	89.24	3,785.1	
11,261.0	87.76	88.77	7,761.1	51.4	3,878.7	89.24	3,879.1	
11,356.0	89.08	88.95	7,763.7	53.2	3,973.7	89.23	3,974.0	
11,451.0	89.69	89.65	7,764.7	54.4	4,068.7	89.23	4,069.0	
11,547.0	89.34	89.56	7,765.5	55.1	4,164.7	89.24	4,165.0	
11,642.0	89.34	89.83	7,766.6	55.6	4,259.7	89.25	4,260.0	

SDI

SDI Survey Report

Company:	OCCIDENTAL PERMIAN LTD.	Local Co-ordinate Reference:	Well FNR "26" Federal #4H
Project:	Forty Niner Ridge	TVD Reference:	WELL @ 0.0usft (Original Well Elev)
Site:	Eddy County, NM	MD Reference:	WELL @ 0.0usft (Original Well Elev)
Well:	FNR "26" Federal #4H	North Reference:	Grid
Wellbore:	DH - Job #320813-MPH-875	Survey Calculation Method:	Minimum Curvature
Design:	DH - Job #320813-MPH-875	Database:	EDM-Regulatory

Survey								
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	Closure Azimuth (°)	Closure Distance (usft)	
11,737.0	89.60	90.71	7,767.5	55.1	4,354.7	89.27	4,355.0	
11,832.0	88.90	89.65	7,768.7	54.8	4,449.6	89.29	4,450.0	
11,927.0	89.52	90.62	7,770.0	54.6	4,544.6	89.31	4,545.0	
11,973.0	90.13	90.88	7,770.2	54.0	4,590.6	89.33	4,591.0	
Last MWD Survey								
12,020.0	90.13	90.88	7,770.1	53.3	4,637.6	89.34	4,637.9	
Projection to Bit								

Survey Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
11,973.0	7,770.2	54.0	4,590.6	Last MWD Survey
12,020.0	7,770.1	53.3	4,637.6	Projection to Bit



FNR 26 Fed 4H
Eddy County, New Mexico
Northing: 462426.30
Easting: 646735.80
Design #1



To convert a Magnetic Direction to a Grid Direction: Add 7.20°
To convert a True Direction to a Grid Direction: Subtract 0.25°

Azimuth to Grid North
True North: 0.25°
Magnetic North: 7.20°
Magnetic Field
Strength: 48,000 amT
Dip Angle: 66.13°
Date: 02/27/2013
Model: IGRF2010

SECTION DETAILS:

MD	Inc	Azi	TVD	+N/-S	+E/-W	Diag	TFace	VSect	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
6999.9	0.00	0.00	6999.9	0.0	0.0	0.00	0.00	0.0	
8115.8	89.27	89.67	7716.0	4.0	707.1	8.00	89.67	707.1	
12053.7	89.27	89.67	7766.0	26.5	4644.6	0.00	0.00	4644.7	FNR26F 4H BHL

WELL DETAILS: FNR 26 Fed 4H

Ground Level: 3381.4

0.0 +N/-S 0.0 +E/-W
Northing 462426.30 Easting 646735.80
Latitude 32° 16' 13.564" N Longitude 103° 51' 30.915" W

DESIGN TARGET DETAILS:

Name	TVD	+N/-S	+E/-W	Northing	Easting
	7766.0	26.5	4644.6		
FNR26F 4H BHL				462452.80	651380.40


PROJECT DETAILS:

Eddy County, New Mexico
Geodetic System: US State Plane 1927
Datum: NAD 1927 (NADCON CONUS)
Ellipsoid: Clarke 1866
Zone: New Mexico East 3001
System Datum: Mean Sea Level

SITE DETAILS: FNR 26 Fed 4H

Site Centre Northing: 462426.30
Easting: 646735.80

Positional Uncertainty: 0.0
Convergence: 0.25
Local North: Grid



KB @ 3405.4usft (H&P 474)
Gr: 3381.4

