

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy Minerals and Natural Resources

Form C-101
Revised July 18, 2013

Oil Conservation Division

☐ AMENDED REPORT

1220 South St. Francis Dr.

NM OIL CONSERVATION
ARTESIA DISTRICT

Santa Fe, NM 87505

JUN 23 2014

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

1. Operator Name and Address BOPCO, L.P. P.O. Box 2760 Midland, TX		2. OGRE Number 260737
3. Property Code 40065 313213	4. Property Name Poker Lake Unit CVX JV BS	5. API Number 30015-42457
		6. Well No. 054H

7. Surface Location

UL - Lot	Section	Township	Range	Lot Idn	Feet from	N/S Line	Feet From	E/W Line	County
E	2	24 S	30 E		2500	NORTH	370	WEST	EDDY

*** Proposed Bottom Hole Location**

UL - Lot	Section	Township	Range	Lot Idn	Feet from	N/S Line	Feet From	E/W Line	County
H	2	24 S	30 E		1980	NORTH	330	EAST	EDDY

9. Pool Information

10. Pool Name WC; 015 G-06 52330360 B.S.	11. Pool Code 96403
--	-------------------------------

Additional Well Information

12. Work Type New Well	13. Well Type Oil	14. Cable/Rotary	15. Lease Type State	16. Ground Level Elevation 3450
17. Multiple N	18. Proposed Depth 14,422	19. Formation 2nd Bone Spring Sand	20. Contractor	21. Spud Date 8/20/2014
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☒ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surface	17-1/2"	13-3/8"	48	780'	730	Surface
Int.	12-1/4"	9-5/8"	40	4,050'	980	Surface
Prod.	7-7/8"	5-1/2"	17	14,422'	1980	Surface

Casing/Cement Program: Additional Comments

--

22. Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Annular	5,000	2,500	Hydrill
Double Ram	5,000	5,000	Shaffer

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief.

I further certify that I have complied with 19.15.14.9 (A) NMAC ☐ and/or 19.15.14.9 (B) NMAC ☐ if applicable.

Signature: *Whitney McKee*

Printed name: Whitney McKee

Title: Engineering Assistant

E-mail Address: wbmckee@basspct.com

Date: 06/17/2014

Phone:

OIL CONSERVATION DIVISION

Approved By:

Title:

Approved Date: **7-28-14**

Expiration Date: **7-28-16**

Conditions of Approval Attached

DISTRICT IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone (505) 476-3480 Fax: (505) 476-3482

State of New Mexico
Energy, Minerals and Natural Resources Department

CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, New Mexico 87505

NM OIL CONSERVATION
ARTESIA DISTRICT

Form C-102
Revised August 1, 2011

Submit one copy to appropriate District Office

JUN 23 2014
RECEIVED

RECEIVED

WELL LOCATION AND ACREAGE DEDICATION PLAT

☐ AMENDED REPORT

API Number 30-015-42457	Pool Code 96403 97944	Pool Name WC; 015 G-06 WILDCAT (BONE SPRING)
Property Code 40065 313213	Property Name POKER LAKE UNIT CVX JV BS	Well Number 054H
OGRID No. 260737	Operator Name BOPCO, L.P.	Elevation 3450

Surface Location


UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
E	2	24 S	30 E		2500	NORTH	370	WEST	EDDY

Bottom Hole Location If Different From Surface


UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
H	2	24 S	30 E		1980'	NORTH	330	EAST	EDDY

Dedicated Acres	Joint or Infill	Consolidation Code	Order No.
160			

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

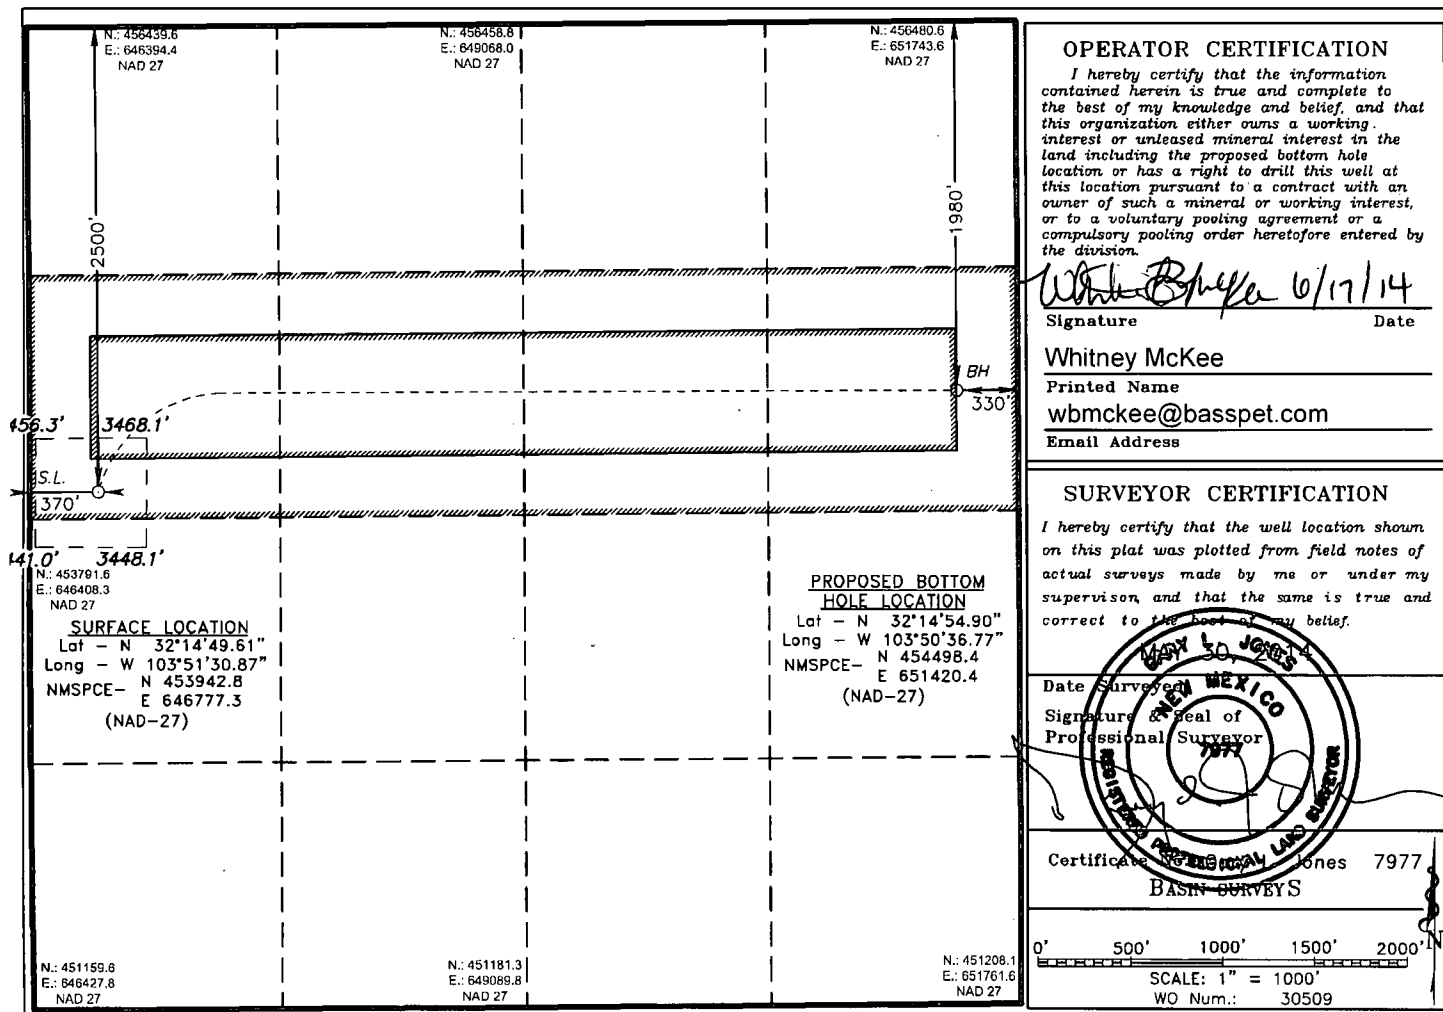


SECTION 2, TOWNSHIP 24 SOUTH, RANGE 30 EAST, N.M.P.M.,
EDDY COUNTY, NEW MEXICO.

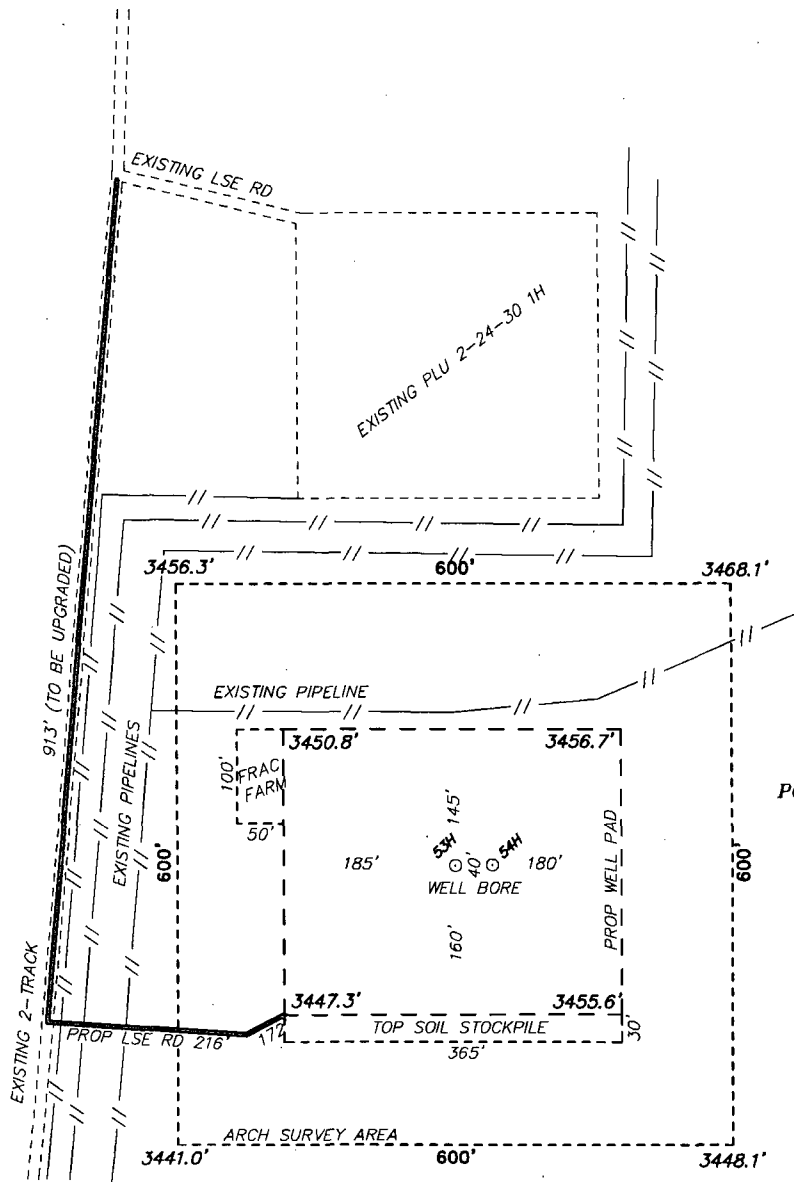

BOPCO, L.P.
POKER LAKE UNIT CVX JV BS 054H
ELEV. - 3450'
Lat - N 32°14'49.61"
Long - W 103°51'30.87"
NMSPCE- N 453942.8
E 646777.3
(NAD-27)

MALAGA, NM IS ±12 MILES TO THE WEST OF LOCATION.



Directions to Location:

FROM THE JUNCTION OF HWY 128 AND MOBLEY RANCH, GO SOUTH ON MOBLEY RANCH 0.6 MILES; CONTINUE SOUTH ON CALICHE ROAD FOR 4.7 MILES TO A "Y", CONTINUE SOUTH 1.3 MILES TO PROPOSED LEASE ROAD.

basin
surveys
focused on excellence
in the oilfield

P.O. Box 1786
1120 N. West County Rd.
Hobbs, New Mexico 88241
(575) 393-7316 - Office
(575) 392-2206 - Fax
basinsurveys.com

BOPCO, L.P.

REF: POKER LAKE UNIT CVX JV BS 054H / WELL PAD TOPO


THE POKER LAKE UNIT CVX JV BS 054H LOCATED 2500' FROM

THE NORTH LINE AND 370' FROM THE WEST LINE OF

SECTION 2, TOWNSHIP 24 SOUTH, RANGE 30 EAST,

N.M.P.M., EDDY COUNTY, NEW MEXICO.

SECTION 2, TOWNSHIP 24 SOUTH, RANGE 30 EAST, N.M.P.M.,
EDDY COUNTY, NEW MEXICO.

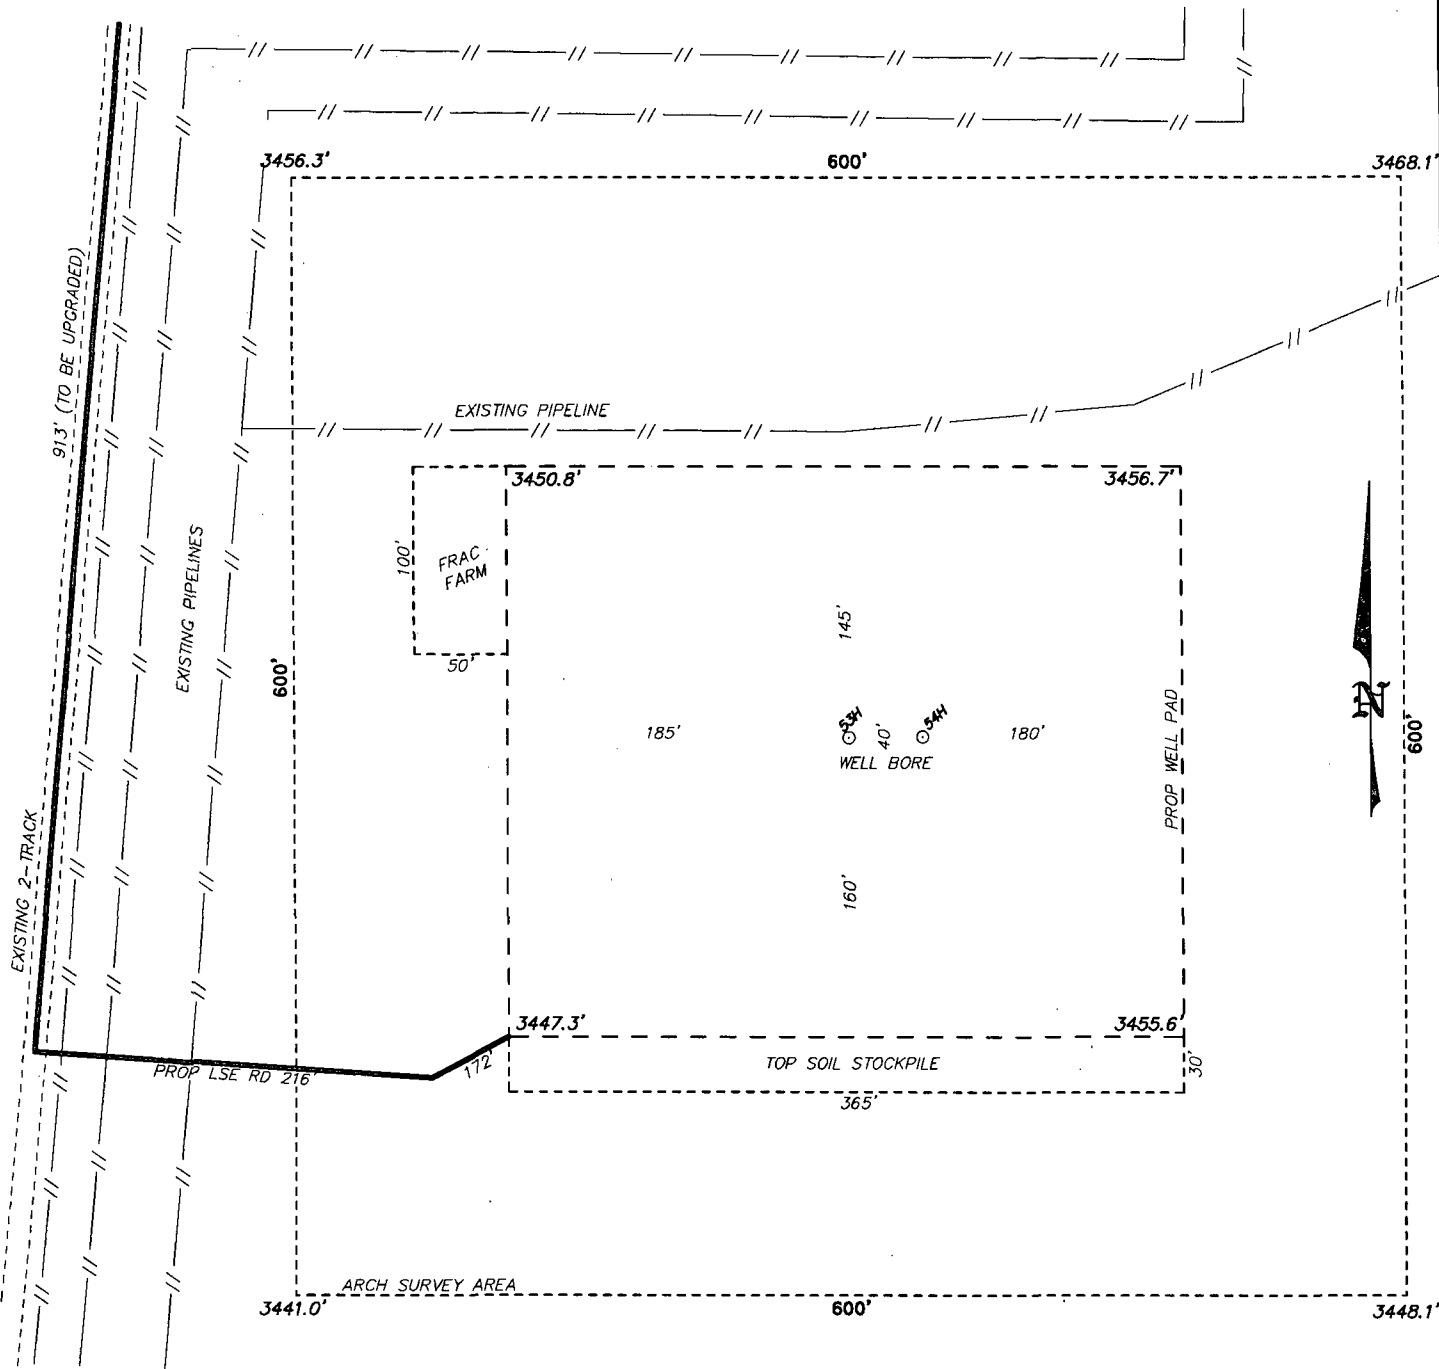

100 0 100 200 FEET
SCALE: 1" = 100'

BOPCO, L.P.


REF: POKER LAKE UNIT CVX JV BS 054H / WELL PAD TOPO

THE POKER LAKE UNIT CVX JV BS 054H LOCATED 2500' FROM
THE NORTH LINE AND 370' FROM THE WEST LINE OF
SECTION 2, TOWNSHIP 24 SOUTH, RANGE 30 EAST,
N.M.P.M., EDDY COUNTY, NEW MEXICO.

basin
surveys
focused on excellence
in the oilfield

P.O. Box 1786
1120 N. West County Rd.
Hobbs, New Mexico 88241
(575) 393-7316 - Office
(575) 392-2206 - Fax
basinsurveys.com

W.O. Number: 30509 Drawn By: K. NORRIS Date: 06-03-2014 Survey Date: 05-09-2014 Sheet 1 of 1 Sheets

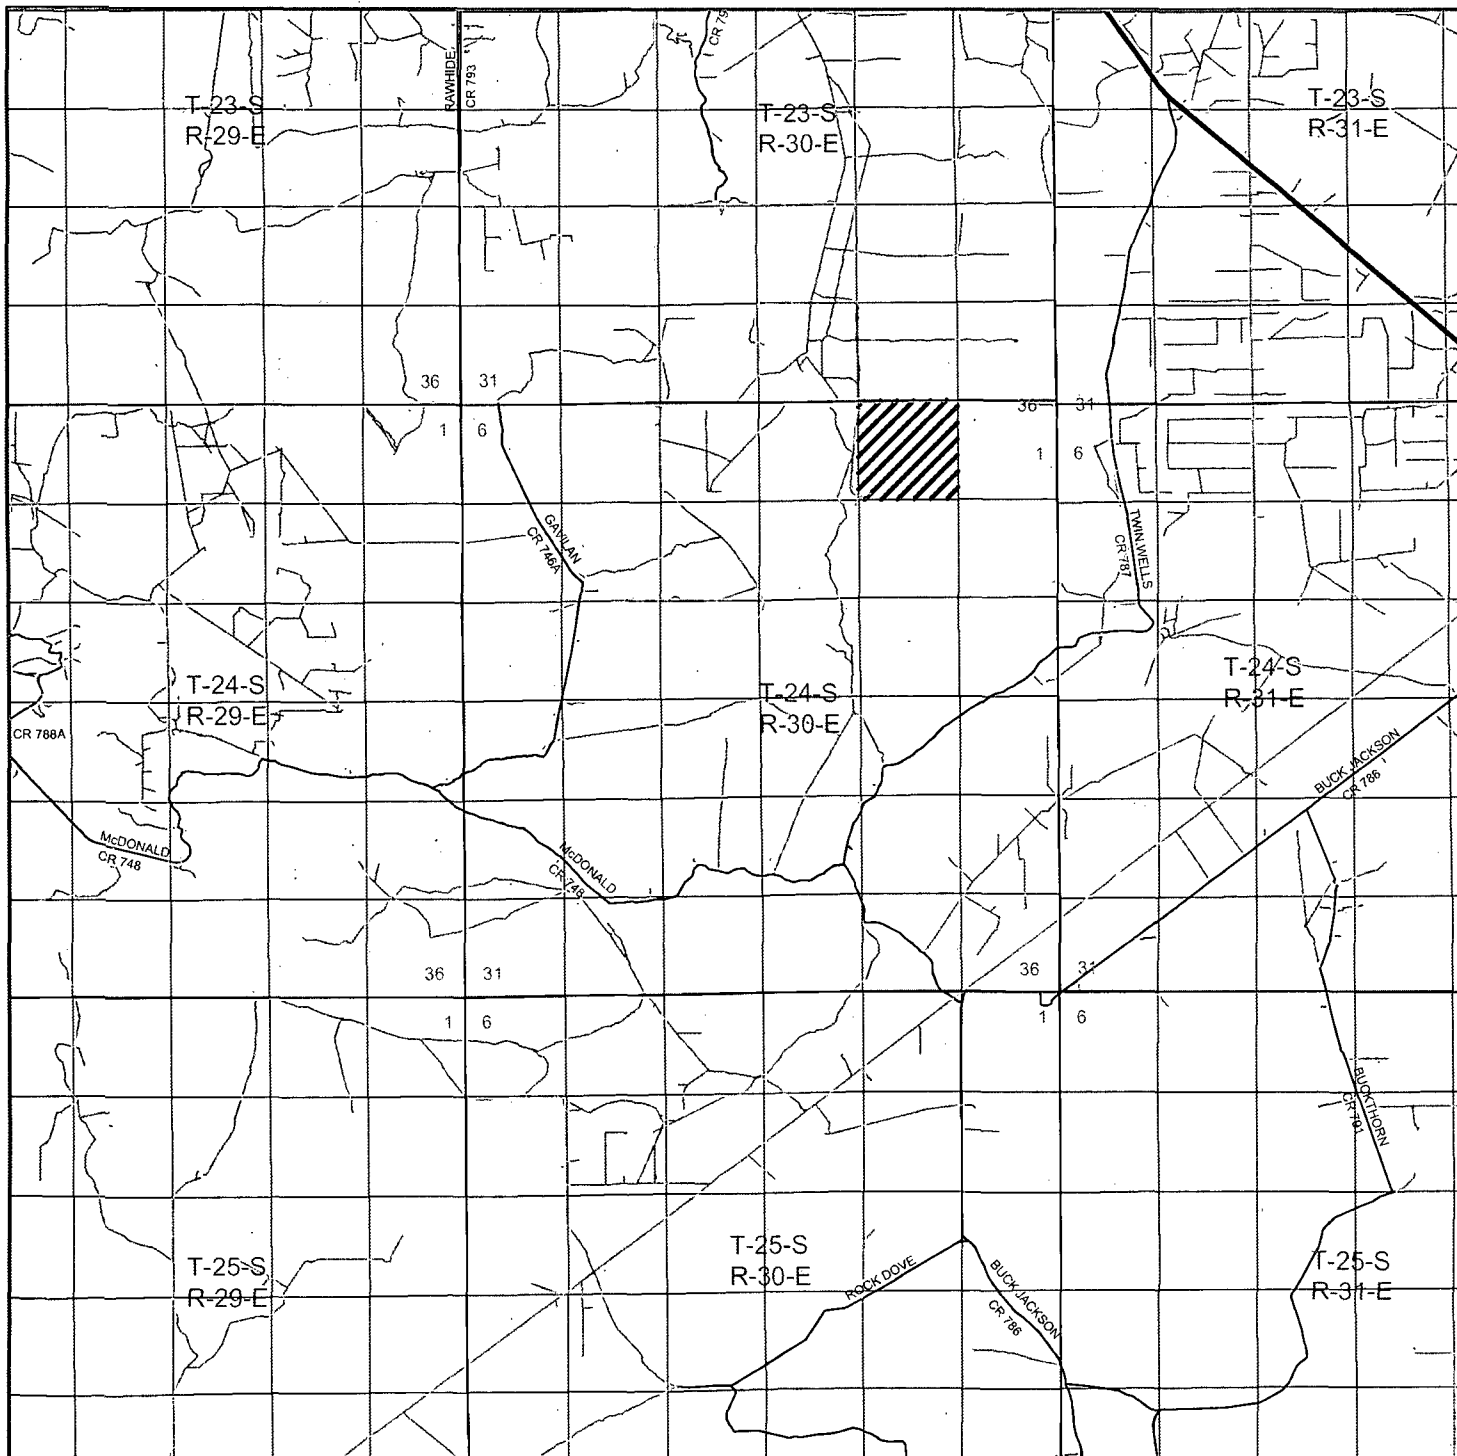

POKER LAKE UNIT CVX JV BS 054H

Located 2500' FNL and 370' FWL
 Section 2, Township 24 South, Range 30 East,
 N.M.P.M., Eddy County, New Mexico.

basin
surveys
 focused on excellence
 in the oilfield

P.O. Box 1786
 1120 N. West County Rd.
 Hobbs, New Mexico 88241
 (575) 393-7316 - Office
 (575) 392-2206 - Fax
 basinsurveys.com

0 1 MI 2 MI 3 MI 4 MI

SCALE: 1" = 2 MILES

W.O. Number: KAN 30509


Survey Date: 05-09-2014

YELLOW TINT - USA LAND
 BLUE TINT - STATE LAND
 NATURAL COLOR - FEE LAND



BOPCO, L.P.



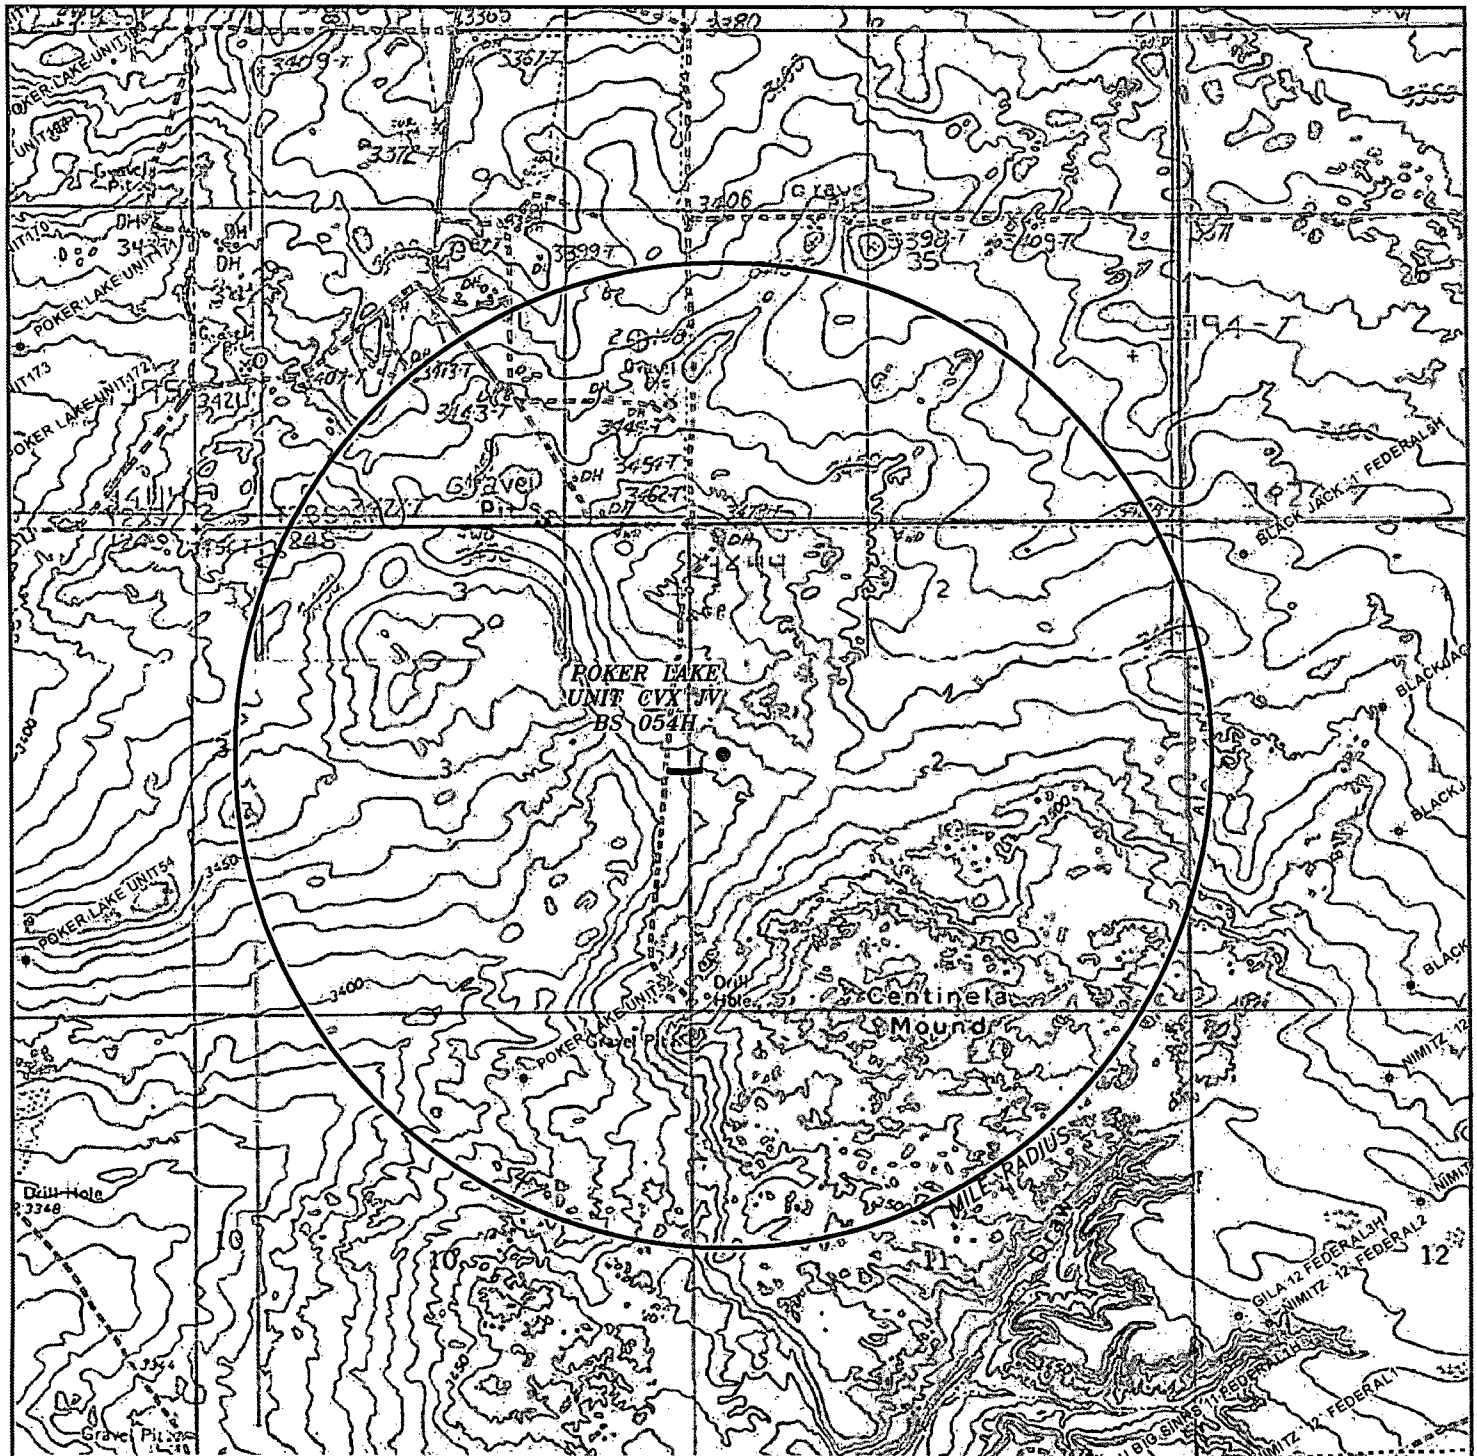

POKER LAKE UNIT CVX JV BS 054H

Located 2500' FNL and 370' FWL

Section 2, Township 24 South, Range 30 East,
N.M.P.M., Eddy County, New Mexico.

basin
surveys

focused on excellence
in the oilfield

P.O. Box 1786
1120 N. West County Rd.
Hobbs, New Mexico 88241
(575) 393-7316 - Office
(575) 392-2206 - Fax
basinsurveys.com

0' 1000' 2000' 3000' 4000'

SCALE: 1" = 2000'


W.O. Number: KAN 30509

Survey Date: 05-09-2014

YELLOW TINT - USA LAND
BLUE TINT - STATE LAND
NATURAL COLOR - FEE LAND



BOPCO, L.P.

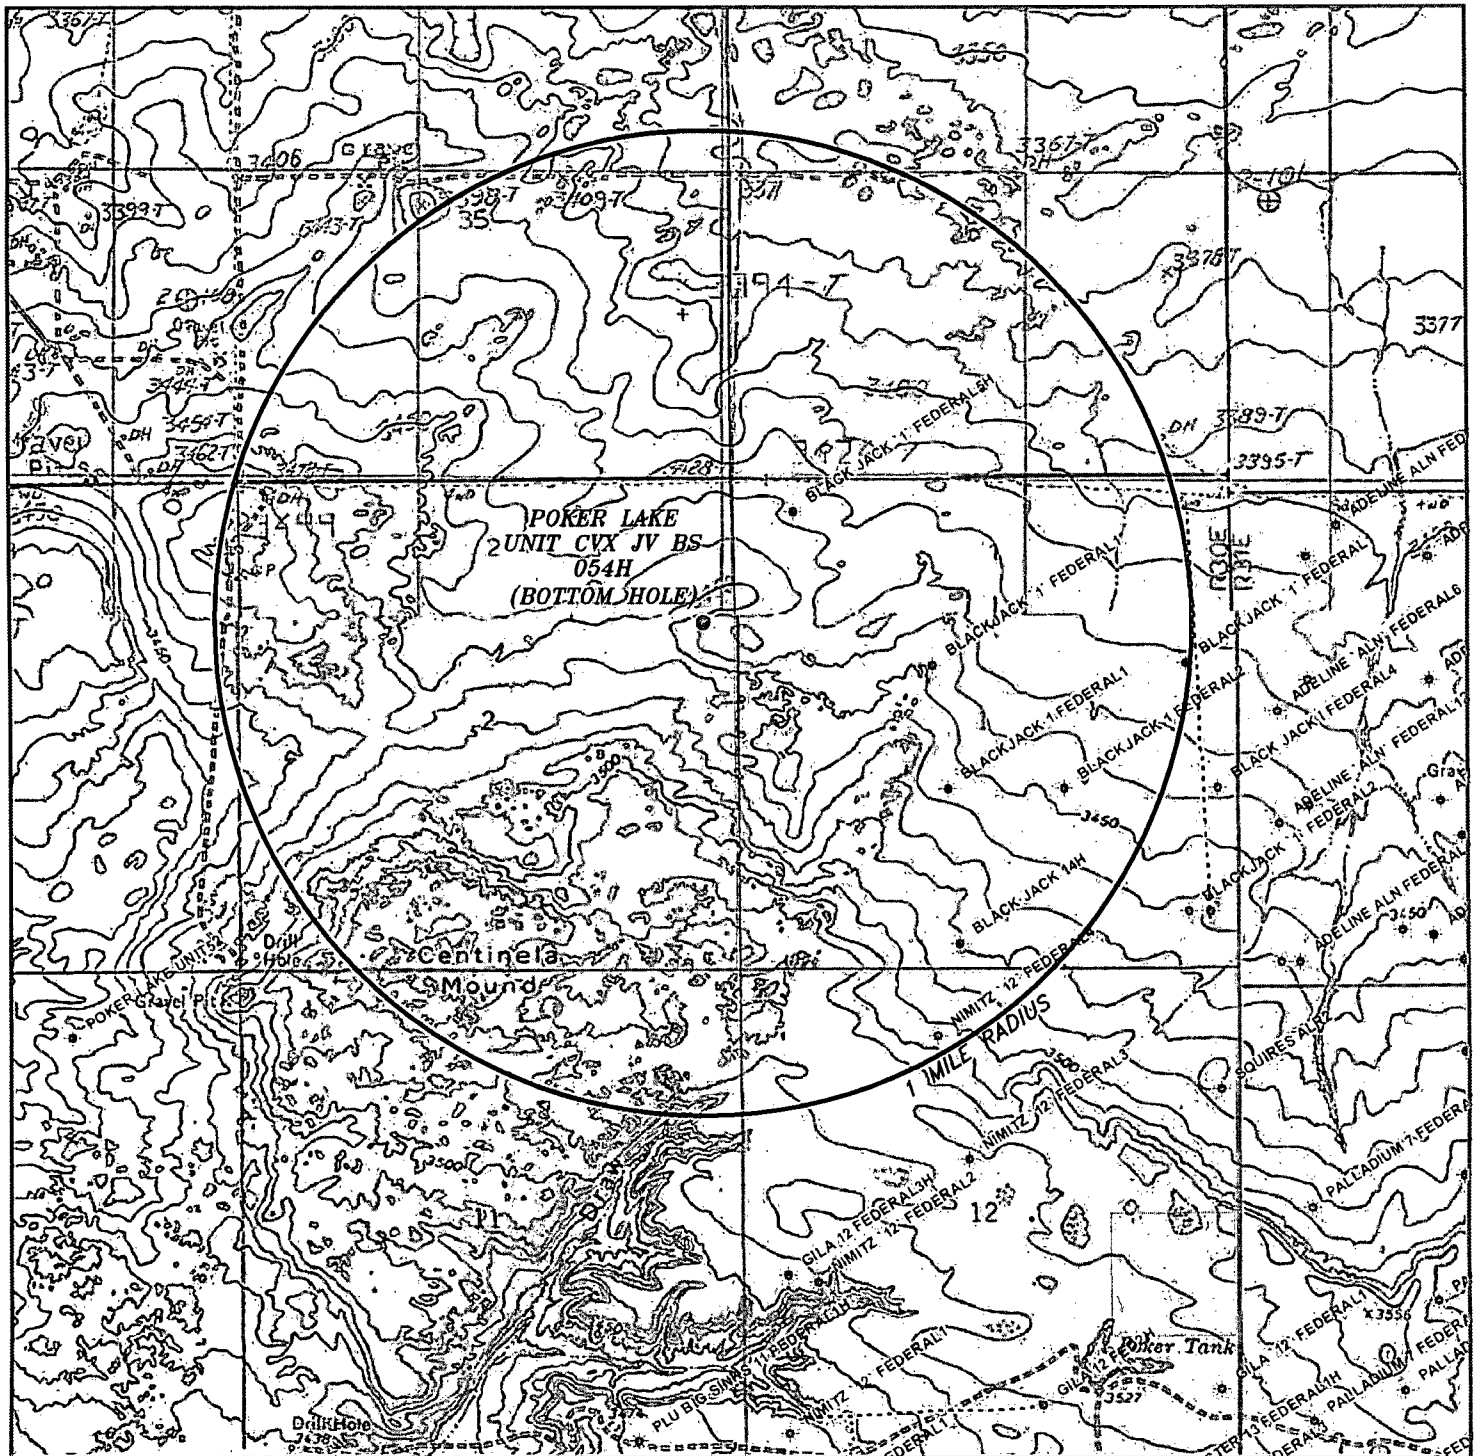

POKER LAKE UNIT CVX JV BS 054H (BOTTOM HOLE)

Located 1980' FNL and 330' FEL
 Section 2, Township 24 South, Range 30 East,
 N.M.P.M., Eddy County, New Mexico.

basin
surveys
 focused on excellence
 in the oilfield

P.O. Box 1786
 1120 N. West County Rd.
 Hobbs, New Mexico 88241
 (575) 393-7316 - Office
 (575) 392-2206 - Fax
 basinsurveys.com

0' 1000' 2000' 3000' 4000'

SCALE: 1" = 2000'


W.O. Number: KAN 30509

Survey Date: 05-09-2014

YELLOW TINT - USA LAND
 BLUE TINT - STATE LAND
 NATURAL COLOR - FEE LAND



BOPCO, L.P.

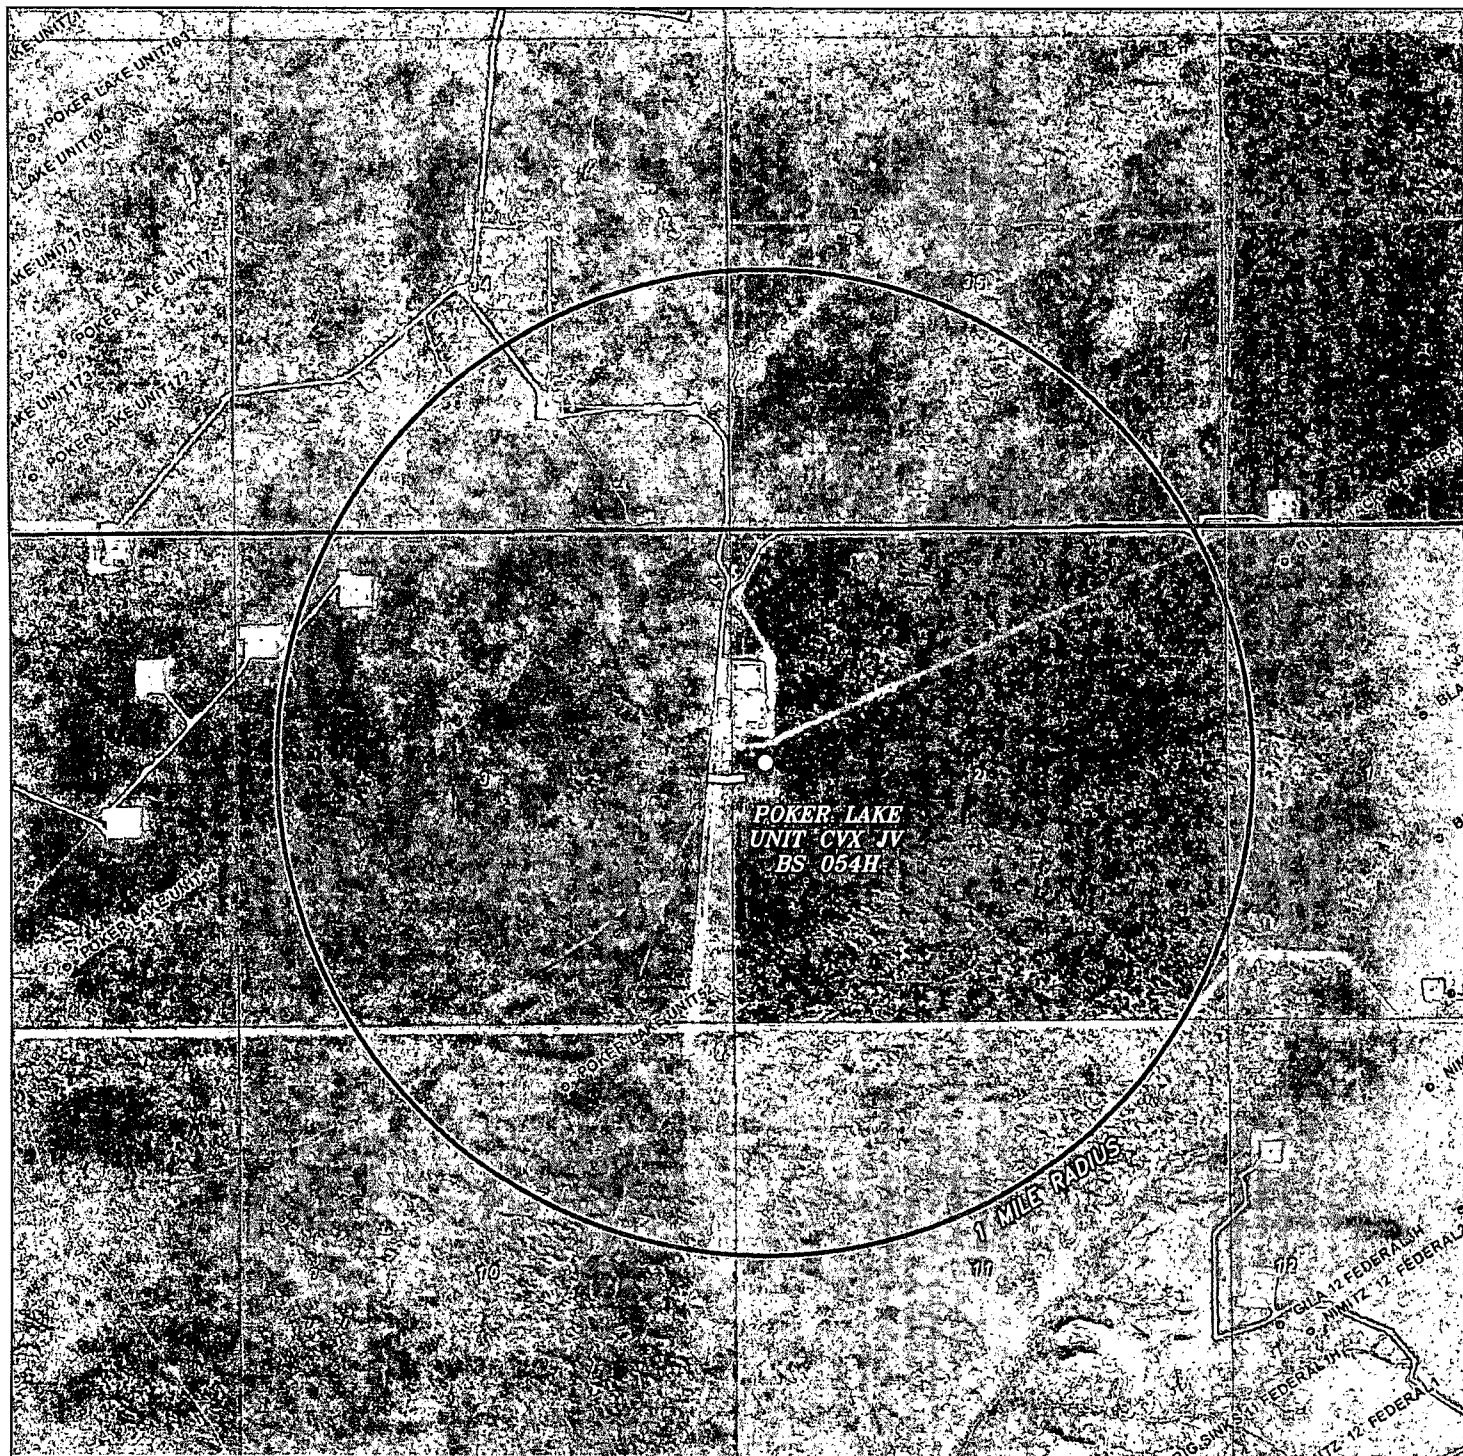

POKER LAKE UNIT CVX JV BS 054H

Located 2500' FNL and 370' FWL

Section 2, Township 24 South, Range 30 East,
N.M.P.M., Eddy County, New Mexico.



P.O. Box 1786
1120 N. West County Rd.
Hobbs, New Mexico 88241
(575) 393-7316 - Office
(575) 392-2206 - Fax
basinsurveys.com

0' 1000' 2000' 3000' 4000'
SCALE: 1" = 2000'


W.O. Number: KAN 30509

Survey Date: 05-09-2014

YELLOW TINT - USA LAND
BLUE TINT - STATE LAND
NATURAL COLOR - FEE LAND




BOPCO, L.P.

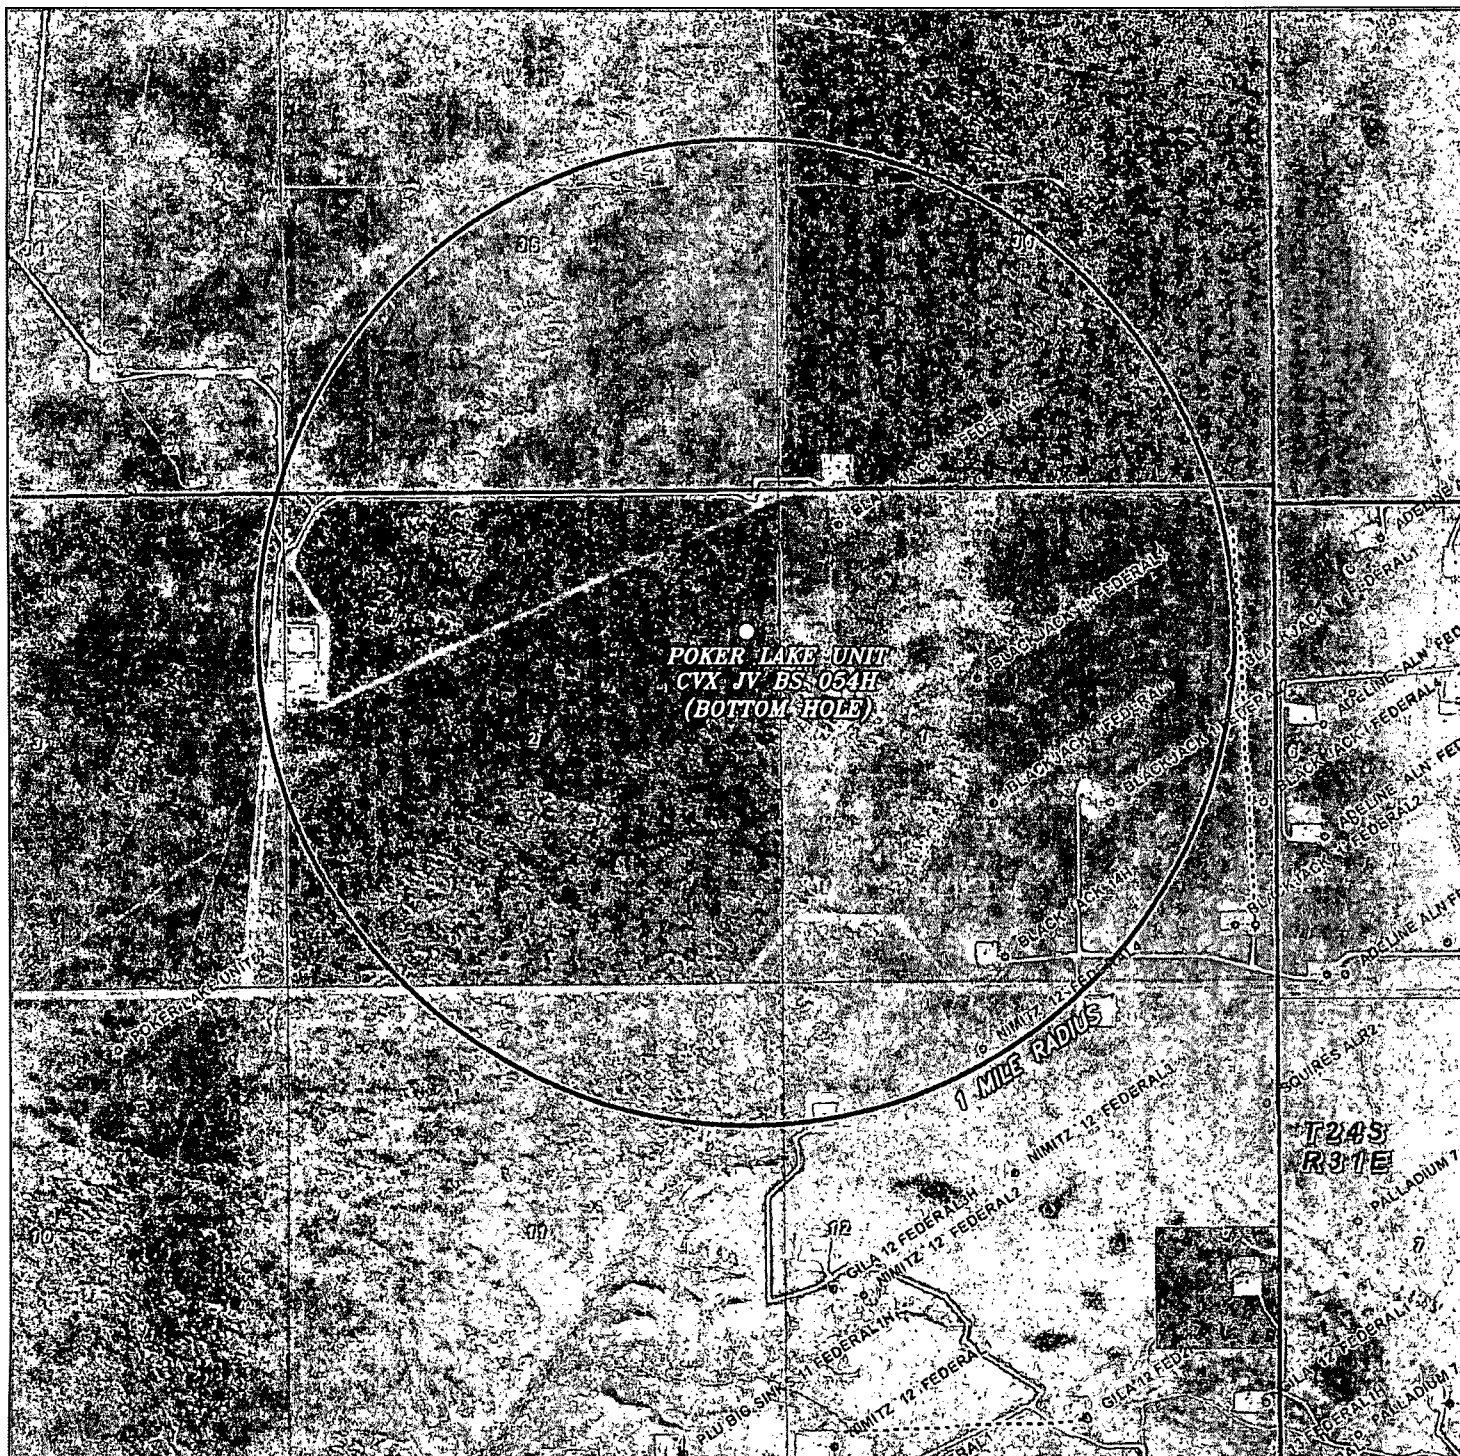

POKER LAKE UNIT CVX JV BS 054H (BOTTOM HOLE)

Located 1980' FNL and 330' FEL

Section 2, Township 24 South, Range 30 East,
N.M.P.M., Eddy County, New Mexico.



focused on excellence
in the oilfield

P.O. Box 1786
1120 N. West County Rd.
Hobbs, New Mexico 88241
(575) 393-7316 - Office
(575) 392-2206 - Fax
basinsurveys.com

0' 1000' 2000' 3000' 4000'

SCALE: 1" = 2000'

W.O. Number: KAN 30509

Survey Date: 05-09-2014

YELLOW TINT - USA LAND
BLUE TINT - STATE LAND
NATURAL COLOR - FEE LAND



BOPCO, L.P.

EXHIBIT "D"


RIG LAYOUT SCHEMATIC
INCLUSIVE OF CLOSED-LOOP DESIGN PLAN

SOLIDS CONTROL EQUIPMENT LEGEND

- | | |
|-----------------------------------|--------------------|
| 1) ROLL OFF BIN | 5) CENTRIFUGE |
| 2) STEEL TANK | 6) DEWATERING UNIT |
| 3) MUD CLEANER | 7) CATCH TANK |
| 4) SHAKER | 8) CHOKE MANIFOLD |
| A) BLEED LINE FROM CHOKE MANIFOLD | |

FLARE PIT 150' AWAY
FROM LOCATION IN H2S
AREA, 100' AWAY FROM
LOCATION OUTSIDE H2S

EDGE OF LOCATION W/BERM

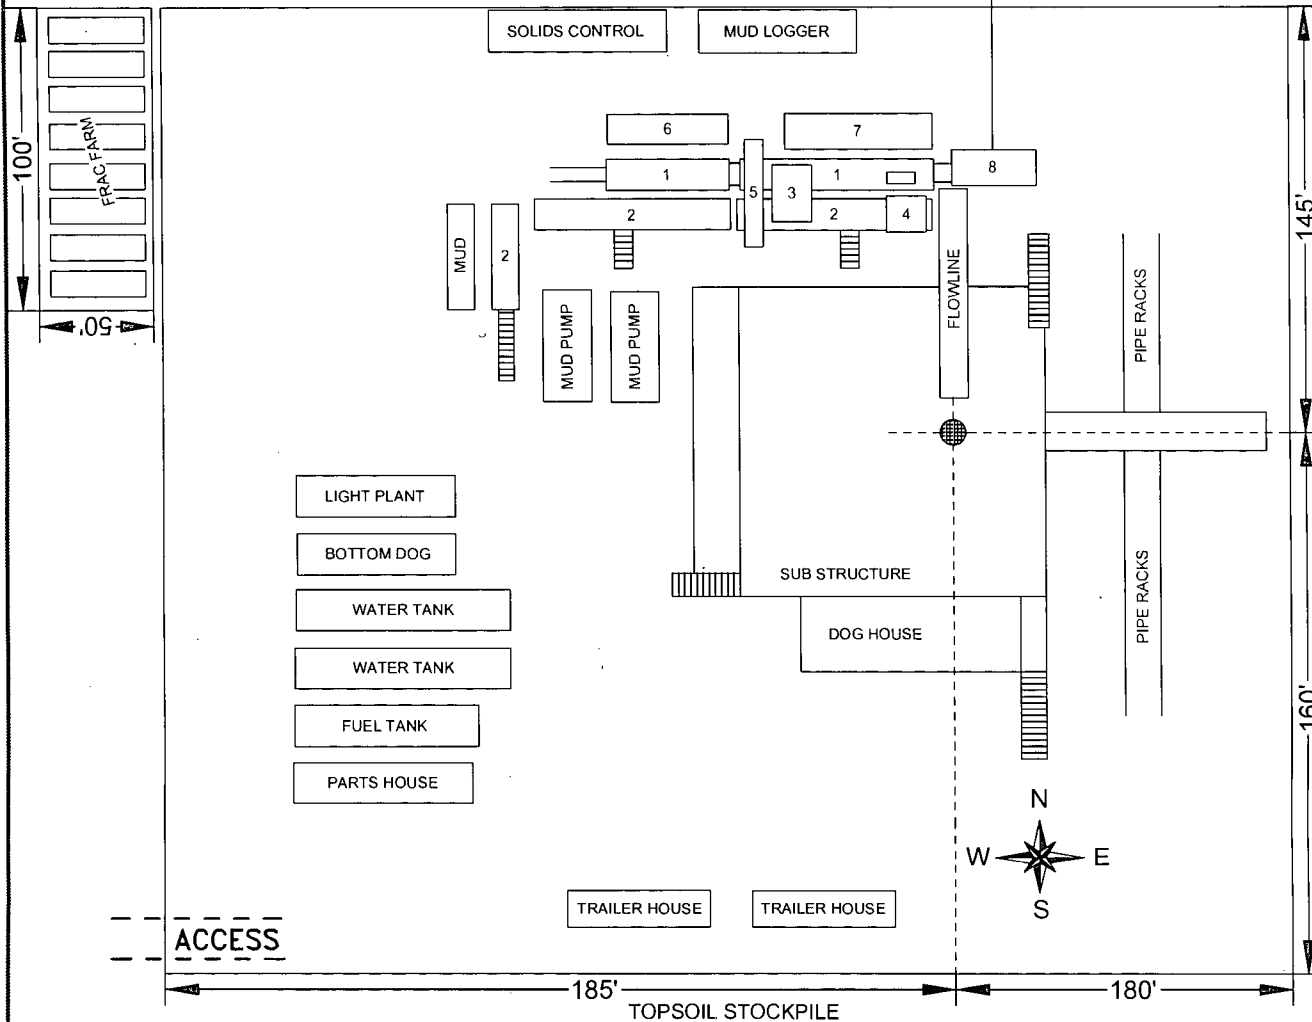

POKER LAKE UNIT CVX JV BS 054H

Located 2500' FNL and 370' FWL

Section 2, Township 24 South, Range 30 East,
N.M.P.M., Eddy County, New Mexico.

basin
surveys
focused on excellence
in the oilfield

P.O. Box 1786
1120 N. West County Rd.
Hobbs, New Mexico 88241
(575) 393-7316 - Office
(575) 392-2206 - Fax
basinsurveys.com

SCALE: NONE

W.O. Number: JMS 30508

Survey Date: 06-05-2014



BOPCO, L.P.





Project: Eddy County, NM (NAD27 NME)
Site: Poker Lake Unit CVX JV BS
Well: #054H
Wellbore: WB1
Design: Plan #1 06-13-14
Rig: Latshaw 14



PHOENIX
TECHNOLOGY SERVICES



Azimuths to Grid North
True North: -0.25
Magnetic North: 7.10
Magnetic Field
Strength: 48299.5nT
Dip Angle: 60.09
Date: 06/13/2014
Model: IGRF2010_14

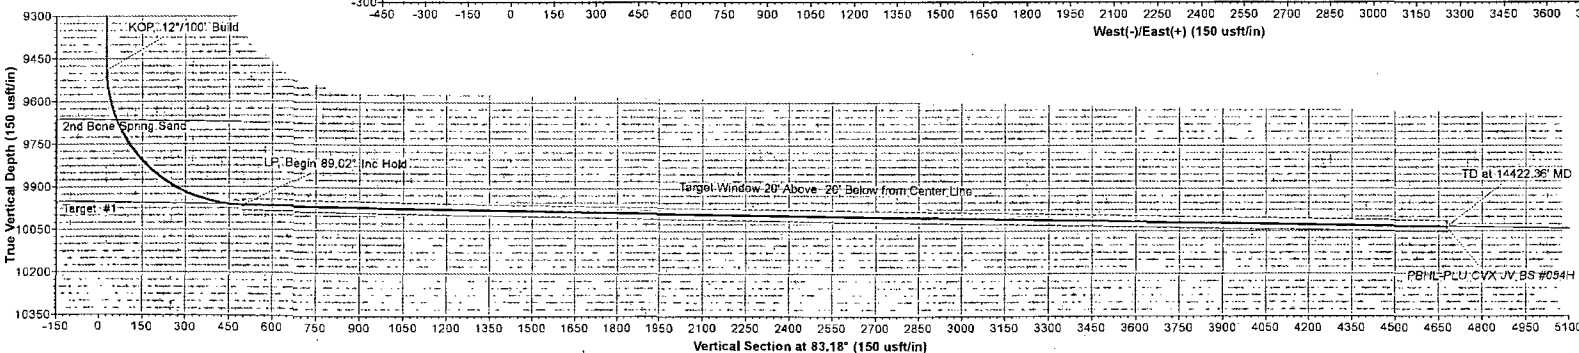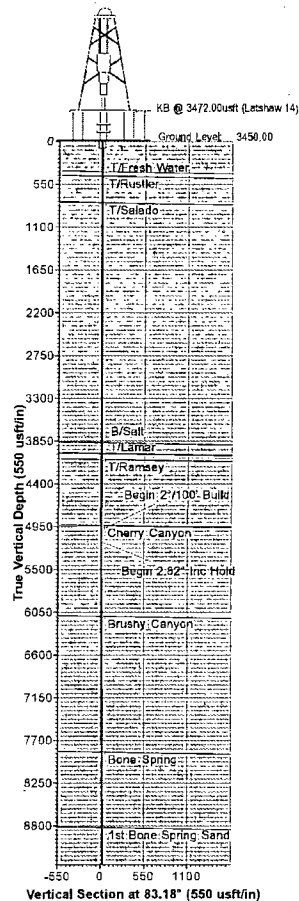

WELL DETAILS											
		+N-S	+E-W	North	Ground Level	3450.00			Latitude	Longitude	
		0.00	0.00	453942.80	Easting	646777.30			32° 14' 49.60854 N	103° 51' 39.86904 W	



SECTION DETAILS											
Sec	MD	Inc	Azi	TVD	+N-S	+E-W	Dleg	TFace	VSeet	Target	Annotation
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
2	5000.00	0.00	0.00	5000.00	0.00	0.00	0.00	0.00	0.00		Begin 2°/100' Build
3	5141.00	2.82	0.00	5140.94	3.47	0.00	2.00	0.00	0.41		Begin 2.82° Inc Hold
4	8465.47	2.82	0.00	8460.14	217.70	0.00	0.00	0.00	25.66		KOP: 12°/100' Build
5	10235.73	89.02	86.12	8965.39	272.37	465.88	12.00	86.17	495.73		LP: Begin 89.02° Inc Hold
6	14422.36	89.02	86.12	10037.00	555.60	4643.10	0.00	0.00	4678.22	PBHL-PLU CVX JV BS #054H	TD at 14422.36' MD

DESIGN TARGET DETAILS											
Name	TVD	+N-S	+E-W	North	Easting	Latitude	Longitude	Shape			
PBHL-PLU CVX JV BS #054H	10037.00	555.60	4643.10	454498.40	651420.40	32° 14' 54.90148 N	103° 50' 38.77517 W	Rectangle (Sides: L40.00 W80.00)			
- plan hits target center											


Map System: US State Plane 1927 (Exact solution)
Datum: NAD 1927 (NADCON CONUS)
Ellipsoid: Clarke 1866
Zone Name: New Mexico East 3001
Local Origin: Well #054H, Grid North
Latitude: 32° 14' 49.60854 N
Longitude: 103° 51' 30.86904 W
Grid East: 646777.30
Grid North: 453942.80
Scale Factor: 1.000
Geomagnetic Model: IGRF2010_14
Sample Date: 13-Jun-14
Magnetic Declination: 7.35°
Dip Angle from Horizontal: 60.09°
Magnetic Field Strength: 48300
To convert a Magnetic Direction to a Grid Direction, Add 7.10°
To convert a Magnetic Direction to a True Direction, Add 7.35° East
To convert a True Direction to a Grid Direction, Subtract 0.25°

FORMATION TOP DETAILS					
TVDPath	MDPath	Formation	DipAngle	DipDir	
401.00	401.00	T/Fresh Water	0.98	83.18	
459.00	459.00	T/Rustler	0.98	83.18	
801.00	801.00	T/Salado	0.98	83.18	
3884.00	3884.00	B/Salt	0.98	83.18	
4023.00	4023.00	T/Lamar	0.98	83.18	
4098.00	4098.00	T/Ramsey	0.98	83.18	
4949.00	4949.00	Cherry Canyon	0.98	83.18	
6117.10	6118.35	Brushy Canyon	0.98	83.18	
7865.28	7869.64	Bone Spring	0.98	83.18	
8838.38	8840.91	1st Bone Spring Sand	0.98	83.18	
9688.05	9678.13	2nd Bone Spring Sand	0.98	83.18	
15030.16	14022.30	Target #1	0.98	83.18	

LEGEND
--- #053H, WB1, Plan #3 06-13-14 V0
--- Plan #1 06-13-14

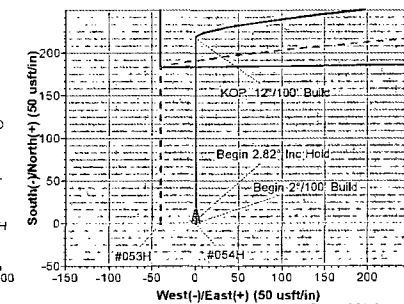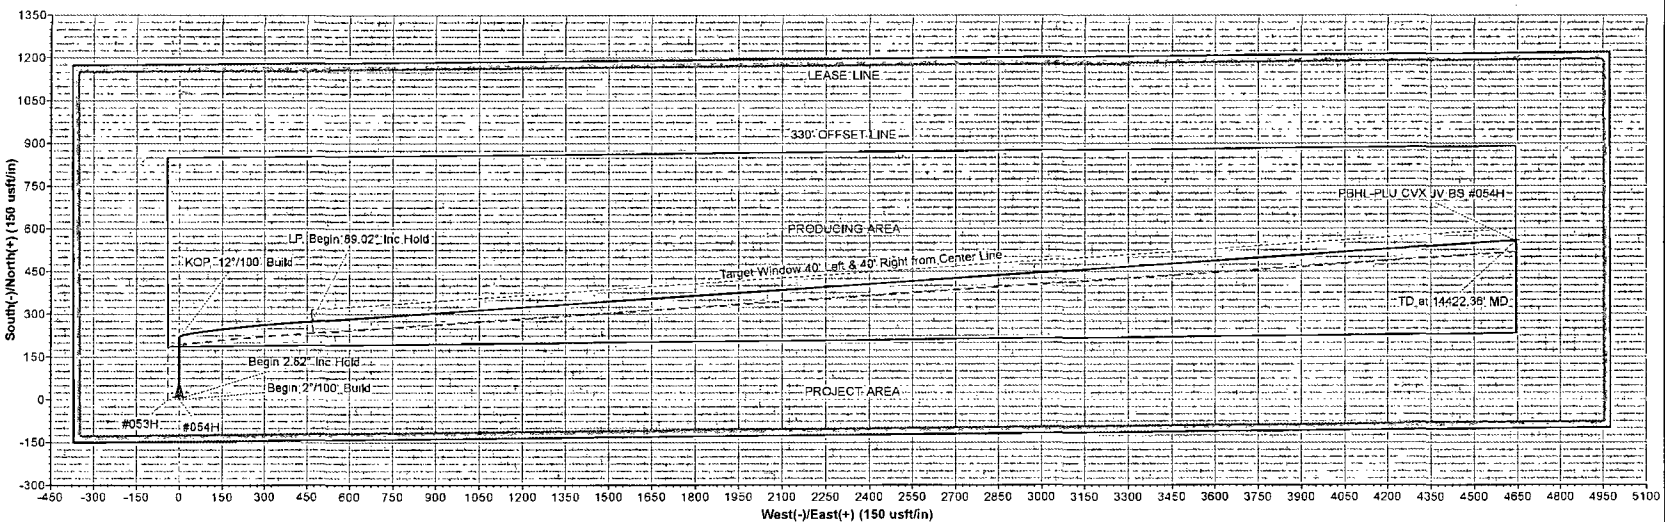

Created By: Julio Pila Date: 10-34 June 13 2014



BOPCO, L P

Eddy County, NM (NAD27 NME)

Poker Lake Unit CVX JV BS

#054H

WB1

Plan: Plan #1 06-13-14

Standard Planning Report

13 June, 2014





Phoenix Technology Services

Planning Report



Database:	GCR DB	Local Co-ordinate Reference:	Well #054H
Company:	BOPCO, L P	TVD Reference:	KB @ 3472.00usft (Latshaw 14)
Project:	Eddy County, NM (NAD27 NME)	MD Reference:	KB @ 3472.00usft (Latshaw 14)
Site:	Poker Lake Unit CVX JV BS	North Reference:	Grid
Well:	#054H	Survey Calculation Method:	Minimum Curvature
Wellbore:	WB1		
Design:	Plan #1 06-13-14		

Project	Eddy County, NM (NAD27 NME)		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site	Poker Lake Unit CVX JV BS		
Site Position:	Map	Northing:	424,489.10 usft
From:		Easting:	675,156.40 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "
		Latitude:	32° 9' 56.77628 N
		Longitude:	103° 46' 2.23055 W
		Grid Convergence:	0.30 °

Well	#054H		
Well Position	+N/-S	29,453.70 usft	Northing:
	+E/-W	-28,379.10 usft	Easting:
Position Uncertainty	0.00 usft	Wellhead Elevation:	Ground Level:
			3,450.00 usft

Wellbore	WB1		
Magnetics	Model Name	Sample Date	Declination
			(°)
	IGRF2010_14	06/13/14	7.35
			Dip Angle
			(°)
			Field Strength
			(nT)
			48,300

Design	Plan #1 06-13-14		
Audit Notes:			
Version:	Phase:	PLAN	Tie On Depth:
			0.00
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W
	(usft)	(usft)	(usft)
	0.00	0.00	0.00
			Direction
			(°)
			83.18

Plan Sections										
Measured Depth	Inclination	Azimuth	Vertical Depth	+N/-S	+E/-W	Dogleg Rate	Build Rate	Turn Rate	TFO	Target
(usft)	(°)	(°)	(usft)	(usft)	(usft)	(°/100usft)	(°/100usft)	(°/100usft)	(°)	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
5,000.00	0.00	0.00	5,000.00	0.00	0.00	0.00	0.00	0.00	0.00	
5,141.00	2.82	0.00	5,140.94	3.47	0.00	2.00	2.00	0.00	0.00	
9,495.47	2.82	0.00	9,490.14	217.70	0.00	0.00	0.00	0.00	0.00	
10,235.73	89.02	86.12	9,965.39	272.37	466.68	12.00	11.64	11.63	86.17	
14,422.36	89.02	86.12	10,037.00	555.60	4,643.10	0.00	0.00	0.00	0.00	PBHL-PLU CVX JV B



Phoenix Technology Services

Planning Report



Database:	GCR DB	Local Co-ordinate Reference:	Well #054H
Company:	BOPCO, LP	TVD Reference:	KB @ 3472.00usft (Latshaw 14)
Project:	Eddy County, NM (NAD27 NME)	MD Reference:	KB @ 3472.00usft (Latshaw 14)
Site:	Poker Lake Unit CVX JV BS	North Reference:	Grid
Well:	#054H	Survey Calculation Method:	Minimum Curvature
Wellbore:	WB1		
Design:	Plan #1 06-13-14		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
401.00	0.00	0.00	401.00	0.00	0.00	0.00	0.00	0.00	0.00
T/Fresh Water									
459.00	0.00	0.00	459.00	0.00	0.00	0.00	0.00	0.00	0.00
T/Rustler									
801.00	0.00	0.00	801.00	0.00	0.00	0.00	0.00	0.00	0.00
T/Salado									
3,884.00	0.00	0.00	3,884.00	0.00	0.00	0.00	0.00	0.00	0.00
B/Salt									
4,023.00	0.00	0.00	4,023.00	0.00	0.00	0.00	0.00	0.00	0.00
T/Lamar									
4,099.00	0.00	0.00	4,099.00	0.00	0.00	0.00	0.00	0.00	0.00
T/Ramsey									
4,949.00	0.00	0.00	4,949.00	0.00	0.00	0.00	0.00	0.00	0.00
Cherry Canyon									
5,000.00	0.00	0.00	5,000.00	0.00	0.00	0.00	0.00	0.00	0.00
Begin 2°/100' Build									
5,100.00	2.00	0.00	5,099.98	1.75	0.00	0.21	2.00	2.00	0.00
5,141.00	2.82	0.00	5,140.94	3.47	0.00	0.41	2.00	2.00	0.00
Begin 2.82° Inc Hold									
5,200.00	2.82	0.00	5,199.87	6.37	0.00	0.76	0.00	0.00	0.00
5,300.00	2.82	0.00	5,299.75	11.29	0.00	1.34	0.00	0.00	0.00
5,400.00	2.82	0.00	5,399.63	16.21	0.00	1.93	0.00	0.00	0.00
5,500.00	2.82	0.00	5,499.51	21.13	0.00	2.51	0.00	0.00	0.00
5,600.00	2.82	0.00	5,599.39	26.05	0.00	3.10	0.00	0.00	0.00
5,700.00	2.82	0.00	5,699.27	30.97	0.00	3.68	0.00	0.00	0.00
5,800.00	2.82	0.00	5,799.15	35.89	0.00	4.26	0.00	0.00	0.00
5,900.00	2.82	0.00	5,899.02	40.81	0.00	4.85	0.00	0.00	0.00
6,000.00	2.82	0.00	5,998.90	45.73	0.00	5.43	0.00	0.00	0.00
6,100.00	2.82	0.00	6,098.78	50.65	0.00	6.02	0.00	0.00	0.00
6,118.35	2.82	0.00	6,117.10	51.55	0.00	6.12	0.00	0.00	0.00
Brushy Canyon									
6,200.00	2.82	0.00	6,198.66	55.57	0.00	6.60	0.00	0.00	0.00
6,300.00	2.82	0.00	6,298.54	60.49	0.00	7.19	0.00	0.00	0.00
6,400.00	2.82	0.00	6,398.42	65.41	0.00	7.77	0.00	0.00	0.00
6,500.00	2.82	0.00	6,498.30	70.33	0.00	8.36	0.00	0.00	0.00
6,600.00	2.82	0.00	6,598.18	75.25	0.00	8.94	0.00	0.00	0.00
6,700.00	2.82	0.00	6,698.06	80.17	0.00	9.52	0.00	0.00	0.00
6,800.00	2.82	0.00	6,797.93	85.09	0.00	10.11	0.00	0.00	0.00
6,900.00	2.82	0.00	6,897.81	90.01	0.00	10.69	0.00	0.00	0.00
7,000.00	2.82	0.00	6,997.69	94.93	0.00	11.28	0.00	0.00	0.00
7,100.00	2.82	0.00	7,097.57	99.85	0.00	11.86	0.00	0.00	0.00
7,200.00	2.82	0.00	7,197.45	104.77	0.00	12.45	0.00	0.00	0.00
7,300.00	2.82	0.00	7,297.33	109.69	0.00	13.03	0.00	0.00	0.00
7,400.00	2.82	0.00	7,397.21	114.61	0.00	13.62	0.00	0.00	0.00
7,500.00	2.82	0.00	7,497.09	119.53	0.00	14.20	0.00	0.00	0.00
7,600.00	2.82	0.00	7,596.97	124.45	0.00	14.79	0.00	0.00	0.00
7,700.00	2.82	0.00	7,696.84	129.37	0.00	15.37	0.00	0.00	0.00
7,800.00	2.82	0.00	7,796.72	134.29	0.00	15.95	0.00	0.00	0.00
7,868.64	2.82	0.00	7,865.28	137.66	0.00	16.36	0.00	0.00	0.00
Bone Spring									
7,900.00	2.82	0.00	7,896.60	139.21	0.00	16.54	0.00	0.00	0.00
8,000.00	2.82	0.00	7,996.48	144.13	0.00	17.12	0.00	0.00	0.00



Phoenix Technology Services Planning Report



Database:	GCR DB	Local Co-ordinate Reference:	Well #054H
Company:	BOPCO, LP	TVD Reference:	KB @ 3472.00usft (Latshaw 14)
Project:	Eddy County, NM (NAD27 NME)	MD Reference:	KB @ 3472.00usft (Latshaw 14)
Site:	Poker Lake Unit CVX JV BS	North Reference:	Grid
Well:	#054H	Survey Calculation Method:	Minimum Curvature
Wellbore:	WB1		
Design:	Plan #1 06-13-14		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,100.00	2.82	0.00	8,096.36	149.05	0.00	17.71	0.00	0.00	0.00
8,200.00	2.82	0.00	8,196.24	153.97	0.00	18.29	0.00	0.00	0.00
8,300.00	2.82	0.00	8,296.12	158.89	0.00	18.88	0.00	0.00	0.00
8,400.00	2.82	0.00	8,396.00	163.81	0.00	19.46	0.00	0.00	0.00
8,500.00	2.82	0.00	8,495.88	168.73	0.00	20.05	0.00	0.00	0.00
8,600.00	2.82	0.00	8,595.75	173.65	0.00	20.63	0.00	0.00	0.00
8,700.00	2.82	0.00	8,695.63	178.57	0.00	21.21	0.00	0.00	0.00
8,800.00	2.82	0.00	8,795.51	183.49	0.00	21.80	0.00	0.00	0.00
8,840.91	2.82	0.00	8,836.38	185.50	0.00	22.04	0.00	0.00	0.00
1st Bone Spring Sand									
8,900.00	2.82	0.00	8,895.39	188.41	0.00	22.38	0.00	0.00	0.00
9,000.00	2.82	0.00	8,995.27	193.33	0.00	22.97	0.00	0.00	0.00
9,100.00	2.82	0.00	9,095.15	198.25	0.00	23.55	0.00	0.00	0.00
9,200.00	2.82	0.00	9,195.03	203.17	0.00	24.14	0.00	0.00	0.00
9,300.00	2.82	0.00	9,294.91	208.09	0.00	24.72	0.00	0.00	0.00
9,400.00	2.82	0.00	9,394.79	213.01	0.00	25.31	0.00	0.00	0.00
9,495.47	2.82	0.00	9,490.14	217.70	0.00	25.86	0.00	0.00	0.00
KOP, 12°/100' Build									
9,500.00	2.91	10.75	9,494.66	217.93	0.02	25.91	11.99	1.92	237.30
9,600.00	13.03	73.91	9,593.67	223.56	11.37	37.85	12.00	10.13	63.16
9,678.13	22.28	79.28	9,668.05	228.77	34.44	61.37	12.00	11.83	6.87
2nd Bone Spring Sand									
9,700.00	24.88	80.09	9,688.09	230.34	43.04	70.10	12.00	11.91	3.69
9,800.00	36.82	82.40	9,773.79	237.95	93.66	121.26	12.00	11.94	2.32
9,900.00	48.79	83.70	9,847.02	246.06	161.00	189.09	12.00	11.97	1.30
10,000.00	60.77	84.59	9,904.58	254.33	242.12	270.62	12.00	11.98	0.89
10,100.00	72.75	85.29	9,943.97	262.39	333.49	362.30	12.00	11.98	0.70
10,200.00	84.74	85.91	9,963.45	269.89	431.10	460.11	12.00	11.98	0.61
10,235.73	89.02	86.12	9,965.39	272.37	466.68	495.73	12.00	11.98	0.59
LP, Begin 89.02° Inc Hold									
10,300.00	89.02	86.12	9,966.49	276.72	530.79	559.91	0.00	0.00	0.00
10,400.00	89.02	86.12	9,968.20	283.48	630.55	659.76	0.00	0.00	0.00
10,500.00	89.02	86.12	9,969.91	290.25	730.31	759.62	0.00	0.00	0.00
10,600.00	89.02	86.12	9,971.62	297.01	830.06	859.47	0.00	0.00	0.00
10,700.00	89.02	86.12	9,973.34	303.78	929.82	959.32	0.00	0.00	0.00
10,800.00	89.02	86.12	9,975.05	310.54	1,029.57	1,059.18	0.00	0.00	0.00
10,900.00	89.02	86.12	9,976.76	317.31	1,129.33	1,159.03	0.00	0.00	0.00
11,000.00	89.02	86.12	9,978.47	324.07	1,229.09	1,258.88	0.00	0.00	0.00
11,100.00	89.02	86.12	9,980.18	330.84	1,328.84	1,358.74	0.00	0.00	0.00
11,200.00	89.02	86.12	9,981.89	337.60	1,428.60	1,458.59	0.00	0.00	0.00
11,300.00	89.02	86.12	9,983.60	344.37	1,528.36	1,558.44	0.00	0.00	0.00
11,400.00	89.02	86.12	9,985.31	351.13	1,628.11	1,658.30	0.00	0.00	0.00
11,500.00	89.02	86.12	9,987.02	357.90	1,727.87	1,758.15	0.00	0.00	0.00
11,600.00	89.02	86.12	9,988.73	364.66	1,827.62	1,858.00	0.00	0.00	0.00
11,700.00	89.02	86.12	9,990.44	371.43	1,927.38	1,957.86	0.00	0.00	0.00
11,800.00	89.02	86.12	9,992.15	378.19	2,027.14	2,057.71	0.00	0.00	0.00
11,900.00	89.02	86.12	9,993.86	384.96	2,126.89	2,157.56	0.00	0.00	0.00
12,000.00	89.02	86.12	9,995.57	391.72	2,226.65	2,257.42	0.00	0.00	0.00
12,100.00	89.02	86.12	9,997.28	398.49	2,326.41	2,357.27	0.00	0.00	0.00
12,200.00	89.02	86.12	9,998.99	405.25	2,426.16	2,457.12	0.00	0.00	0.00
12,300.00	89.02	86.12	10,000.70	412.02	2,525.92	2,556.98	0.00	0.00	0.00
12,400.00	89.02	86.12	10,002.41	418.78	2,625.67	2,656.83	0.00	0.00	0.00
12,500.00	89.02	86.12	10,004.12	425.55	2,725.43	2,756.69	0.00	0.00	0.00



Phoenix Technology Services

Planning Report



Database:	GCR DB	Local Co-ordinate Reference:	Well #054H
Company:	BOPCO, LP	TVD Reference:	KB @ 3472.00usft (Latshaw 14)
Project:	Eddy County, NM (NAD27 NME)	MD Reference:	KB @ 3472.00usft (Latshaw 14)
Site:	Poker Lake Unit CVX JV BS	North Reference:	Grid
Well:	#054H	Survey Calculation Method:	Minimum Curvature
Wellbore:	WB1		
Design:	Plan #1 06-13-14		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
12,600.00	89.02	86.12	10,005.83	432.31	2,825.19	2,856.54	0.00	0.00	0.00
12,700.00	89.02	86.12	10,007.54	439.08	2,924.94	2,956.39	0.00	0.00	0.00
12,800.00	89.02	86.12	10,009.25	445.84	3,024.70	3,056.25	0.00	0.00	0.00
12,900.00	89.02	86.12	10,010.96	452.61	3,124.46	3,156.10	0.00	0.00	0.00
13,000.00	89.02	86.12	10,012.67	459.38	3,224.21	3,255.95	0.00	0.00	0.00
13,100.00	89.02	86.12	10,014.38	466.14	3,323.97	3,355.81	0.00	0.00	0.00
13,200.00	89.02	86.12	10,016.09	472.91	3,423.72	3,455.66	0.00	0.00	0.00
13,300.00	89.02	86.12	10,017.80	479.67	3,523.48	3,555.51	0.00	0.00	0.00
13,400.00	89.02	86.12	10,019.51	486.44	3,623.24	3,655.37	0.00	0.00	0.00
13,500.00	89.02	86.12	10,021.22	493.20	3,722.99	3,755.22	0.00	0.00	0.00
13,600.00	89.02	86.12	10,022.94	499.97	3,822.75	3,855.07	0.00	0.00	0.00
13,700.00	89.02	86.12	10,024.65	506.73	3,922.51	3,954.93	0.00	0.00	0.00
13,800.00	89.02	86.12	10,026.36	513.50	4,022.26	4,054.78	0.00	0.00	0.00
13,900.00	89.02	86.12	10,028.07	520.26	4,122.02	4,154.63	0.00	0.00	0.00
14,000.00	89.02	86.12	10,029.78	527.03	4,221.77	4,254.49	0.00	0.00	0.00
14,022.30	89.02	86.12	10,030.16	528.54	4,244.02	4,276.76	0.00	0.00	0.00
Target #1									
14,100.00	89.02	86.12	10,031.49	533.79	4,321.53	4,354.34	0.00	0.00	0.00
14,200.00	89.02	86.12	10,033.20	540.56	4,421.29	4,454.19	0.00	0.00	0.00
14,300.00	89.02	86.12	10,034.91	547.32	4,521.04	4,554.05	0.00	0.00	0.00
14,400.00	89.02	86.12	10,036.62	554.09	4,620.80	4,653.90	0.00	0.00	0.00
14,422.36	89.02	86.12	10,037.00	555.60	4,643.10	4,676.22	0.00	0.00	0.00
TD at 14422.36' MD - PBHL-PLU CVX JV BS #054H									

Design Targets

Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
- hit/miss target									
- Shape									
PBHL-PLU CVX JV BS #1	-89.03	86.12	10,037.00	555.60	4,643.10	454,498.40	651,420.40	32° 14' 54.90148 N	103° 50' 36.77517 W
- plan hits target center									
- Rectangle (sides W80.00 H40.00 D4,186.63)									

Formations

Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
401.00	401.00	T/Fresh Water		0.98	83.18
459.00	459.00	T/Rustler		0.98	83.18
801.00	801.00	T/Salado		0.98	83.18
3,884.00	3,884.00	B/Salt		0.98	83.18
4,023.00	4,023.00	T/Lamar		0.98	83.18
4,099.00	4,099.00	T/Ramsey		0.98	83.18
4,949.00	4,949.00	Cherry Canyon		0.98	83.18
6,118.35	6,117.10	Brushy Canyon		0.98	83.18
7,868.64	7,865.28	Bone Spring		0.98	83.18
8,840.91	8,836.38	1st Bone Spring Sand		0.98	83.18
9,678.13	9,668.05	2nd Bone Spring Sand		0.98	83.18
14,022.30	10,030.16	Target #1		0.98	83.18




Phoenix Technology Services
Planning Report




Database:	GCR DB	Local Co-ordinate Reference:	Well #054H
Company:	BOPCO, LP	TVD Reference:	KB @ 3472.00usft (Latshaw 14)
Project:	Eddy County, NM (NAD27 NME)	MD Reference:	KB @ 3472.00usft (Latshaw 14)
Site:	Poker Lake Unit CVX JV BS	North Reference:	Grid
Well:	#054H	Survey Calculation Method:	Minimum Curvature
Wellbore:	WB1		
Design:	Plan #1 06-13-14		

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
5,000.00	5,000.00	0.00	0.00	Begin 2°/100' Build
5,141.00	5,140.94	3.47	0.00	Begin 2.82° Inc Hold
9,495.47	9,490.14	217.70	0.00	KOP, 12°/100' Build
10,235.73	9,965.39	272.37	466.68	LP, Begin 89.02° Inc Hold
14,422.36	10,037.00	555.60	4,643.10	TD at 14422.36' MD

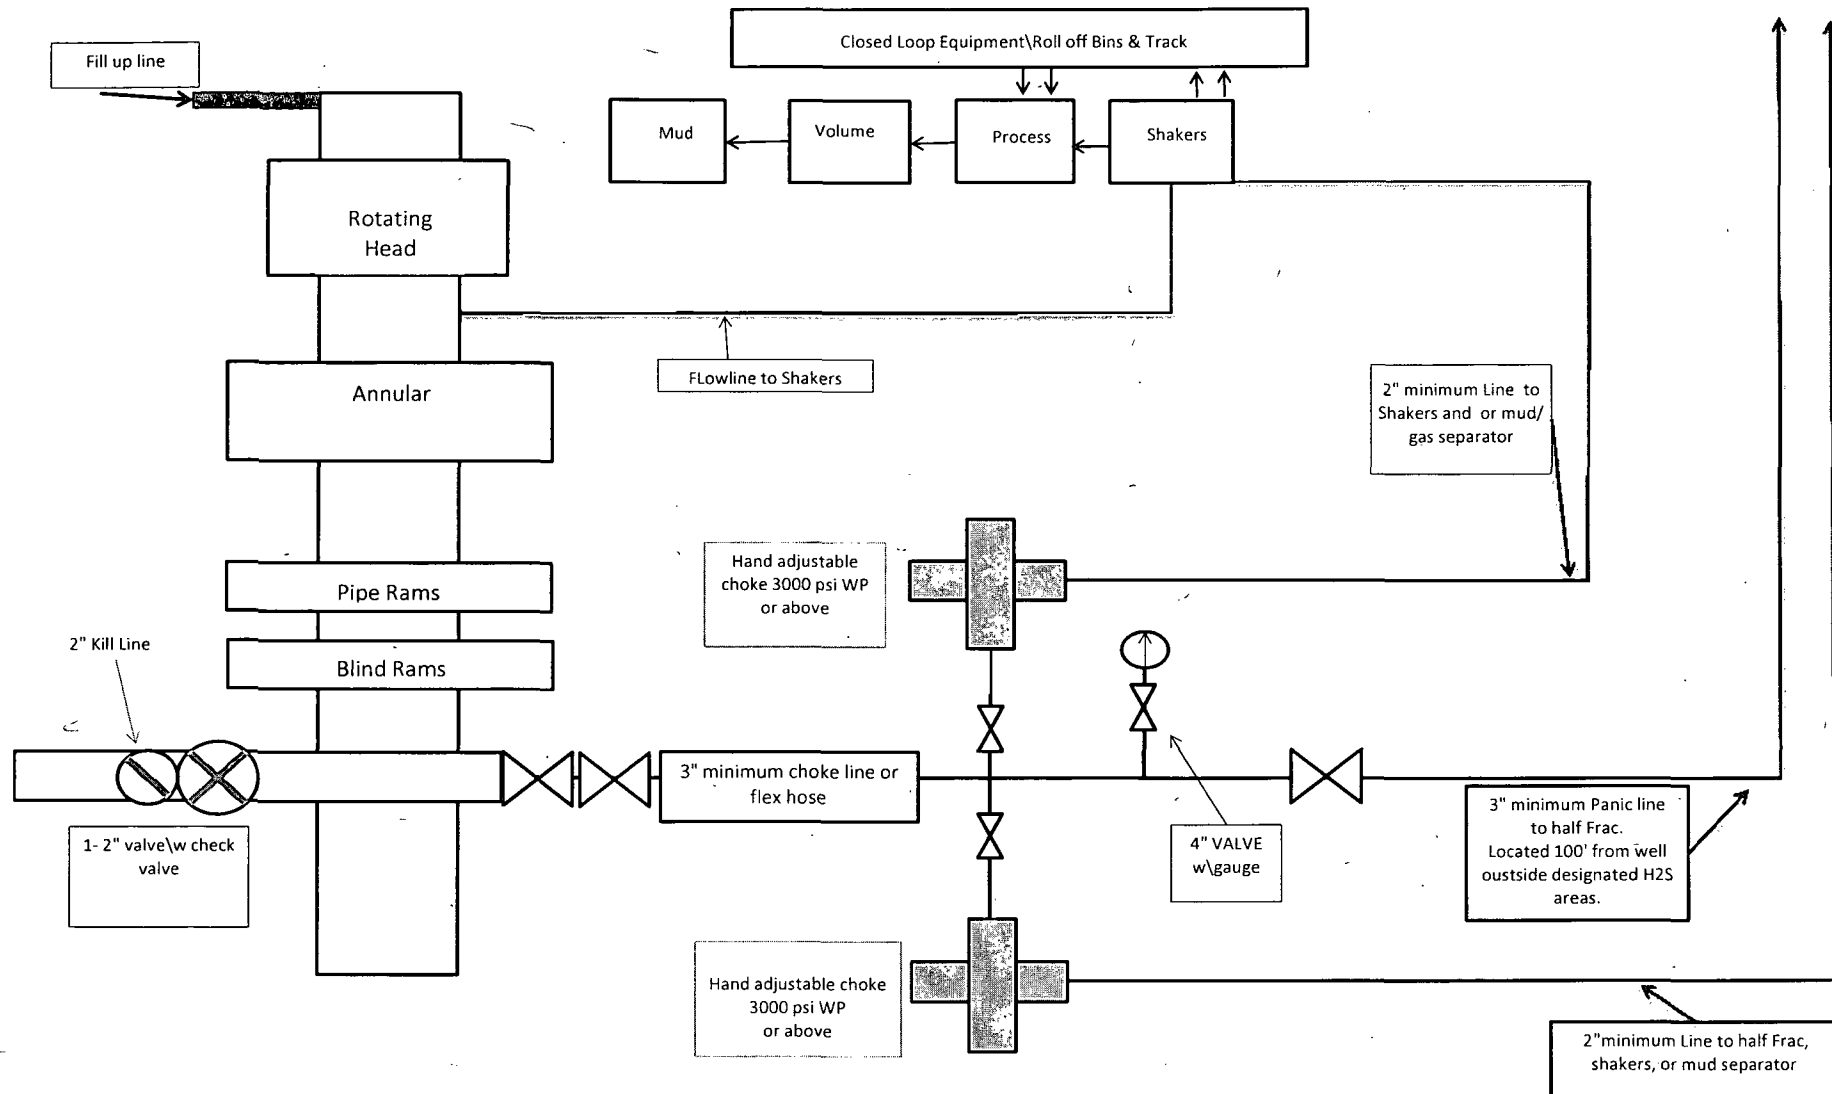


13-5/8" X 3-M BOPE (2 Rams and Rotating Head) & Closed Loop System Equipment Schematic Diagram A

Note: all valves & lines on choke manifold are 3" unless otherwise noted. Exact manifold configuration may vary.

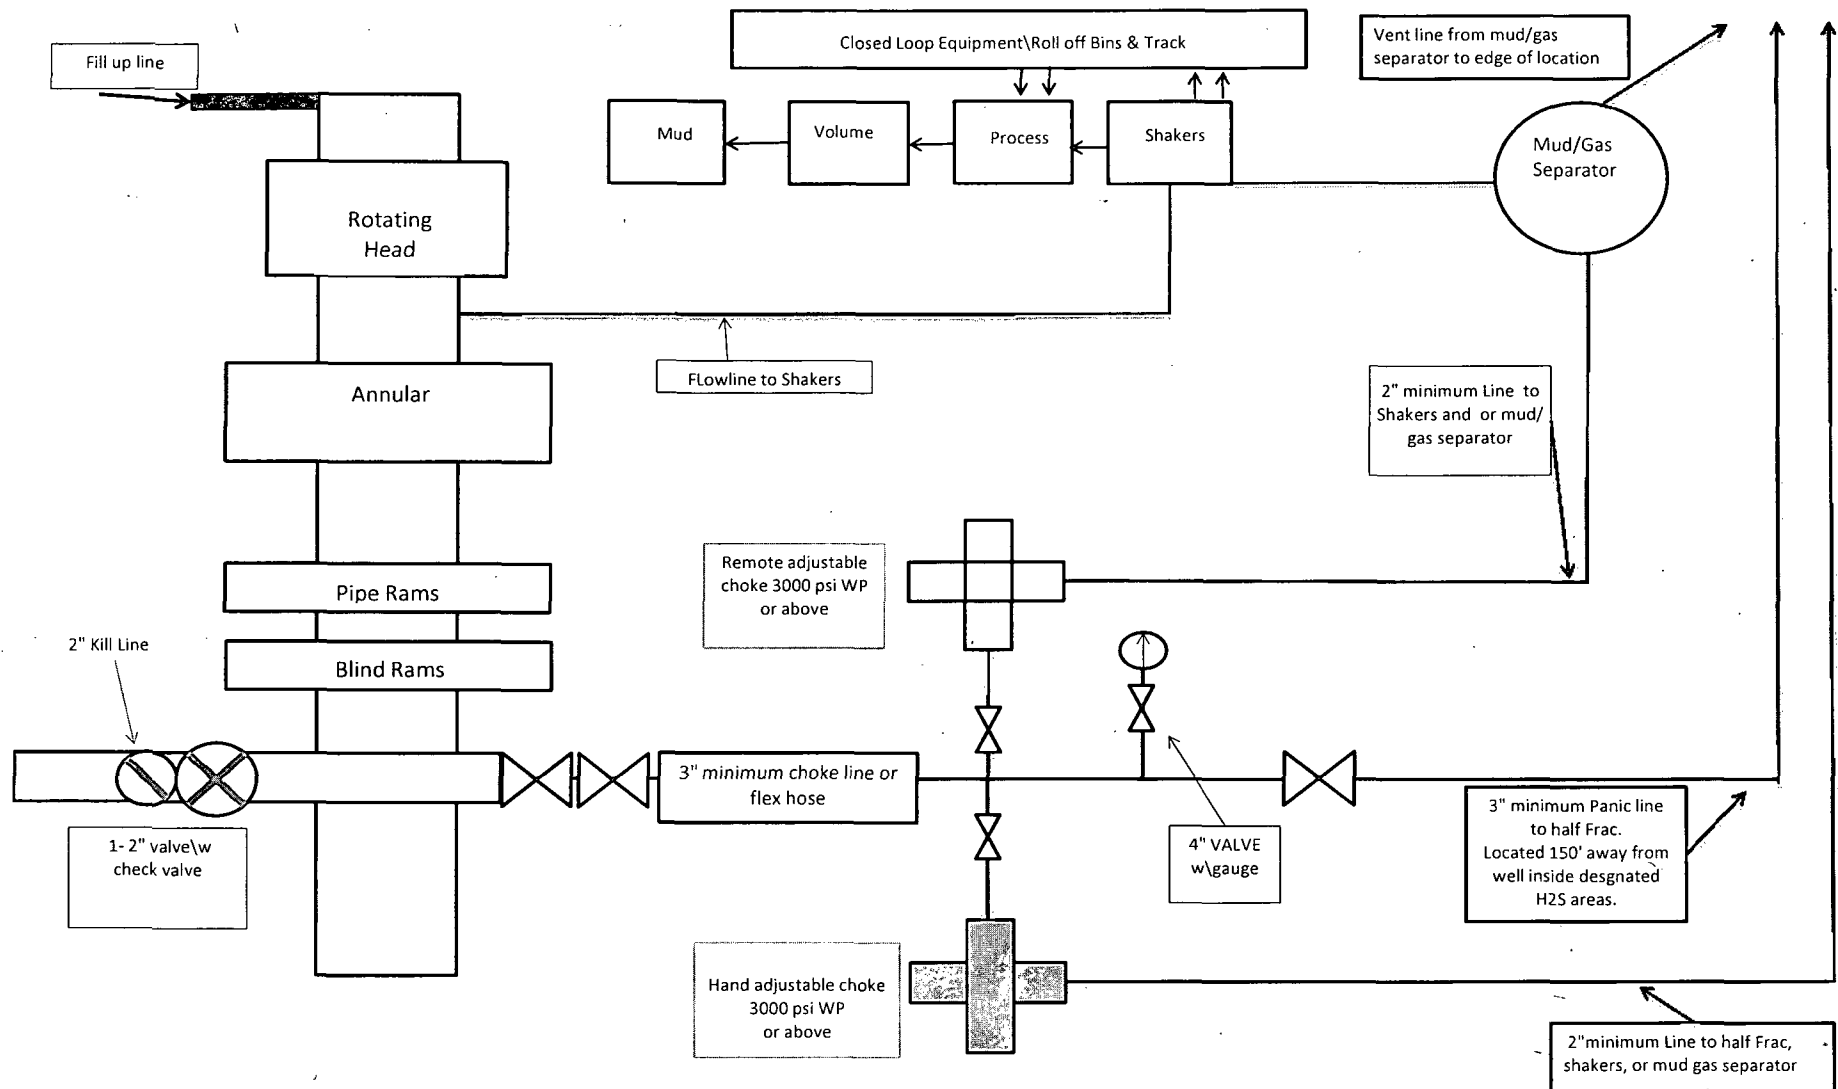

**13-5/8" X 3-M BOPE (2 Rams and Rotating Head) &
Closed Loop System Equipment Schematic
H2S contingency
Diagram B**

Note: all valves & lines on choke manifold are 3" unless otherwise noted. Exact manifold configuration may vary.

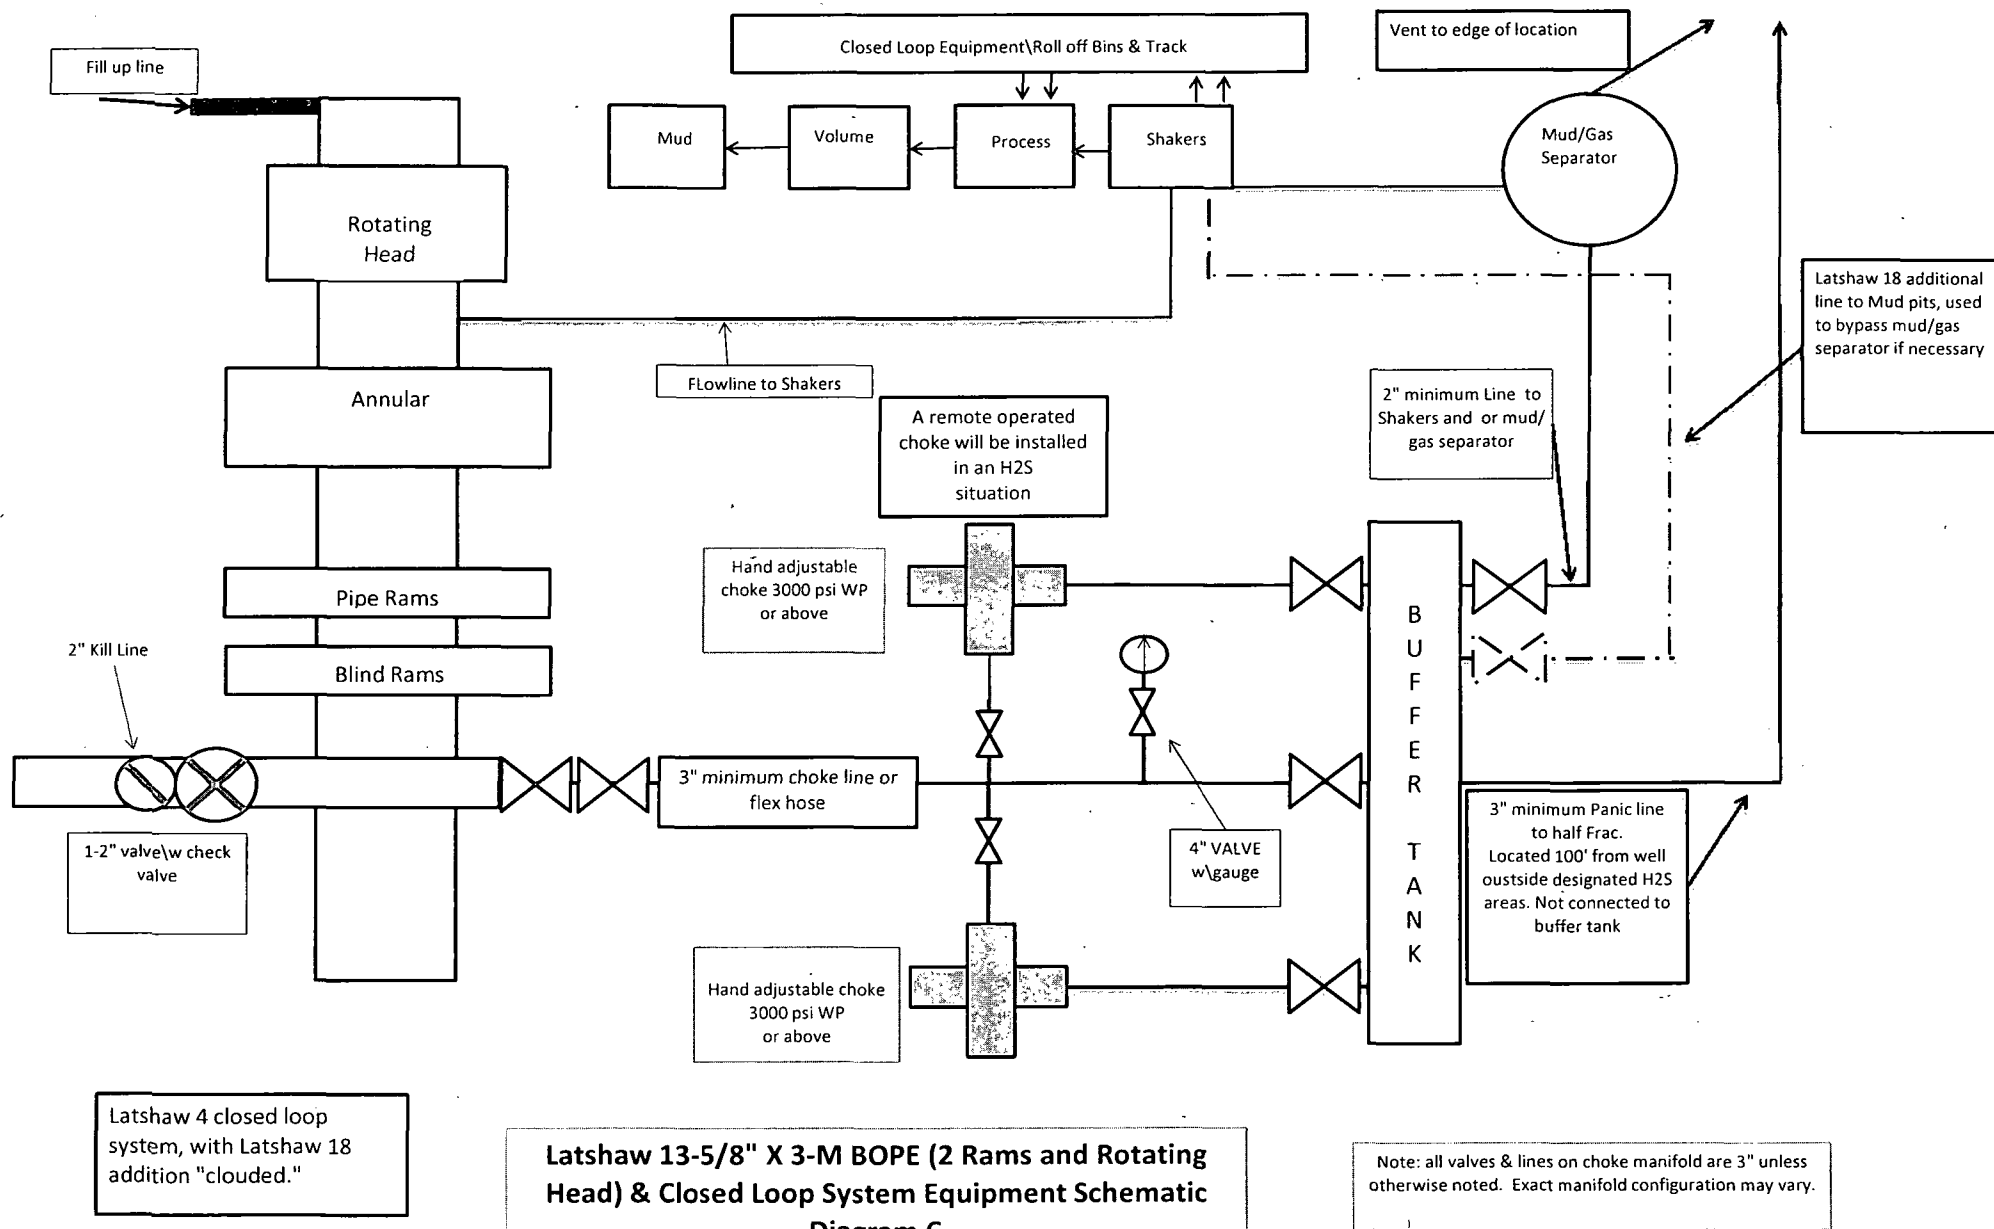

Note: Dimensional information reflected on this drawing are estimated measurements only.






Diagram Z

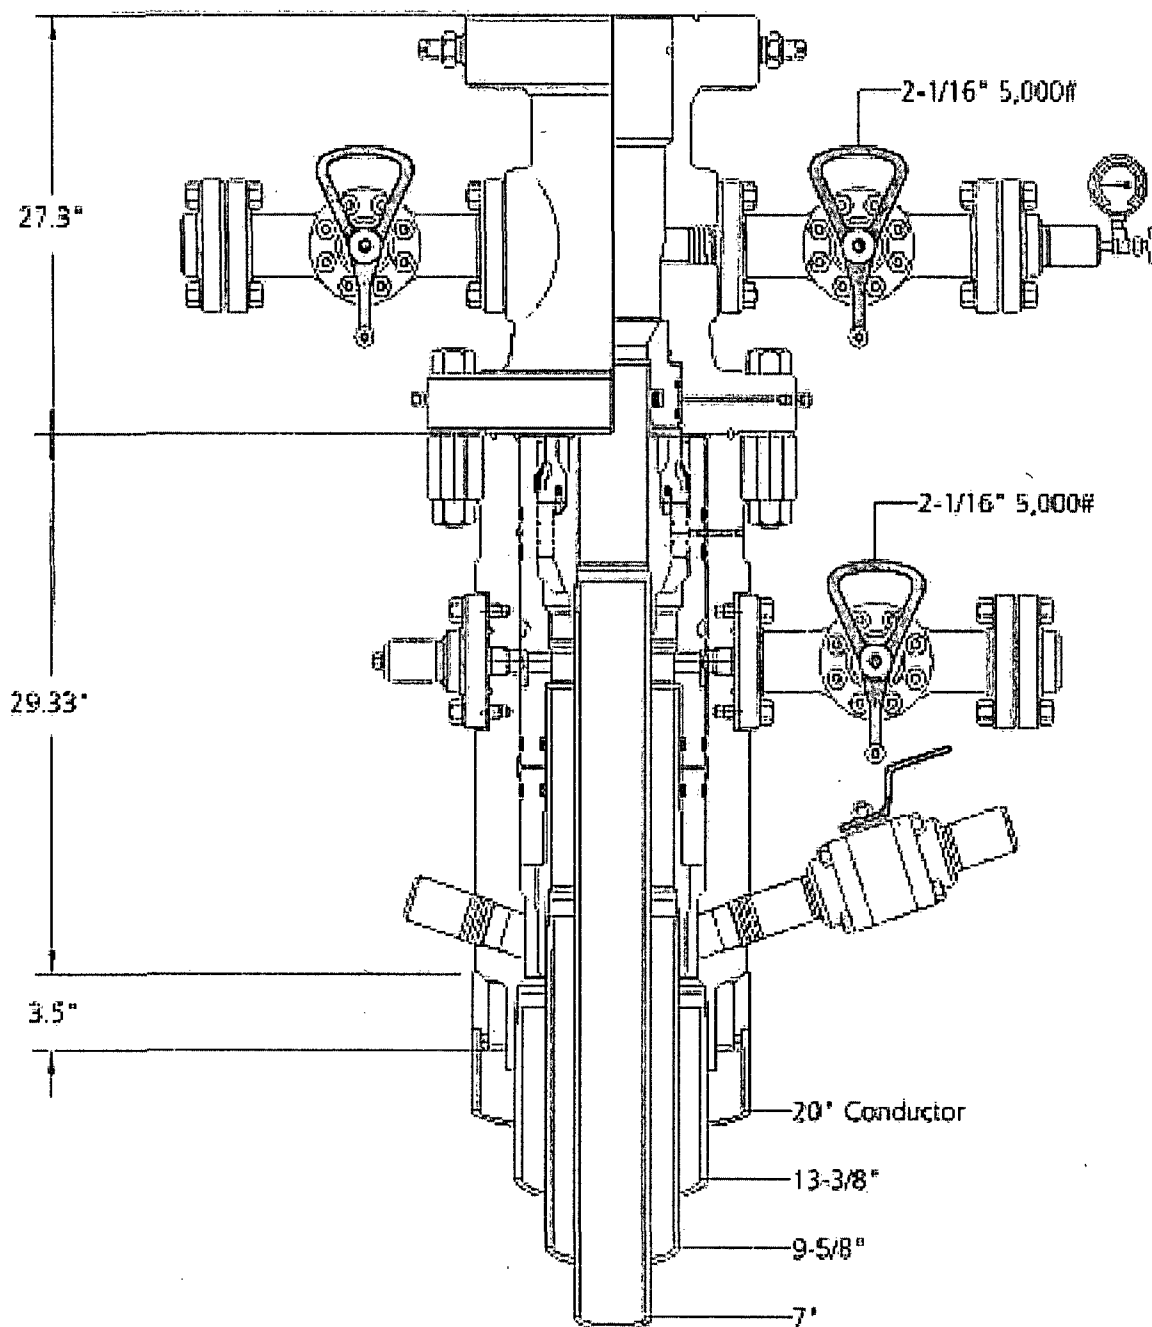

BOPCO
Project: South East New Mexico

CAMERON



Midwest Hose
& Specialty, Inc.

Internal Hydrostatic Test Graph

April 4, 2012

Customer: Latshaw


Pick Ticket #: 81610

Hose Specifications

<u>Hose Type</u>	<u>Length</u>
D	30'
<u>I.D.</u>	<u>O.D.</u>
3"	4 15/32
<u>Working Pressure</u>	<u>Burst Pressure</u>
5000 PSI	Standard Safety Multiplier Applies

Verification

<u>Type of Fitting</u>	<u>Coupling Method</u>
41/16 SK	Swage
<u>Die Size</u>	<u>Final O.D.</u>
5.12"	5.16"
<u>Hose Serial #</u>	<u>Hose Assembly Serial #</u>
6884	81610

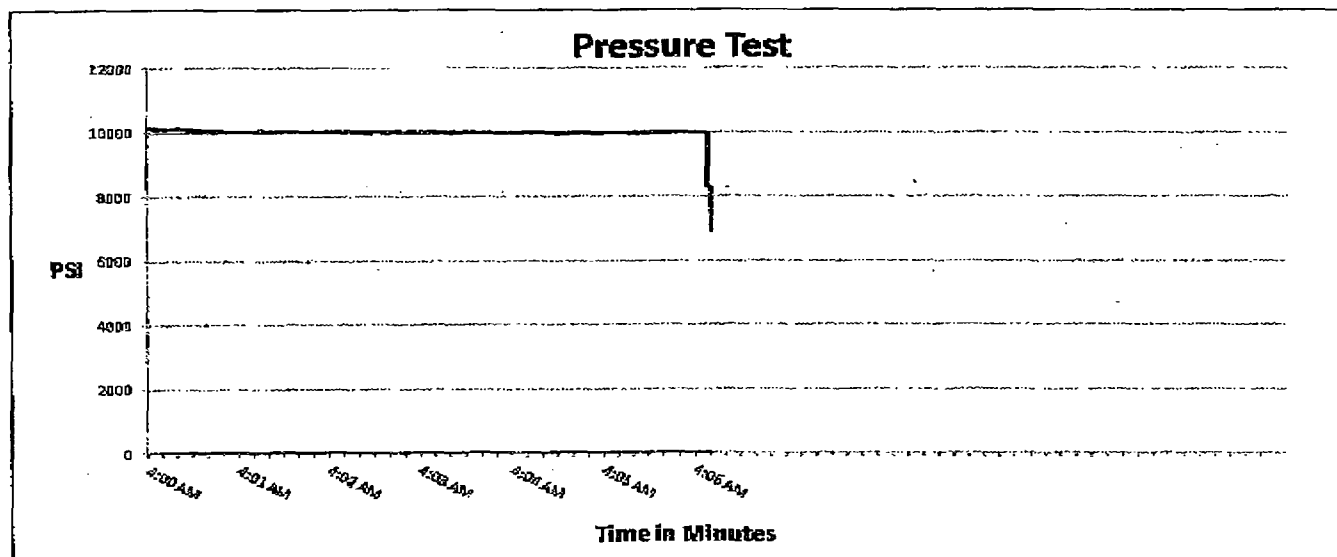

Test Pressure
10000 PSI

Time Held at Test Pressure
6 1/4 Minutes

Actual Burst Pressure

Peak Pressure
10195 PSI

Comments: Hose assembly pressure tested with water at ambient temperature.

Tested By: Donnie Mclemore

Approved By: Bobby Fink

M I D W E S T
HOSE AND SPECIALTY INC.

INTERNAL HYDROSTATIC TEST REPORT			
Customer: LATSHAW DRILLING		P.O. Number: RIG#4	
HOSE SPECIFICATIONS			
Type: CHOKER LINE		Length: 30'	
I.D. 3" INCHES		O.D. 6" INCHES	
WORKING PRESSURE 5,000 PSI	TEST PRESSURE 10,000 PSI		BURST PRESSURE PSI
COUPLINGS			
Type of End Fitting 4 1/16 5K FLANGE			
Type of Coupling: SWEDGED		MANUFACTURED BY MIDWEST HOSE & SPECIALTY	
PROCEDURE			
<u>Hose assembly pressure tested with water at ambient temperature.</u>			
TIME HELD AT TEST PRESSURE 1 MIN.		ACTUAL BURST PRESSURE: 0 PSI	
COMMENTS: SO#81610 Hose is covered with stainless steel armour cover and wrapped with fire resistant vermiculite coated fiberglass insulation rated for 1500 degrees complete with lifting eyes			
Date: 3/2/2011	Tested By: BOBBY FINK		Approved: MENDI JACKSON

Permit Conditions of Approval

API: 30-015-42457

OCD Reviewer	Condition
CSHAPARD	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string