

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO.
30-015-32715

5. Indicate Type of Lease

STATE ☒ FEE ☐

6. State Oil & Gas Lease No.

7. Lease Name or Unit Agreement Name

H B 2 STATE

8. Well Number
003

9. OGRID Number
6137

10. Pool name or Wildcat
CEDAR CANYON; BONE SPRING

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☒ Other

2. Name of Operator

Devon Energy Production Company, LP

3. Address of Operator

333 W. Sheridan Avenue, Oklahoma City, OK 73102

4. Well Location

Unit Letter M : 660' feet from the South line and 660' feet from the West line
Section 02 Township 24S Range 29E NMPM Eddy County, NM

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3068' KB; 3051' GL; 17' KB to GL

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐
CLOSED-LOOP SYSTEM ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☒
CASING/CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- 5/6/15--MIRU. POOH w/Rod pump and 2-7/8" production tubing from 8,410'.
- Set CIBP @ 7,900'. Spot 25 sx CI H on top. Tagged TOC @ 7,772'.
- Spot 50 sx CI C @ 6,861'. Tagged TOC @ 6,595'. (T. Bone Spring @ 6,850')
- Spot 50 sx CI C @ 5,027'. Tagged TOC @ 4,750'.
- Spot 50 sx CL C @ 3,182'. Tagged TOC @ 2,929'. Spot 25 sx CI C @ 2,929'. Tagged TOC @ 2,624'. (B. Salt @ 2,894'; 9-5/8" shoe @ 3073', Delaware Top @ 3,106')
- Spot 65 sx CL C @ 710. Tagged TOC @ 340'. (13-3/8" shoe @ 540'. T. Salt @ 615')
- Spot 25 sx CI C from 127' to surface.
- 5/22/15-Cut wellhead off. Top out 9-5/8 & 7" csg to surface w/60 sx CI C.
- 5/25/15-Set dry hole marker. Wellbore is plugged & abandoned.

Approved for plugging of well bore only.
Liability under bond is retained pending receipt of C-103 (Subsequent Report of Well Plugging) which may be found at OCD Web Page under Forms, www.emnrd.state.nm.us/oed.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Ronnie Slack TITLE Operations Technician DATE 7-16-15

Type or print name Ronnie Slack E-mail address: Ronnie.Slack@dmv.com PHONE: 405-552-4615

For State Use Only

APPROVED BY: [Signature] TITLE Dr. J. E. Spewer

Conditions of Approval (if any):

DATE 7-16-2015
NM OIL CONSERVATION
ARTESIA DISTRICT

JUL 16 2015

RECEIVED

* Submit Subsequent C-103

DEVON ENERGY PRODUCTION COMPANY LP

Well Name: H B 2 STATE 3		Field: PIERCE CROSSING EAST	
Location: 660' FSL & 660' FWL SEC 2-T24S-R29E		County: EDDY	State: NM
Elevation: 3068' KB; 3051' GL; 17' KB-GL		Spud Date: 4/18/03	Compl Date: 7/24/03
API#: 30-015-32715	Prepared by: Mitchel Doolin	Date: 1/28/15	Rev: 7/16/15-R.Slack

**WELLBORE PLUGGED & ABANDONED
5/25/15**

17-1/2" hole
13-3/8", 48#, H40, STC, @ 540'
 Cmt'd w/500sx to surf.

12-1/4" hole
9-5/8", 36#, J55, LTC, @ 3,073'
 Cmt'd w/1300 sx. To surface


Bone Springs Perfs (1/24/2004)
 7,963' - 7,971'; 8,068' - 8,073'
 8,124' - 8,137'; 8,199' - 8,208'

Liner hanger @ 10,068

8-3/4" hole
7", 26#, J55, LTC, @ 10,400'
 Cmt'd w/1270 sx. Estimated TOC 2,550, cbl-6/30/03

Morrow Perfs (6/30/2003)
 13,445'-13,560'

6-1/8" Hole
4-1/2", 13.5#, P-110, LTC, @ 14,085'
 Cmt'd w/510 sx

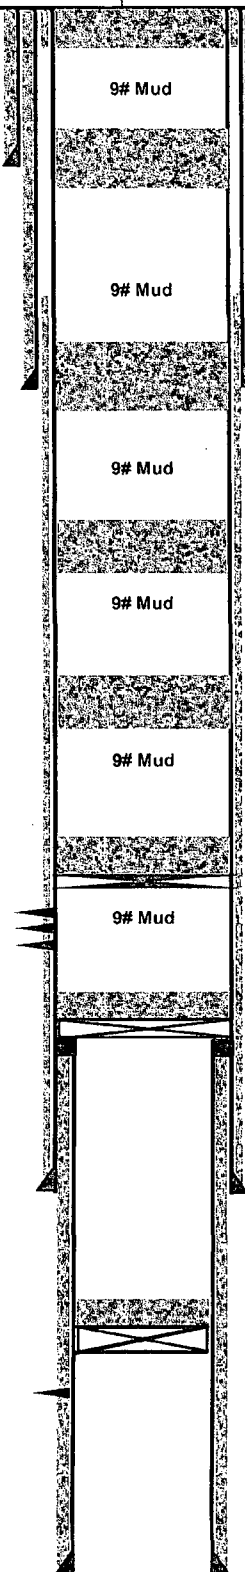

Set dry hole marker. (5/25/15)
 Cut wellhead off. Top out csgrs w/60 sx CI C (5/22/15)
 Spot 25 sx CI C from 127' to surface. (5/16/15)

Tagged TOC @ 340'. (5/16/15)
 Spot 65 sx CI C @ 710'. (5/16/15)
 (T.Salt @ 615')

Tagged TOC @ 2,624'. (5/16/15)
 Spot 25 sx CI C @ 2,929'. (5/15/15)
 Tagged TOC @ 2,929'. (5/15/15)
 Spot 50 sx CI C @ 3,182'. (5/15/15)
 (B.Salt @ 2,894'; T. Delaware @ 3,106')

Tagged TOC @ 4,750'. (5/15/15)
 Spot 50 sx CI C @ 5,027'. (5/14/15)

Tagged TOC @ 6,595'. (5/14/15)
 Spot 50 sx CI C @ 6,861'. (5/14/15)
 (T.Bone Spring @ 6,850')

Spot 25 sx CI H on top. Tagged TOC @ 7,772'. (5/14/15)
 CIBP @ 7,900'. (5/12/15)

CIBP @ 10,050' Bailer dumped 35' cmt

CIBP @ 13,019' Bailer dumped 35' cmt (1/24/2004)

14,085' TD