

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
May 27, 2004

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-015-20137
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		7. Lease Name or Unit Agreement Name Wilkinson AZ
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other	8. Well Number 2	9. OGRID Number 025575
2. Name of Operator Yates Petroleum Corporation	10. Pool name or Wildcat Penasco Draw San Andres Yeso	
3. Address of Operator 105 S. 4 th Street, Artesia, NM 88210		
4. Well Location Unit Letter M : 990 feet from the South line and 990 feet from the West line Section 25 Township 18S Range 25E NMPM Eddy County		
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3467'GR		
Pit or Below-grade Tank Application <input type="checkbox"/> or Closure <input type="checkbox"/>		
Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____		
Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____		

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDON ☐
CASING/CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Yates Petroleum Corporation plans to plug and abandon this well as follows:

1. RU safety equipment as needed.
2. POH with production equipment.
3. RU WSC to pump down 3-1/2" casing establishing injection rate. Pump 100 sx cement filling casing to surface.
4. Install dry hole marker, clean location and reclaim as per regulated.

NOTE: Yates Petroleum Corporation will use steel pits and no earth pits

Notify OCD 24 hrs . prior to
any work done.

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE Tina Huerta TITLE Regulatory Compliance Supervisor DATE January 26, 2006

Type or print name Tina Huerta E-mail address: tinah@ypcnm.com Telephone No. 505-748-1471

For State Use Only

APPROVED BY: Phil Hansen TITLE Field Sup. DATE 1/30/06
Conditions of Approval (if any):

YATES PETROLEUM CORPORATION

Well: Wilkinson AZ #2

Location: 25M, 18S, 25E

Field: Penasco Draw (San Andres Yeso)

Eddy Co, NM

Elevation: 3467' GL Spud: 4/23/68 TD: 1530'

Compl. 5/14/68

Before

Casing And Cementing:

8 5/8" 28# J-55 @ 1044' in 11" hole.
Cmtd w/400 sxs. T/cement @340'
Grouted through 3/4" w/100 sxs.

TOC 5 1/2" 5 1/2" 14# J-55 @ 1527'.
@460' Cmtd w/180 sxs.
8 5/8" @ TOC @460'.
1044'

Original Completion:

5/8/68-Perf. 1378'-1440'.
Acidize w/3000 gals,
Frac w/ 3500# sand & 120,000 gals.
water.


Potential:

5/23/68-P/60 BOPD & 80 BLWPD

Status:

Current Production: 5 BOPM 8/93

Cum Production: 20,317 BO 8/93

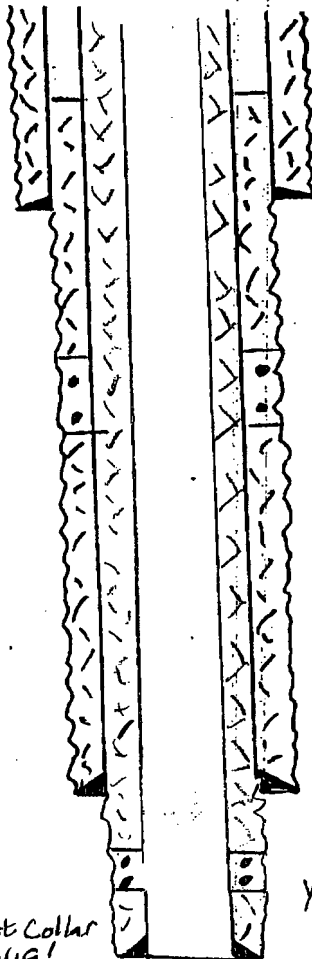

1378'
Squeezed
1440'

5 1/2" @
1527'

Yeso Perfs 2136' - 2138'

*3 1/2" @ 2450'
Cement Circ to Surface*

*Float Collar
@ 2419'*

Revised 11/26/06 mH

YATES PETROLEUM CORPORATION

Well: Wilkinson AZ #2

Location: 25M, 18S, 25E

Field: Penasco Draw (San Andres Yeso)

Eddy Co, NM

Elevation: 3467' GL Spud: 4/23/68 TD: 1530'

Compl. 5/14/68

After

Casing And Cementing:

8 5/8" 28# J-55 @ 1044' in 11" hole.
Cmtd w/400 sxs. T/cement @340'
Grouted through 3/4" w/100 sxs.

TOC 5 1/2"
@460'
8 5/8" @
1044'

5 1/2" 14# J-55 @ 1527'.
Cmtd w/180 sxs.
TOC @460'.

Original Completion:

5/8/68-Perf. 1378'-1440'.
Acidize w/3000 gals,
Frac w/ 3500# sand & 120,000 gals.
water.


Potential:

5/23/68-P/60 BOPD & 80 BLWPD

Status:

Current Production: 5 BOPM 8/93

Cum Production: 20,317 BO 8/93

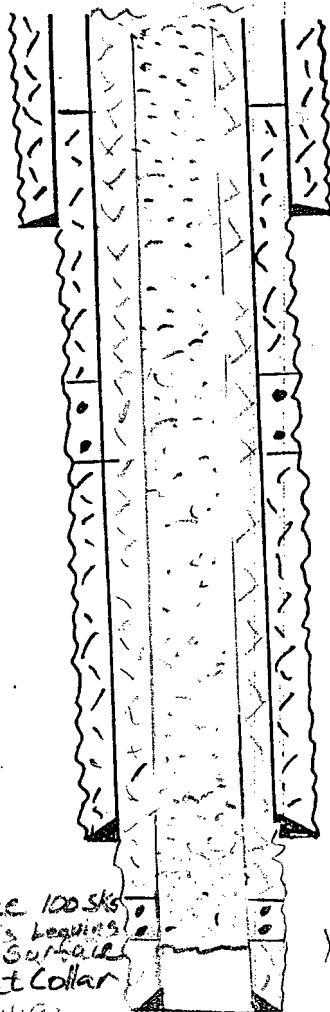

1378'
Squeezed
1440'

5 1/2" @
1527'

Yeso Perfs 2136' - 2368'

*3 1/2" @ 2450' 9.3" J-55
Cement Circ to Surface*

Revised 11/26/06 MHT